Exhibit B

RFP 27-02

Revised 11/6/2026

GRANDVIEW ELEMENTARY SCHOOL

SECTIONS 1, 2, 3, 4

ROOF SHOP DRAWINGS

1583 GRAND AVE.
WINDSOR, CO

GENERAL ROOFING & CODE COMPLIANCE NOTES
GENERAL JURISDICTION & APPLICABLE CODES

Authority Having Jurisdiction (AHJ): Colorado Division of Fire Prevention and Control (DFPC). Applicable Codes: All work shall comply with the currently adopted editions of the DFPC regulatory framework, including but not limited to:
2021 International Building Code (IBC)
2021 International Existing Building Code (IEBC)
2021 International Energy Conservation Code (IECC)
2021 International Fire Code (IFC)
2023 Colorado Model Electric Ready and Solar Ready Code
ASCE/SEI 7-16 (American Society of Civil Engineers Standard Minimum Design Loads for Buildings and Other Structures) Occupancy & Construction: Building is classified as Group E (Educational) Occupancy, Risk Category III, Construction Type IIB.

ROOF DESIGN & PERFORMANCE CRITERIA
Fire Classification: The complete roof assembly (including EPDM and pedestal paver system) must achieve a Class A fire rating tested in accordance with UL 790 or ASTM E108. The Contractor shall provide the specific UL assembly number in the product submittals.
Thermal Resistance (IECC Zone 5B): The new roof assembly entirely above the deck shall provide a minimum continuous insulation value of R-30. Tapered polyiso layouts must be engineered to achieve this average.
Wind Uplift & Structural Criteria:
Location & Risk Category: Weld RE4 Grandview Elementary School (Windsor, CO), Risk Category III.
Basic Wind Speed (VULT): 115 mph (3-second gust), Exposure Category C per SEAC/DFPC criteria.
Historical Baseline: Legacy 1997 Uniform Building Code (UBC) calculations indicated a uniform uplift design pressure of 22 psf during all construction phases.
Current Code Design Pressure: Per 2021 IBC / ASCE 7-16, the required average ultimate wind uplift pressure for the new roof assembly is 16 psf (equivalent to 9.6 psf nominal, calculated as $16 psf X 0.6). Edge Flashing: All perimeter edge metal must be tested, certified, and installed in compliance with ANSI/SPRI ES-1 standards.

PERMITTING & ADMINISTRATIVE SUBMITTALS
DFPC Documentation: The Contractor is responsible for submitting all required project documentation directly to Safebuilt, the pre-qualified school district building department.



TABLE OF CONTENTS

1	COVER/TABLE OF CONTENTS
2.1	ROOF PLAN OVERALL
3.1	ROOF ASSEMBLY - BASE BID
3.2	ROOF ASSEMBLY - ALTERNATE BID
3.3	COMPONENT ATTACHMENT
3.4	MEMBRANE SECUREMENT
4	CURB
5	PIPE
6	DRAIN
7	ROOF HATCH
8	PRIMARY SCUPPER
9	OVERFLOW SCUPPER
10	BRICK PARAPET
11	STUD WALL PARAPET
12	RISEWALL
13	AREA DIVIDER
14	ROOF TO ROOF EXPANSION JOINT
15	ALUM. FRAME HEAD

GENERAL NOTES:

All roofing products are to be installed according to manufacturer's recommendations and the project performance requirements in the specification.

Dimensions are to be field verified (V.I.F.) and dimensions on roof plan (provided from architectural drawings) and details are not to scale (N.T.S.).

Review all conditions prior to installation and make revisions as needed to ensure proper drainage and for compliance with roof system manufacturer's warranty requirements.

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076


Date: 9/23/2026

Approved By: C.C.

Page: 1

NOTE:
ABANDONED CURBS TO REMAIN AND CURB CAPS TO STAY IN PLACE.

ROOF SYMBOL LEGEND		DETAIL
	CURB	4
	PIPE	5
RD	ROOF DRAIN	6
	ROOF HATCH	7
S/DS	SCUPPER	8
OS	OVERFLOW SCUPPER	9
	WALKPAD	N/A

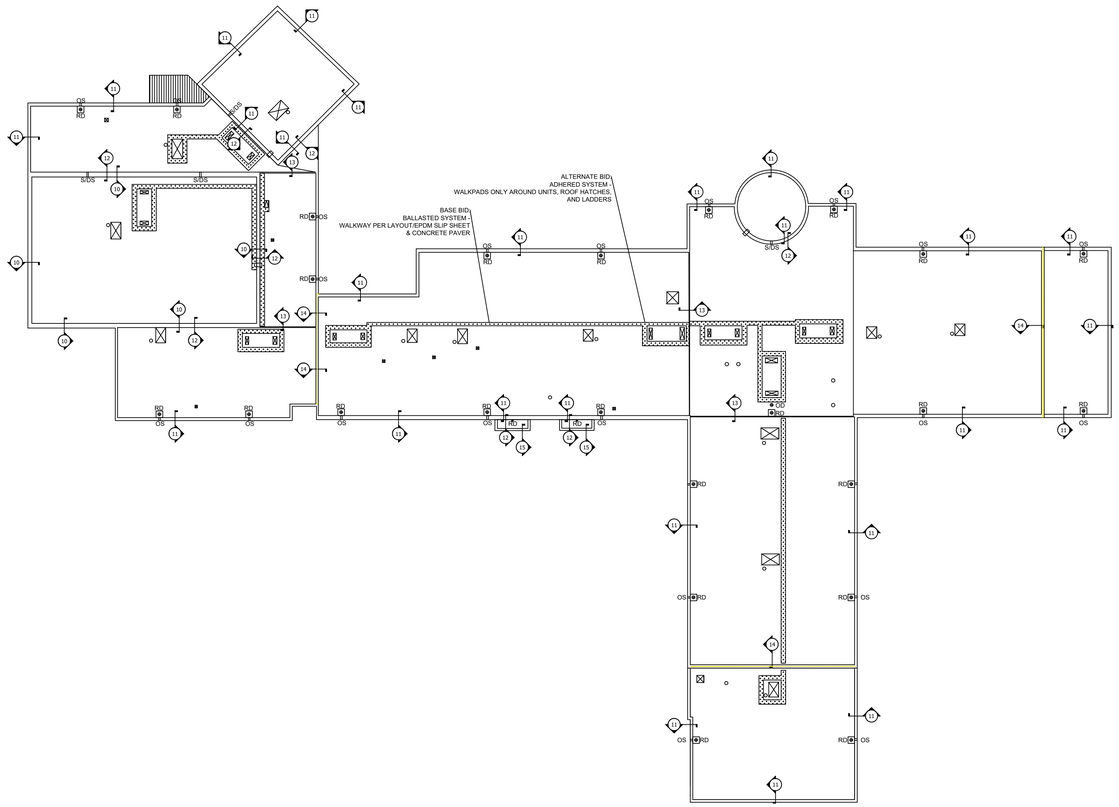

ROOF PLAN

SCALE 1/32" = 1'-0"

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:


General:

Project No: 969-076

Date: 9/23/2026

Approved By: C.C.

Page: 2.1

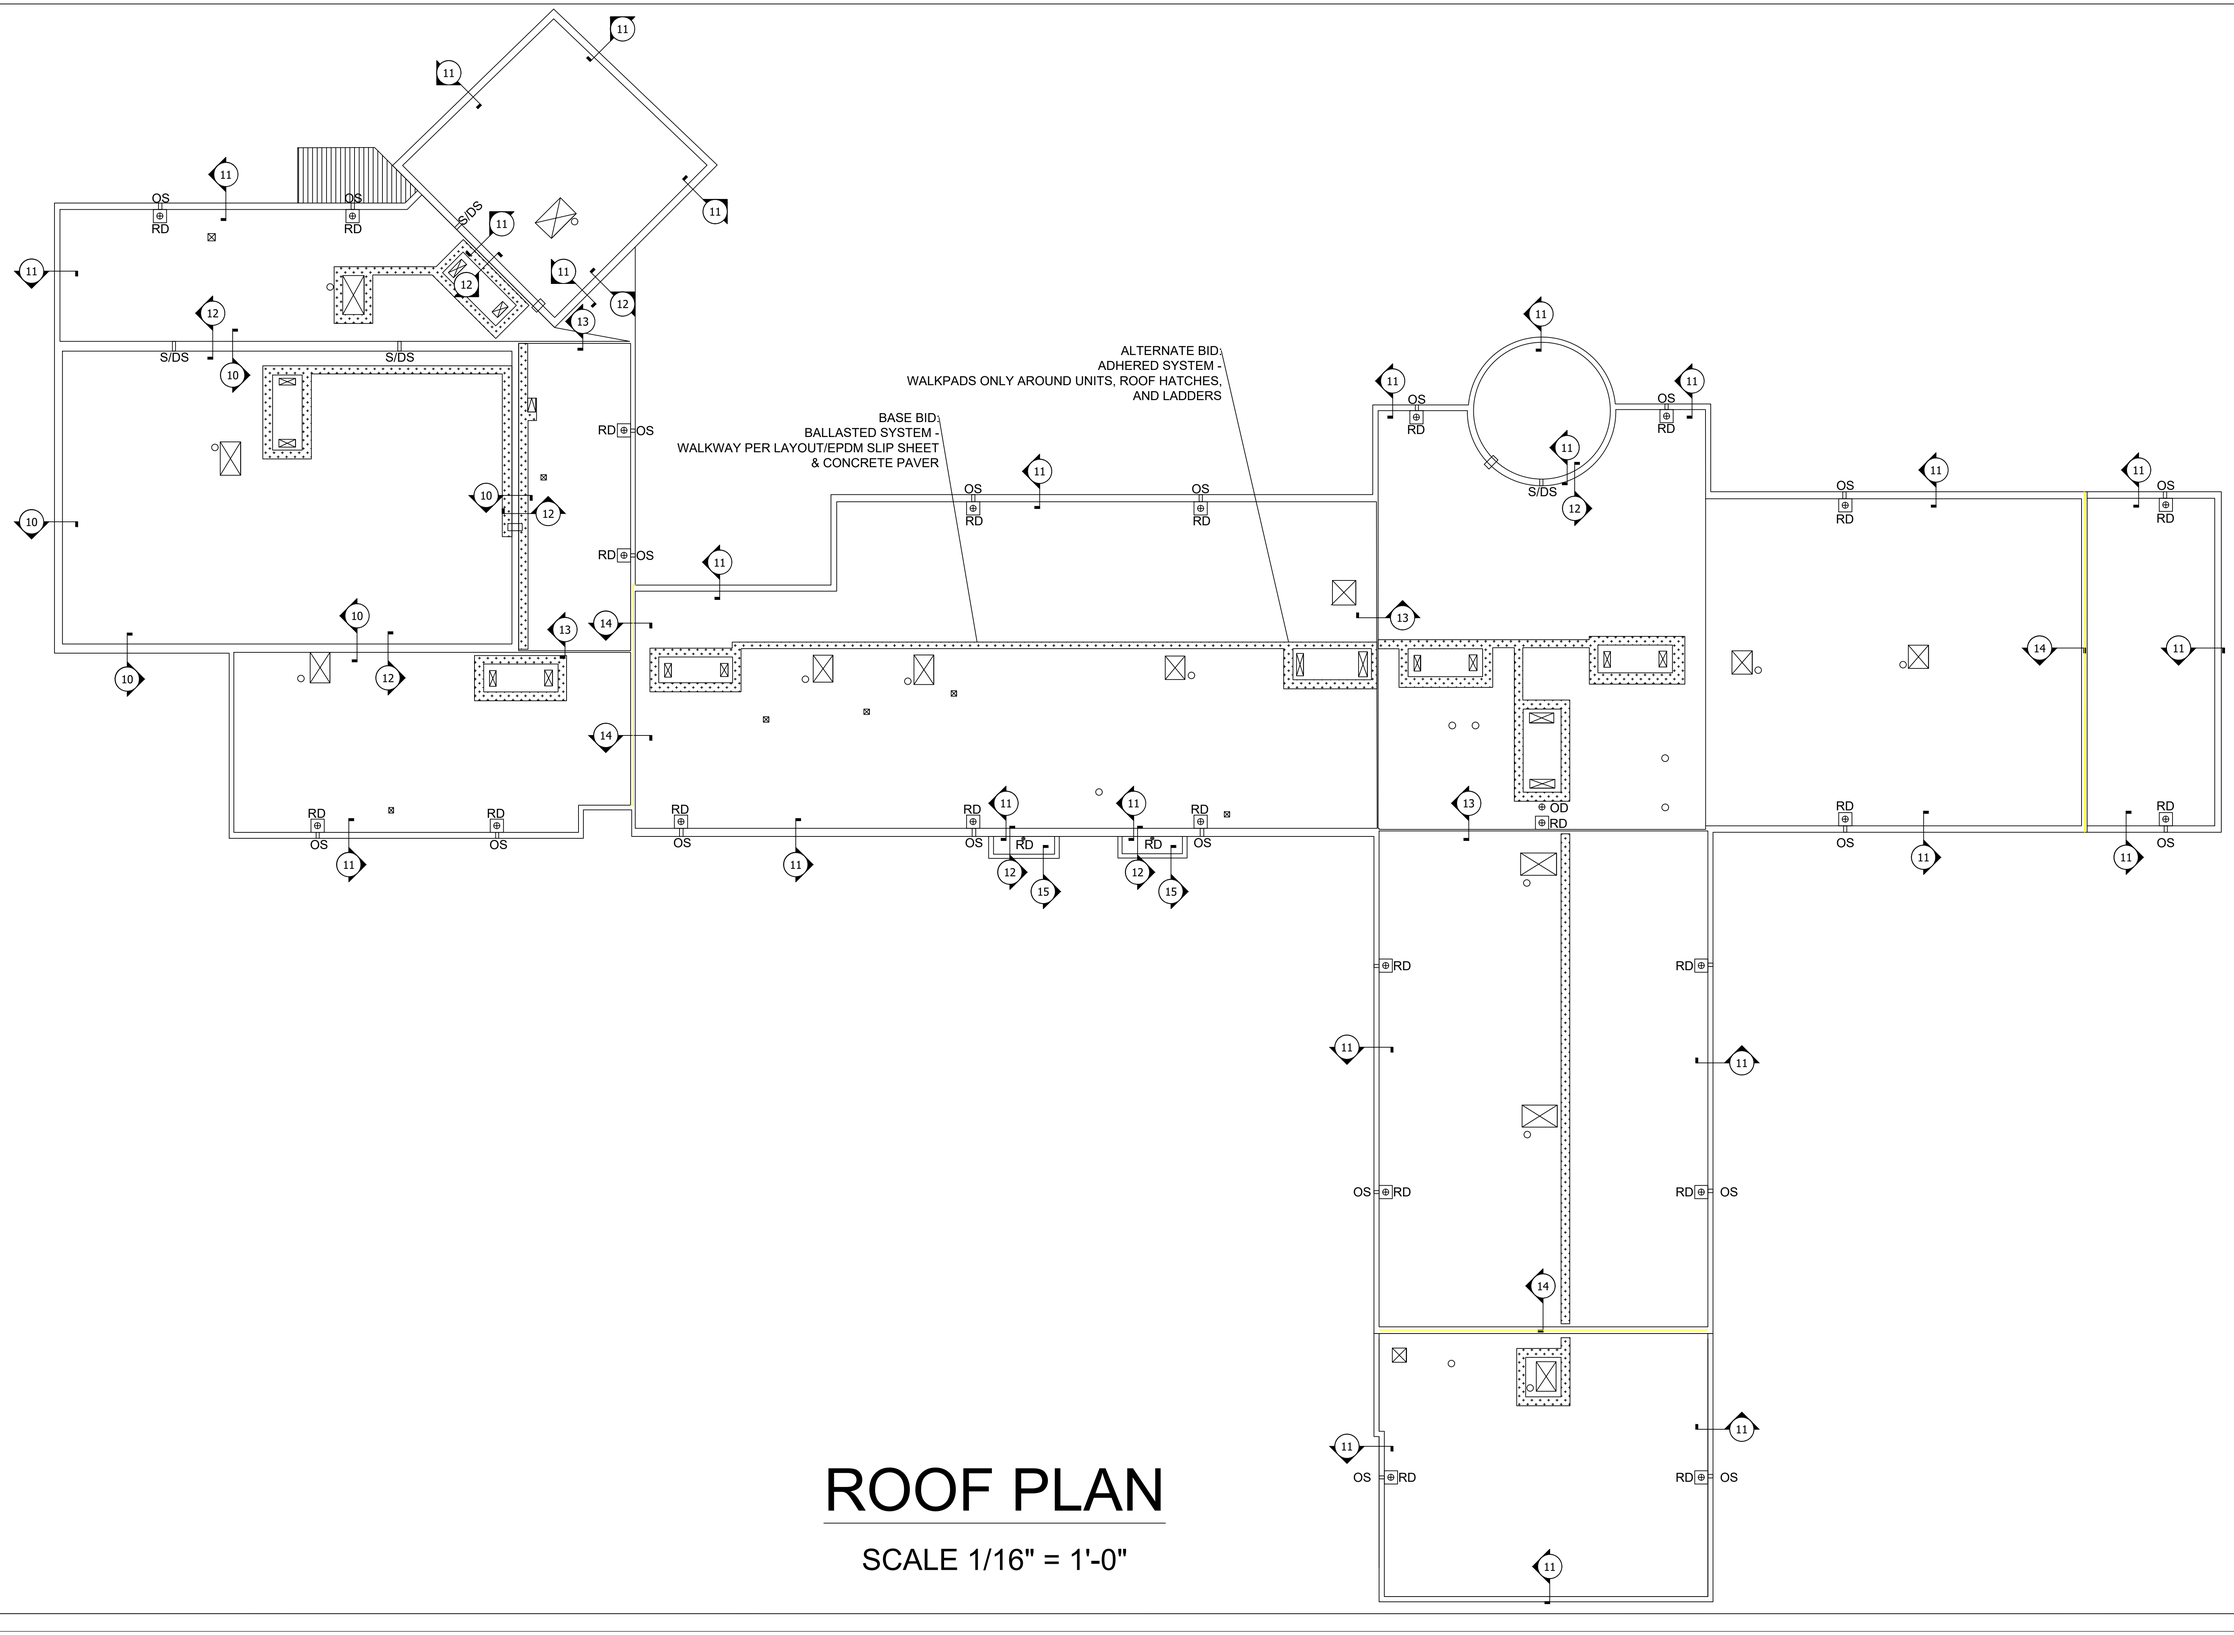

ROOF PLAN

SCALE 1/16" = 1'-0"

GENERAL NOTES:

-ALL INSULATION LAYER JOINTS TO BE STAGGERED AND OFFSET A MINIMUM OF 6" IN ALL DIRECTIONS FROM EACH SUCCEEDING LAYER.


-THE SURFACE TO WHICH INSULATION IS TO BE APPLIED SHALL BE DRY, FREE OF FINS, PROTRUSIONS, SHARP EDGES, LOOSE AND FOREIGN MATERIALS, OIL AND GREASE. AREA SHOULD BE CLEANED WITH AIR BLOWER.

-REVIEW ALL CONDITIONS PRIOR TO INSTALLATION AND MAKE REVISIONS AS NEEDED TO ENSURE PROPER DRAINAGE AND FOR COMPLIANCE WITH ROOF SYSTEM MANUFACTURER'S WARRANTY REQUIREMENTS.

CARLISLE 90-MIL SURE-SEAL EPDM MEMBRANE;
LOOSE LAID AND HELD IN PLACE WITH 1-1/2" NOMINAL ROUND WATER WORN GRAVEL CONFORMING TO GRADATION #4 IN ACCORDANCE WITH ASTM D-448 SIZING. WITH COVERAGE MINIMUM OF:
- 10 LBS.PER SQUARE FOOT (10' PERIMETER)
- 13 LBS PER SQUARE FOOT OF #2 (2-1/2") STONE (10' X 10' CORNER)

CARLISLE MIN. 1.0" 20-PSI INSULBASE POLYISO INSULATION OR INSULFOAM 1.00# EPS INSULATION;
- LOOSE LAID

EXISTING INSULATION TO REMAIN;
-REMOVE AND REPLACE ANY COMPROMISED, DAMAGED, OR WET AREAS OF EXISTING

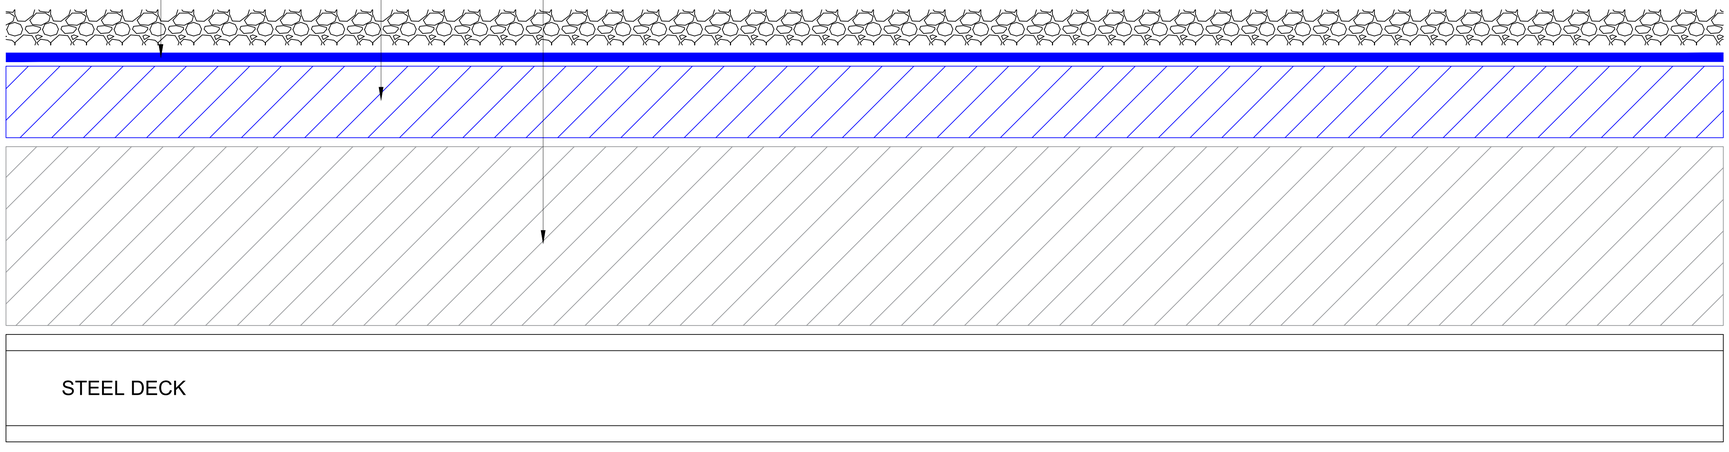

ASSEMBLY SECTION CUT - BASE BID ASSEMBLY

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:
Consultant:
General:

Project No: 969-076
Date: 9/23/2026
Approved By: C.C.

Page: 3.1

GENERAL NOTES:

-ALL INSULATION LAYER JOINTS TO BE STAGGERED AND OFFSET A MINIMUM OF 6" IN ALL DIRECTIONS FROM EACH SUCCEEDING LAYER.


-THE SURFACE TO WHICH INSULATION IS TO BE APPLIED SHALL BE DRY, FREE OF FINS, PROTRUSIONS, SHARP EDGES, LOOSE AND FOREIGN MATERIALS, OIL AND GREASE. AREA SHOULD BE CLEANED WITH AIR BLOWER.

-REVIEW ALL CONDITIONS PRIOR TO INSTALLATION AND MAKE REVISIONS AS NEEDED TO ENSURE PROPER DRAINAGE AND FOR COMPLIANCE WITH ROOF SYSTEM MANUFACTURER'S WARRANTY REQUIREMENTS.

CARLISLE 145-MIL SURE-SEAL FLEECEBACK EPDM MEMBRANE;
ADHERED WITH FLEXIBLE FAST AT THE FOLLOWING RATE:
- ALL ROOF ZONES: 4" O.C. BEADS

1/2" SECURSHIELD HD PLUS COVER BOARD (SUPPLIED BY CARLISLE) (4' X 8' BOARD);
MECHANICALLY FASTENED AT THE FOLLOWING RATE:
- ALL ROOF ZONES: 16 INSULFAST FASTENERS AND 3" INSULATION PLATES

EXISTING INSULATION TO REMAIN;
-REMOVE AND REPLACE ANY COMPROMISED, DAMAGED, OR WET AREAS OF EXISTING

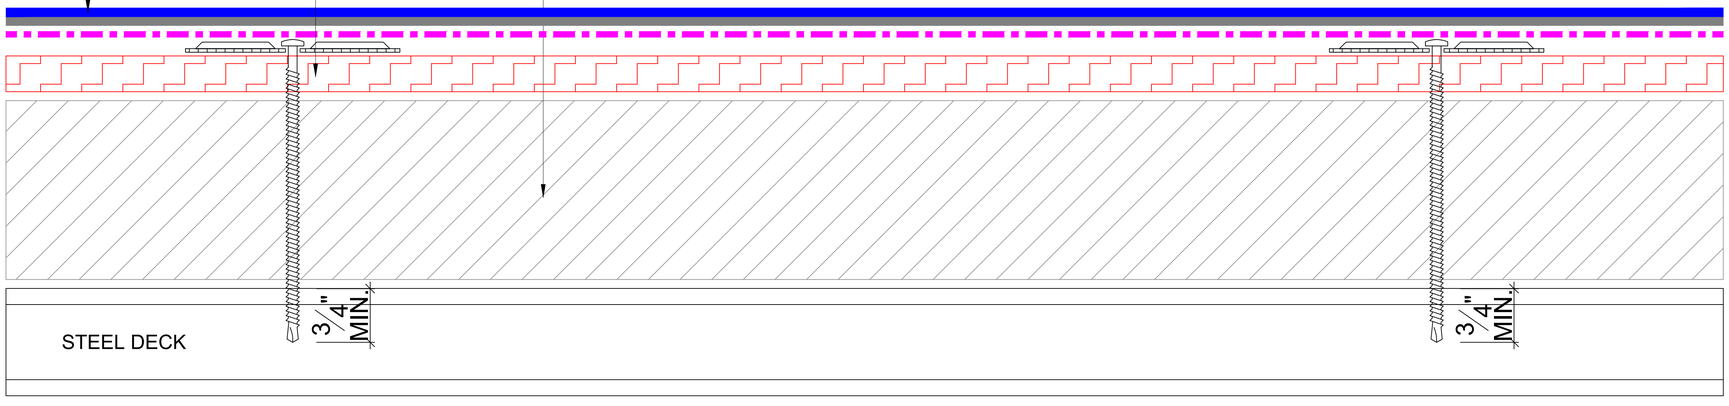

ASSEMBLY SECTION CUT - ALTERNATE ASSEMBLY

FRW CONSULT


GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:
Consultant:
General:


Project No: 969-076
Date: 9/23/2026
Approved By: C.C.

Page: 3.2

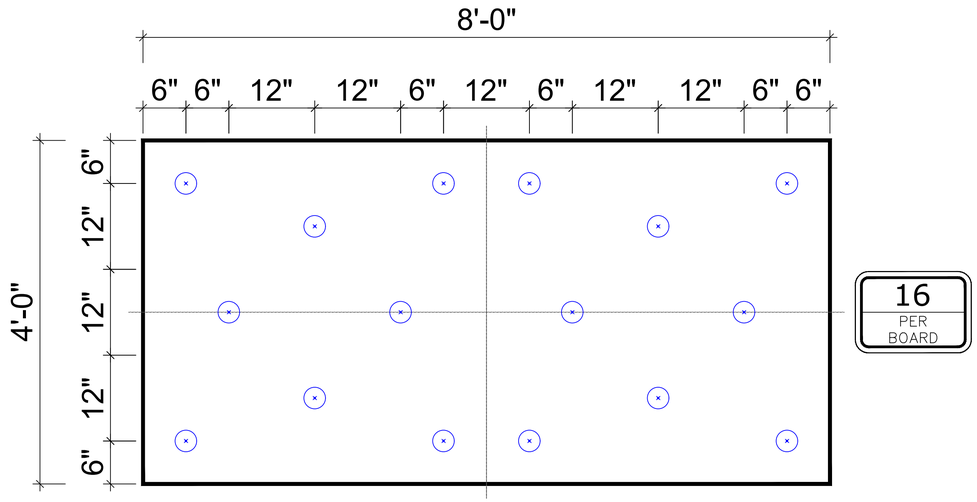

1 INSULATION ATTACHMENT

16 PER 4'X8'

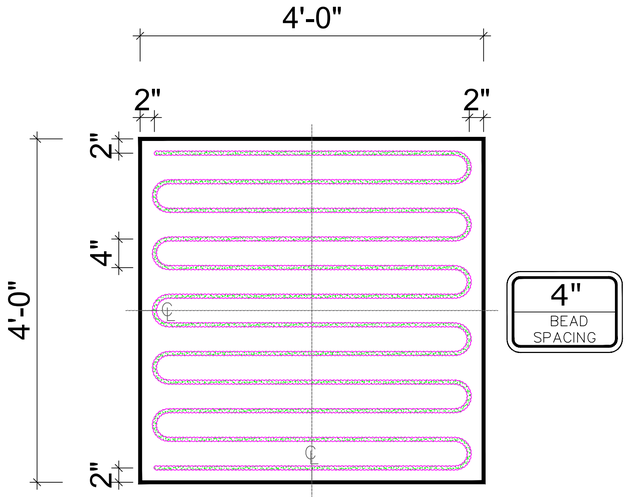

2 MEMBRANE ATTACHMENT

4" O.C. BEADS

COMPONENT ATTACHMENT

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

2.	REV. 2	9/23/26
1.	REV. 1	9/21/26
No.	Revision/Issue	Date

Architect:

Consultant:


General:

Project No: 969-076


Date: 9/23/2026

Approved By: C.C.

Page: 3.3

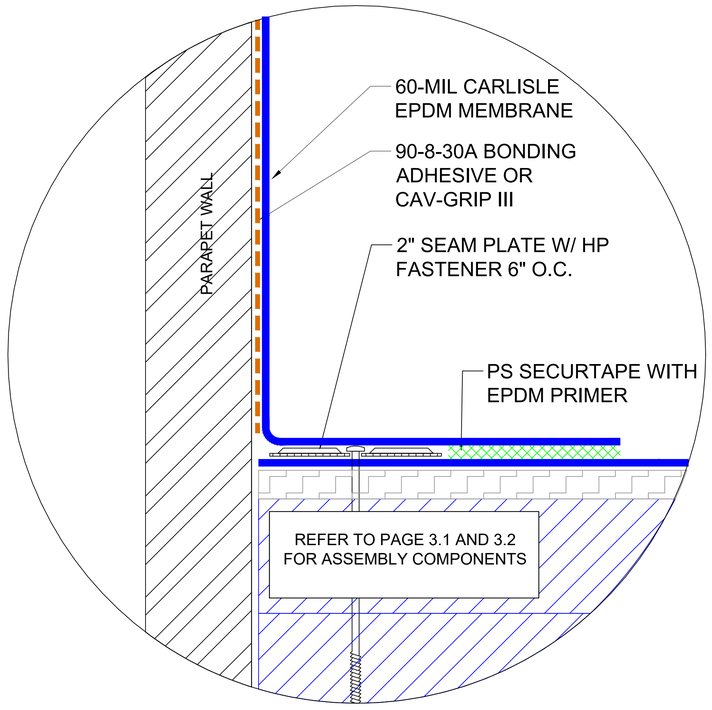

SECUREMENT INTO DECK

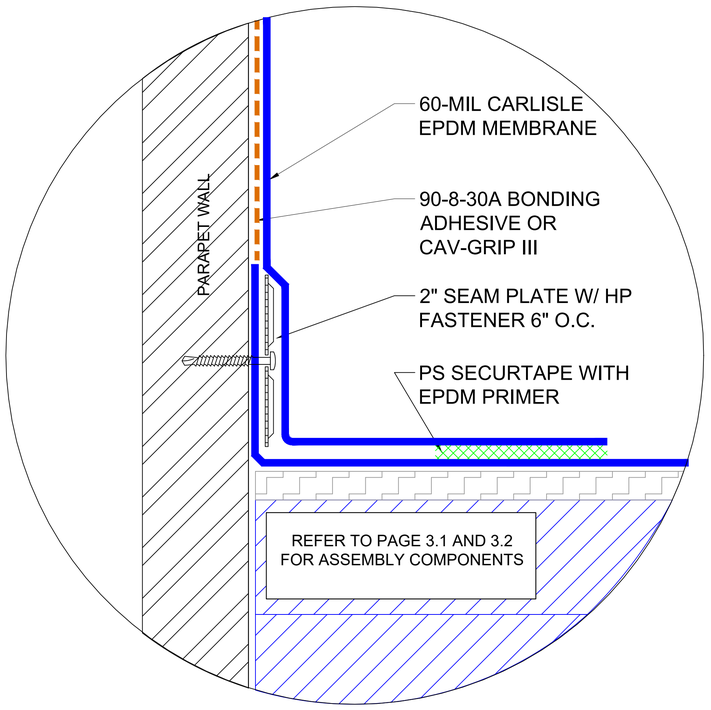

SECUREMENT INTO VERTICAL SUBSTRATE

MEMBRANE ATTACHMENT

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026


Approved By: C.C.

Page: 3.4

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

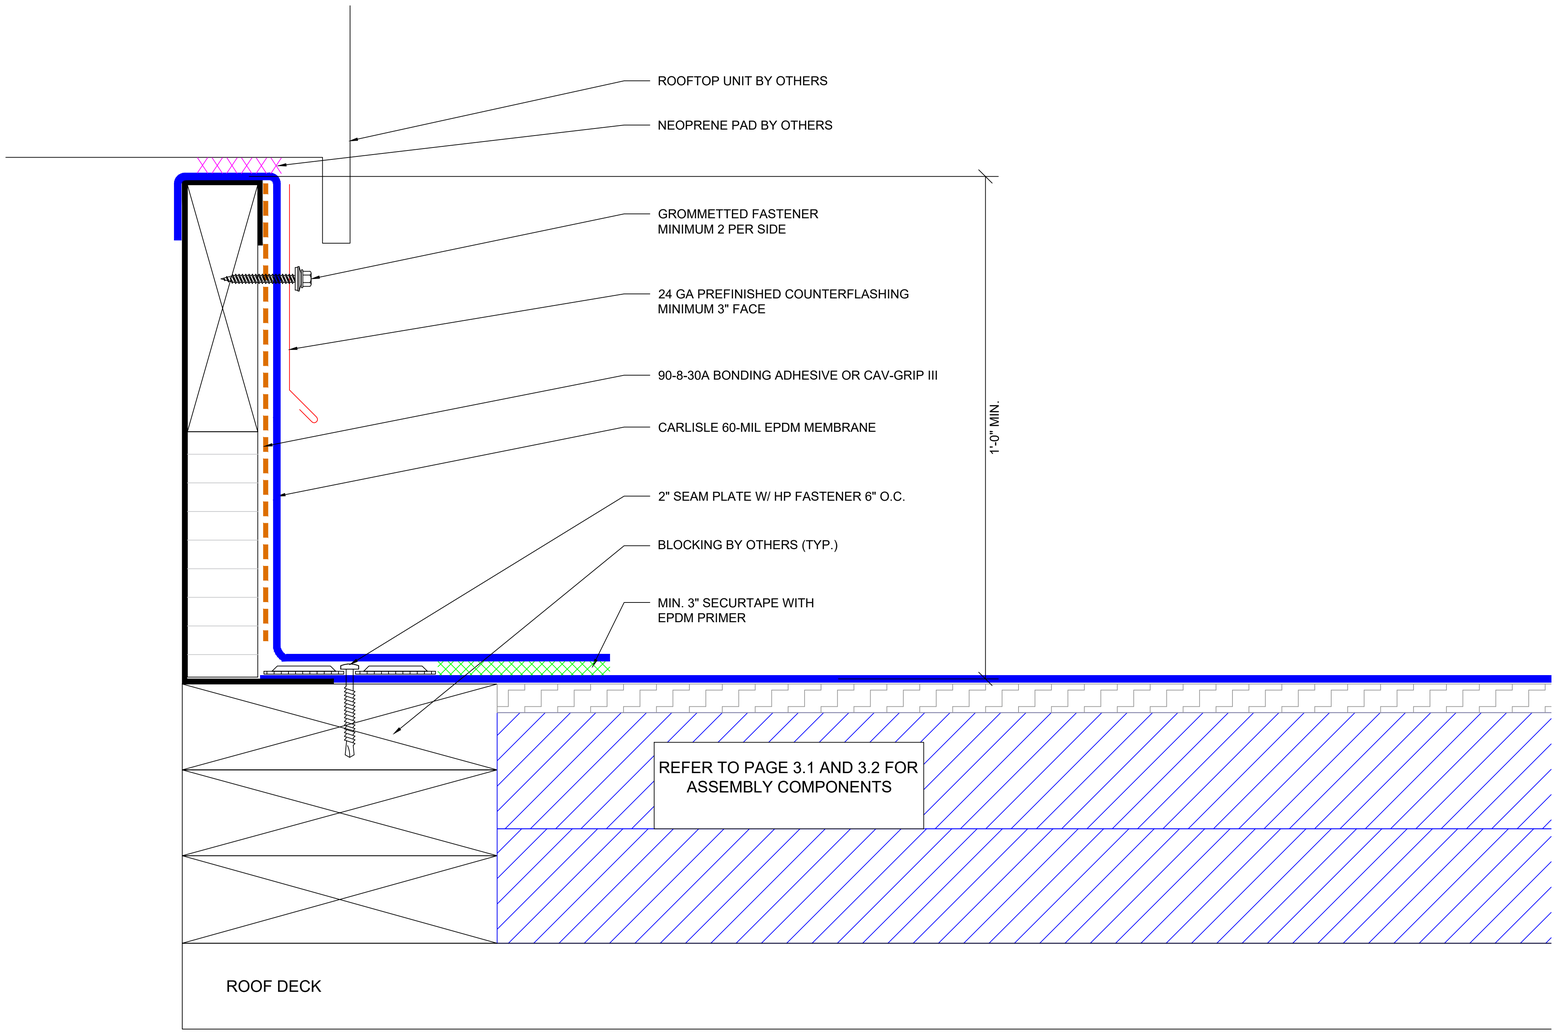

EQUIPMENT CURB

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026

Approved By: C.C.


Page: 4

GENERAL NOTES:

-PIPES TO BE FREE OF ALL DEBRIS PRIOR TO INSTALLATION OF PIPE FLASHING AND WATER CUT OFF MASTIC.

-PIPES TO BE SET BY PLUMBER TO GIVE AMPLE HEIGHT FOR FLASHING. PLUMBER IS RESPONSIBLE FOR SECURING PIPE STACK TO STRUCTURE.

-TAPERED INSULATION NOT SHOWN FOR CLARITY.

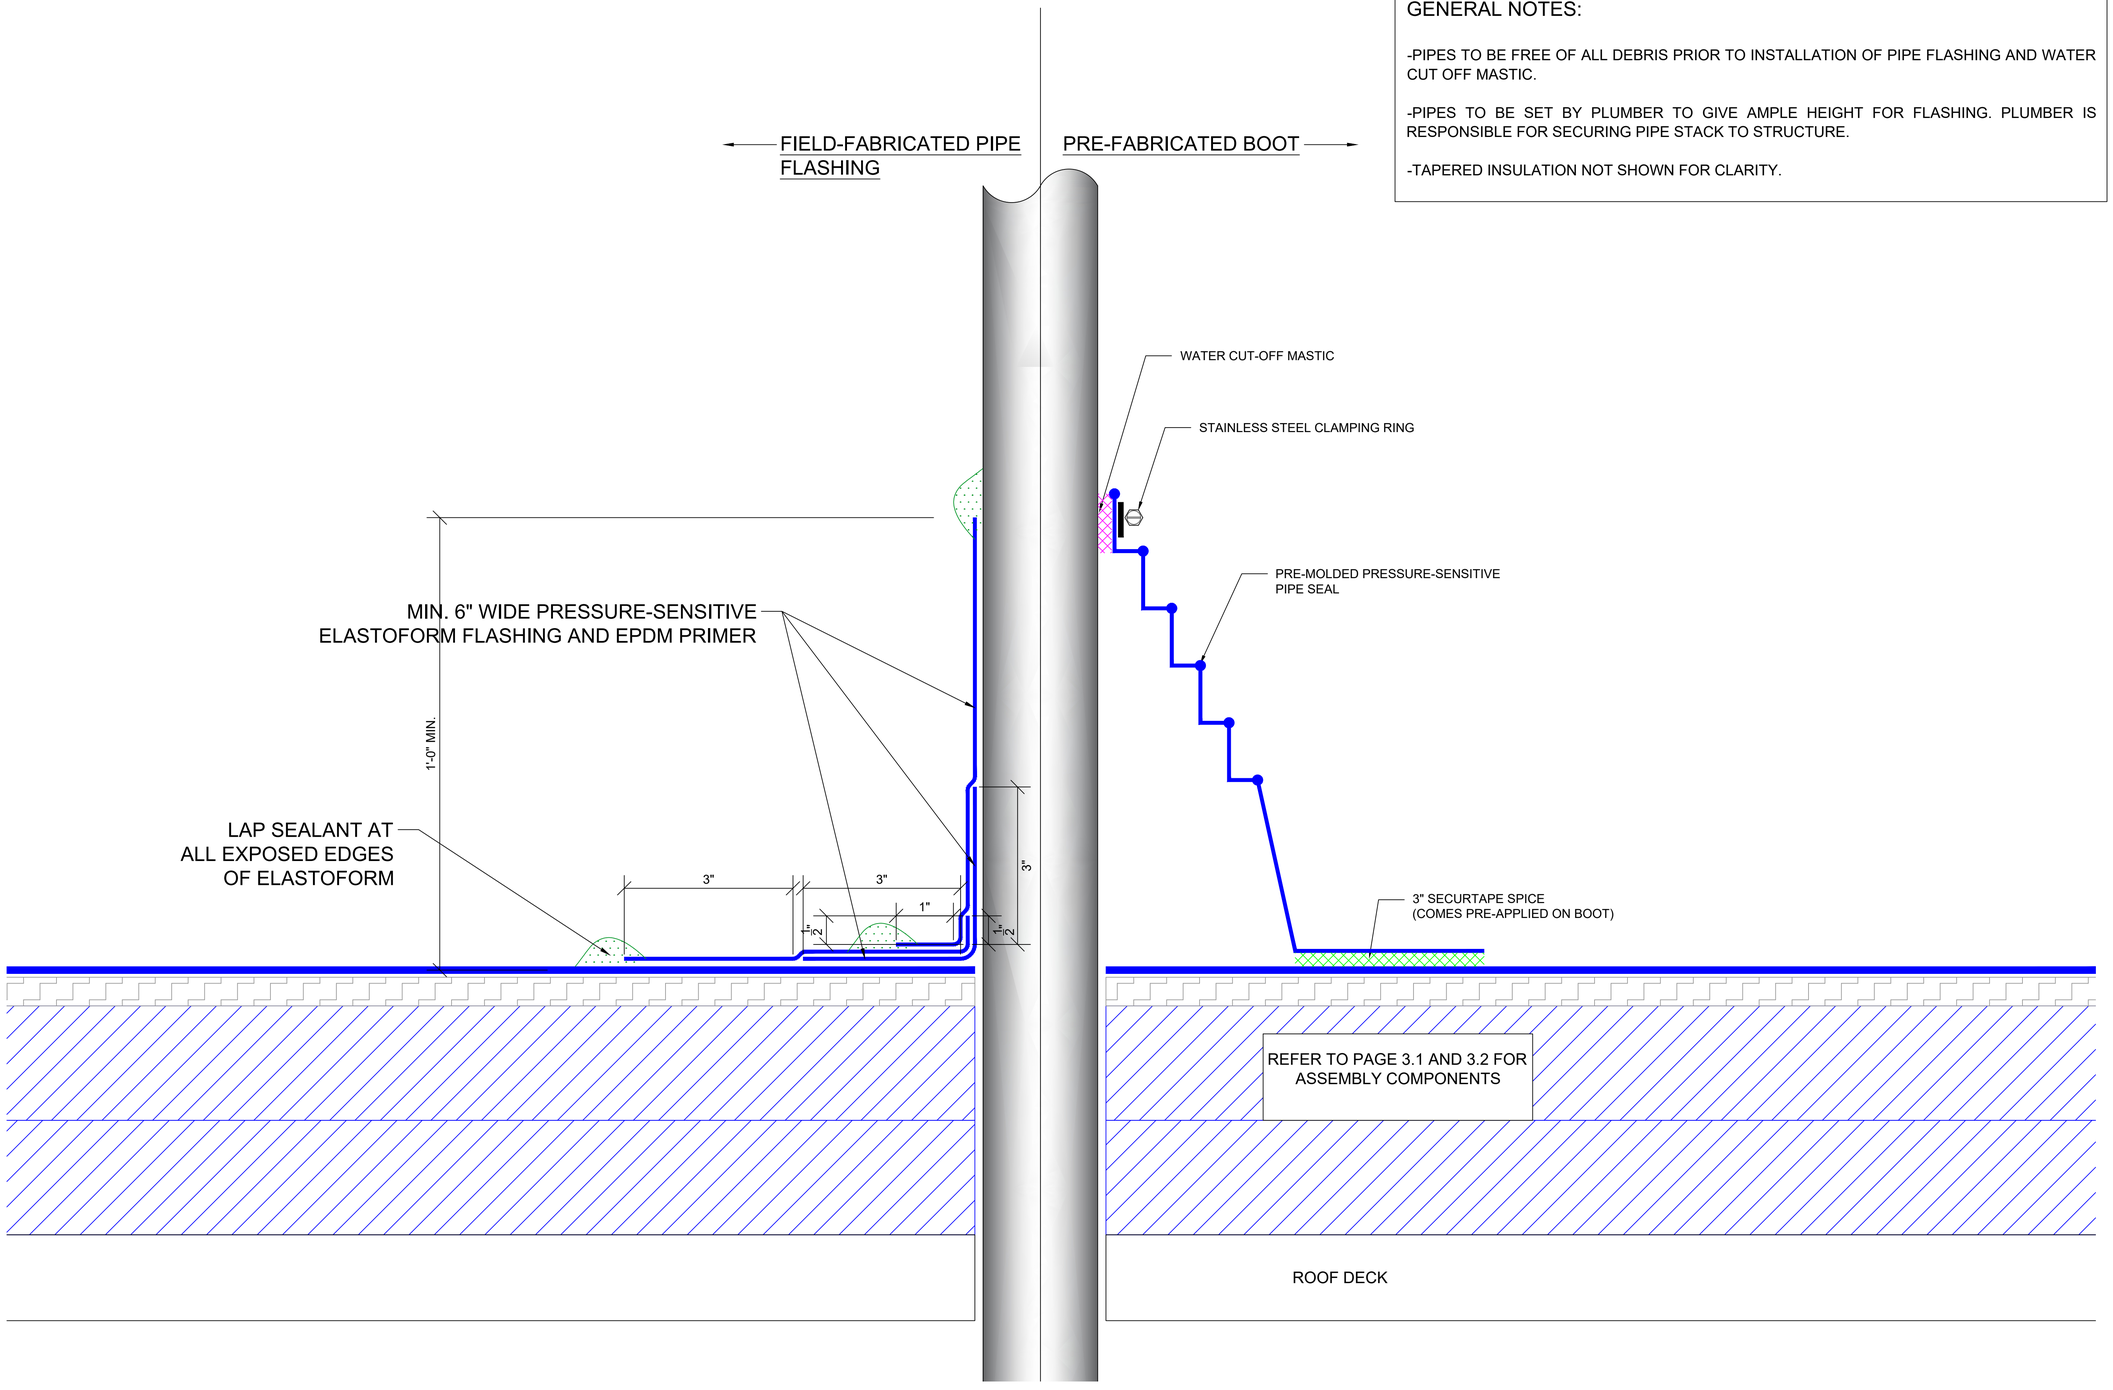

PIPE

FRW CONSULT


GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:	
Consultant:	
General:	

Project No:	969-076	Page: 5
Date:	9/23/2026	
Approved By:	C.C.	

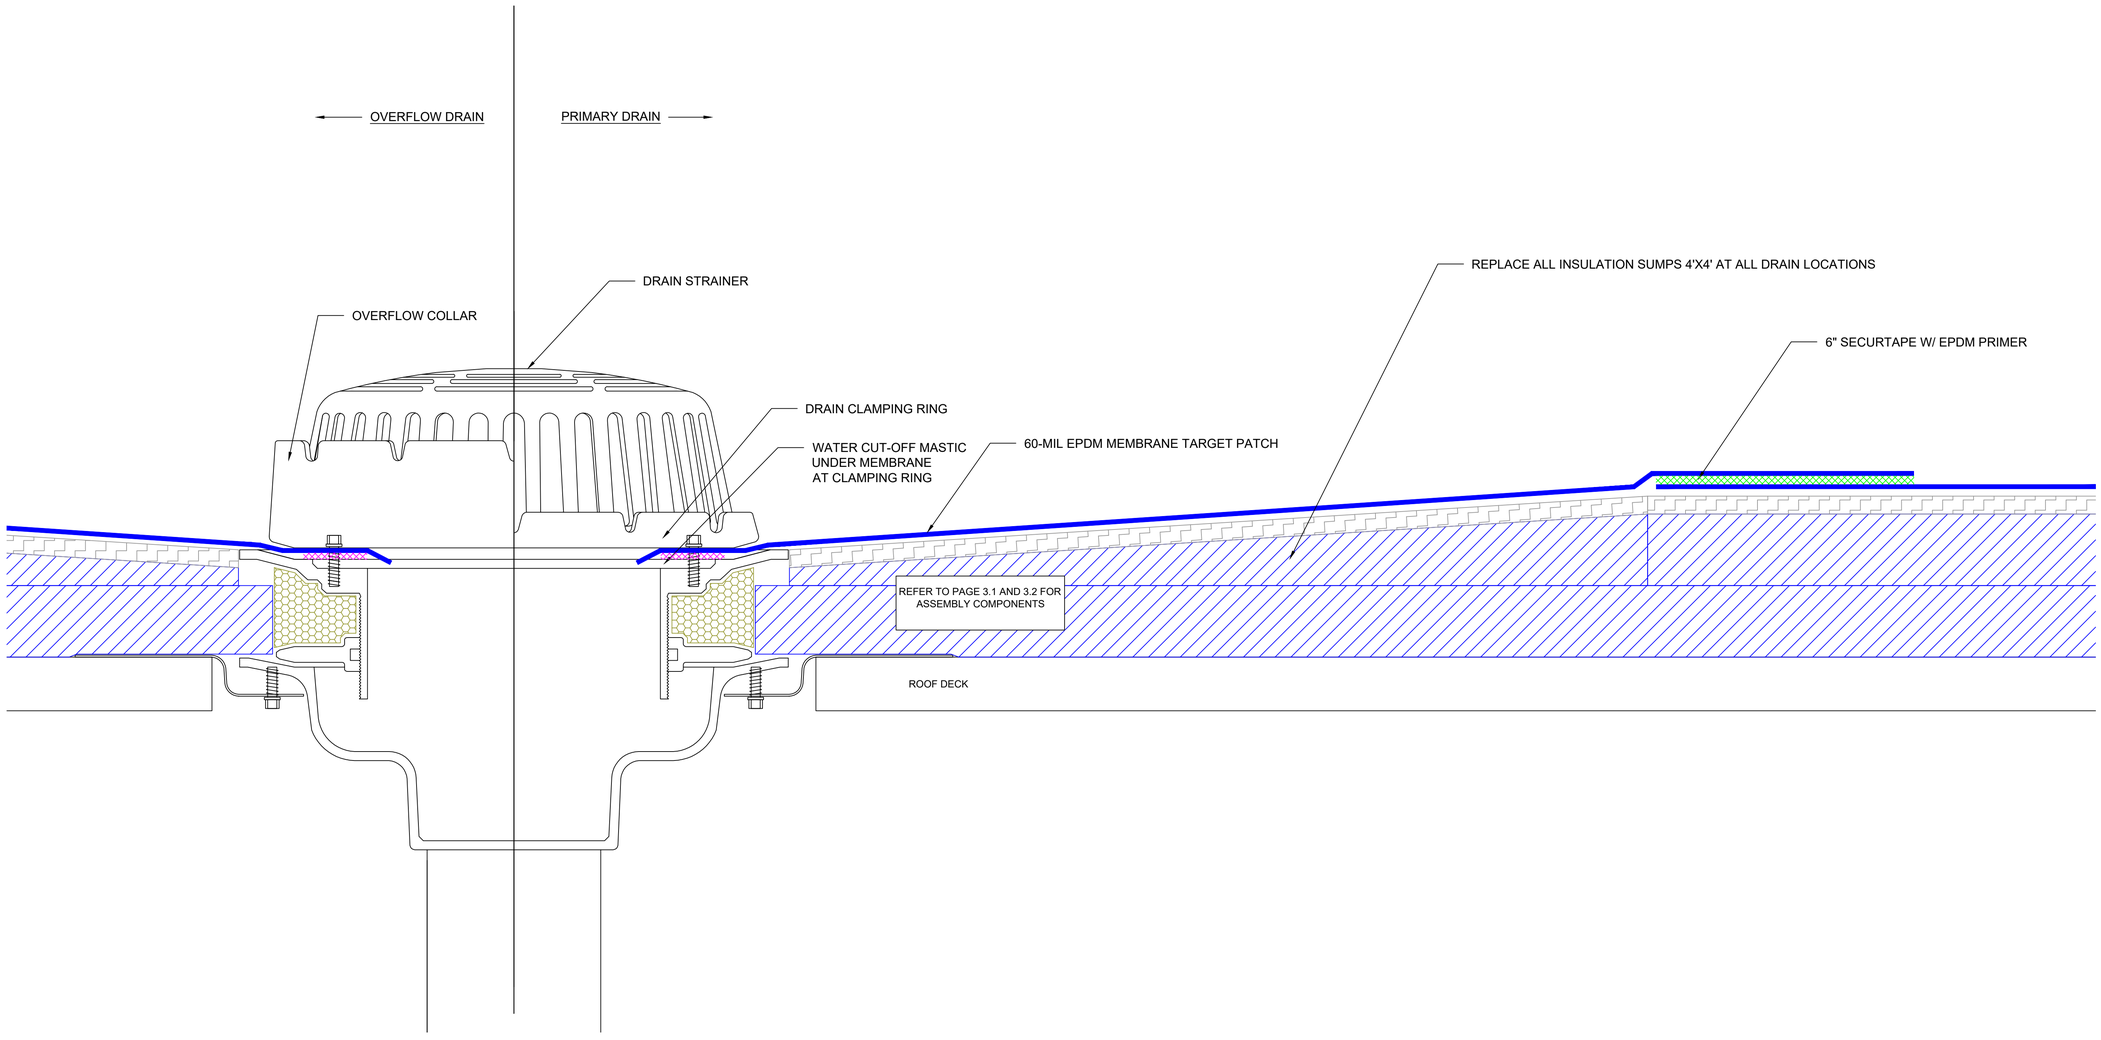

DRAIN

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26


Architect:	
Consultant:	
General:	

Project No:	969-076	Page: 6
Date:	9/23/2026	
Approved By:	C.C.	

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

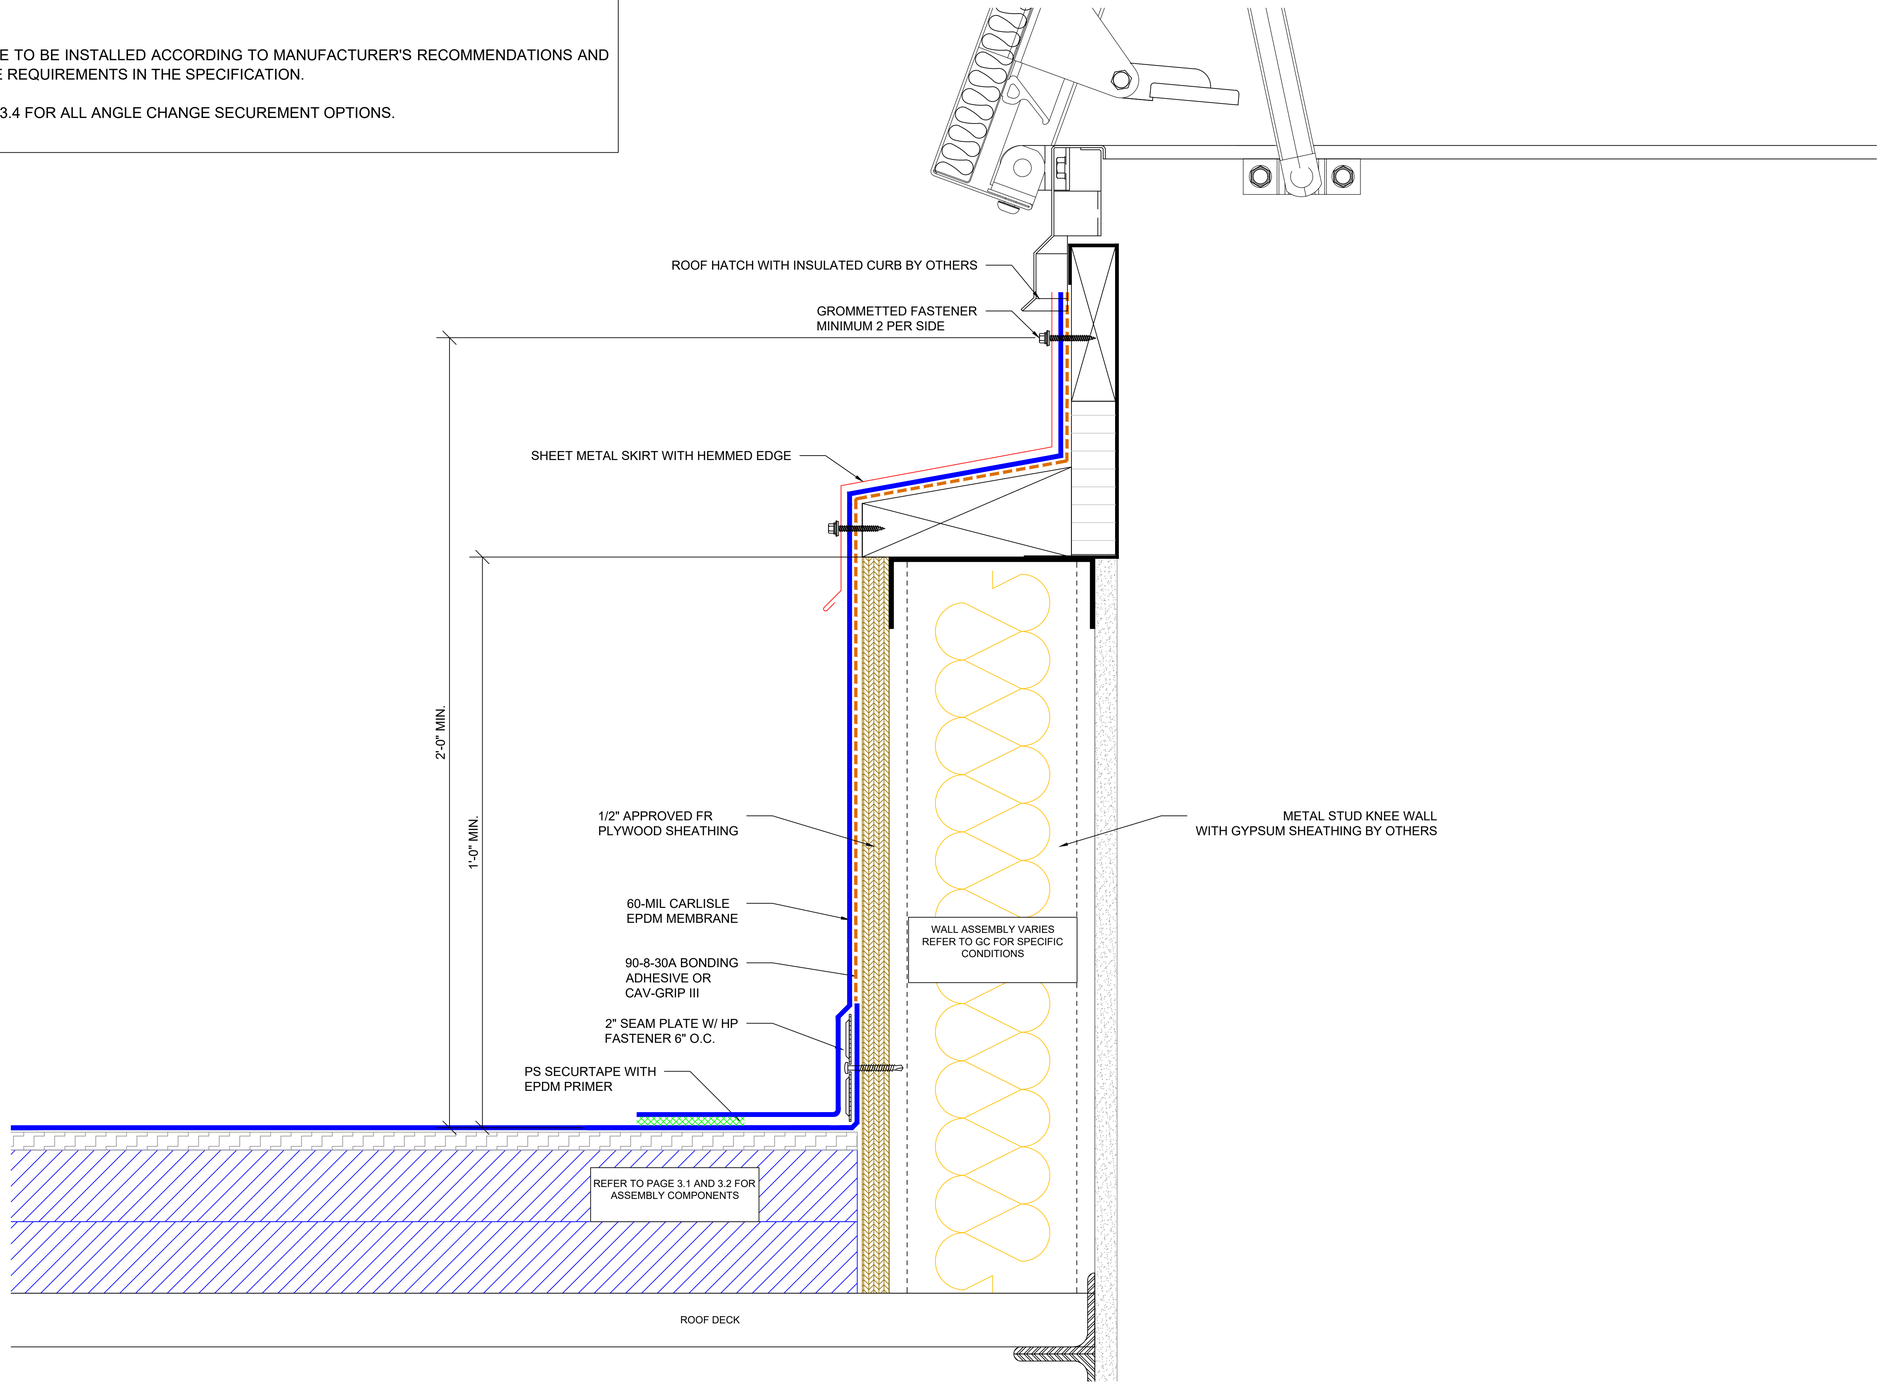

ROOF HATCH

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:


General:

Project No: 969-076

Date: 9/23/2026

Approved By: C.C.

Page: 7

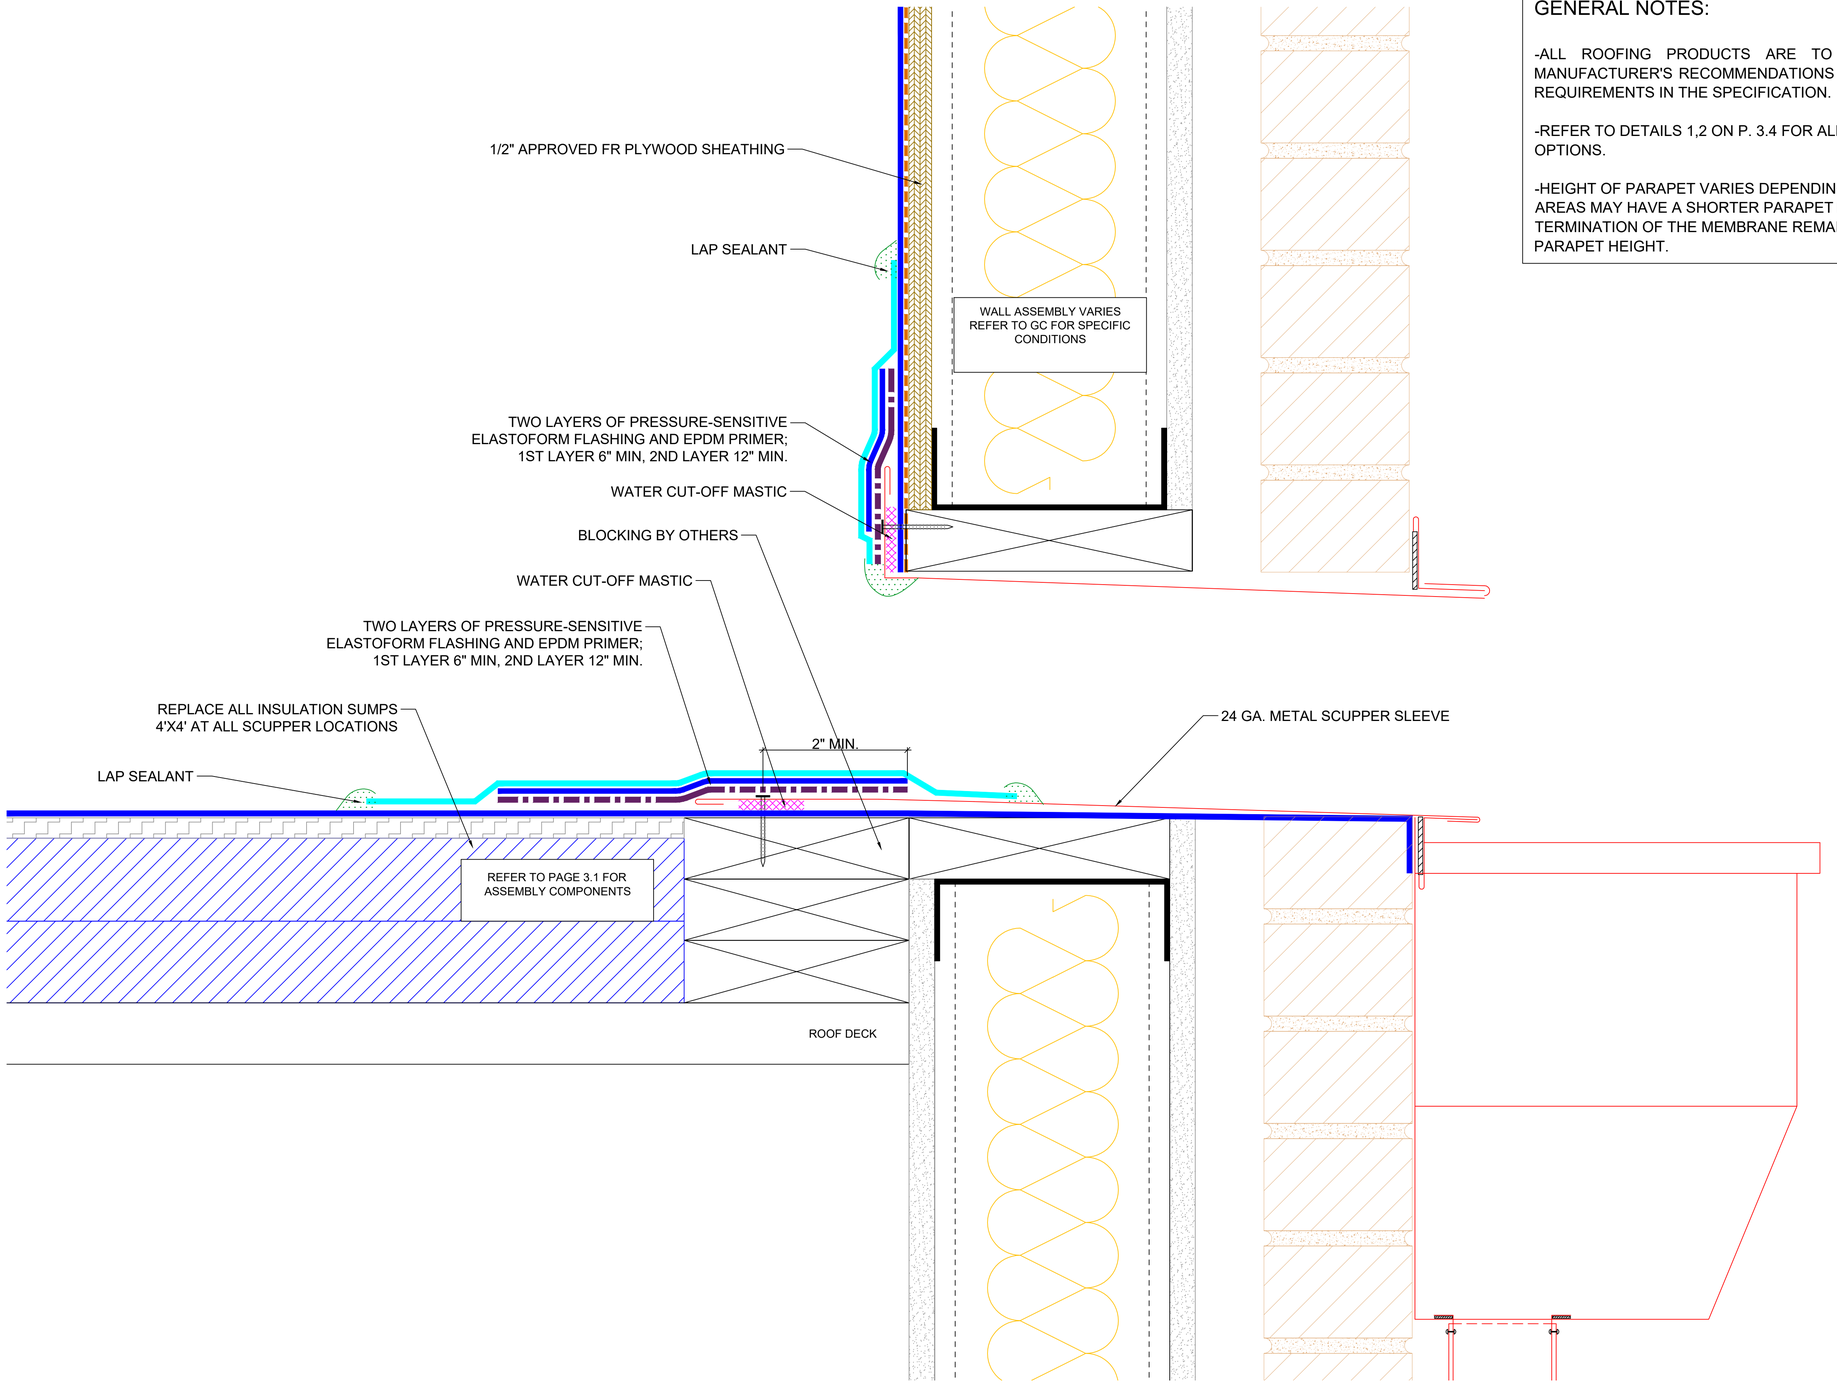

SCUPPER

REF. ARCH. DET.: 16/A4.2

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

-HEIGHT OF PARAPET VARIES DEPENDING ON LOCATION OF DETAIL. SOME AREAS MAY HAVE A SHORTER PARAPET HEIGHT THAN WHAT IT DEPICTED. TERMINATION OF THE MEMBRANE REMAINS THE SAME INDEPENDENT OF PARAPET HEIGHT.

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

2.	REV. 2	9/23/26
1.	REV. 1	9/21/26
No.	Revision/Issue	Date

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026


Approved By: C.C.

Page: 8

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

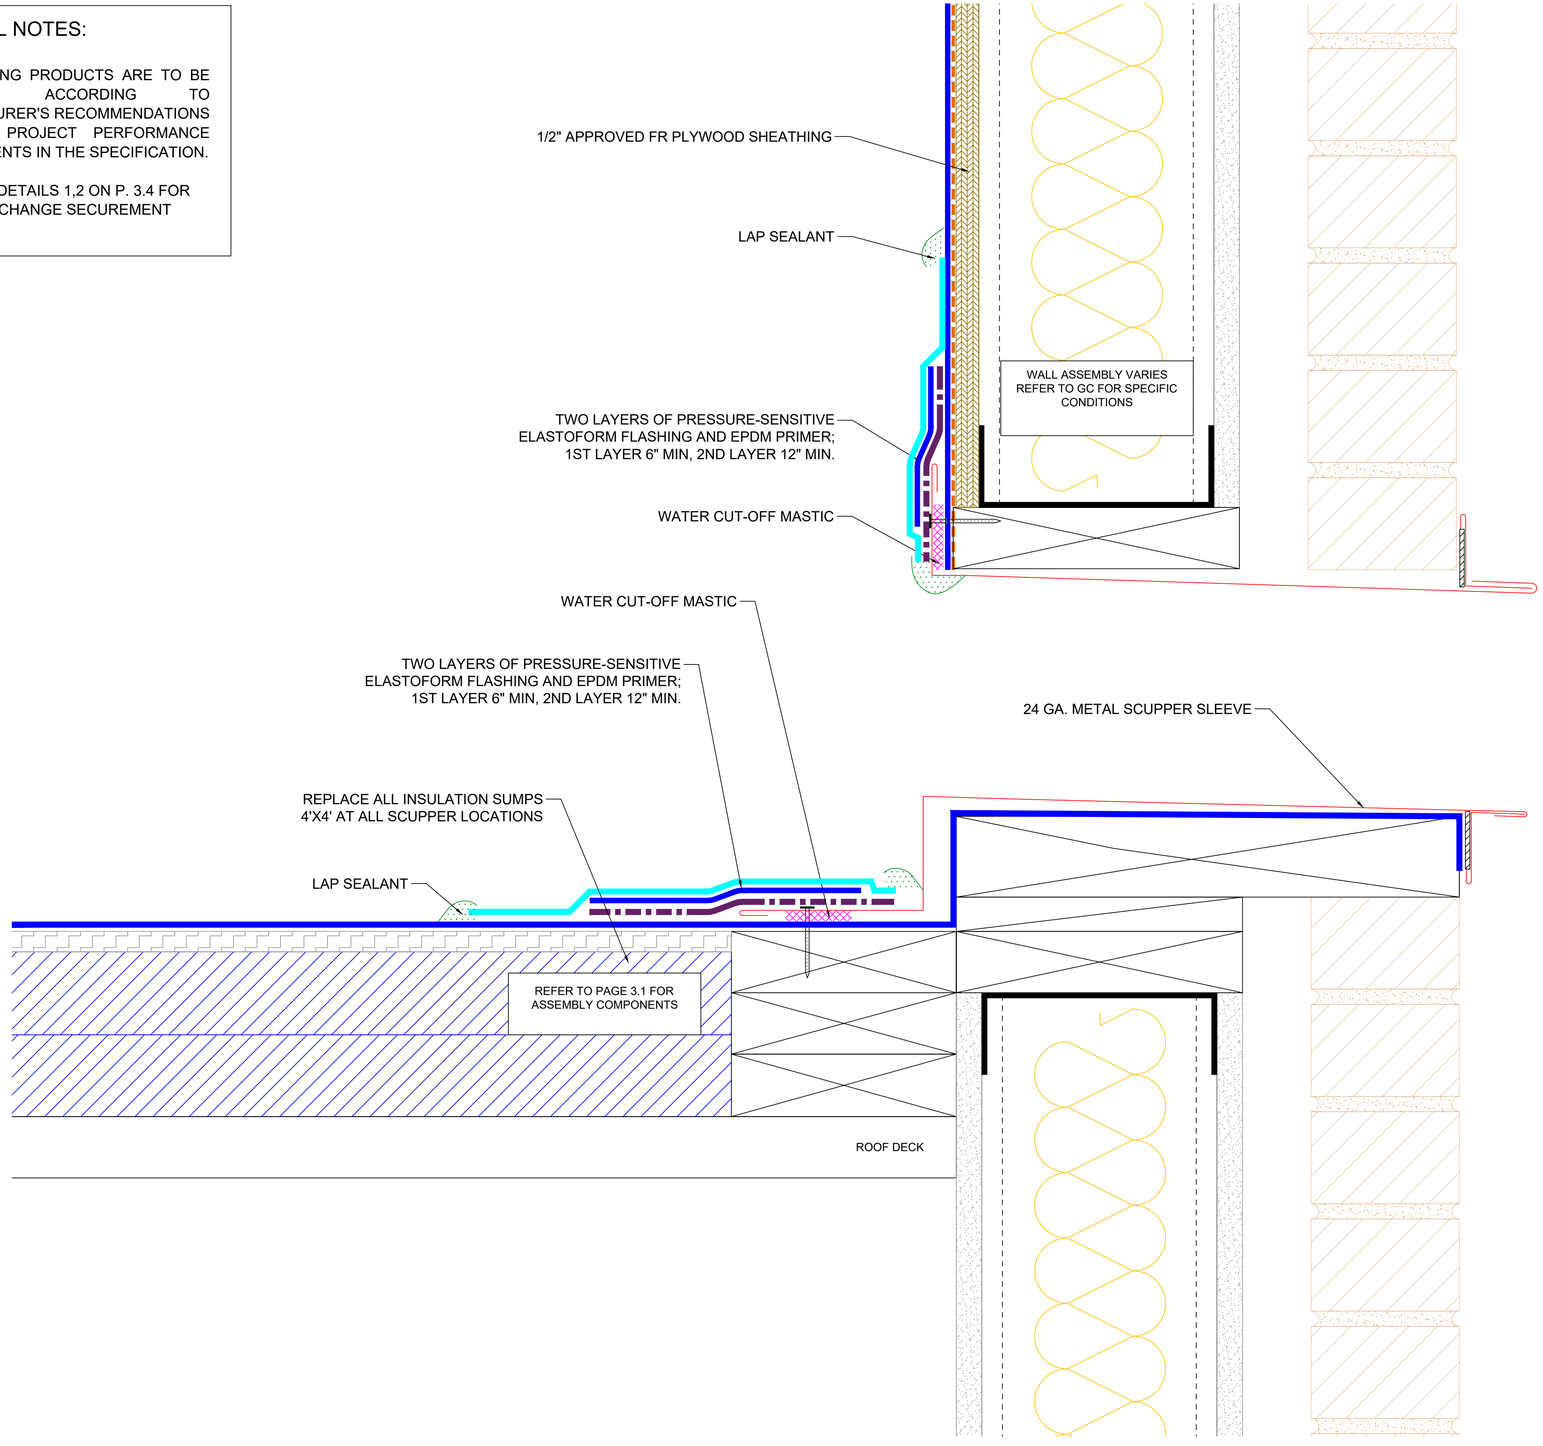

OVERFLOW SCUPPER

FRW CONSULT


GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:	
Consultant:	
General:	

Project No:	969-076	Page: 9
Date:	9/23/2026	
Approved By:	C.C.	

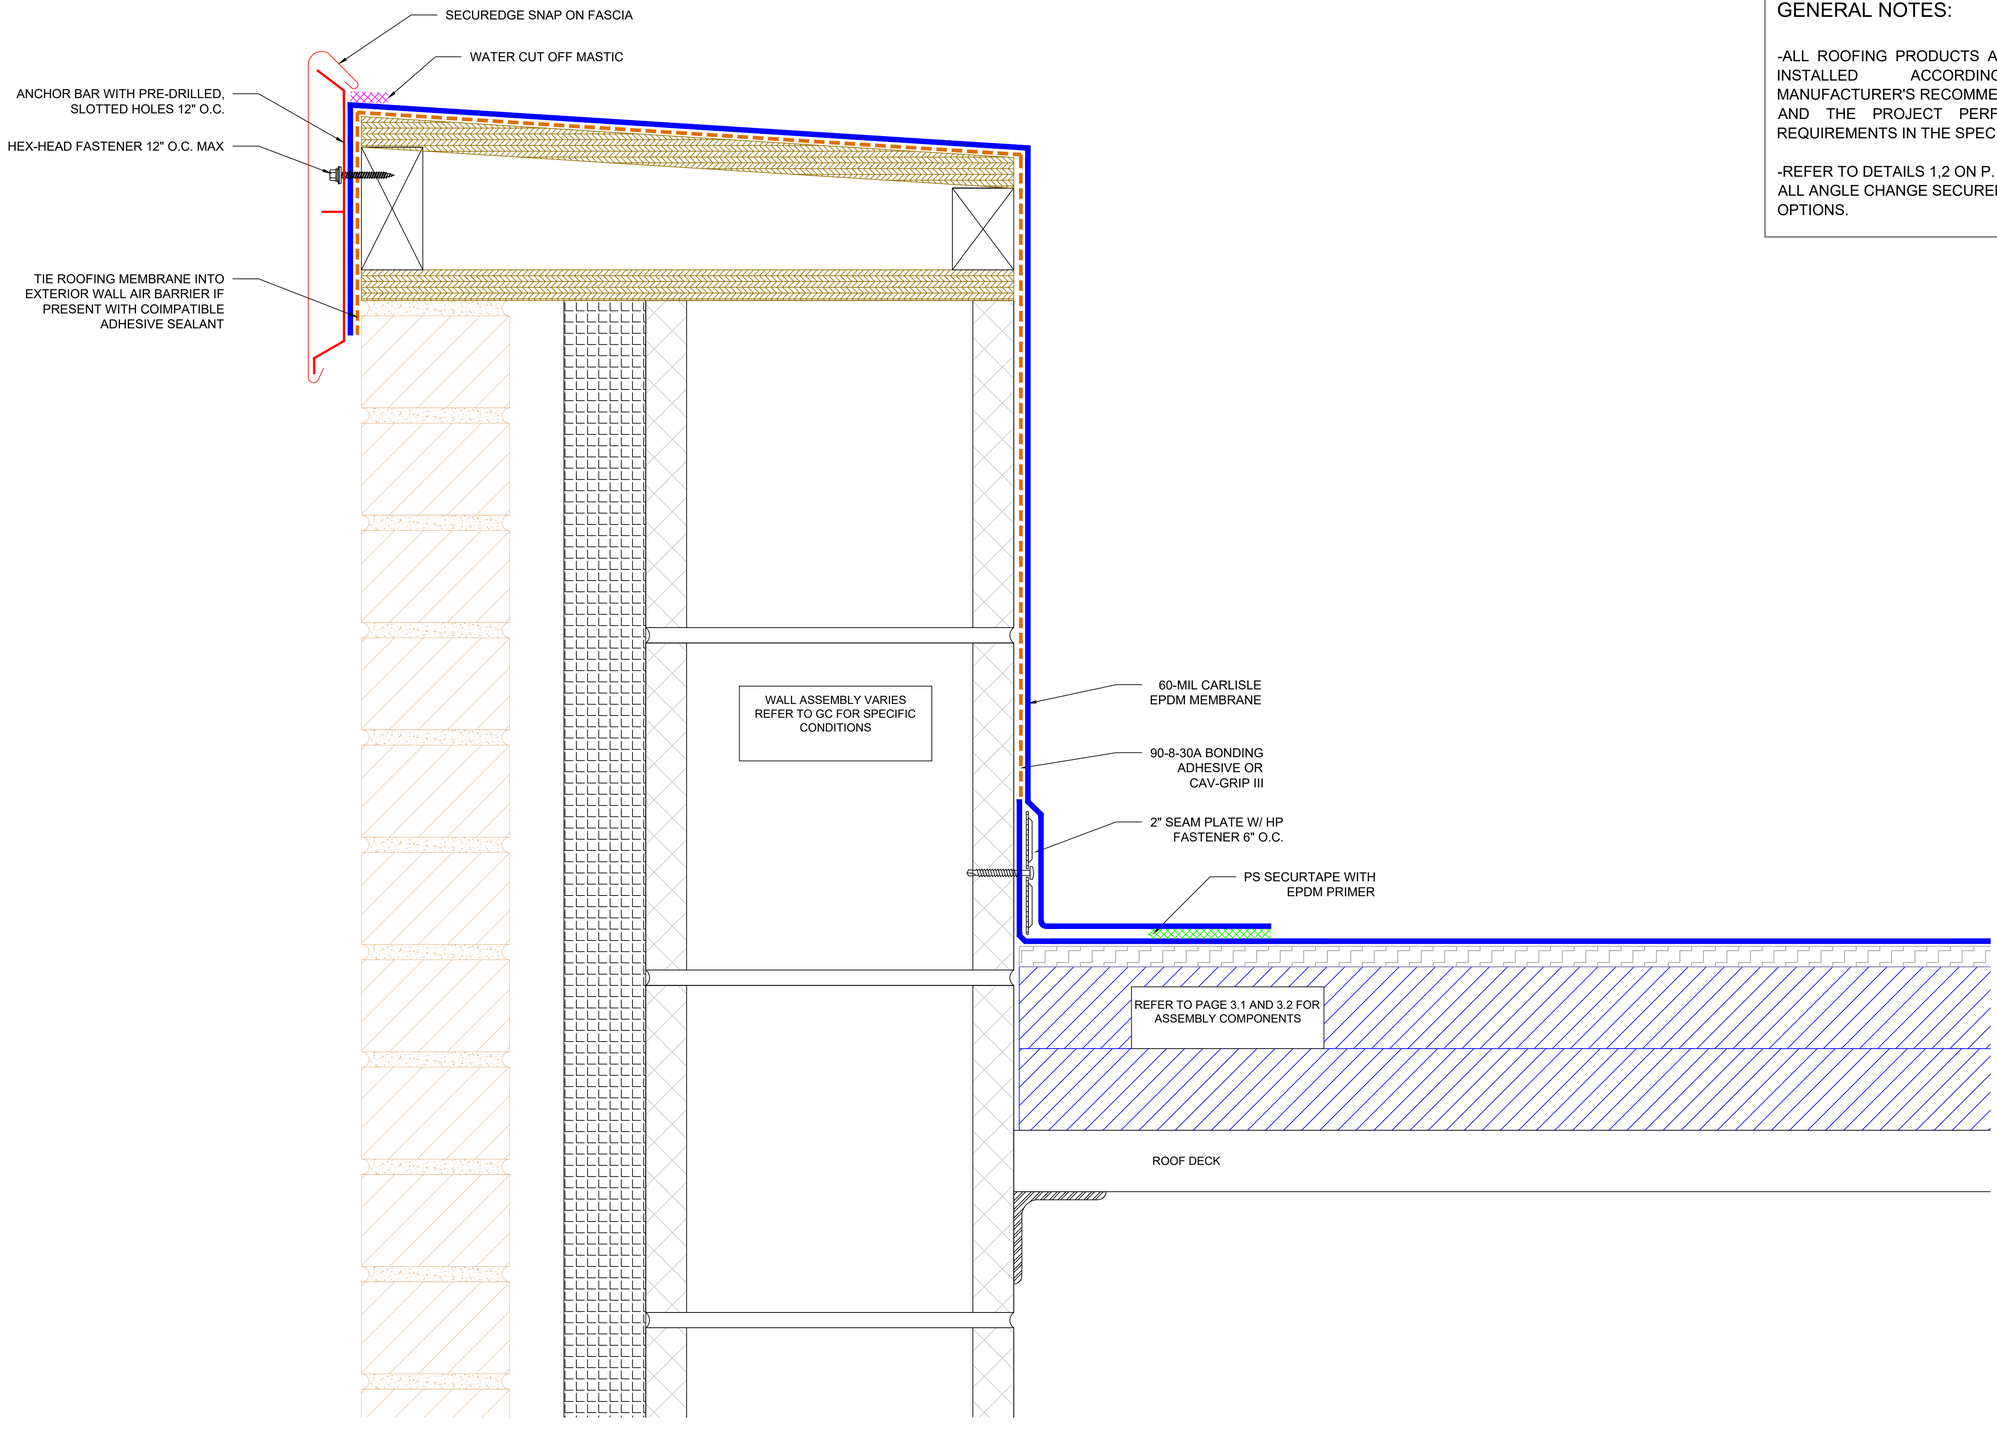

BRICK PARAPET

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:


General:

Project No: 969-076

Date: 9/23/2026

Approved By: C.C.

Page: 10

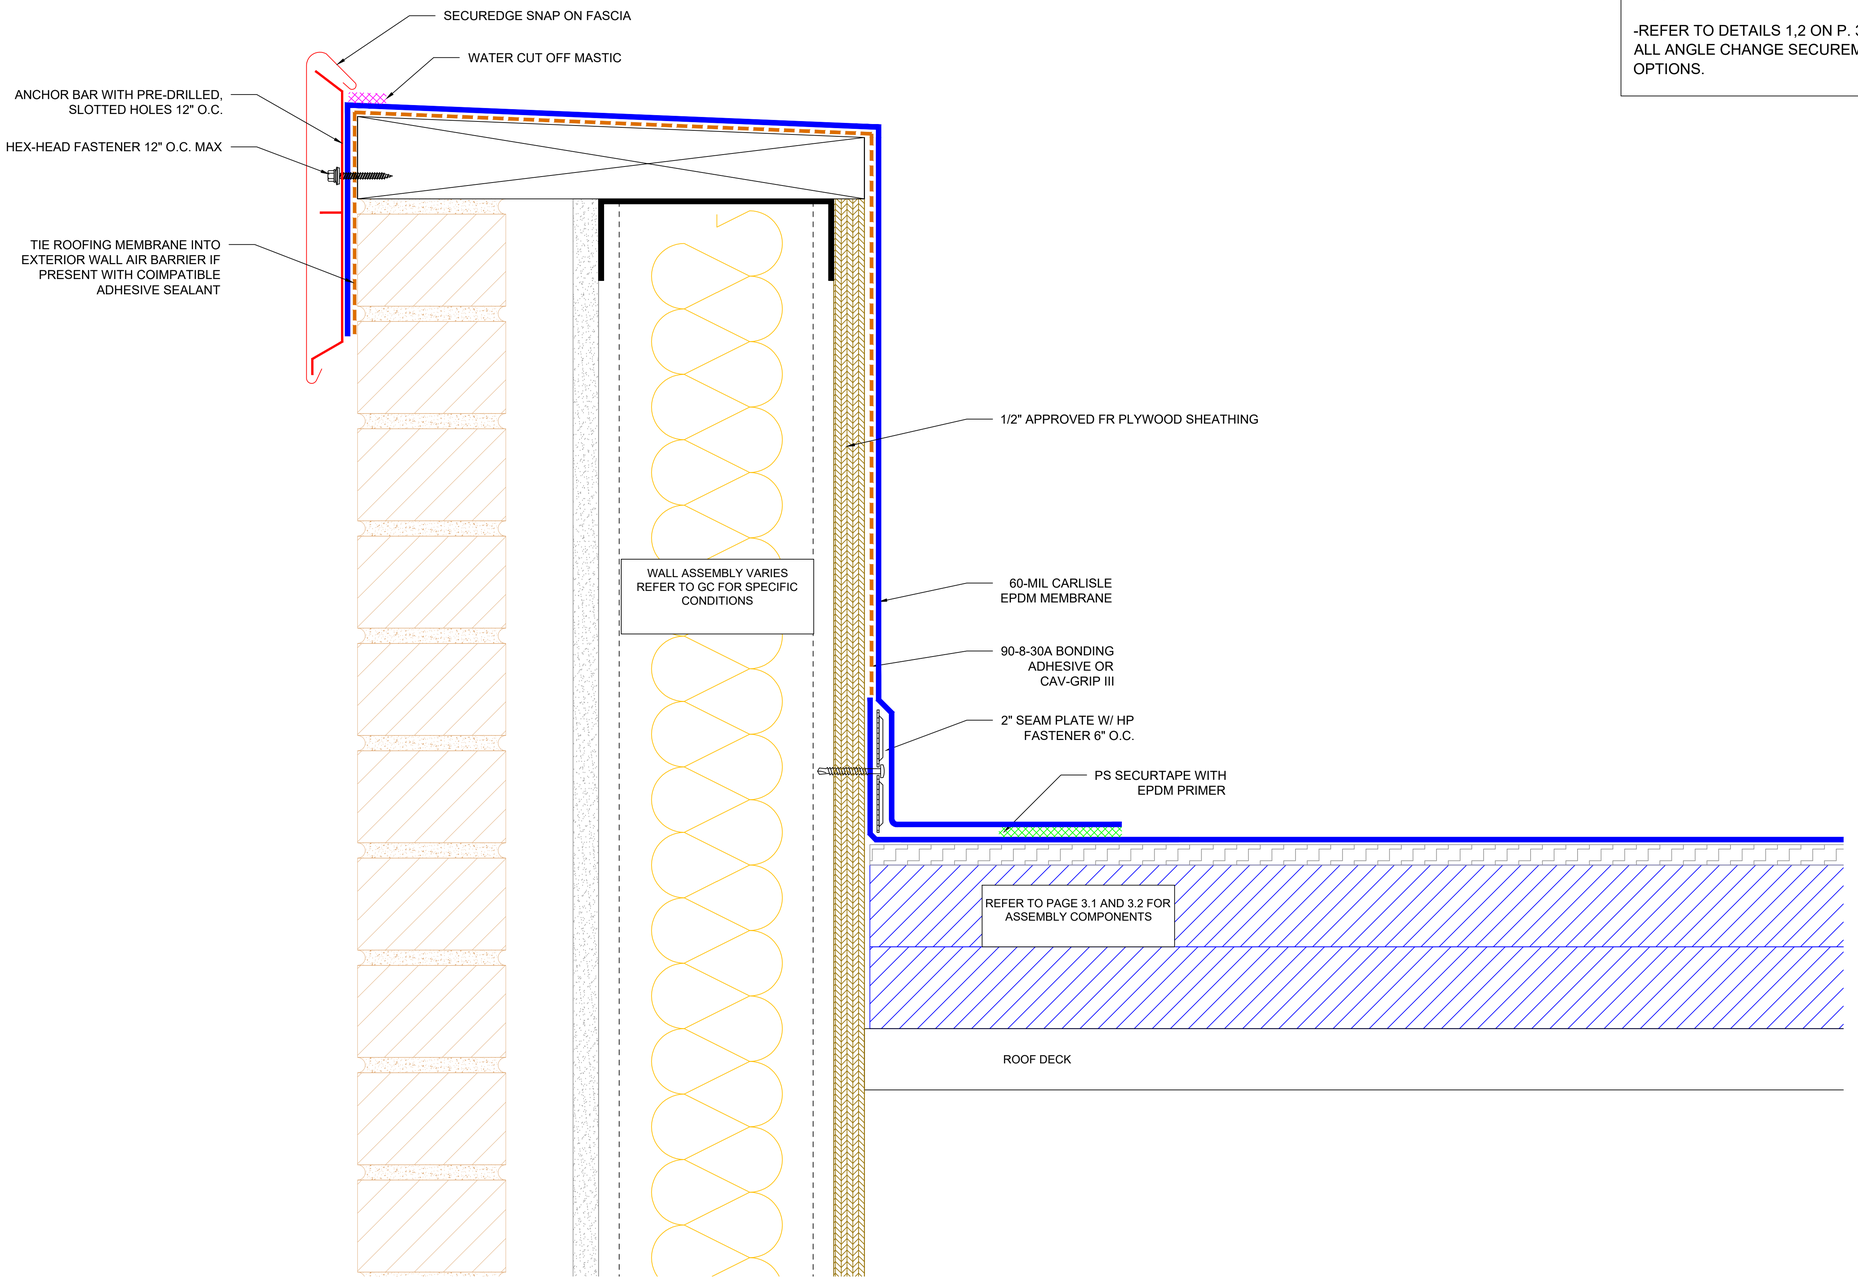

STUD PARAPET

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026


Approved By: C.C.

Page: 11

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

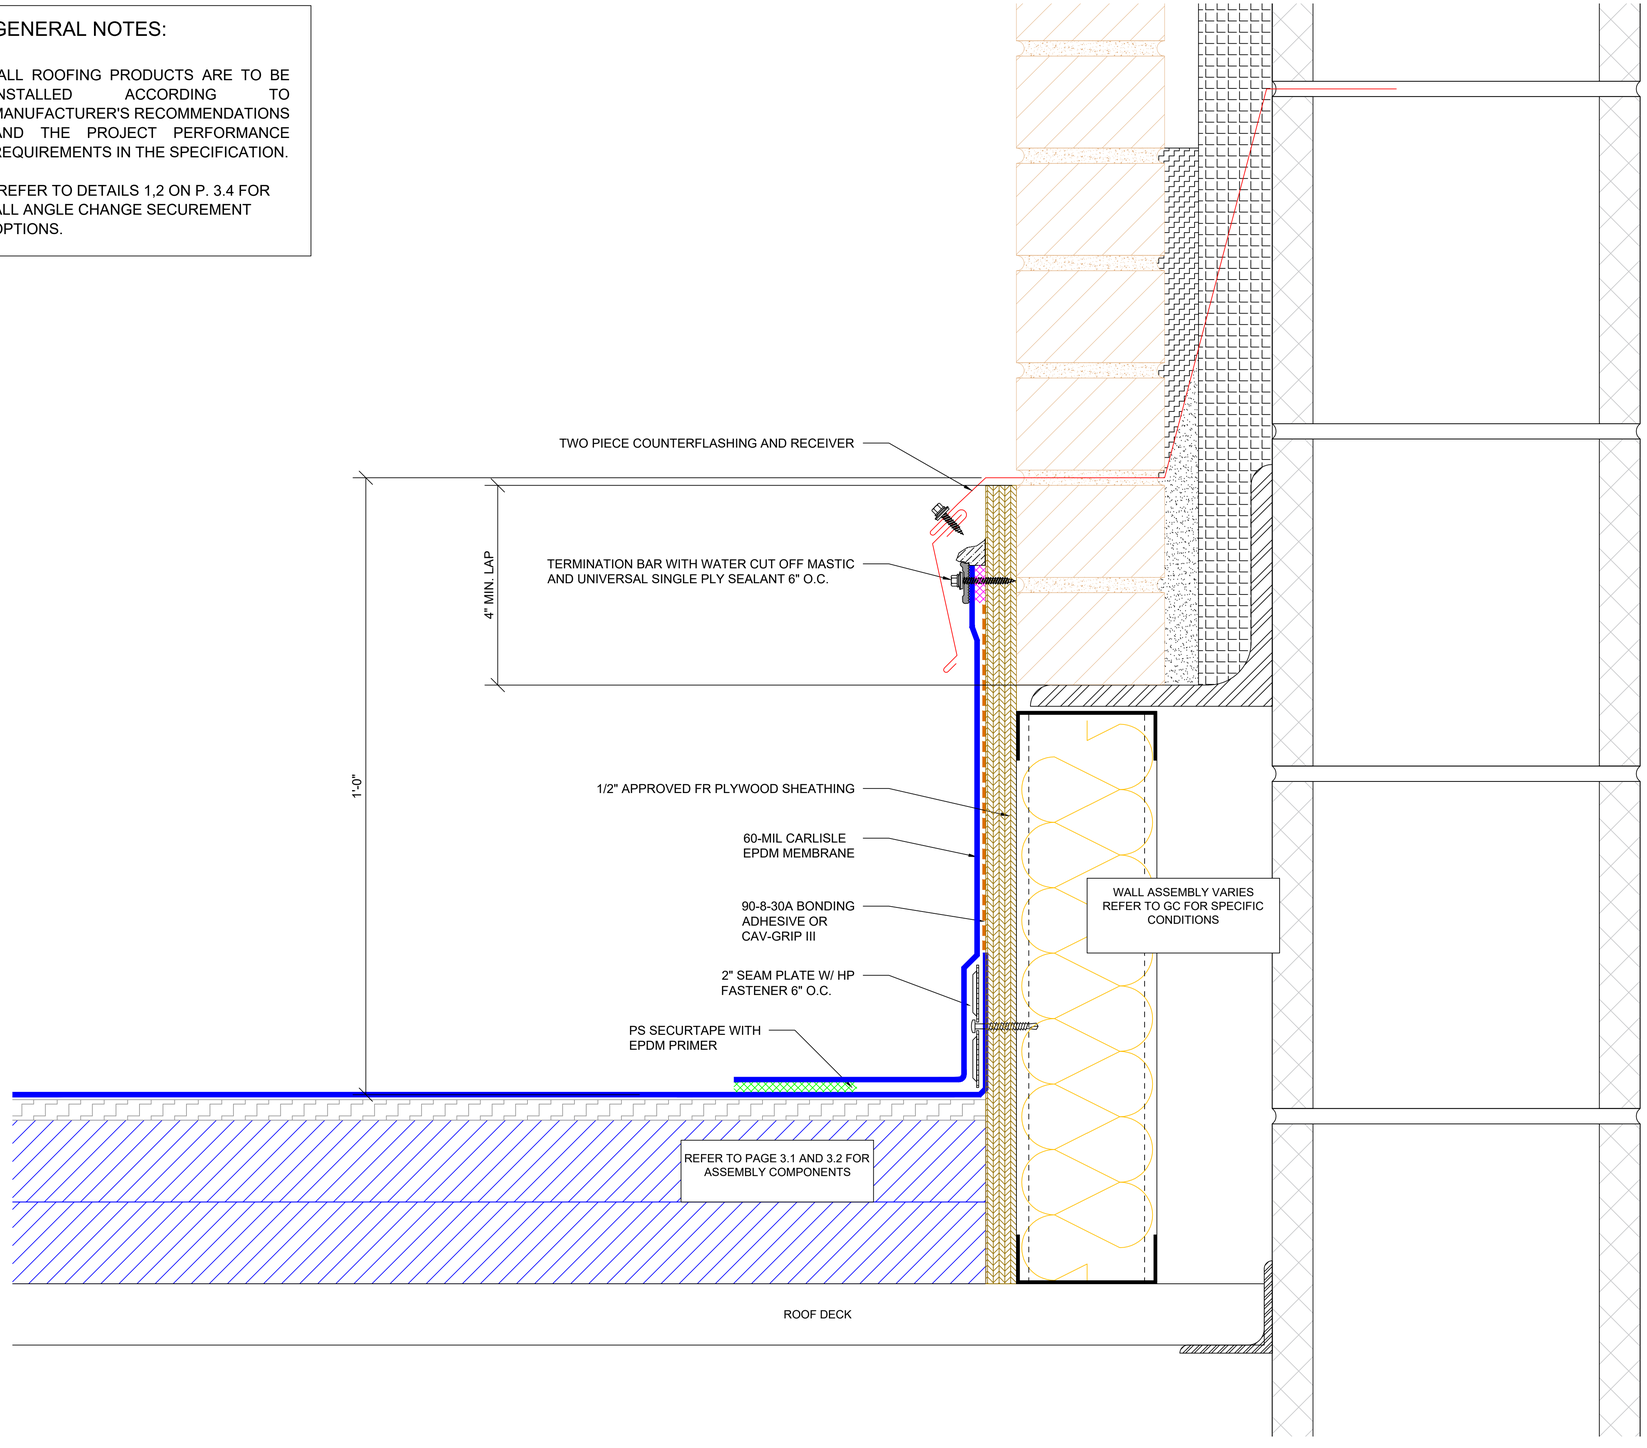

RISEWALL

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026


Approved By: C.C.

Page: 12

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

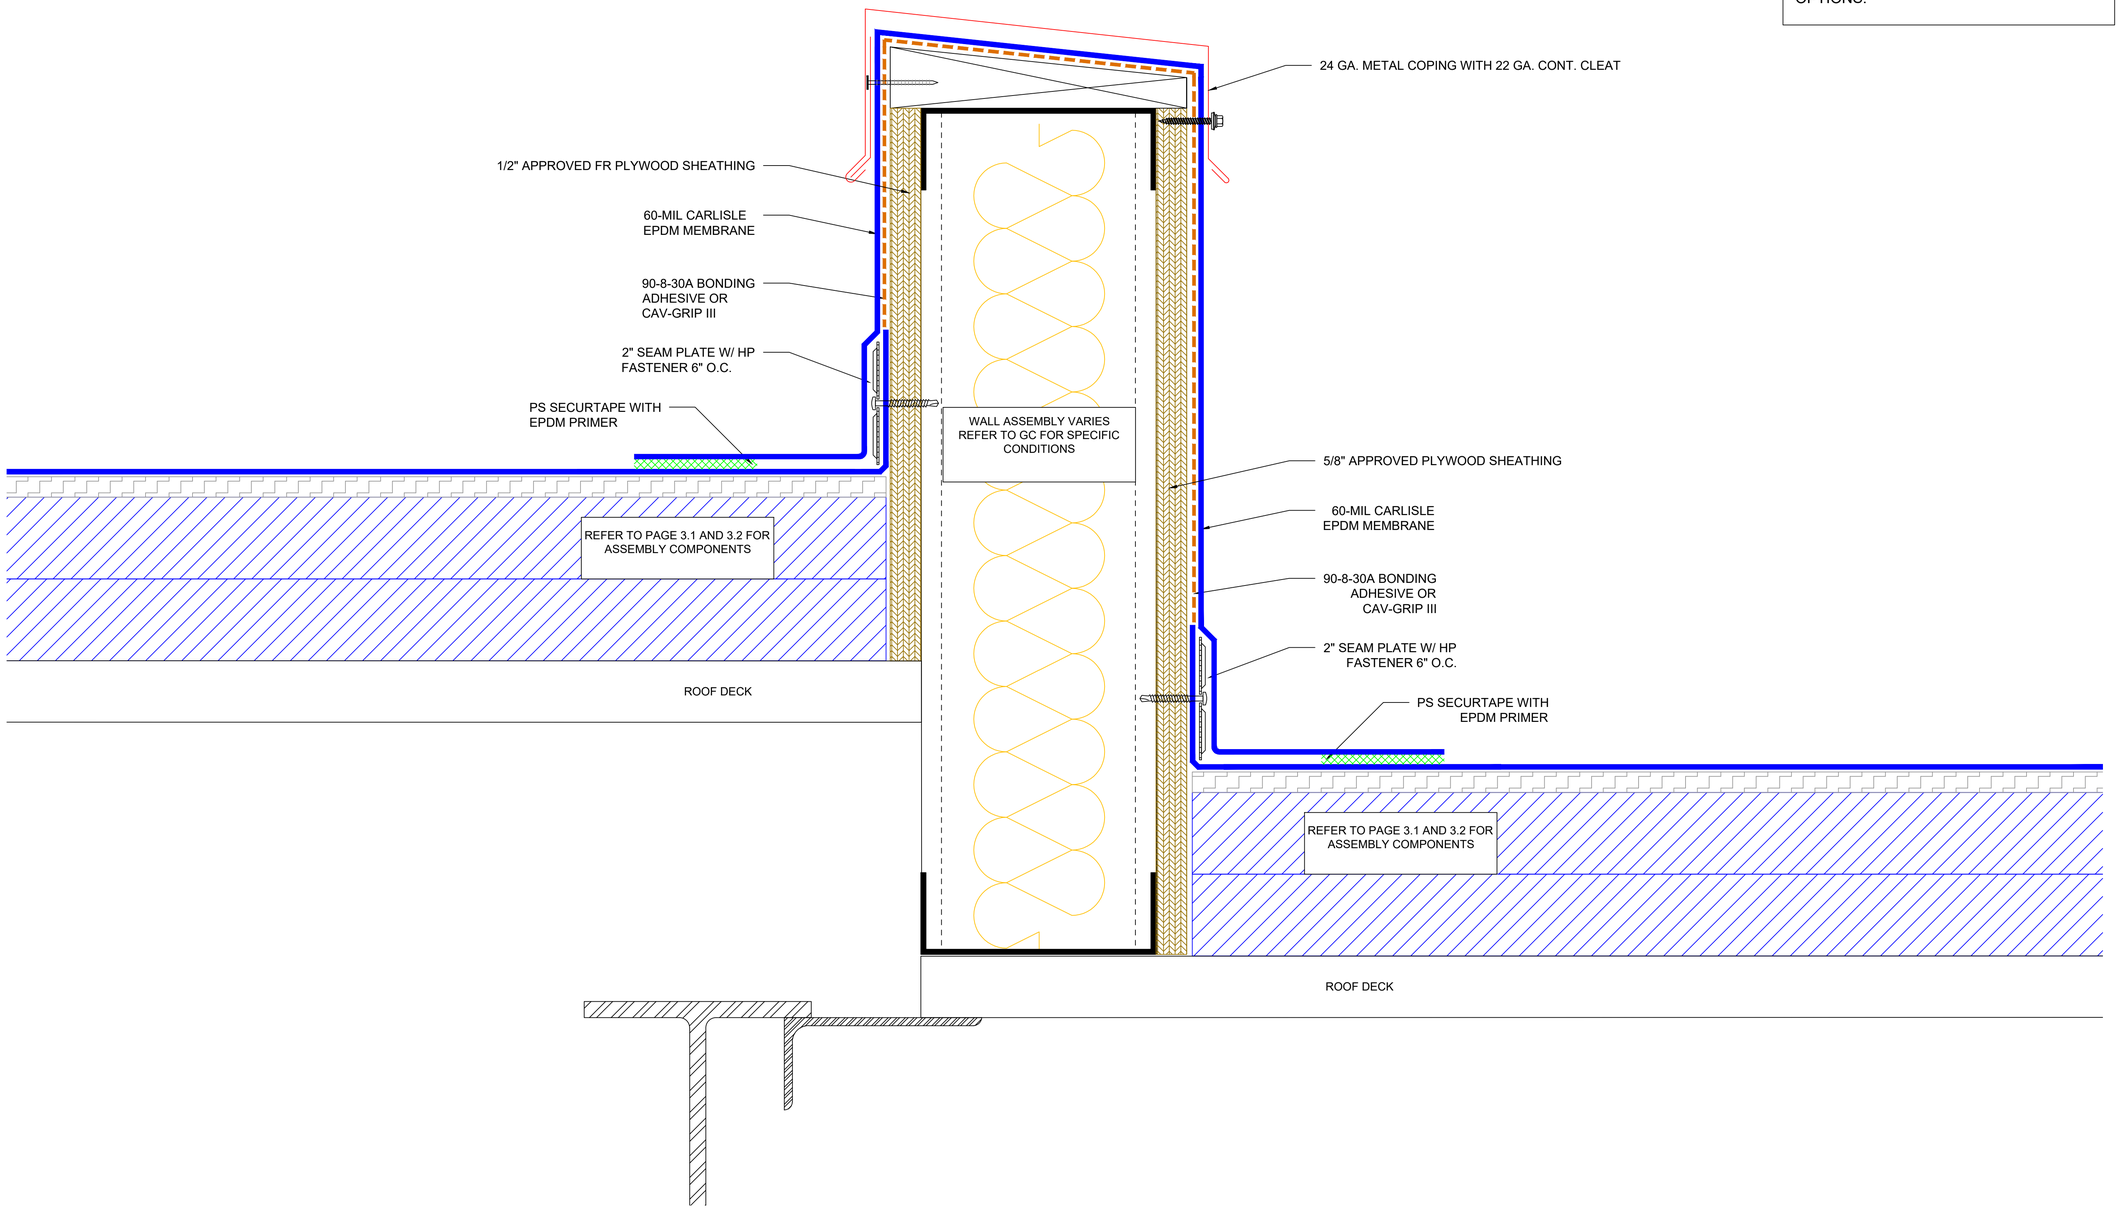

AREA DIVIDER

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026


Approved By: C.C.

Page: 13

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

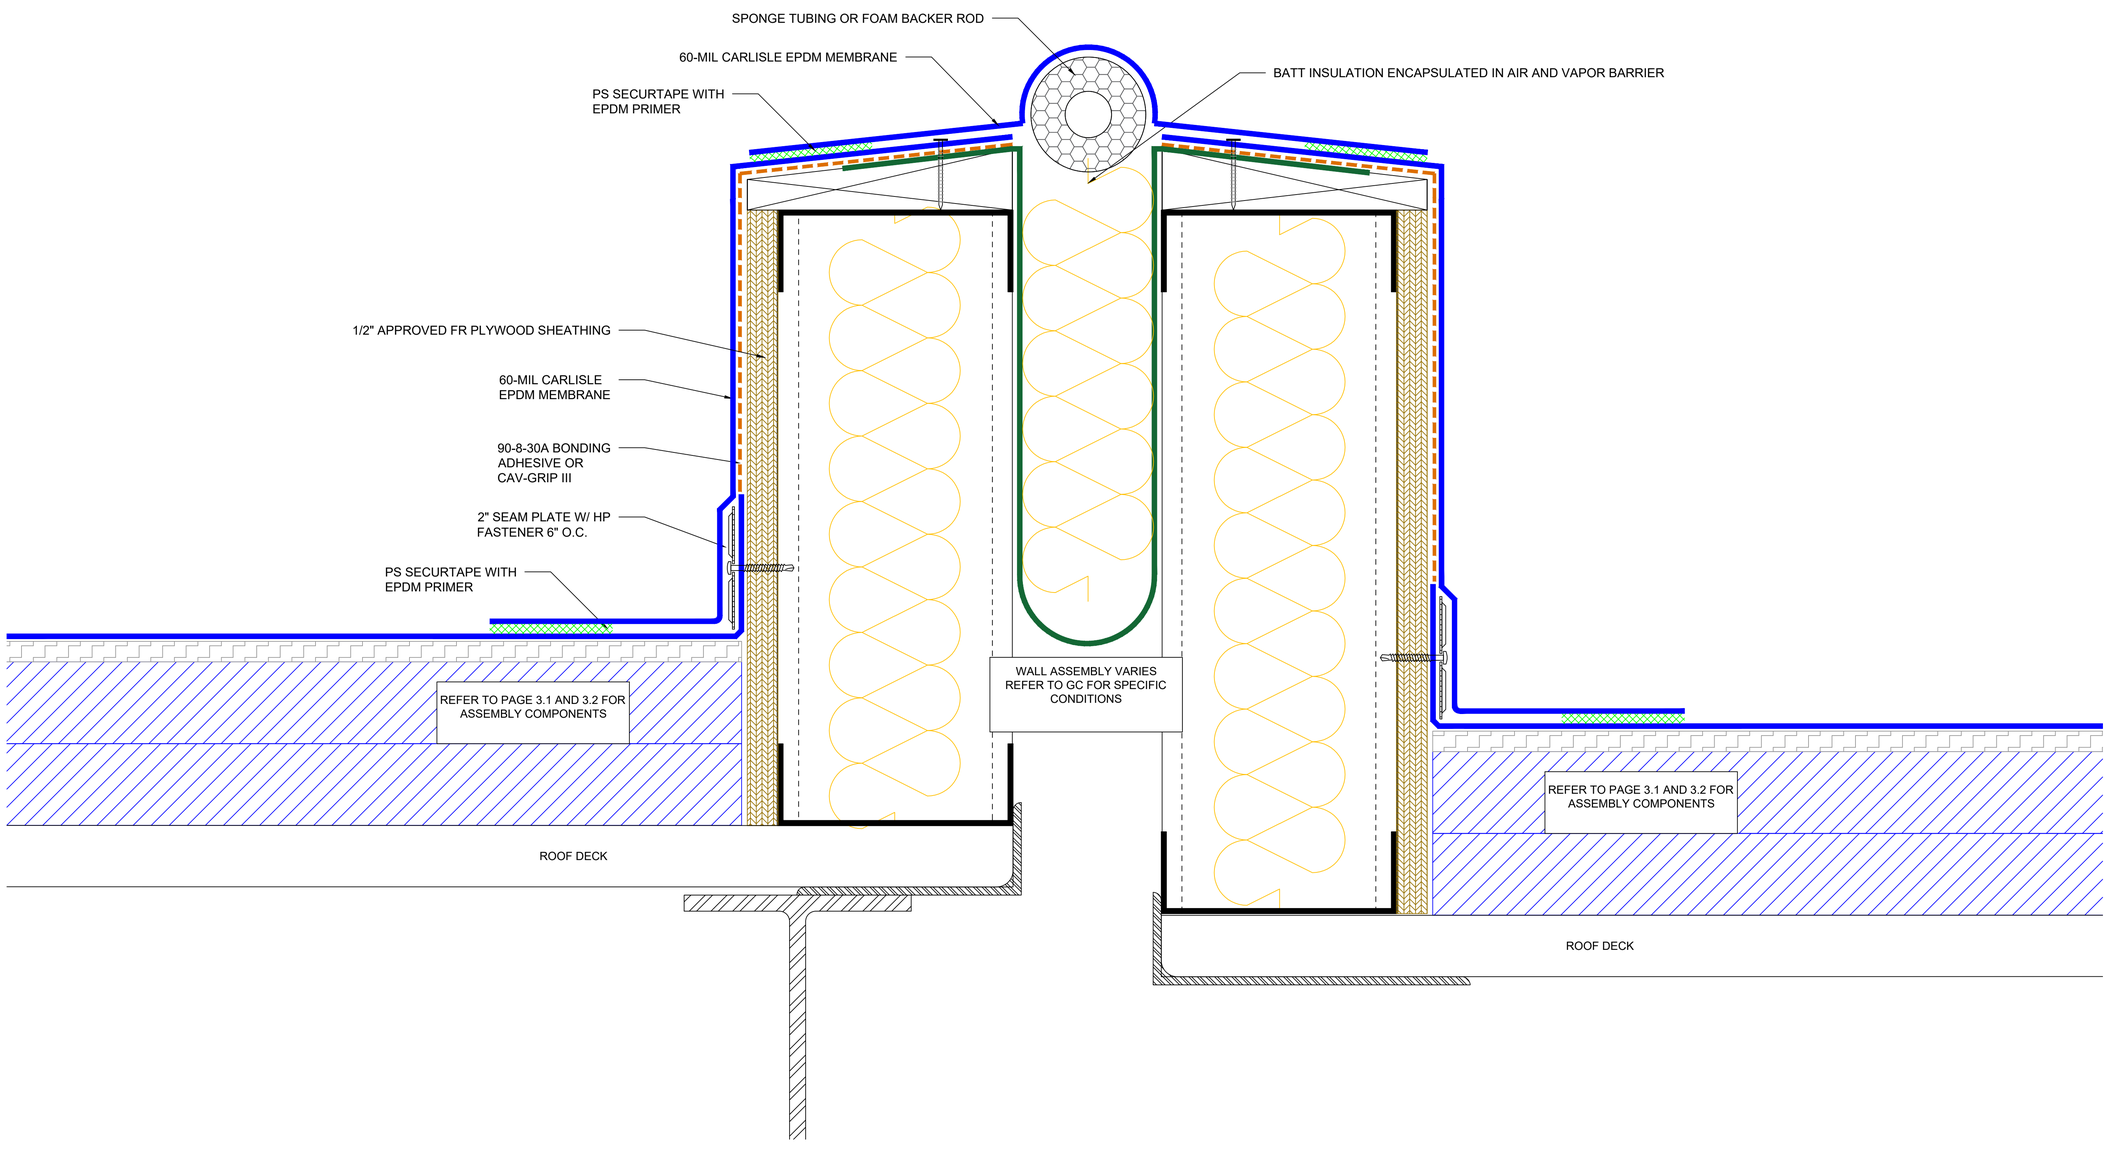

ROOF TO ROOF EXPANSION JOINT

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS
1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26


Architect:	
Consultant:	
General:	

Project No:	969-076	Page: 14
Date:	9/23/2026	
Approved By:	C.C.	

GENERAL NOTES:

-ALL ROOFING PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND THE PROJECT PERFORMANCE REQUIREMENTS IN THE SPECIFICATION.

-REFER TO DETAILS 1,2 ON P. 3.4 FOR ALL ANGLE CHANGE SECUREMENT OPTIONS.

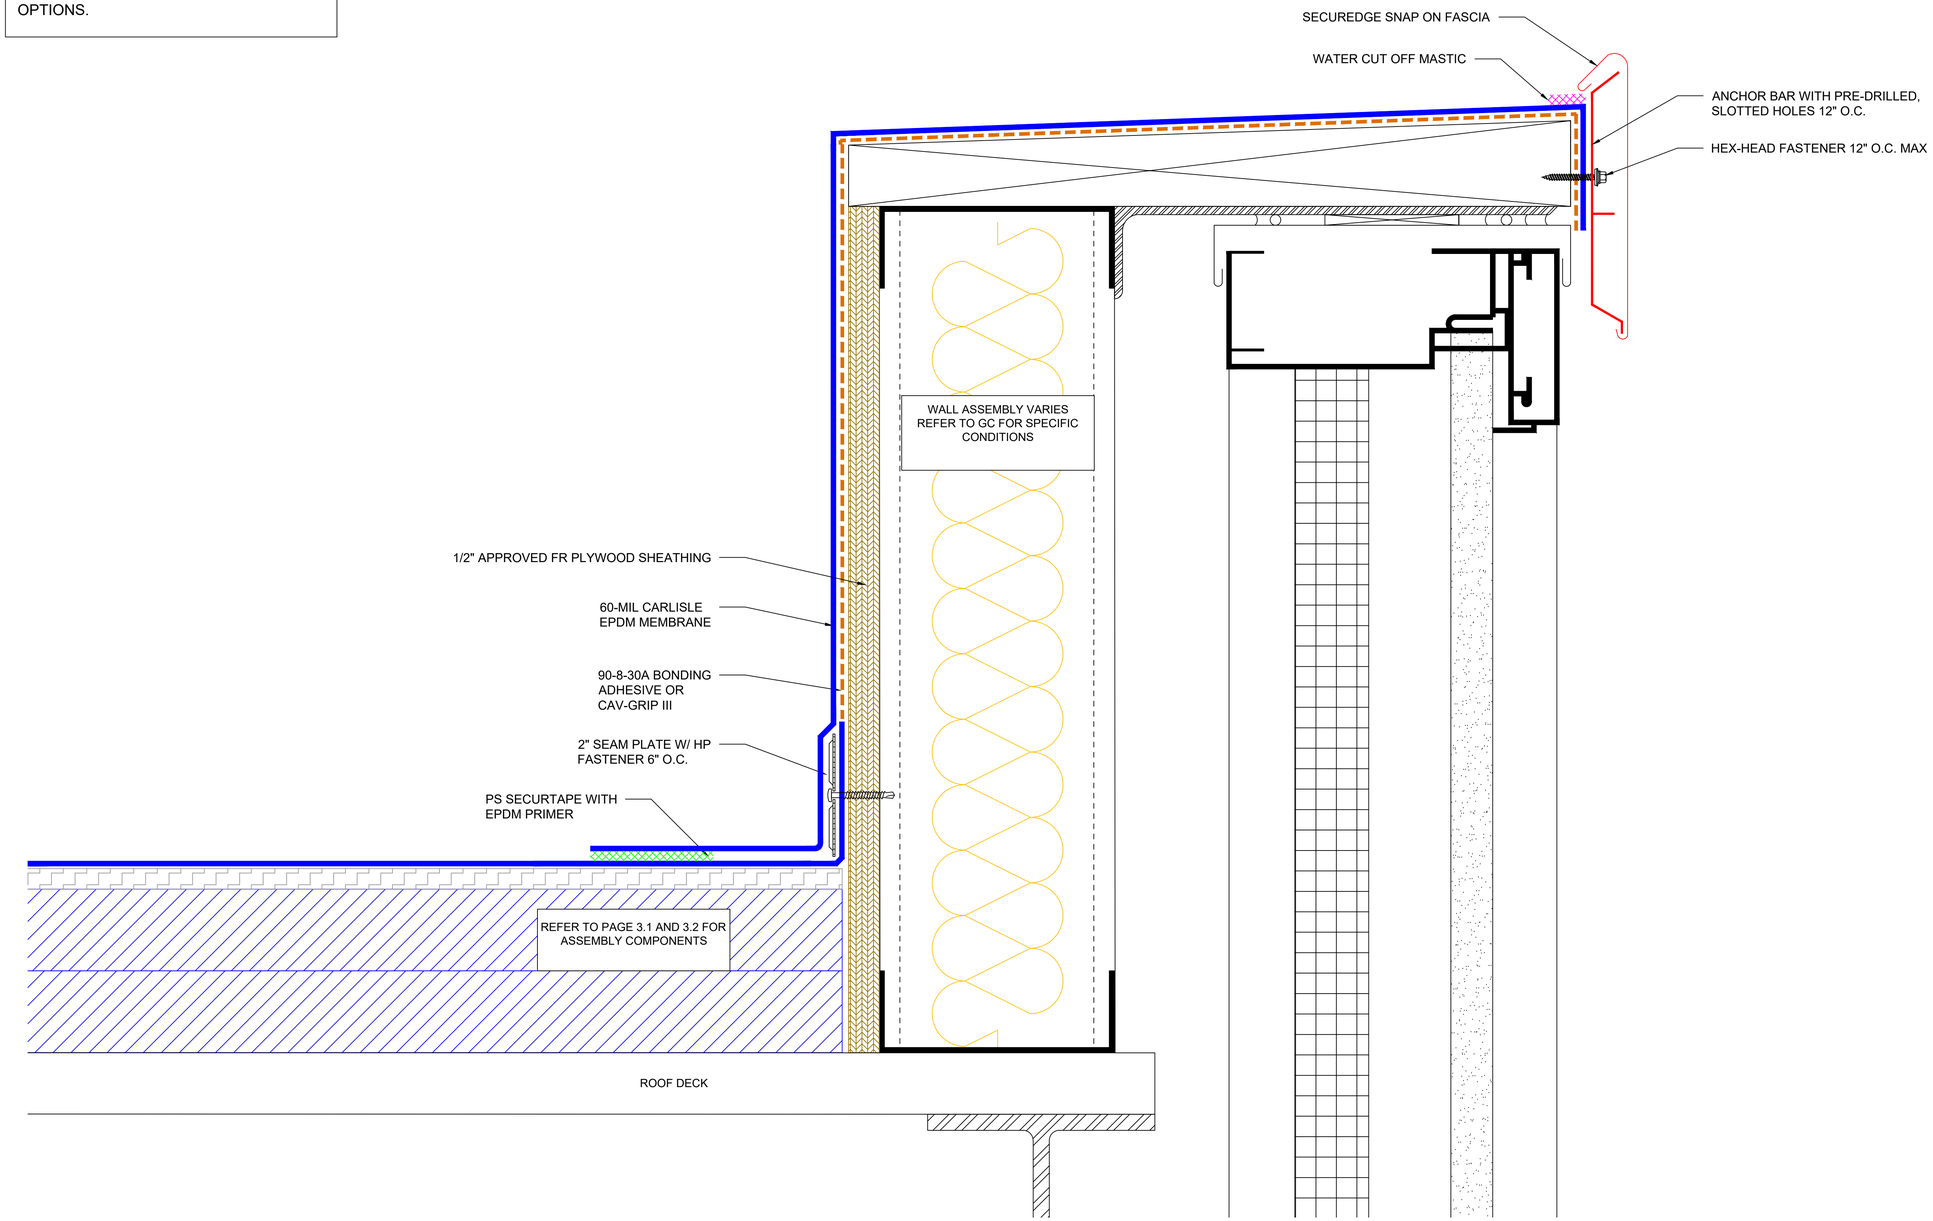

ALUM. FRAME HEAD

FRW CONSULT

GRANDVIEW ELEMENTARY SCHOOL
ROOF SHOP DRAWINGS

1583 GRAND AVE. I WINDSOR, CO

No.	Revision/Issue	Date
2.	REV. 2	9/23/26
1.	REV. 1	9/21/26

Architect:

Consultant:

General:

Project No: 969-076

Date: 9/23/2026

Approved By: C.C.

Page: 15