DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720-273-0431
Email: dan@daoarch.com

Date: 11/12/2026
Project: Westminster Public Schools – 2026 Bond Projects – Hodgkins Leadership Academy
DAO Project No.: 2025-033

Addendum 001

The following revisions are to be incorporated into the Construction Documents, dated September 25, 2026

I. SPECIFICATIONS

Table of Contents – Section reissued in its entirety – Incorporating sections below

Section 01 2300 – Section issued in its entirety - Defining project alternates

II. DRAWINGS

Sheet AD1.0 – Sheet reissued in its entirety – Defining project alternates.

Sheet AD1.1 – Sheet reissued in its entirety – Defining project alternates and revising project scope.

Sheet AD1.2 – Sheet reissued in its entirety – Defining project alternates and revising project scope.

Sheet AD1.3 – Sheet reissued in its entirety – Defining project alternates.

Sheet AD1.4 – Sheet reissued in its entirety – Defining project alternates.

Sheet A1.0 – Sheet reissued in its entirety – Defining project alternates and adding information regarding the displays.

Sheet A1.1 – Sheet reissued in its entirety – Defining project alternates and adding information regarding the displays.

Sheet A1.2 – Sheet reissued in its entirety – Clarifying drawing information.

Sheet A1.3 – Sheet reissued in its entirety – Defining project alternates.

Sheet A1.4 – Sheet reissued in its entirety – Defining project alternates.

Sheet A6.0 – Sheet reissued in its entirety – Defining project alternates.

Sheet A6.1 – Sheet reissued in its entirety – Clarifying project scope.

Sheet A6.2 – Sheet reissued in its entirety – Defining project alternates.

Sheet A6.5 – Sheet reissued in its entirety – Defining project alternates.

Sheet A9.0 – Sheet reissued in its entirety – Defining project alternates.

Sheet A9.1 – Sheet reissued in its entirety – Defining project alternates and revising project scope.

Sheet A9.2 – Sheet reissued in its entirety – Revising project scope.

Sheet MD1.0 – Sheet reissued in its entirety – Defining project alternates.

Sheet MD1.1 – Sheet reissued in its entirety – Defining project alternates.

Sheet M1.0 – Sheet reissued in its entirety – Defining project alternates.

Sheet M1.1 – Sheet reissued in its entirety – Defining project alternates.

Sheet E0.3 – Sheet reissued in its entirety – Added alternate designations at panels serving Alternate 01 and Alternate 02 work..

Sheet E1.2 – Sheet reissued in its entirety – Identified electrical work associated with Alternate 01, Classroom Enclosure Scope, and Alternate 02, Teacher wall Modification Scope..

Sheet E1.3B – Sheet reissued in its entirety – Identified electrical work associated with Alternate 01, Classroom Enclosure Scope..

Sheet E1.4 – Sheet reissued in its entirety –- Added scope boundaries and designations for Alternate 01 and Alternate 02..

Sheet E1.5B – Sheet reissued in its entirety – Added scope boundaries and designations for Alternate 01..

Sheet E3.0 – Sheet reissued in its entirety – Added alternate designations to panel notes.

III. OTHER

None issued at this time.

Table of Contents

Division	Section Title

PROCUREMENT AND CONTRACTING DOCUMENTS GROUP

DIVISION 00 - PROCUREMENT AND CONTRACTING REQUIREMENTS

SPECIFICATIONS GROUP

General Requirements Subgroup

DIVISION 01 - GENERAL REQUIREMENTS
01 10 00 Summary
01 23 00 Alternates
01 25 00 Substitution Procedures
01 26 00 Contract Modification Procedures
01 29 00 Payment Procedures
01 31 00 Project Management And Coordination
01 32 00 Construction Progress Documentation
01 32 33 Photographic Documentation
01 33 00 Submittal Procedures
01 40 00 Quality Requirements
01 42 00 References
01 50 00 Temporary Facilities And Controls
01 60 00 Product Requirements
01 73 00 Execution
01 73 29 Cutting And Patching
01 77 00 Closeout Procedures
01 78 23 Operation And Maintenance Data
01 78 39 Project Record Documents
01 79 00 Demonstration and Training

Facility Construction Subgroup

DIVISION 02 - EXISTING CONDITIONS
02 41 19 Selective Demolition

Copyright © 2019 by the American Institute of Architects. Warning: This AIA MasterSpec based document is protected by U.S. Copyright Law and International Treaties. A valid, current MasterSpec license is required for editing or use of this document.

DIVISION 03 - CONCRETE
NOT APPLICABLE

DIVISION 04 - MASONRY
NOT APPLICABLE

DIVISION 05 - METALS
05 50 00 Metal Fabrications

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES
06 10 00 Rough Carpentry
06 41 13 Wood-veneer-faced Architectural Cabinets

DIVISION 07 - THERMAL AND MOISTURE PROTECTION
07 92 00 Joint Sealants

DIVISION 08 - OPENINGS
08 11 13.16 Hollow Metal Frames
08 14 16 Flush Wood Doors
08 31 13 Access Doors And Frames
08 71 00 Door Hardware
08 80 00 Glazing

DIVISION 09 - FINISHES
09 22 16 Non-structural Metal Framing
09 29 00 Gypsum Board
09 51 23 Acoustical Tile Ceilings
09 65 13 Resilient Base And Accessories
09 68 16 Sheet Carpeting
09 91 23 Interior Painting

DIVISION 10 - SPECIALTIES
10 11 00 Visual Display Surfaces
10 26 00 Wall And Door Protection
10 51 16 Wood Lockers

DIVISION 11 - EQUIPMENT
NOT APPLICABLE

Copyright © 2019 by the American Institute of Architects. Warning: This AIA MasterSpec based document is protected by U.S. Copyright Law and International Treaties. A valid, current MasterSpec license is required for editing or use of this document.

DIVISION 12 - FURNISHINGS
12 36 61.16 Solid Surfacing Countertops

DIVISION 13 - SPECIAL CONSTRUCTION
NOT APPLICABLE

DIVISION 14 - CONVEYING EQUIPMENT
NOT APPLICABLE

Facility Services Subgroup

DIVISION 21 - FIRE SUPPRESSION
NOT APPLICABLE

DIVISION 22 - PLUMBING
NOT APPLICABLE

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)
SEE SHEET M0.0

DIVISION 25 – INTEGRATED AUTOMATION
NOT APPLICABLE

DIVISION 26 – ELECTRICAL
26 05 00 Common Work Results for Electrical
26 05 19 Low Voltage Electrical Power Conductors and Cables
26 05 26 Grounding and Bonding for Electrical Systems
26 05 29 Hangers and Supports for Electrical Systems
26 05 33 Raceways and Boxes for Electrical Systems
26 05 34 Cabinets, Boxes and Fittings
26 05 53 Identification for Electrical Systems
26 05 83 Wiring Connections
26 09 23 Lighting Control Devices
26 27 26 Wiring Devices
26 28 00 Low Voltage Circuit Protective Devices

DIVISION 27 – COMMUNICATIONS
NOT APPLICABLE

Copyright © 2019 by the American Institute of Architects. Warning: This AIA MasterSpec based document is protected by U.S. Copyright Law and International Treaties. A valid, current MasterSpec license is required for editing or use of this document.

DIVISION 28 – ELECTRONIC SAFETY AND SECURITY
NOT APPLICABLE

DIVISION 29 – RESERVED
NOT APPLICABLE

Site and Infrastructure Subgroup

DIVISION 31 – EARTHWORK

NOT APPLICABLE

DIVISION 32 - EXTERIOR IMPROVEMENTS
NOT APPLICABLE

END OF TABLE OF CONTENTS

Copyright © 2019 by the American Institute of Architects. Warning: This AIA MasterSpec based document is protected by U.S. Copyright Law and International Treaties. A valid, current MasterSpec license is required for editing or use of this document.

SECTION 012300

ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if the Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.

1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternates into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.

1. Include, as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation, whether or not indicated as part of alternate.

B. Execute accepted alternates under the same conditions as other Work of the Contract.

C. Schedule: A Part 3 "Schedule of Alternates" Article is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)


PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

01 – Classroom Enclosure Scope – Base Scope: The existing "Team Resource" spaces remain as-is. Alternate Scope: The scope includes: Enclosing "Team Resource" rooms with new walls to become classrooms, providing and installing new doors and/or frames, providing and installing new casework, providing and installing new teaching walls with displays and markerboards, providing and installing new finishes as indicated, and performing associated mechanical and electrical modifications as required.


02 – Casework Modification Scope – Base Scope: The existing classrooms, including casework and teaching fixtures, remains as-is. Alternate Scope: Casework as indicated will be removed in its entirety, while adjacent casework to remain is protected from damage. New matching p-lam will be provided and installed on exposed ends of remaining casework. Repairs to the wall and floor will be made as necessary, and new matching finishes will be provided and installed. Flooring will be replaced as indicted. New teaching walls will be provided, with electrical and technological systems modified as required to support the displays.

END OF SECTION 012300

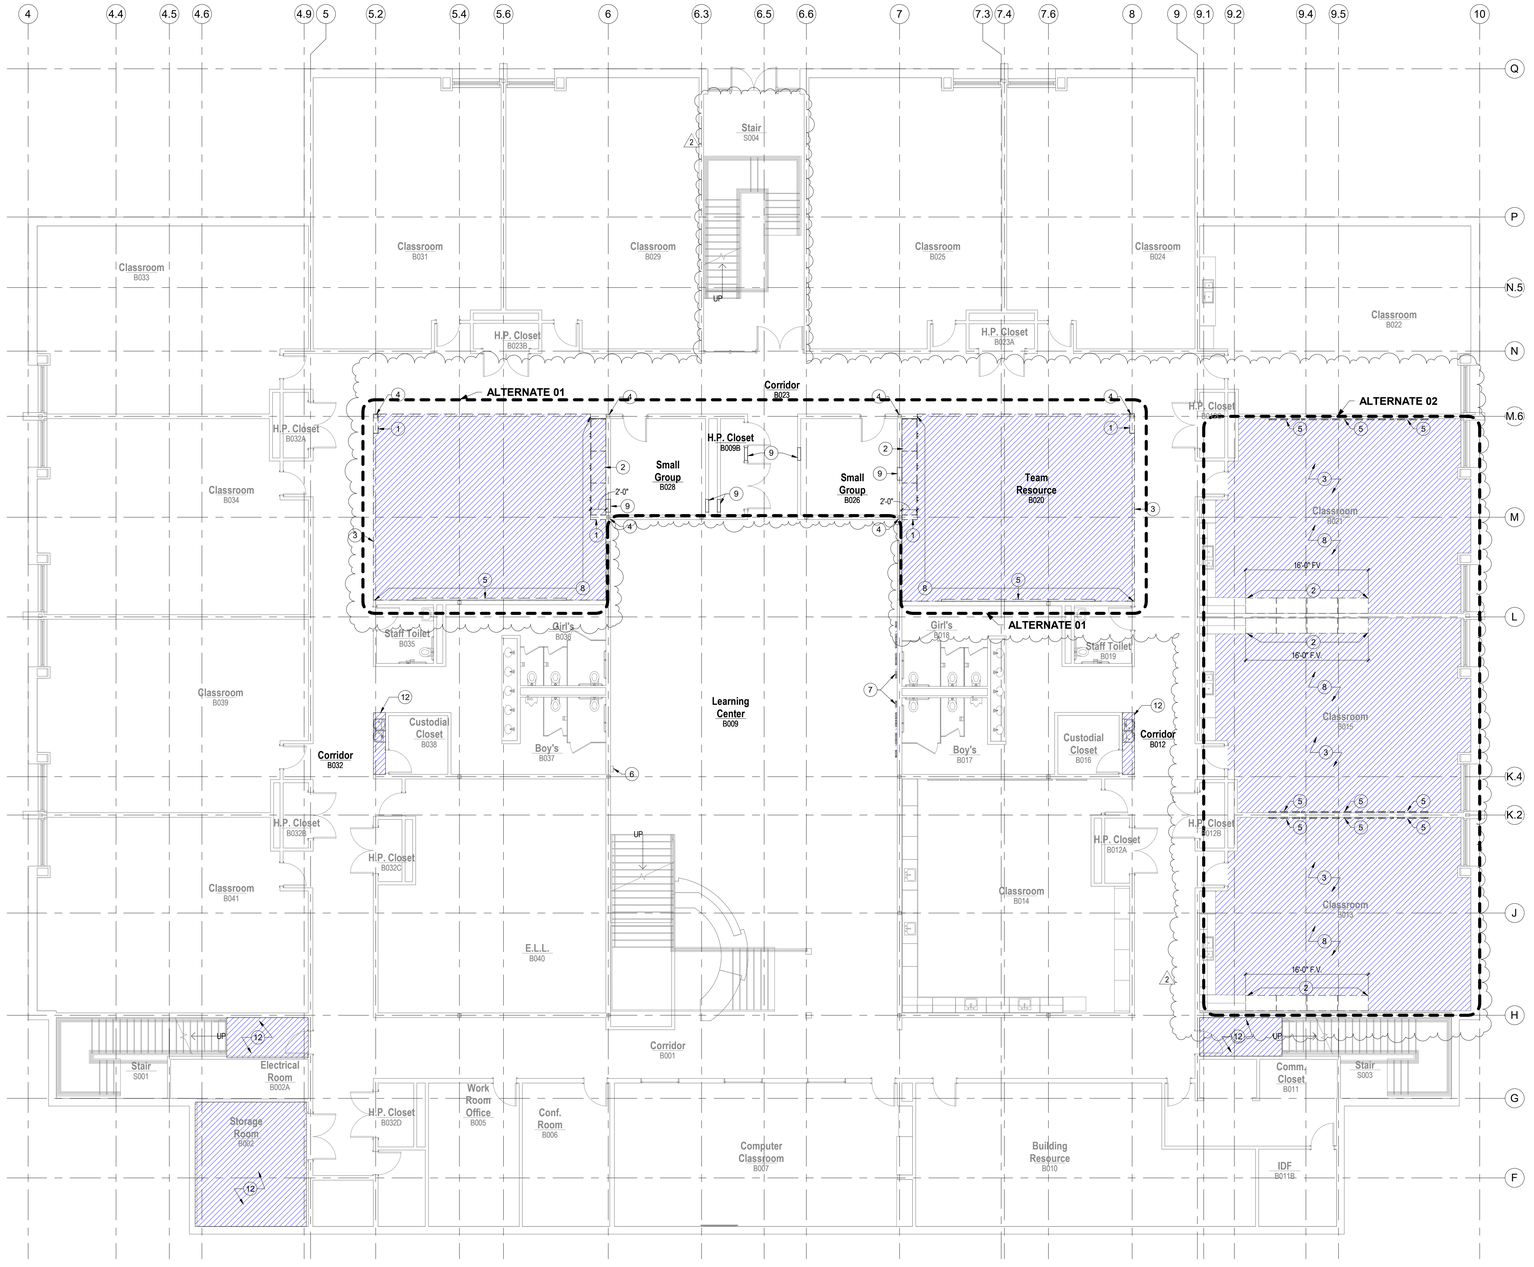

1 Lower Level Demo Plan

SCALE: 1/8" = 1'-0"

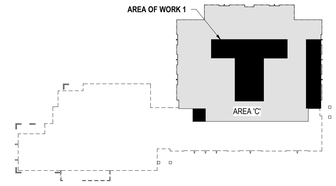

2 Lower Level Key Plan

SCALE: 1" = 80'-0"

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS) AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION KEY NOTES

1. REMOVE EXISTING WALL ASSEMBLY IN ITS ENTIRETY OR AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING CASEWORK AS INDICATED. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND/OR TO RECEIVE NEW FINISHES.
3. REMOVE THE INDICATED PORTION OF THE EXISTING FLOOR FINISH MATERIAL AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE EXISTING SURFACES AS REQUIRED FOR NEW CONSTRUCTION
4. EXISTING COLUMN TO REMAIN.
5. REMOVE EXISTING MARKERBOARDS AND TACKBOARDS IN THEIR ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
6. ROUT SEPARATION CRACK IN EXISTING CONCRETE SLAB AS REQUIRED FOR THE INSTALLATION OF A NEW SEALANT JOINT. EDGES SHALL BE STRAIGHT AND PREPARED AS REQUIRED FOR THE INSTALLATION OF THE JOINT. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
7. REMOVE EXISTING ACOUSTICAL PANELS AND SALVAGE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
8. REMOVE EXISTING RUBBER BASE IN ITS ENTIRETY . PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
9. REMOVE A PORTION OF THE EXISTING WALL ASSEMBLY AS REQUIRED FOR INSTALLATION OF NEW DUCT WORK. COORDINATE SPECIFIC LOCATIONS AND EXTENTS WITH MECHANICAL. PROVIDE ADDITIONAL FRAMING AROUND THE NEW OPENING AS REQUIRED TO MAINTAIN INTEGRITY OF THE WALL ASSEMBLY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
10. NOT USED
11. REMOVE EXISTING FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
12. REMOVE EXISTING VCT FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Lower Level Demolition Plan


AD1.0

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:49 PM

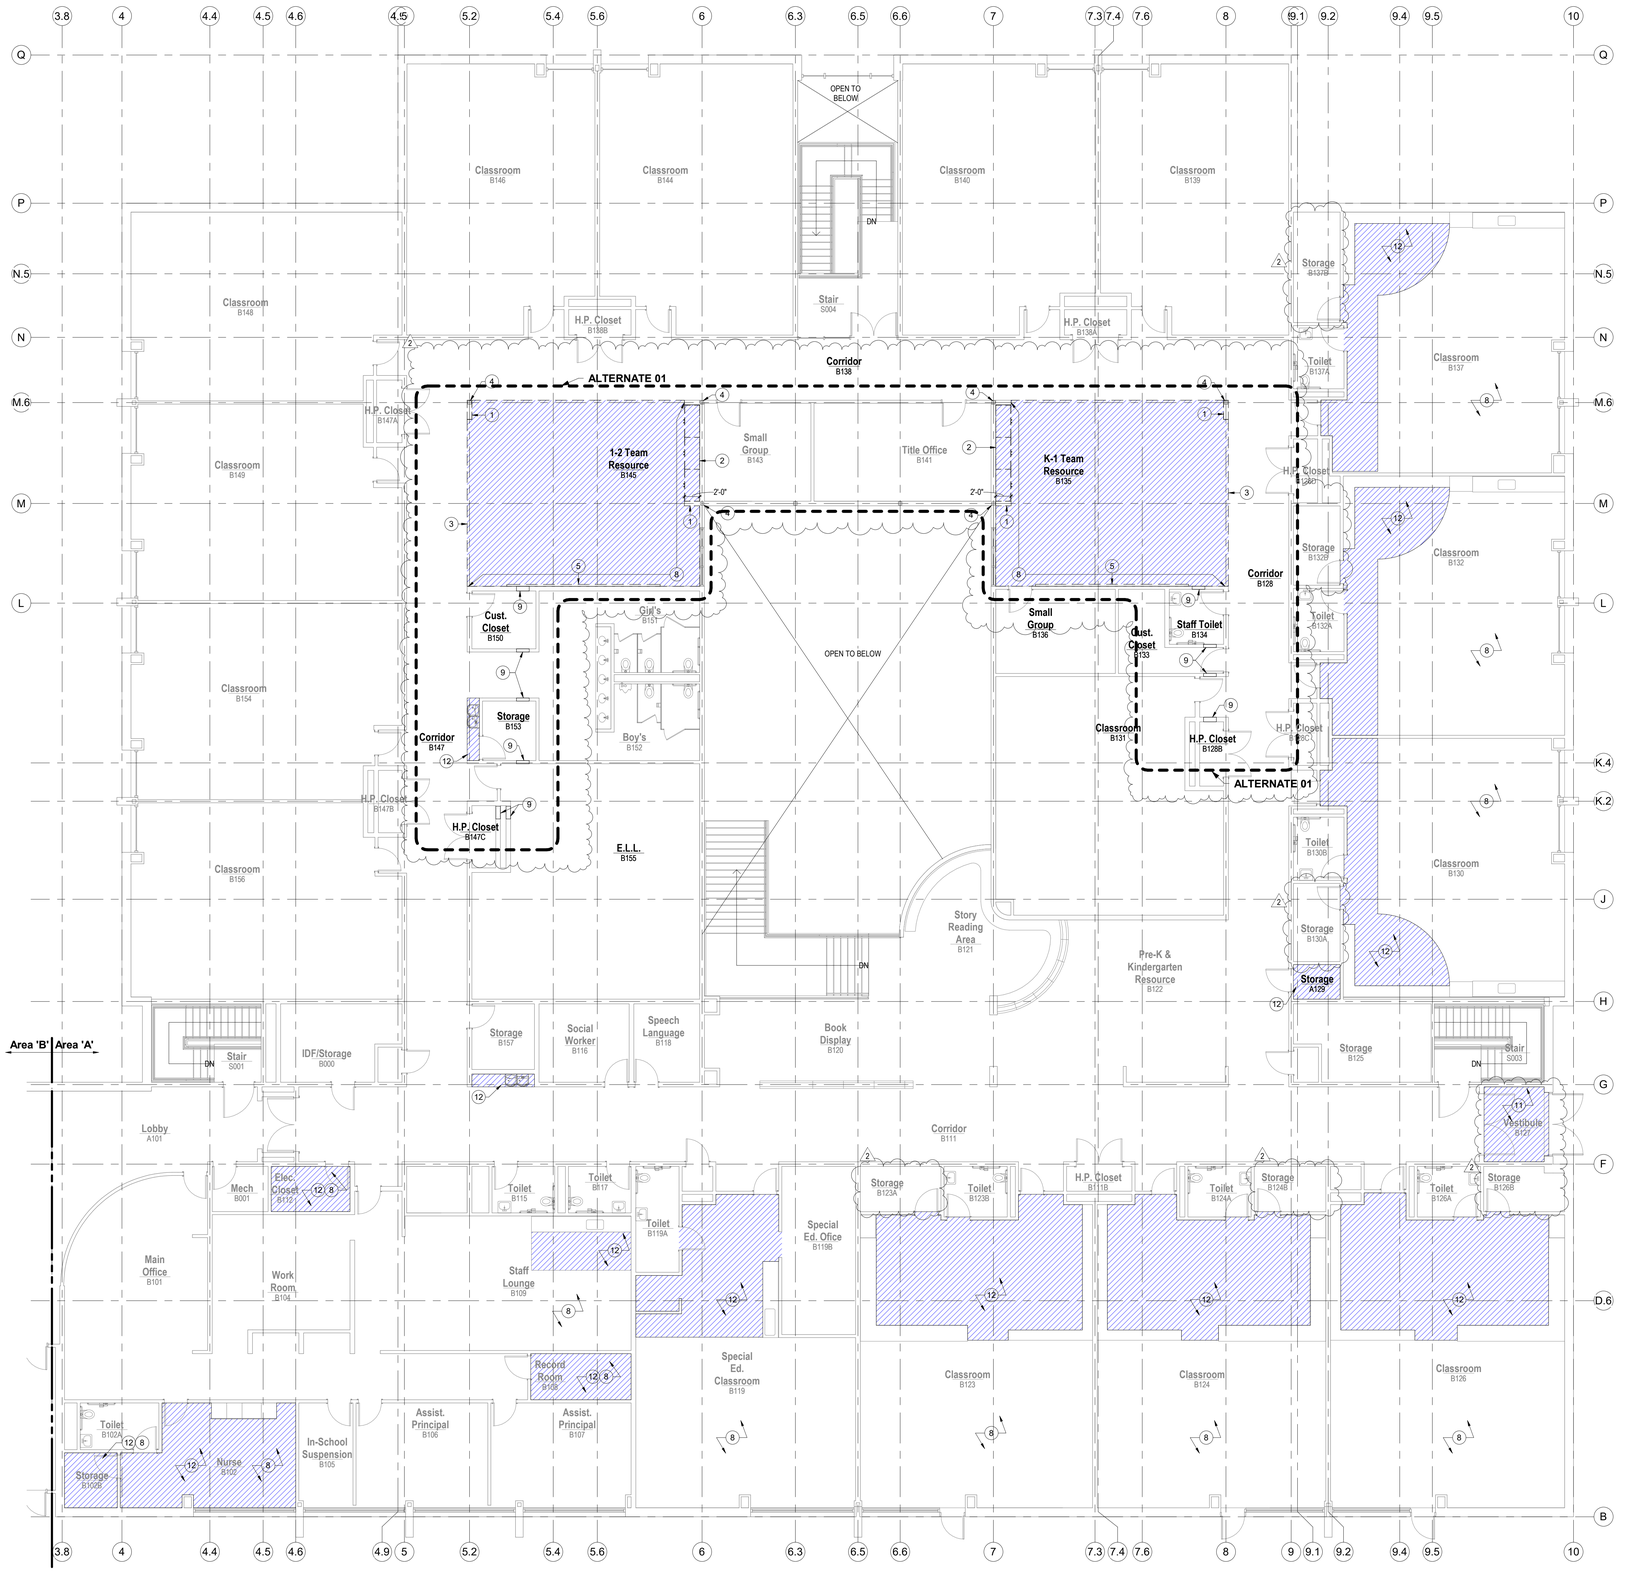

1 Main Level Demo Plan

SCALE: 1/8" = 1'-0"

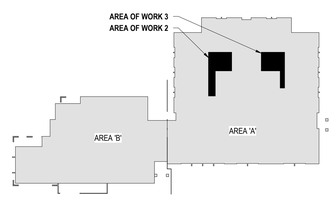

2 Main Level Key Plan

SCALE: 1" = 80'-0"

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS) AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION KEY NOTES

1. REMOVE EXISTING WALL ASSEMBLY IN ITS ENTIRETY OR AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING CASEWORK AS INDICATED. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND/OR TO RECEIVE NEW FINISHES.
3. REMOVE THE INDICATED PORTION OF THE EXISTING FLOOR FINISH MATERIAL AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE EXISTING SURFACES AS REQUIRED FOR NEW CONSTRUCTION
4. EXISTING COLUMN TO REMAIN.
5. REMOVE EXISTING MARKERBOARDS AND TACKBOARDS IN THEIR ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
6. ROUT SEPARATION CRACK IN EXISTING CONCRETE SLAB AS REQUIRED FOR THE INSTALLATION OF A NEW SEALANT JOINT. EDGES SHALL BE STRAIGHT AND PREPARED AS REQUIRED FOR THE INSTALLATION OF THE JOINT. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
7. REMOVE EXISTING ACOUSTICAL PANELS AND SALVAGE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
8. REMOVE EXISTING RUBBER BASE IN ITS ENTIRETY . PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
9. REMOVE A PORTION OF THE EXISTING WALL ASSEMBLY AS REQUIRED FOR INSTALLATION OF NEW DUCT WORK. COORDINATE SPECIFIC LOCATIONS AND EXTENTS WITH MECHANICAL. PROVIDE ADDITIONAL FRAMING AROUND THE NEW OPENING AS REQUIRED TO MAINTAIN INTEGRITY OF THE WALL ASSEMBLY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
10. NOT USED
11. REMOVE EXISTING FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
12. REMOVE EXISTING VCT FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Main Level Demolition Plan
Area 'A'

AD1.1

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:50 PM

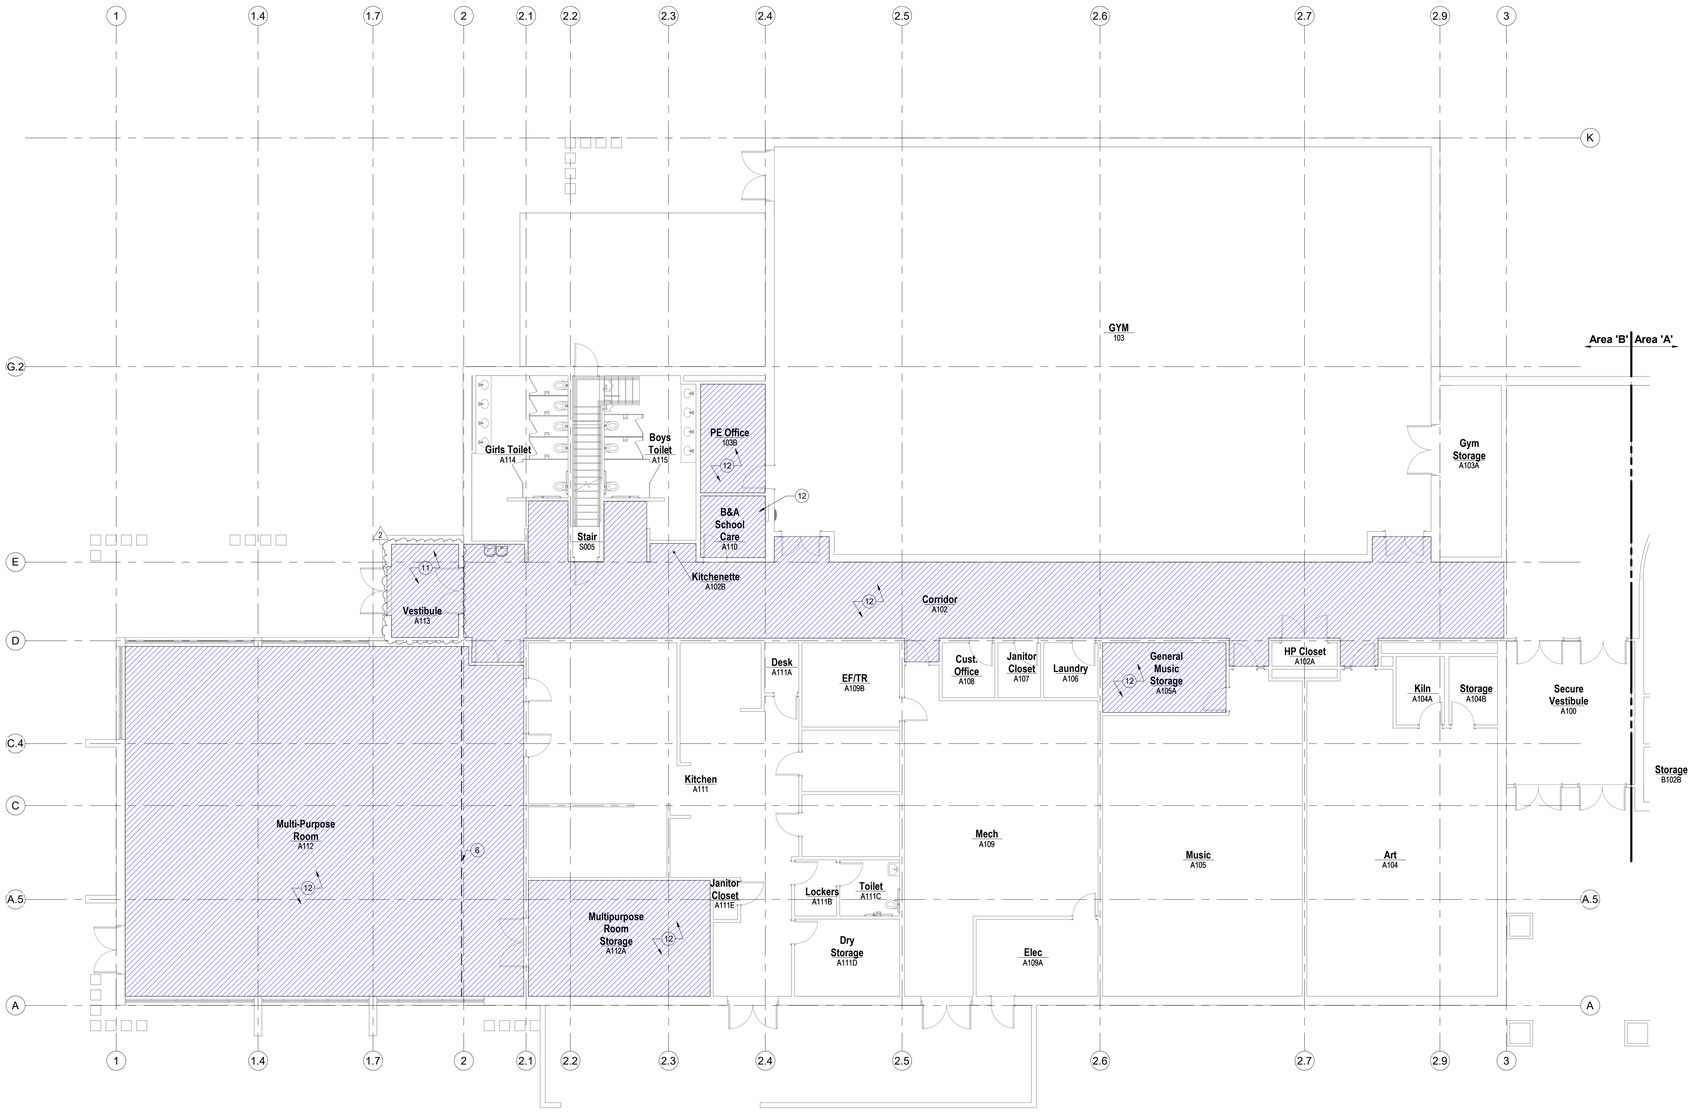


1 Main Level Demo Plan Area B
SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS) AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION KEY NOTES

1. REMOVE EXISTING WALL ASSEMBLY IN ITS ENTIRETY OR AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING CASEWORK AS INDICATED. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND/OR TO RECEIVE NEW FINISHES.
3. REMOVE THE INDICATED PORTION OF THE EXISTING FLOOR FINISH MATERIAL AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE EXISTING SURFACES AS REQUIRED FOR NEW CONSTRUCTION
4. EXISTING COLUMN TO REMAIN.
5. REMOVE EXISTING MARKERBOARDS AND TACKBOARDS IN THEIR ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
6. ROUT SEPARATION CRACK IN EXISTING CONCRETE SLAB AS REQUIRED FOR THE INSTALLATION OF A NEW SEALANT JOINT. EDGES SHALL BE STRAIGHT AND PREPARED AS REQUIRED FOR THE INSTALLATION OF THE JOINT. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
7. REMOVE EXISTING ACOUSTICAL PANELS AND SALVAGE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
8. REMOVE EXISTING RUBBER BASE IN ITS ENTIRETY . PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
9. REMOVE A PORTION OF THE EXISTING WALL ASSEMBLY AS REQUIRED FOR INSTALLATION OF NEW DUCT WORK. COORDINATE SPECIFIC LOCATIONS AND EXTENTS WITH MECHANICAL. PROVIDE ADDITIONAL FRAMING AROUND THE NEW OPENING AS REQUIRED TO MAINTAIN INTEGRITY OF THE WALL ASSEMBLY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
10. NOT USED
11. REMOVE EXISTING FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
12. REMOVE EXISTING VCT FLOORING AND ASSOCIATED BASE IN ITS ENTIRETY AND PREPARE FLOORS AS REQUIRED FOR NEW FINISHES. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION

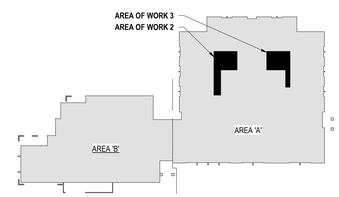

2 Main Level Key Plan
SCALE: 1" = 80'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.:2021-033

September 25, 2026

Main Level Demolition Plan Area 'B'

AD1.2

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 5:07:51 PM

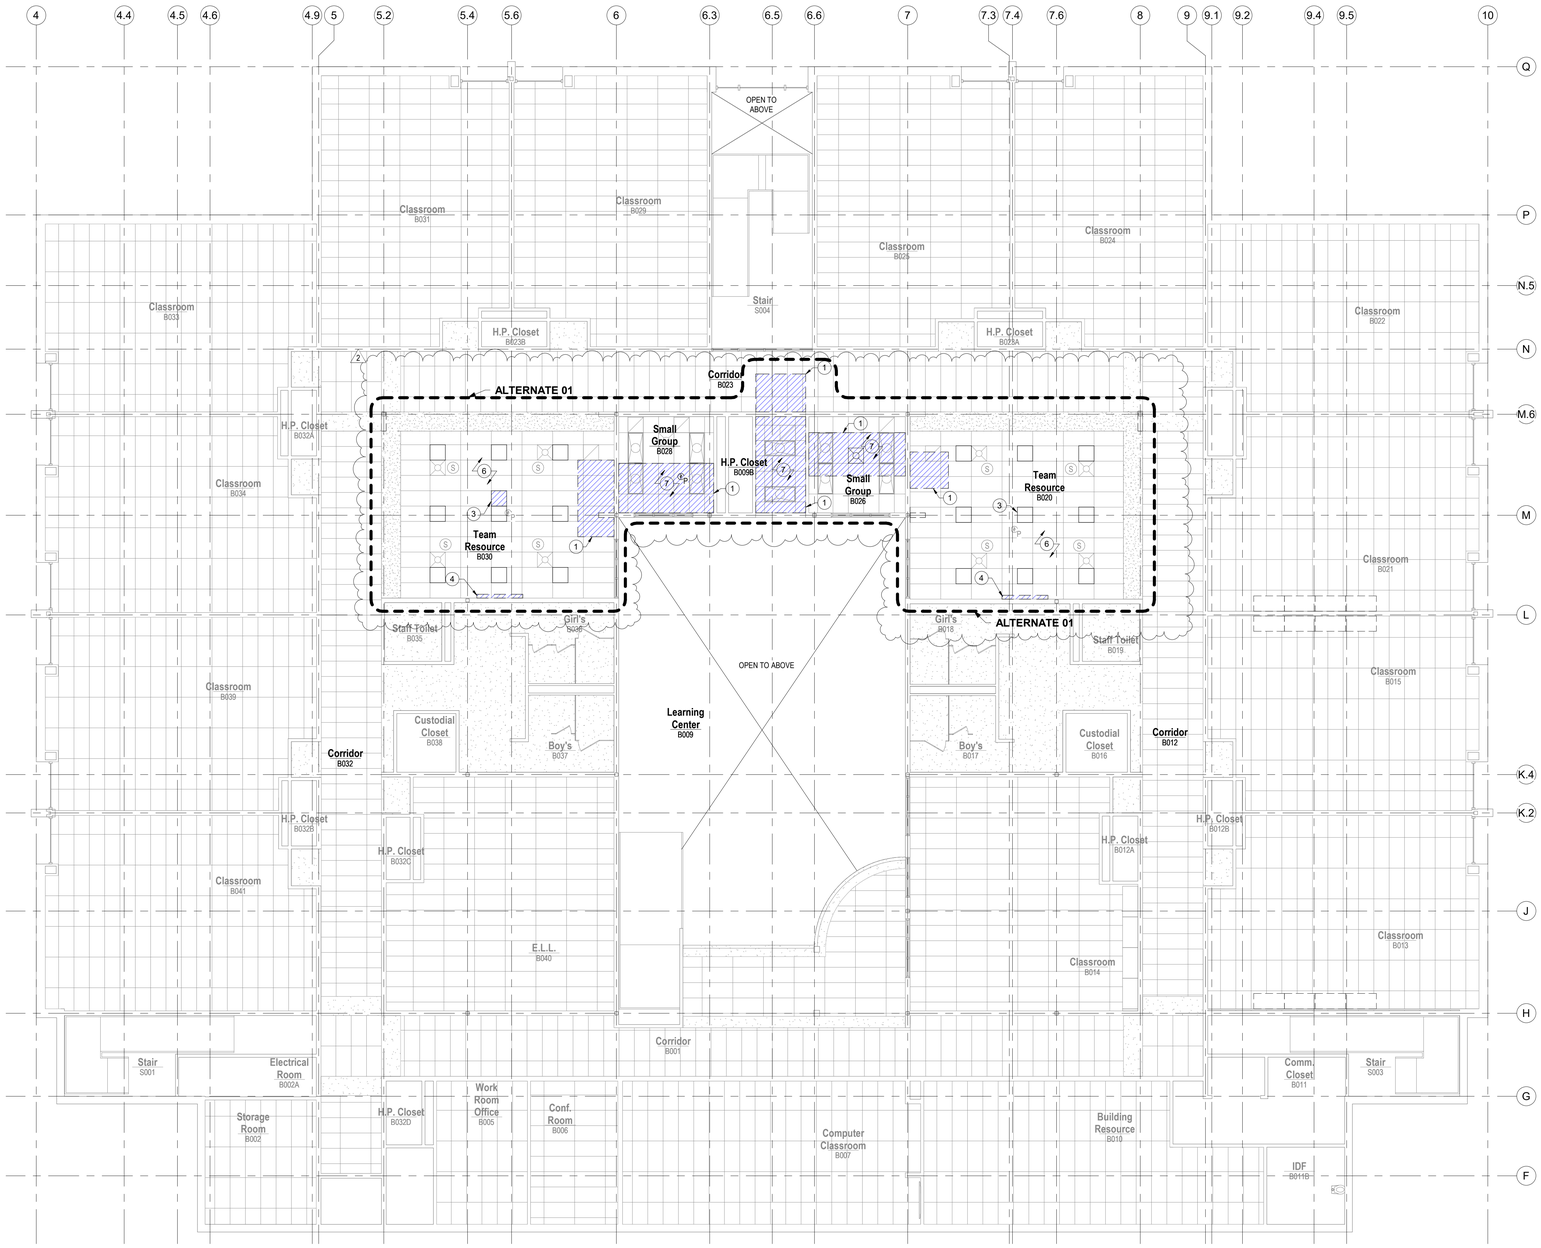

1 **Lower Level Demo RCP**
SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION RCP NOTES


1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ABOVE, BELOW AND ADJACENT TO THE AREAS OF CONSTRUCTION.
3. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
4. REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
5. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
6. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
7. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
8. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
9. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION RCP KEY NOTES

1. REMOVE PORTION OF EXISTING ACT CEILING SYSTEM AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL SYSTEM. REPAIR ACT SYSTEM AS REQUIRED FOR NEW CONSTRUCTION. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
2. REMOVE EXISTING LIGHT FIXTURES IN THEIR ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE EXISTING PROJECTOR AND ADJACENT METAL PANEL IN THEIR ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
4. REMOVE EXISTING WALL MOUNTED PROJECTION SCREEN IN ITS ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED.
5. REMOVE PORTION OF EXISTING GPDW CEILING SYSTEM AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL SYSTEM. REPAIR GPDW CEILING AS REQUIRED FOR NEW CONSTRUCTION. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
6. REMOVE PORTION OF EXISTING ACT CEILING SYSTEM AND ALL ASSOCIATED ELECTRICAL, MECHANICAL, AND PLUMBING DEVICES AS REQUIRED FOR NEW CONSTRUCTION. REPAIR ACT SYSTEM AS REQUIRED FOR NEW CONSTRUCTION.
7. REMOVE EXISTING MECHANICAL, ELECTRICAL, AND LOW VOLTAGE DEVICE(S) AS REQUIRED FOR INSTALLATION OF NEW DUCT WORK AND SALVAGE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

RCP SYMBOL LEGEND

- ACOUSTICAL TILE CEILING (24X48)
- GPDW CEILING
- RECESSED LIGHT FIXTURE
- Φ_P PHOTOELECTRIC SMOKE DETECTOR
- HVAC SUPPLY DIFFUSER
- HVAC RETURN DIFFUSER
- (S) CEILING MOUNTED SPEAKER

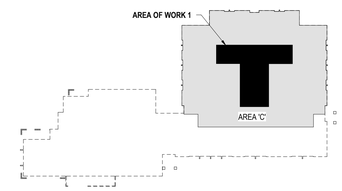

2 **Lower Level Key Plan**
SCALE: 1" = 80'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Lower Level Demolition RCP

AD1.3

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 5:07:32 PM

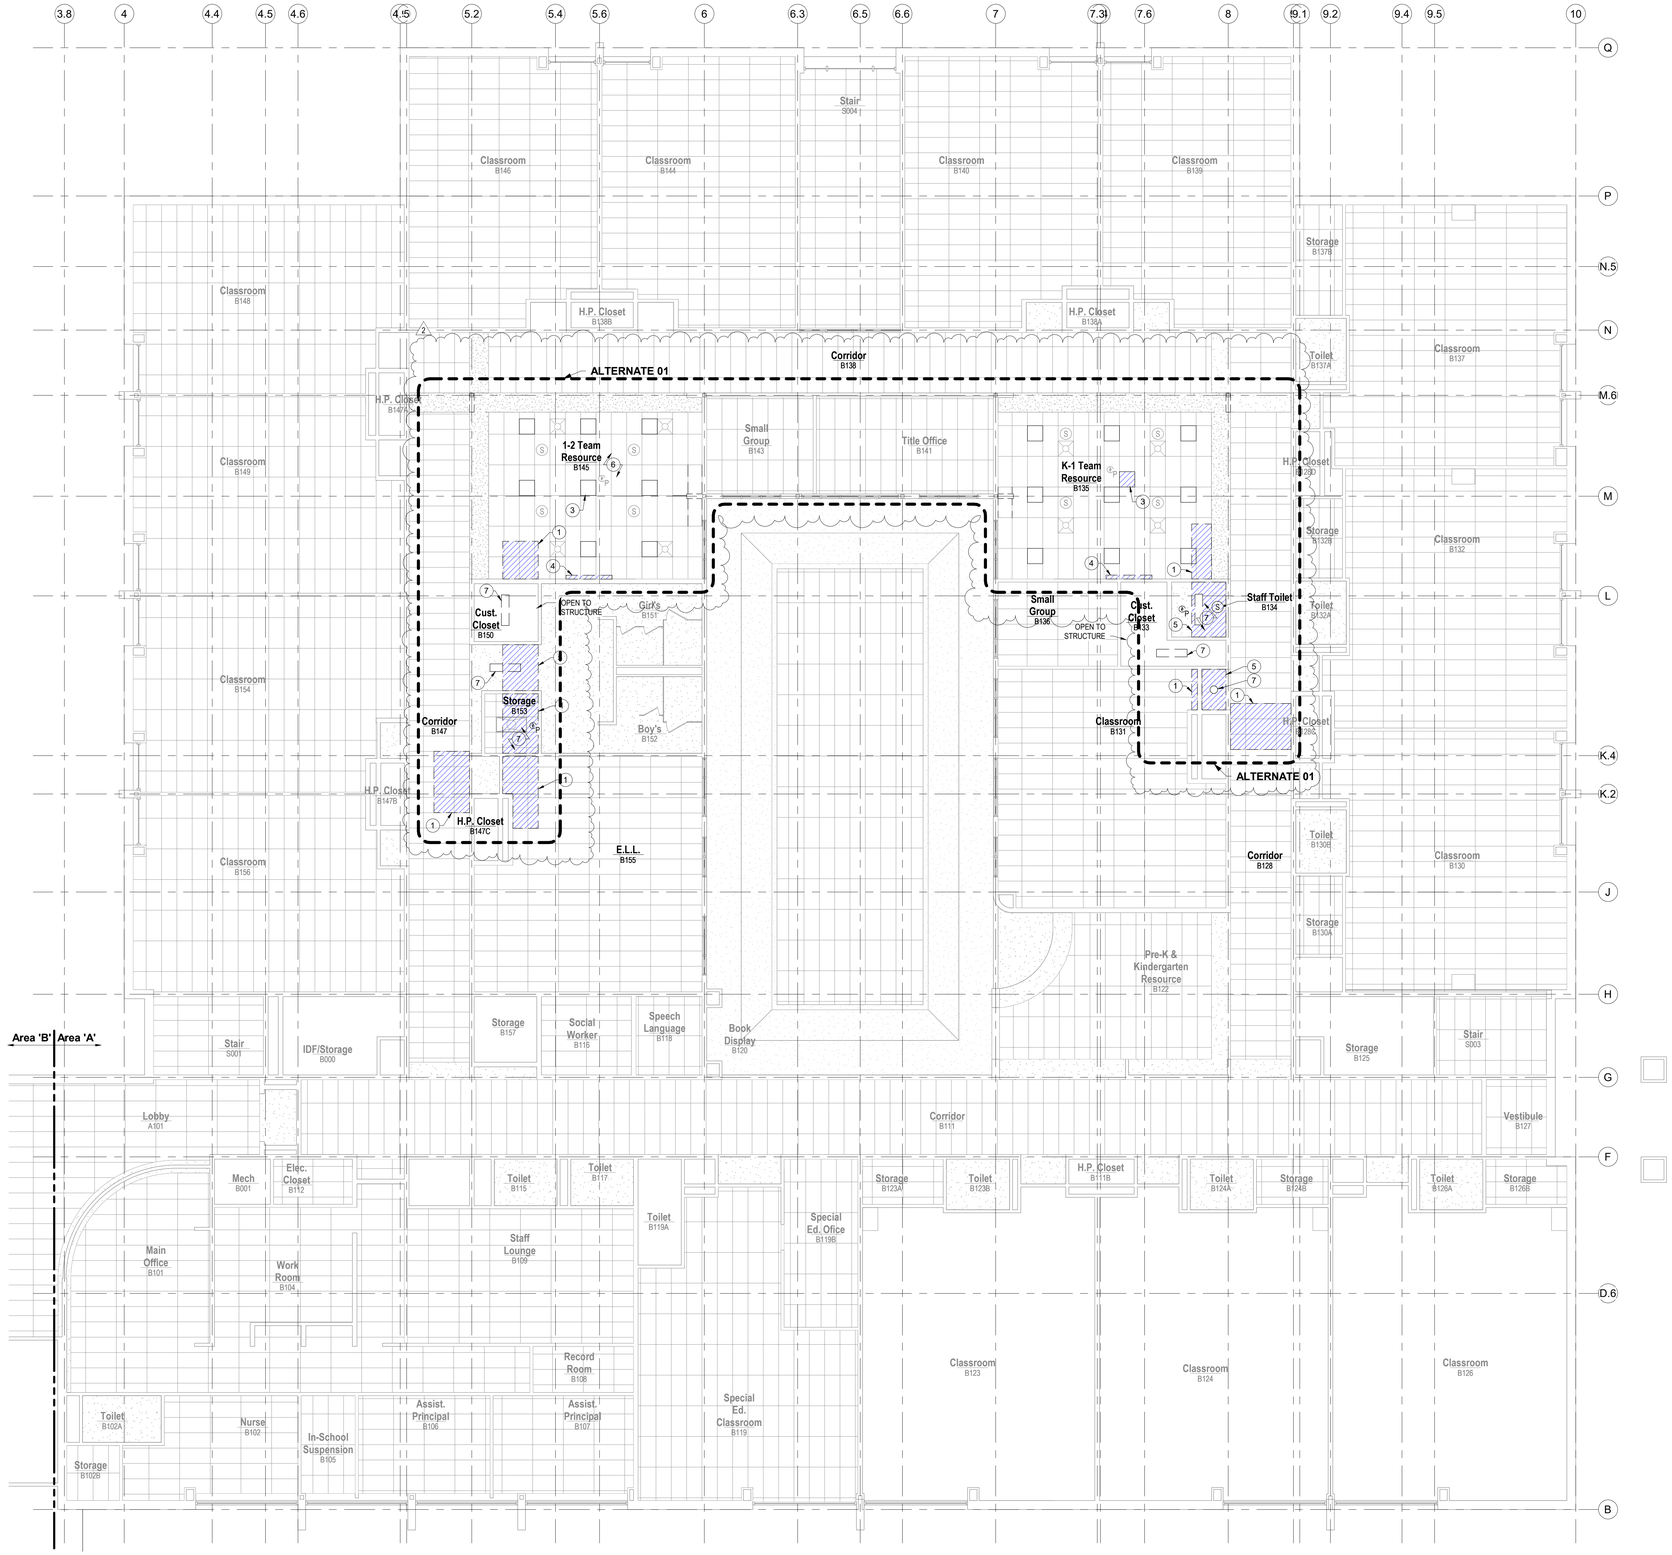

1 Main Level Demo RCP

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION RCP NOTES


1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ABOVE, BELOW AND ADJACENT TO THE AREAS OF CONSTRUCTION.
3. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
4. REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
5. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
6. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
7. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
8. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
9. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION RCP KEY NOTES

1. REMOVE PORTION OF EXISTING ACT CEILING SYSTEM AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL SYSTEM. REPAIR ACT SYSTEM AS REQUIRED FOR NEW CONSTRUCTION. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
2. REMOVE EXISTING LIGHT FIXTURES IN THEIR ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE EXISTING PROJECTOR AND ADJACENT METAL PANEL IN THEIR ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
4. REMOVE EXISTING WALL MOUNTED PROJECTION SCREEN IN ITS ENTIRETY. SALVAGE FOR RETURN TO THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED.
5. REMOVE PORTION OF EXISTING GPDW CEILING SYSTEM AS REQUIRED FOR INSTALLATION OF NEW MECHANICAL SYSTEM. REPAIR GPDW CEILING AS REQUIRED FOR NEW CONSTRUCTION. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
6. REMOVE PORTION OF EXISTING ACT CEILING SYSTEM AND ALL ASSOCIATED ELECTRICAL, MECHANICAL, AND PLUMBING DEVICES AS REQUIRED FOR NEW CONSTRUCTION. REPAIR ACT SYSTEM AS REQUIRED FOR NEW CONSTRUCTION.
7. REMOVE EXISTING MECHANICAL, ELECTRICAL, AND LOW VOLTAGE DEVICE(S) AS REQUIRED FOR INSTALLATION OF NEW DUCT WORK AND SALVAGE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

RCP SYMBOL LEGEND

- ACOUSTICAL TILE CEILING (24X48)
- GPDW CEILING
- RECESSED LIGHT FIXTURE
- PHOTOELECTRIC SMOKE DETECTOR
- HVAC SUPPLY DIFFUSER
- HVAC RETURN DIFFUSER
- (S) CEILING MOUNTED SPEAKER

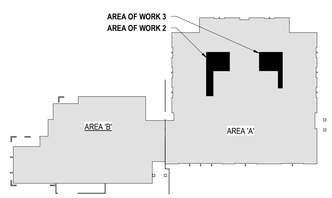

2 Main Level Key Plan

SCALE: 1" = 80'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Main Level Demolition RCP


AD1.4

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:53 PM

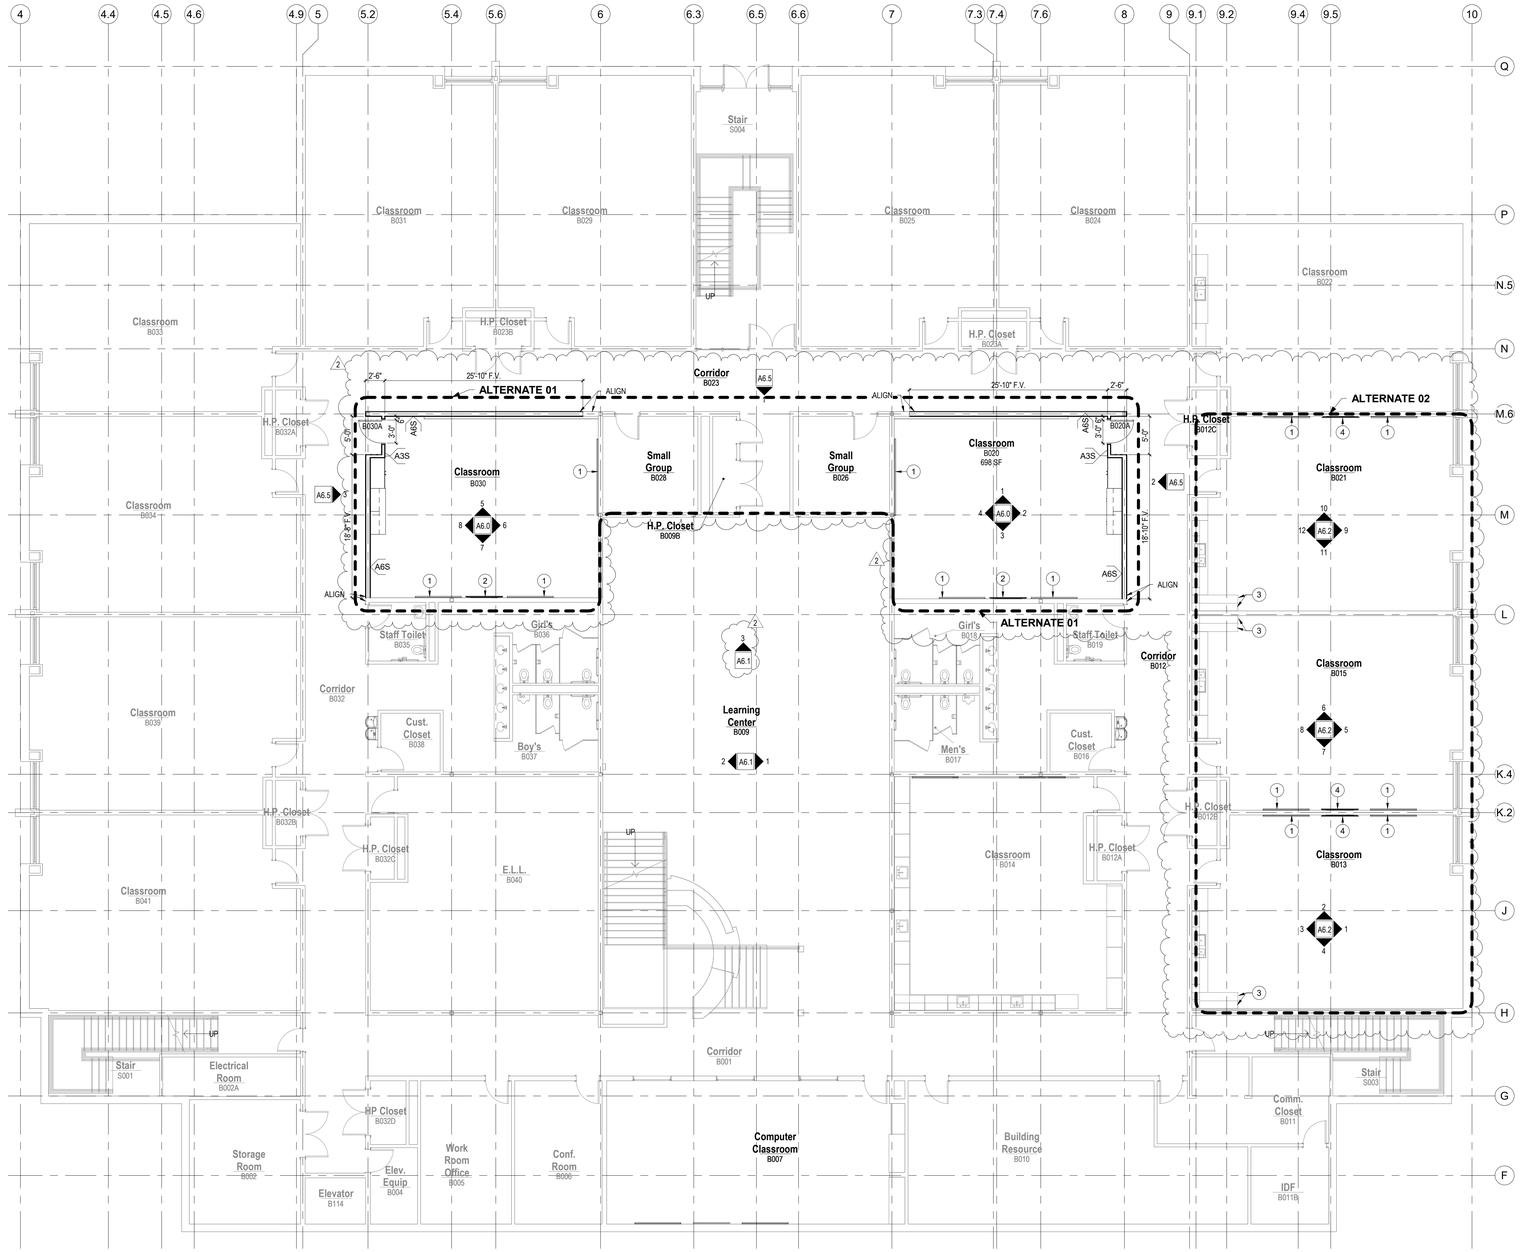

1 Lower Level Plan

SCALE: 1/8" = 1'-0"

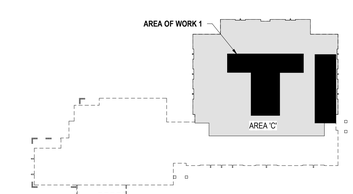

2 Lower Level Key Plan

SCALE: 1" = 80'-0"

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL DOOR FRAMES ARE TO BE INSTALLED 4" AWAY OF ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
7. INTERIOR SIGNAGE TO BE PROVIDED BY OWNER.
8. FURNITURE AND EQUIPMENT PROVIDED BY OWNER.
9. AT ALL LOCATIONS OF NEW DUCT PENETRATIONS THROUGH NEW OR EXISTING WALLS, FINISH THE DRYWALL TIGHT TO THE PERIMETER OF THE DUCTWORK AND SEAL THE JOINT BETWEEN THE DUCTWORK AND THE WALL ASSEMBLY.

KEY NOTES

1. PROVIDE AND INSTALL WALL MOUNTED MARKERBOARDS, CLARIDGE SERIES 4 OR EQUAL. SEE ELEVATIONS FOR SIZING.
2. PROVIDE AND INSTALL WALL-MOUNTED MONITOR. COORDINATE MONITOR AND STAND MODEL SELECTION WITH OWNER AND ARCHITECT. INSTALL BACKING IN WALL AS REQUIRED
3. PROVIDE AND INSTALL PLASTIC LAMINATE VENEER TO THE END OF THE EXISTING CASEWORK. MATCH THE EXISTING COLOR AND PATTERN
4. PROVIDE AND INSTALL WALL-MOUNTED MONITOR. SAMSUNG BE85FX-H BEFX-H SERIES - 85" LED-BACKLIT LCD TV - 4K OR EQUAL. PROVIDE AND INSTALL EATON TRIPP LITE SERIES DISPLAY TV WALL MONITOR MOUNT SWIVEL/TILT DWM6010XX OR EQUAL. PROVIDE BACKING IN WALL AS REQUIRED
5. INSTALL BACKER ROD AND TRAFFIC-RATED SELF-LEVELING POURABLE URETHANE SEALANT WITHIN ROUTED CRACK.

WALL PARTITION TYPES

A3S — 5/8" TYPE 'X' GPDW, 3-5/8" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.

A6S — 5/8" TYPE 'X' GPDW, 6" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Lower Level Floor Plan


A1.0

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Rev4 2026).rvt
11/11/2026 8:07:53 PM

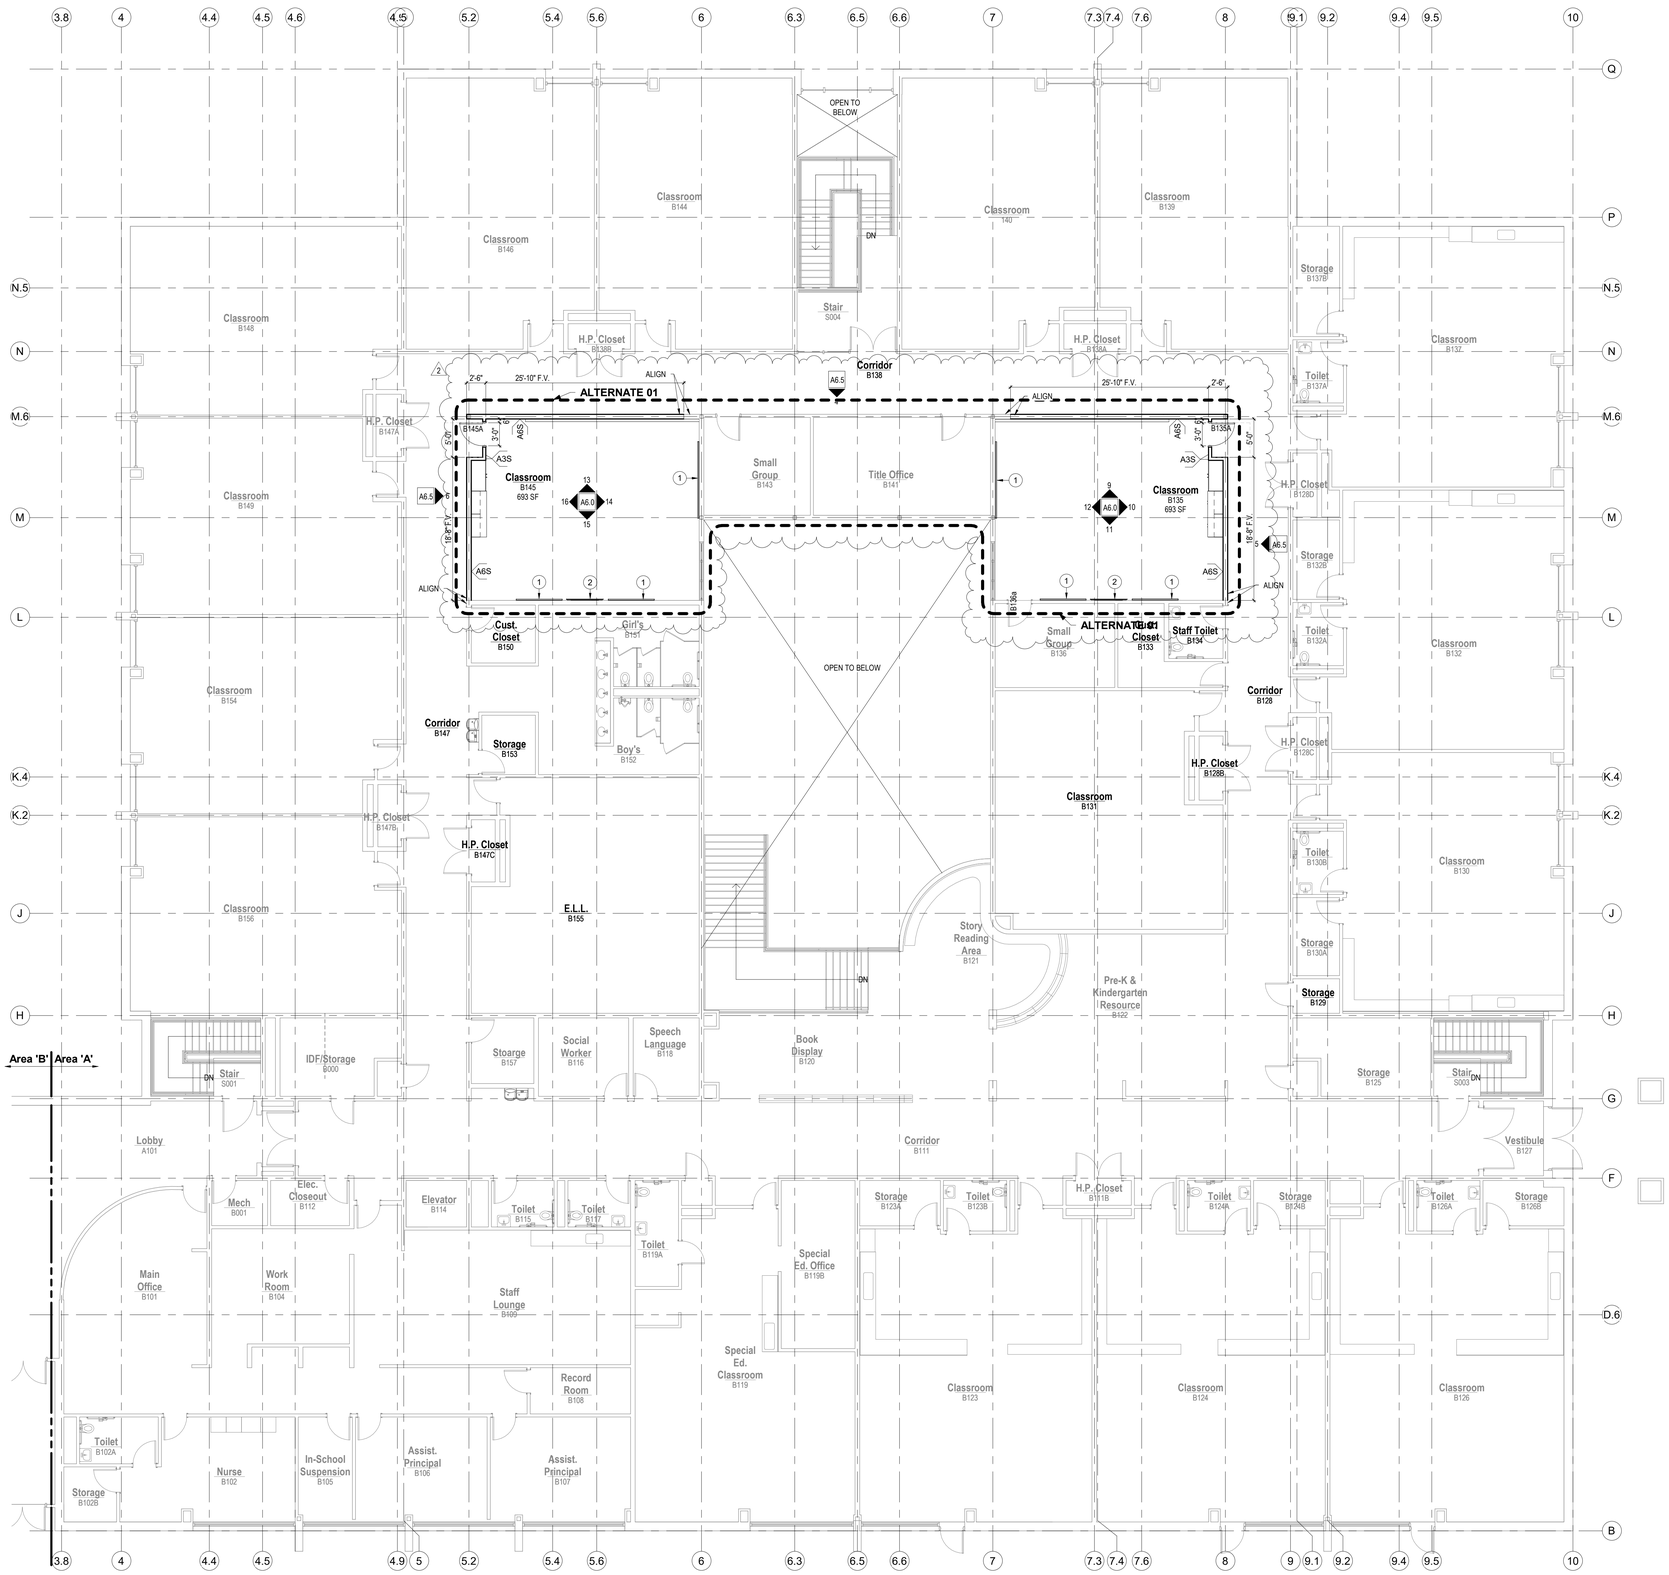

1 Main Level Plan

SCALE: 1/8" = 1'-0"

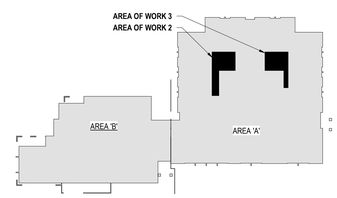

2 Main Level Key Plan

SCALE: 1" = 80'-0"

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL DOOR FRAMES ARE TO BE INSTALLED 4" AWAY OF ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
7. INTERIOR SIGNAGE TO BE PROVIDED BY OWNER.
8. FURNITURE AND EQUIPMENT PROVIDED BY OWNER.
9. AT ALL LOCATIONS OF NEW DUCT PENETRATIONS THROUGH NEW OR EXISTING WALLS, FINISH THE DRYWALL TIGHT TO THE PERIMETER OF THE DUCTWORK AND SEAL THE JOINT BETWEEN THE DUCTWORK AND THE WALL ASSEMBLY.

KEY NOTES

1. PROVIDE AND INSTALL WALL MOUNTED MARKERBOARDS, CLARIDGE SERIES 4 OR EQUAL. SEE ELEVATIONS FOR SIZING
2. PROVIDE AND INSTALL WALL-MOUNTED MONITOR. COORDINATE MONITOR AND STAND MODEL SELECTION WITH OWNER AND ARCHITECT. INSTALL BACKING IN WALL AS REQUIRED
3. PROVIDE AND INSTALL PLASTIC LAMINATE VENEER TO THE END OF THE EXISTING CASEWORK. MATCH THE EXISTING COLOR AND PATTERN
4. PROVIDE AND INSTALL WALL-MOUNTED MONITOR: SAMSUNG BE65F-H BEFX-H SERIES - 65" LED-BACKLIT LCD TV - 4K OR EQUAL. PROVIDE AND INSTALL EATON TRIPP LITE SERIES DISPLAY TV WALL MONITOR MOUNT SWIVEL/TILT DWM6010XX OR EQUAL. PROVIDE BACKING IN WALL AS REQUIRED
5. INSTALL BACKER ROD AND TRAFFIC-RATED SELF-LEVELING POURABLE URETHANE SEALANT WITHIN ROUTED CRACK.

WALL PARTITION TYPES

- A3S — 5/8" TYPE 'X' GPDW, 3-5/8" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.
- A6S — 5/8" TYPE 'X' GPDW, 6" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

Main Level Floor Plan Area 'A'

A1.1

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
10/11/2026 8:07:54 PM



2
1 **Main Level Plan Area B**
SCALE: 1/8" = 1'-0"

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL DOOR FRAMES ARE TO BE INSTALLED 4" AWAY OF ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
7. INTERIOR SIGNAGE TO BE PROVIDED BY OWNER.
8. FURNITURE AND EQUIPMENT PROVIDED BY OWNER.
9. AT ALL LOCATIONS OF NEW DUCT PENETRATIONS THROUGH NEW OR EXISTING WALLS, FINISH THE DRYWALL TIGHT TO THE PERIMETER OF THE DUCTWORK AND SEAL THE JOINT BETWEEN THE DUCTWORK AND THE WALL ASSEMBLY.


KEY NOTES

1. PROVIDE AND INSTALL WALL-MOUNTED MARKERBOARDS, CLARIDGE SERIES 4 OR EQUAL. SEE ELEVATIONS FOR SIZING (2)
2. PROVIDE AND INSTALL WALL-MOUNTED MONITOR. COORDINATE MONITOR AND STAND MODEL SELECTION WITH OWNER AND ARCHITECT. INSTALL BACKING IN WALL AS REQUIRED
3. PROVIDE AND INSTALL PLASTIC LAMINATE VENEER TO THE END OF THE EXISTING CASEWORK. MATCH THE EXISTING COLOR AND PATTERN
4. PROVIDE AND INSTALL WALL-MOUNTED MONITOR: SAMSUNG BE85FX-H BEFX-H SERIES - 85" LED-BACKLIT LCD TV - 4K OR EQUAL. PROVIDE AND INSTALL EATON TRIPP LITE SERIES DISPLAY TV WALL MONITOR MOUNT SWIVEL/TILT DWM6010XX OR EQUAL. PROVIDE BACKING IN WALL AS REQUIRED (2)
5. INSTALL BACKER ROD AND TRAFFIC-RATED SELF-LEVELING POURABLE URETHANE SEALANT WITHIN ROUTED CRACK.

WALL PARTITION TYPES

A3S 5/8" TYPE 'X' GPDW, 3-5/8" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.

A6S 5/8" TYPE 'X' GPDW, 6" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO GPDW SOFFIT ABOVE.

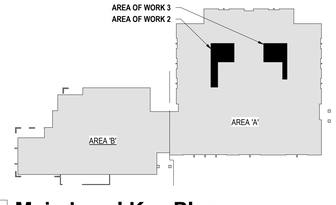

2 **Main Level Key Plan**
SCALE: 1" = 80'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD
Revision Schedule		

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Main Level Plan Area 'B'

A1.2

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:54 PM

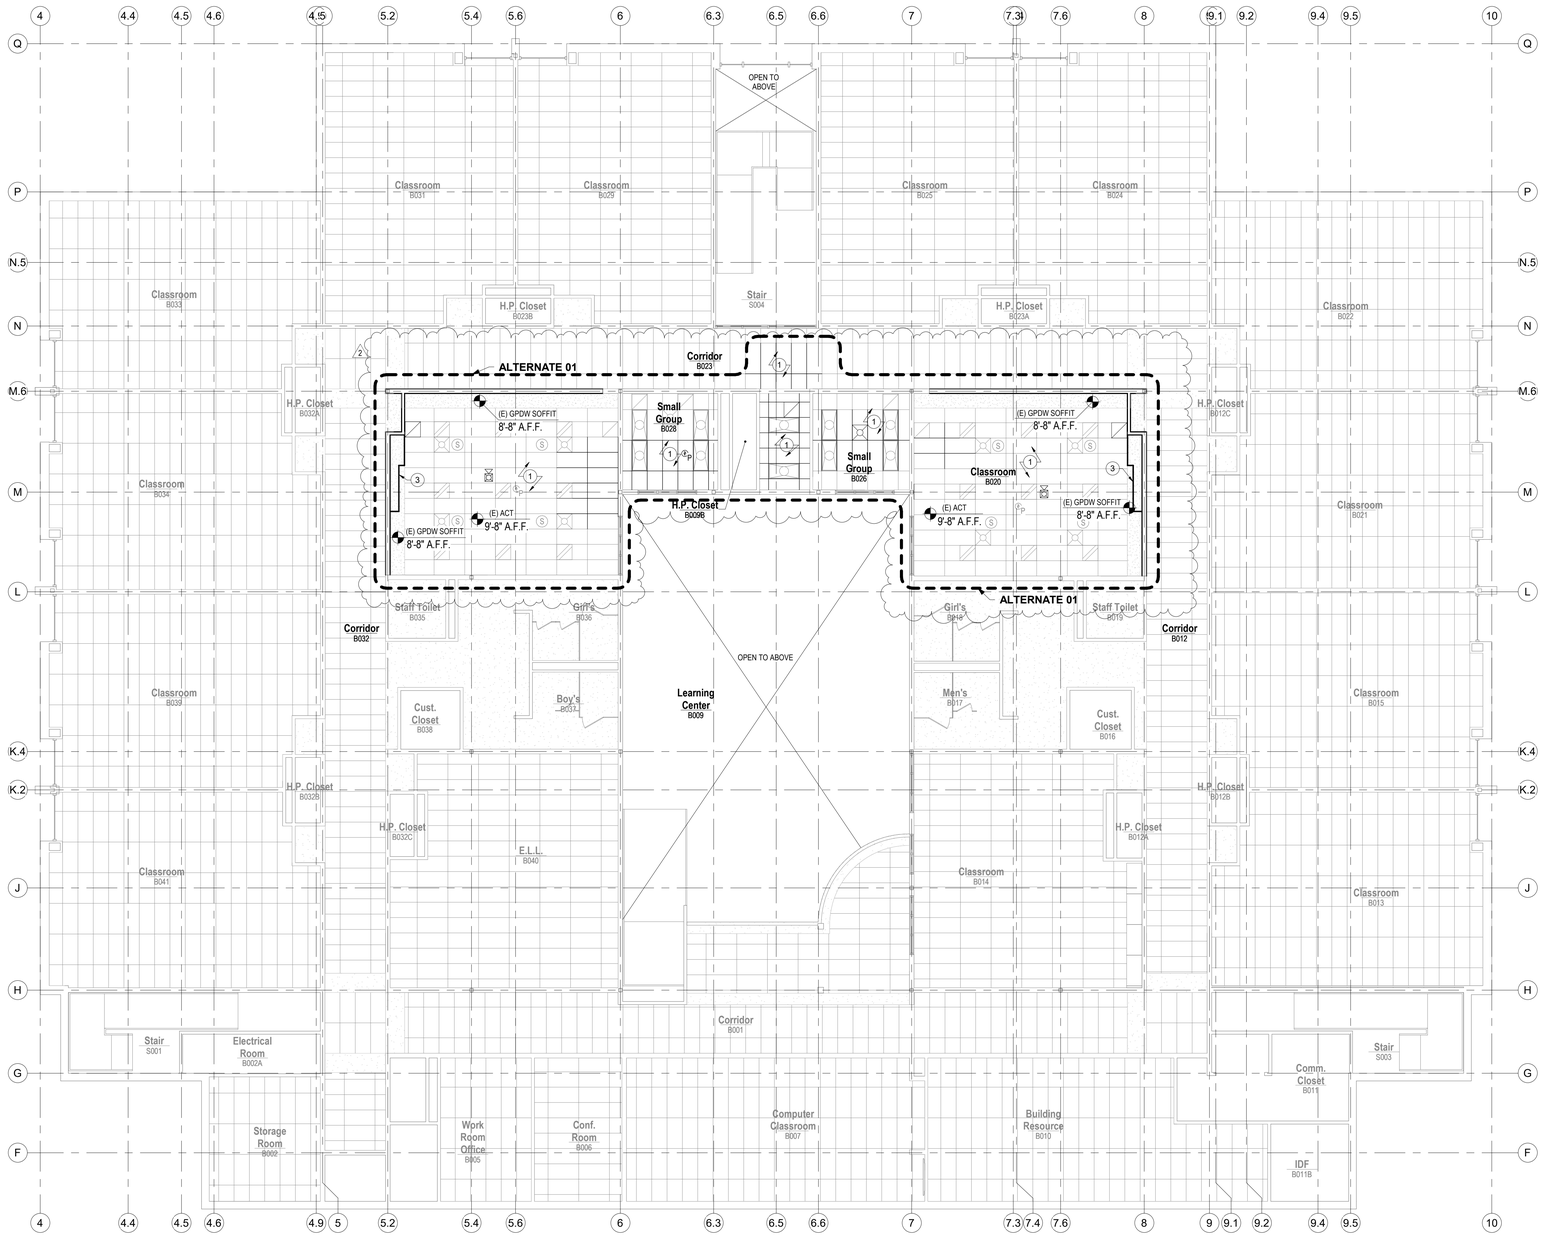

1 Lower Level RCP

SCALE: 1/8" = 1'-0"

RCP GENERAL NOTES:


1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS. IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES, CENTER OF SUSPENDED CEILING GRIDS OR FACE OF FINISHED WALLS/SOFFITS UNLESS NOTED OTHERWISE.
4. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHT FIXTURE SPECIFIC INFORMATION.
5. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL DIFFUSER SPECIFIC INFORMATION.

RCP KEY NOTES

1. REPLACE ACOUSTICAL TILE CEILING SYSTEM DAMAGED BY THE REMOVAL OF EXISTING DEVICES OR WALLS AS REQUIRED. REINSTALL ANY EXISTING DEVICES THAT WERE TEMPORARILY REMOVED AS PART OF THE DEMOLITION.
2. REPLACE GPDW CEILING SYSTEM DAMAGED BY THE REMOVAL OF EXISTING DEVICES OR WALLS AS REQUIRED. REINSTALL ANY EXISTING DEVICES THAT WERE TEMPORARILY REMOVED AS PART OF THE DEMOLITION.
3. MAPLE VENEERED PLYWOOD SOFFIT ABOVE CASEWORK. ALIGN FACE OF SOFFIT WITH FACE OF CASEWORK.
4. REPLACE EXISTING DEVICES THAT WERE REMOVED AS PART OF THE DEMOLITION.

RCP SYMBOL LEGEND

- EXISTING ACOUSTICAL TILE CEILING (24X48)
- NEW ACOUSTICAL TILE CEILING (24X48)
- EXISTING GPDW CEILING
- NEW GPDW CEILING
- EXISTING/REINSTALLED RECESSED LIGHT FIXTURE
- NEW RECESSED LIGHT FIXTURE
- EXISTING/REINSTALLED PHOTOELECTRIC SMOKE DETECTOR
- EXISTING/REINSTALLED HVAC SUPPLY DIFFUSER
- EXISTING/REINSTALLED HVAC RETURN DIFFUSER
- EXISTING/REINSTALLEDCEILING MOUNTED SPEAKER
- NEW FIRE ALARM HORN/STROBE COMBINATION

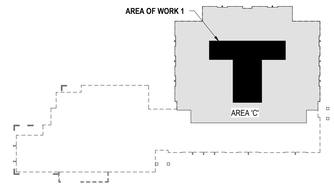

2 Lower Level Key Plan

SCALE: 1" = 80'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Lower Level RCP


A1.3

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:55 PM

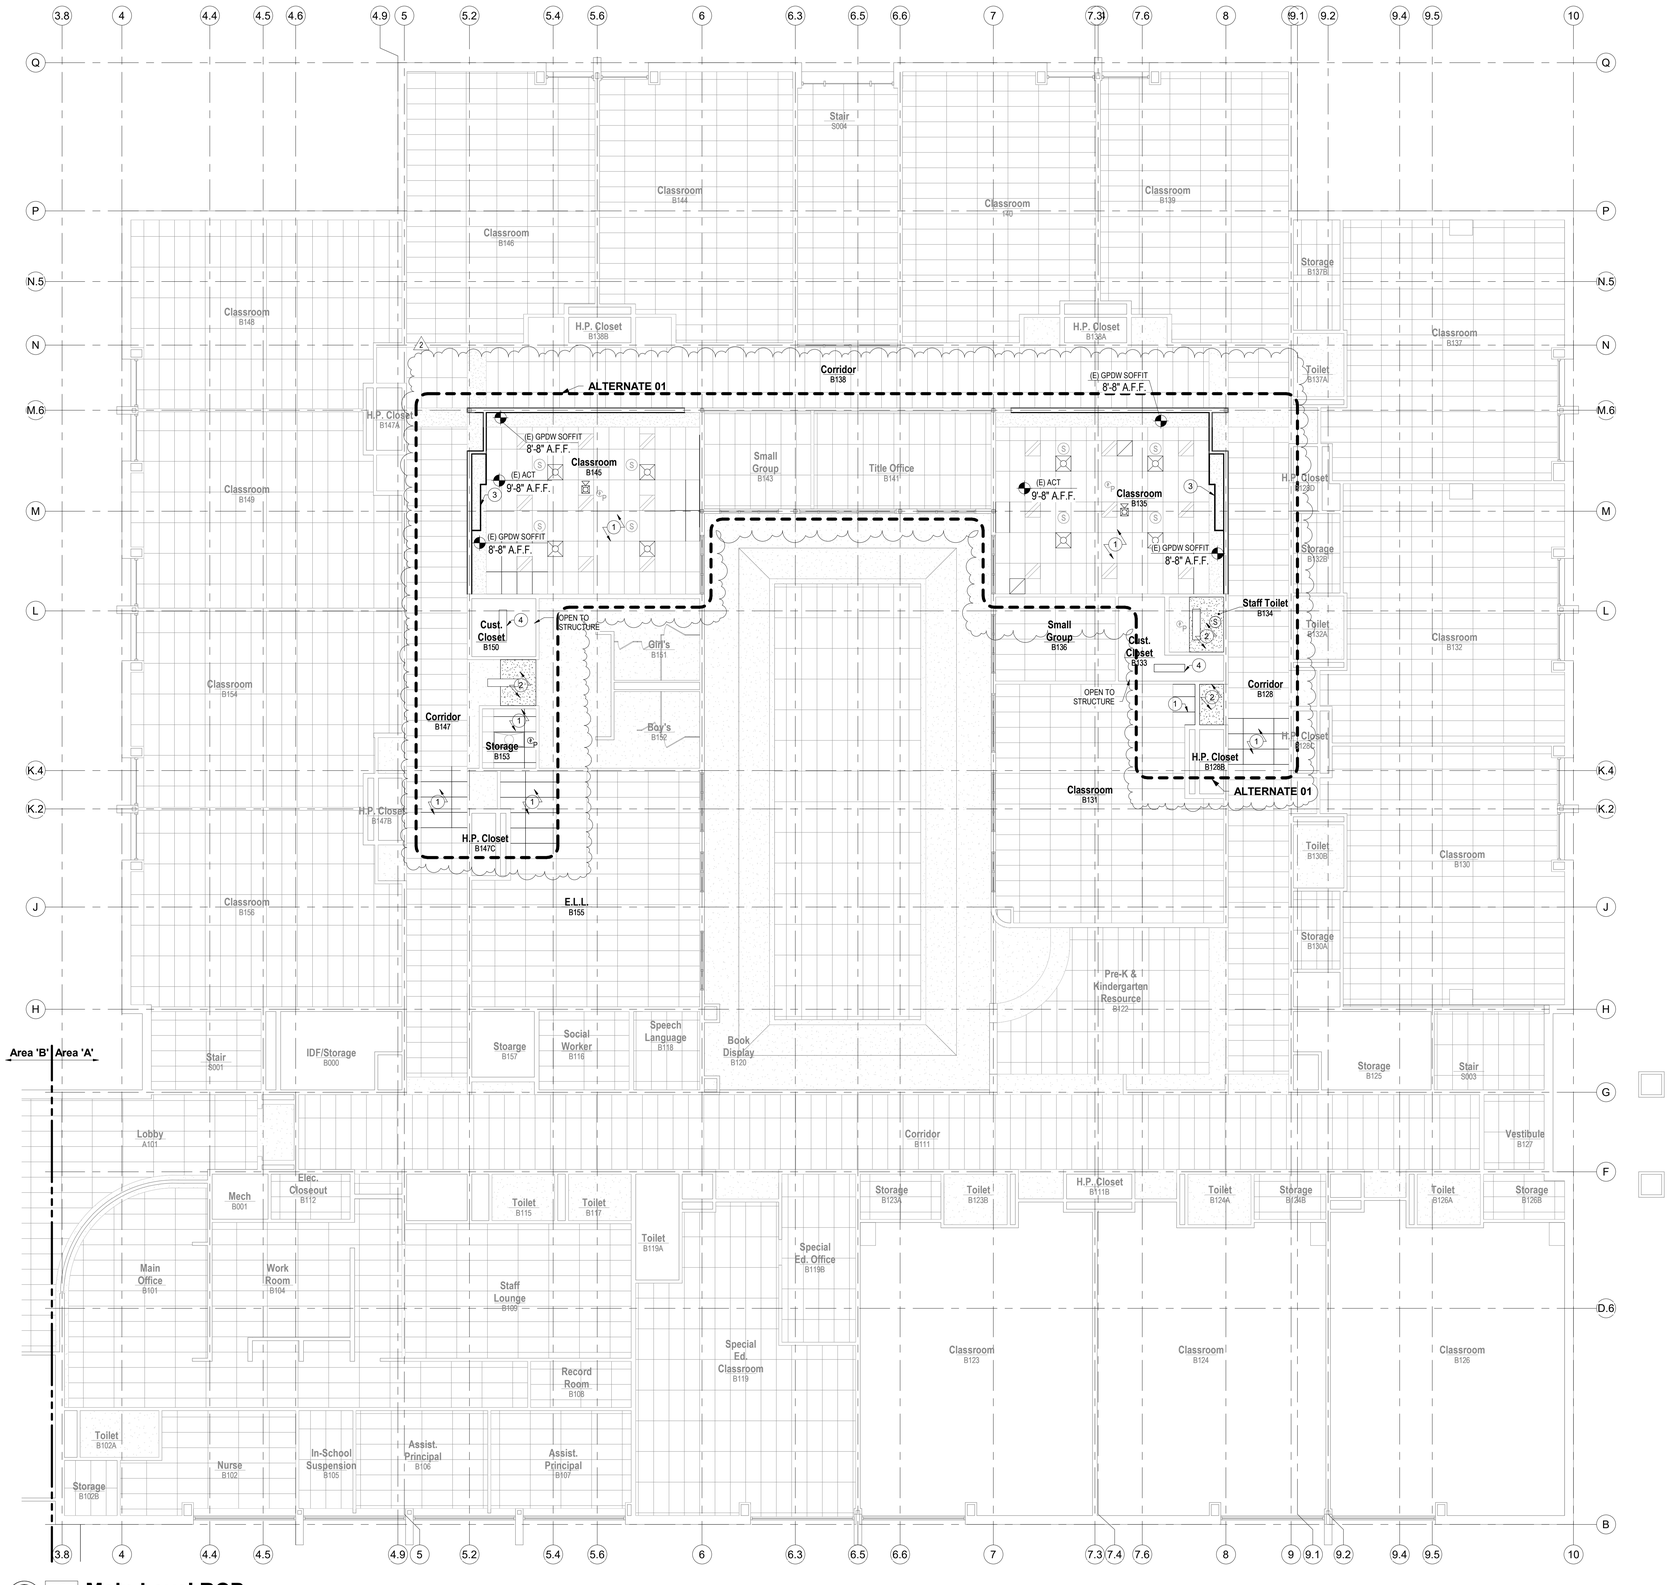

1 Main Level RCP

SCALE: 1/8" = 1'-0"

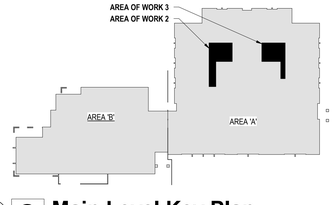

2 Main Level Key Plan

SCALE: 1" = 80'-0"

RCP GENERAL NOTES:

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES, CENTER OF SUSPENDED CEILING GRIDS OR FACE OF FINISHED WALLS/SOFFITS UNLESS NOTED OTHERWISE.
4. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL LIGHT FIXTURE SPECIFIC INFORMATION.
5. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL DIFFUSER SPECIFIC INFORMATION.

RCP KEY NOTES

1. REPLACE ACOUSTICAL TILE CEILING SYSTEM DAMAGED BY THE REMOVAL OF EXISTING DEVICES OR WALLS AS REQUIRED. REINSTALL ANY EXISTING DEVICES THAT WERE TEMPORARILY REMOVED AS PART OF THE DEMOLITION.
2. REPLACE GPDW CEILING SYSTEM DAMAGED BY THE REMOVAL OF EXISTING DEVICES OR WALLS AS REQUIRED. REINSTALL ANY EXISTING DEVICES THAT WERE TEMPORARILY REMOVED AS PART OF THE DEMOLITION.
3. MAPLE VENEERED PLYWOOD SOFFIT ABOVE CASEWORK. ALIGN FACE OF SOFFIT WITH FACE OF CASEWORK.
4. REPLACE EXISTING DEVICES THAT WERE REMOVED AS PART OF THE DEMOLITION.

RCP SYMBOL LEGEND

- EXISTING ACOUSTICAL TILE CEILING (24X48)
- NEW ACOUSTICAL TILE CEILING (24X48)
- EXISTING GPDW CEILING
- NEW GPDW CEILING
- EXISTING/REINSTALLED RECESSED LIGHT FIXTURE
- NEW RECESSED LIGHT FIXTURE
- EXISTING/REINSTALLED PHOTOELECTRIC SMOKE DETECTOR
- EXISTING/REINSTALLED HVAC SUPPLY DIFFUSER
- EXISTING/REINSTALLED HVAC RETURN DIFFUSER
- EXISTING/REINSTALLEDCEILING MOUNTED SPEAKER
- NEW FIRE ALARM HORN/STROBE COMBINATION

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

Main Level RCP


A1.4

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:56 PM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030


Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

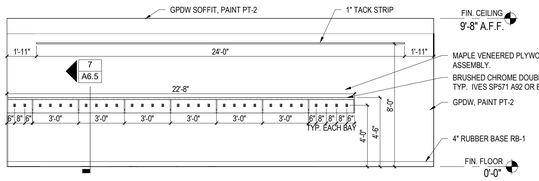

1 Classroom B020 - North

1 | A1.0


SCALE: 1/4" = 1'-0"

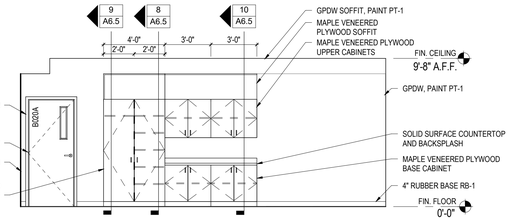

2 Classroom B020 - East

1 | A1.0


SCALE: 1/4" = 1'-0"

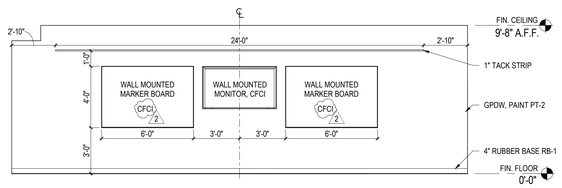

3 Classroom B020 - South

1 | A1.0


SCALE: 1/4" = 1'-0"

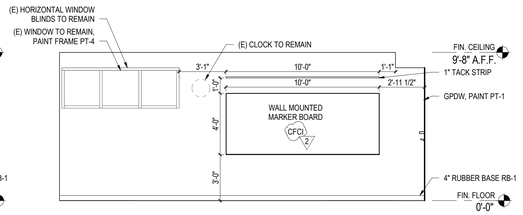

4 Classroom B020 - West

1 | A1.0


SCALE: 1/4" = 1'-0"

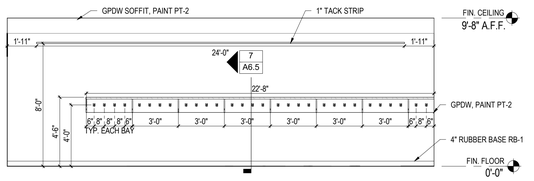

5 Classroom B030 - North

1 | A1.0


SCALE: 1/4" = 1'-0"

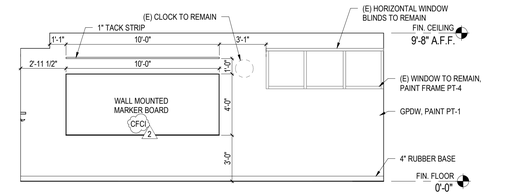

6 Classroom B030 - East

1 | A1.0


SCALE: 1/4" = 1'-0"

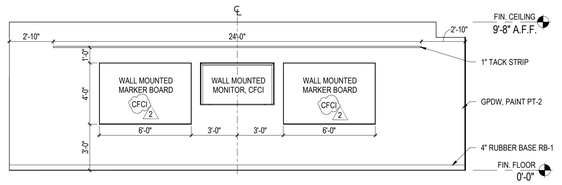

7 Classroom B030 - South

1 | A1.0


SCALE: 1/4" = 1'-0"

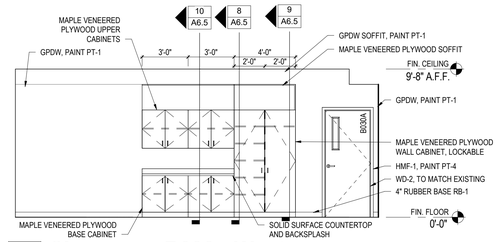

8 Classroom B030 - West

1 | A1.0


SCALE: 1/4" = 1'-0"

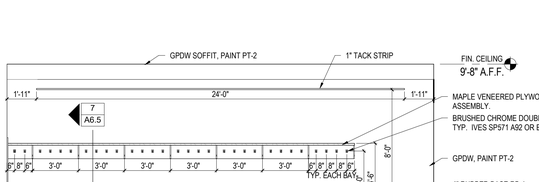

9 Classroom B135 - North

1 | A1.1


SCALE: 1/4" = 1'-0"

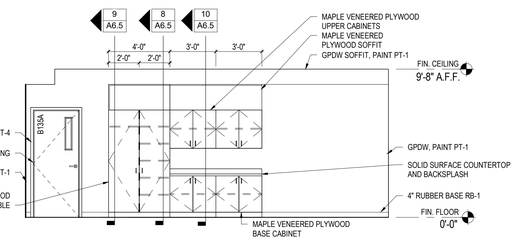

10 Classroom B135 - East

1 | A1.1


SCALE: 1/4" = 1'-0"

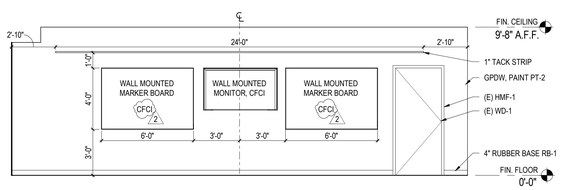

11 Classroom B135 - South

1 | A1.1


SCALE: 1/4" = 1'-0"

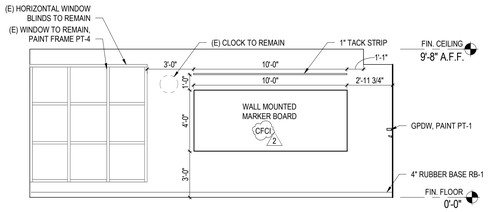

12 Classroom B135 - West

1 | A1.1


SCALE: 1/4" = 1'-0"

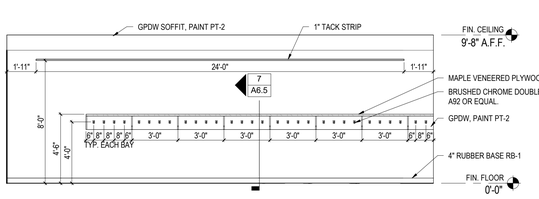

13 Classroom B145 - North

1 | A1.1


SCALE: 1/4" = 1'-0"

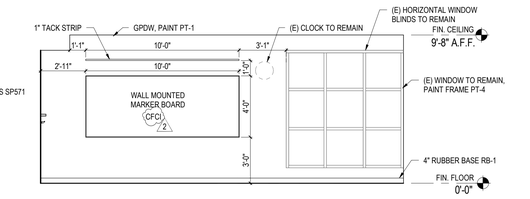

14 Classroom B145 - East

1 | A1.1


SCALE: 1/4" = 1'-0"

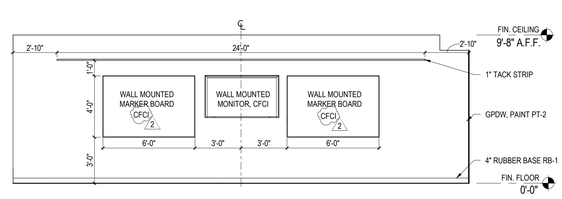

15 Classroom B145 - South

1 | A1.1

SCALE: 1/4" = 1'-0"

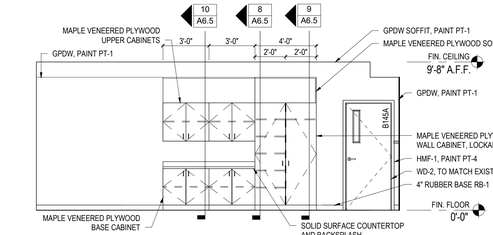

16 Classroom B145 - West

1 | A1.1

SCALE: 1/4" = 1'-0"

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033


September 25, 2026

2
ALTERNATE 01
***ALL VIEW THIS SHEET**

Interior Elevations

A6.0


Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/17/2026 8:07:58 PM

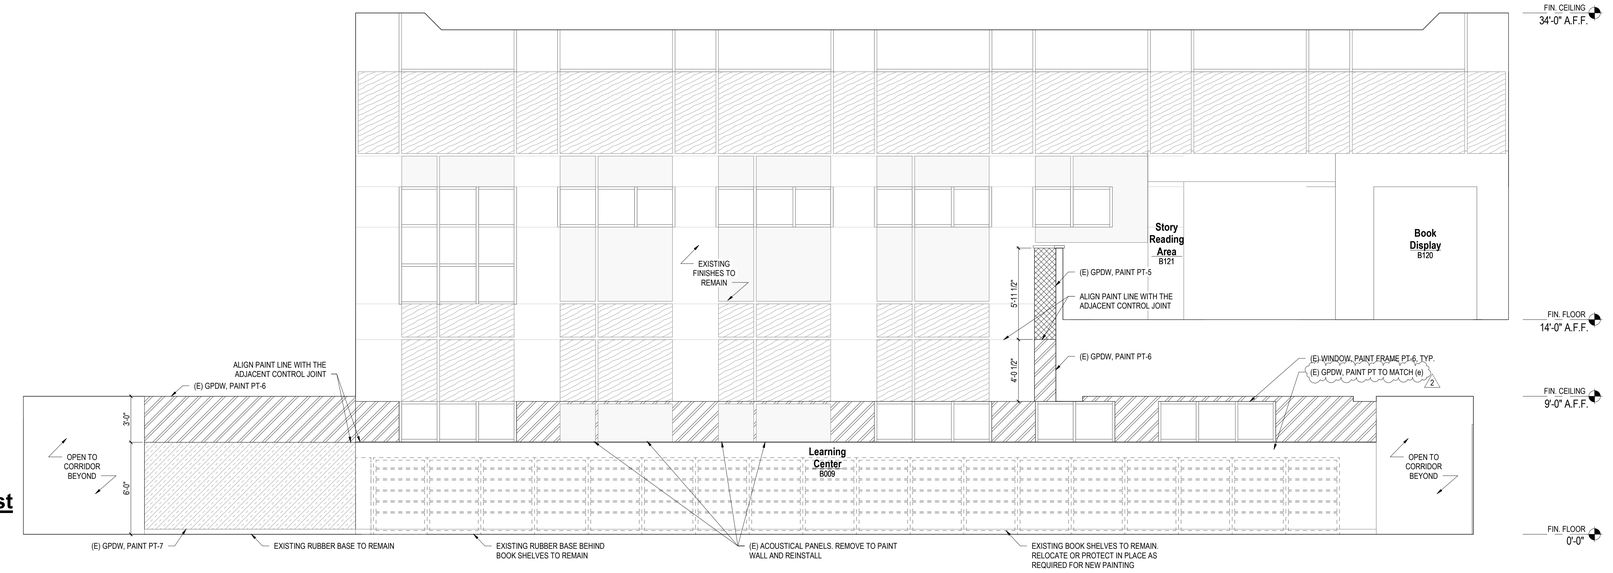

1 Learning Center B009 - East

1 | A1.0


SCALE: 1/4" = 1'-0"

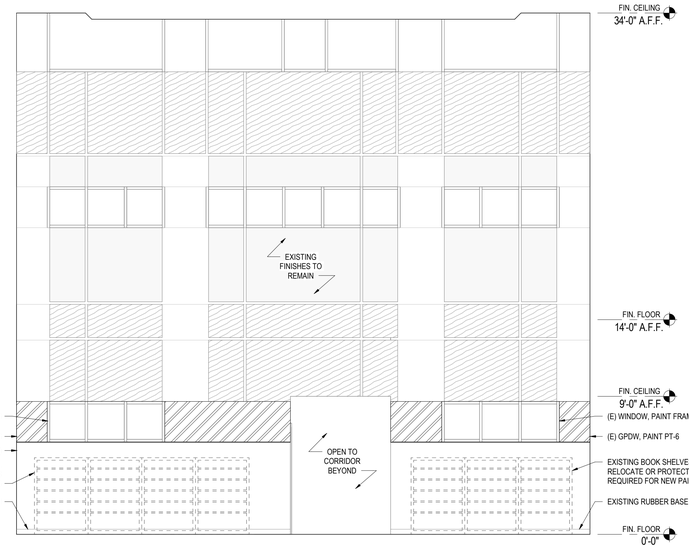

3 Learning Center B009 - North

2

SCALE: 1/4" = 1'-0"

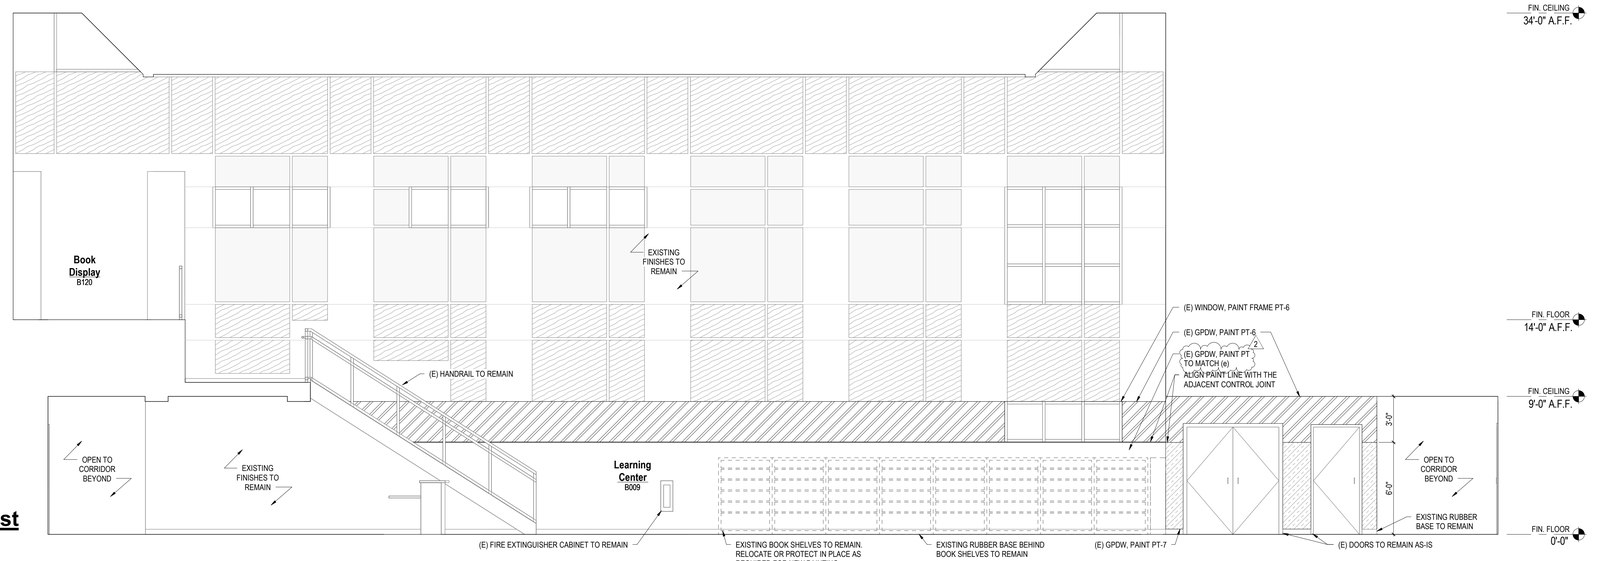

2 Learning Center B009 - West

1 | A1.0

SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026


Interior Elevations

A6.1


Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:07:59 PM




1 B013 - EAST
SCALE: 1/4" = 1'-0"
1 A1.0

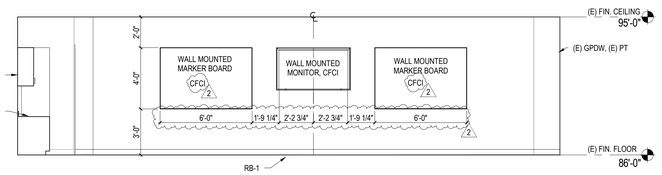


2 B013 - NORTH
SCALE: 1/4" = 1'-0"
1 A1.0

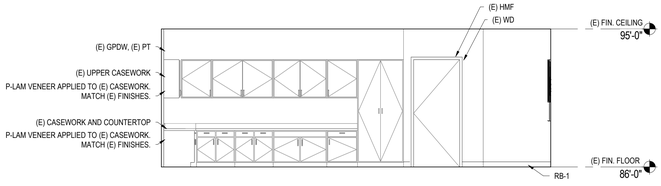


3 B013 - WEST
SCALE: 1/4" = 1'-0"
1 A1.0

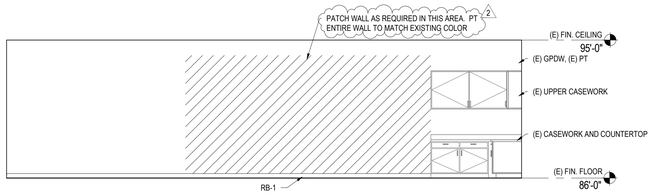


4 B013 - SOUTH
SCALE: 1/4" = 1'-0"
1 A1.0

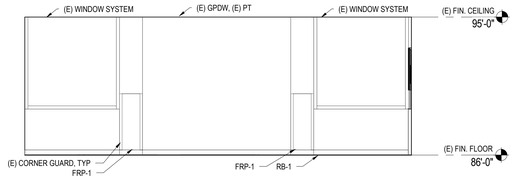


5 B015 - EAST
SCALE: 1/4" = 1'-0"
1 A1.0

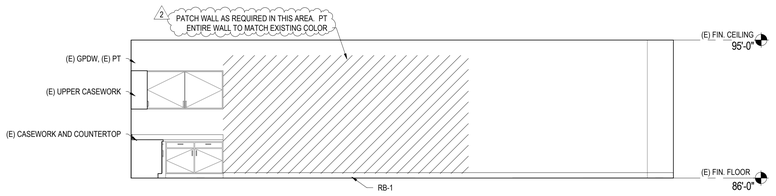


6 B015 - NORTH
SCALE: 1/4" = 1'-0"
1 A1.0

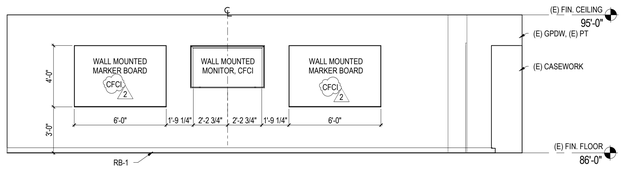


7 B015 - SOUTH
SCALE: 1/4" = 1'-0"
1 A1.0

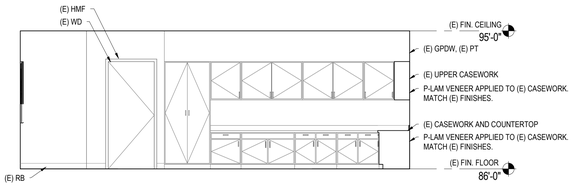


8 B015 - WEST
SCALE: 1/4" = 1'-0"
1 A1.0

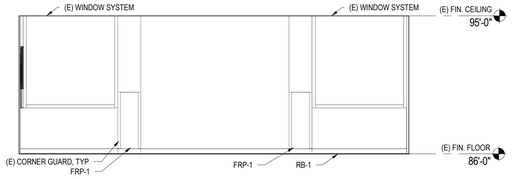


9 B021 - EAST
SCALE: 1/4" = 1'-0"
1 A1.0

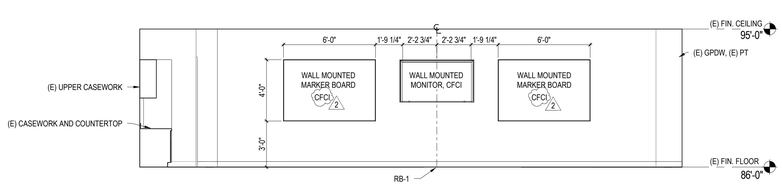

10 B021 - NORTH
SCALE: 1/4" = 1'-0"
1 A1.0

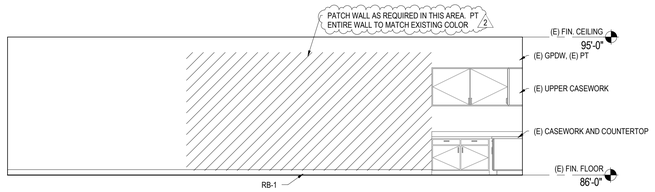

11 B021 - SOUTH
SCALE: 1/4" = 1'-0"
1 A1.0

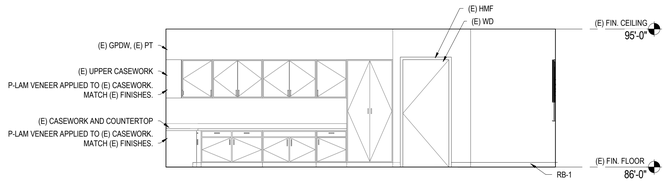

12 B021 - WEST
SCALE: 1/4" = 1'-0"
1 A1.0

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD
Revision Schedule		

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033


September 25, 2026

ALTERNATE 02
*ALL VIEW THIS SHEET

Interior Elevations


A6.2

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:08:00 PM

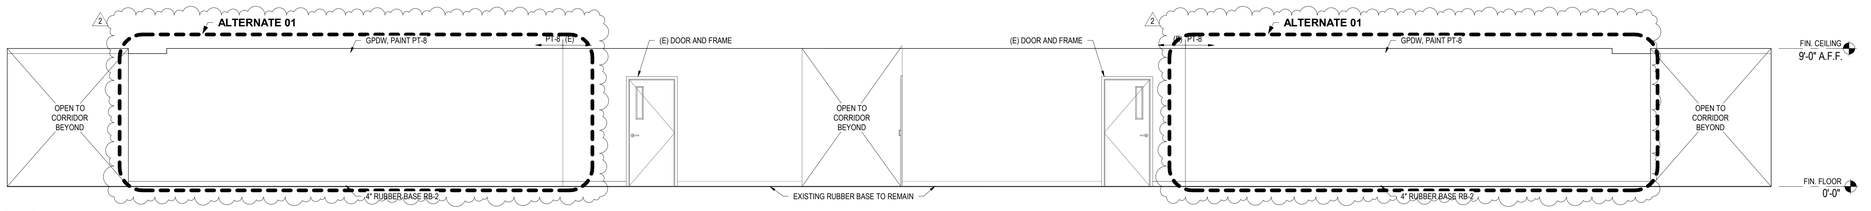


1 Corridor B023 - South

1 | A1.0 SCALE: 1/4" = 1'-0"

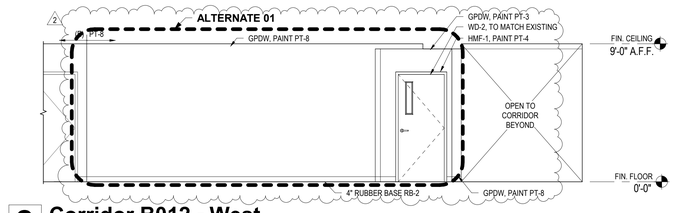


2 Corridor B012 - West

1 | A1.0 SCALE: 1/4" = 1'-0"

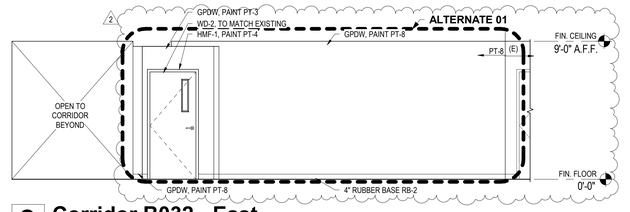


3 Corridor B032 - East

1 | A1.0 SCALE: 1/4" = 1'-0"

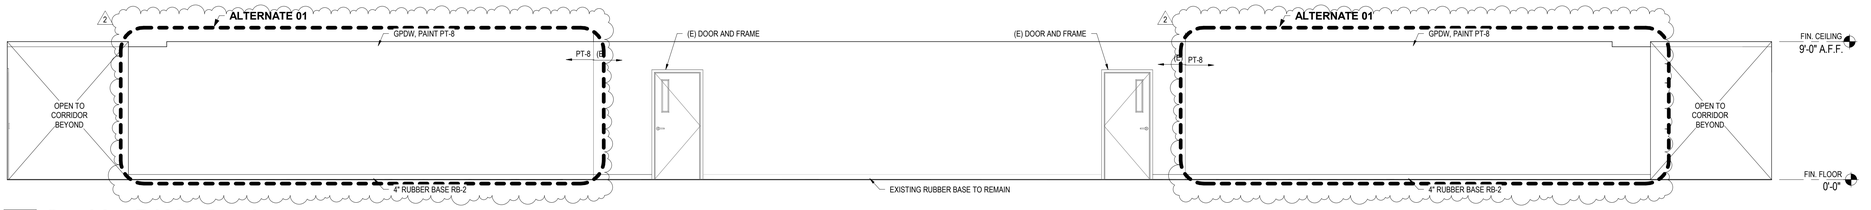


4 Corridor B138 - South

1 | A1.1 SCALE: 1/4" = 1'-0"

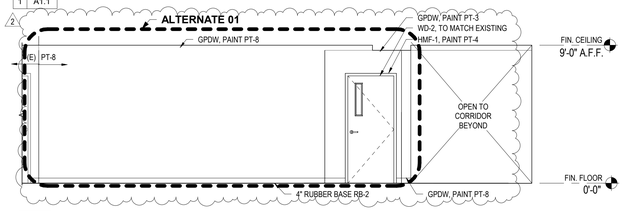

5 Corridor B128 - West


1 | A1.1 SCALE: 1/4" = 1'-0"

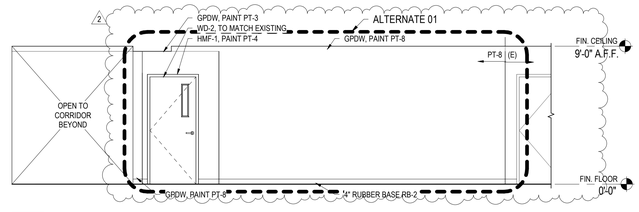

6 Corridor B147 - East


1 | A1.1 SCALE: 1/4" = 1'-0"

ALTERNATE 01

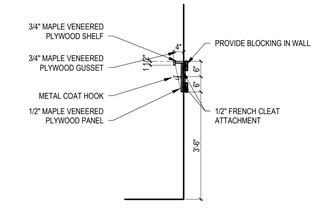


7 Backpack Storage Section

1 | A6.0 SCALE: 1/2" = 1'-0"

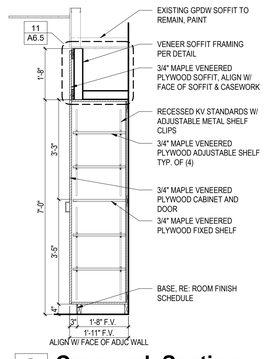


8 Casework Section

2 | A6.0 SCALE: 1/2" = 1'-0"

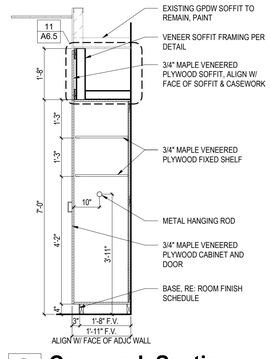


9 Casework Section

2 | A6.0 SCALE: 1/2" = 1'-0"

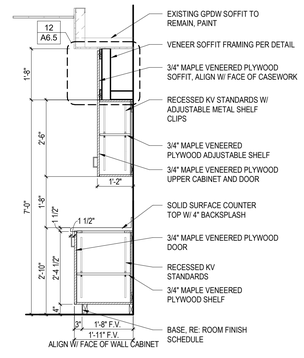

10 Casework Section

2 | A6.0 SCALE: 1/2" = 1'-0"

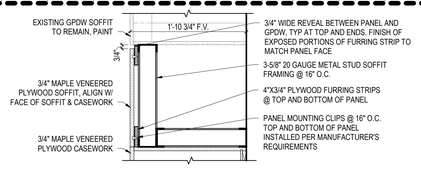


11 Veneer Soffit Detail

8 | A6.5 SCALE: 1" = 1'-0"


CASEWORK GENERAL NOTES

1. ALL CASEWORK SHALL BE CONSTRUCTED TO MEET THE FOLLOWING AWI CONSTRUCTION GRADES:
   WOOD VENEERED PLYWOOD CASEWORK
   -GRADE = CUSTOM
   -SOLID SURFACE COUNTERTOPS AND BACKSPLASH
2. TYPICAL MATERIALS:
   -HEAVY DUTY DRAWER SLIDES
   -FIVE KNUCKLE HINGES
   -WIRE PULLS
   -METAL SHELF CLIPS ON RECESSED K.V. STANDARDS
3. SEE SHEET A9.0 FOR FINISHES.
4. RECESS ALL KV STANDARDS PER DETAIL 13 ON SHEET A6.3 (THIS SHEET).
5. FACE OF WALL CABINETS (DETAILS 8 & 9, THIS SHEET) AND BASE CABINETS (DETAIL 10, THIS SHEET) TO ALIGN WITH FACE OF ADJACENT WALL.

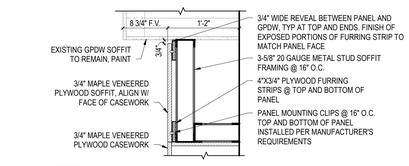


12 Veneer Soffit Detail

10 | A6.5 SCALE: 1" = 1'-0"

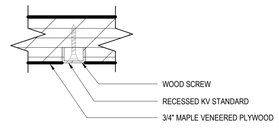


13 Typ. Recessed KV Standard

SCALE: 12" = 1'-0"

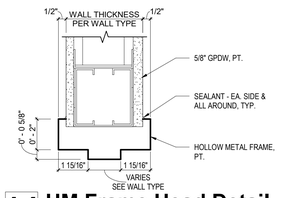


14 HM Frame Head Detail


16 | A6.5 SCALE: 3" = 1'-0"

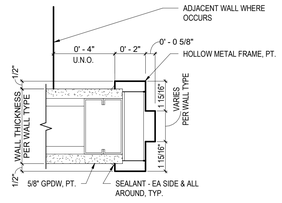


15 HM Frame Jamb Detail

16 | A6.5 SCALE: 3" = 1'-0"







16 Door and Frame Types

SCALE: 1/4" = 1'-0"

(T) INDICATES TEMPERED GLAZING AT THESE LOCATIONS

DOOR AND FRAME SCHEDULE

IDENTIFICATION			DOOR						
			DIMENSIONS						
DOOR NO.	ROOM NO.	ROOM NAME	WIDTH WI	H	TYPE	FRAME TYPE	DOOR/FRAME FIRE RATING	HARDWARE	REMARKS
B020A	B020	Classroom	3' - 0"	7' - 0"	WD-2	HMF-1	N/A	01	Mag Hold, Narrow Lite, Door Finish to Match Existing, Paint Frame
B030A	B030	Classroom	3' - 0"	7' - 0"	WD-2	HMF-1	N/A	01	Mag Hold, Narrow Lite, Door Finish to Match Existing, Paint Frame
B135A	B135	Classroom	3' - 0"	7' - 0"	WD-2	HMF-1	N/A	01	Mag Hold, Narrow Lite, Door Finish to Match Existing, Paint Frame
B136a	B136	Small Group	3' - 0"	7' - 0"	WD-1 (E)	HMF-1 (E)	N/A	EX-01	Existing Door, Frame, and Hardware to Remain
B145A	B145	Classroom	3' - 0"	7' - 0"	WD-2	HMF-1	N/A	01	Mag Hold, Narrow Lite, Door Finish to Match Existing, Paint Frame

NOTE:
(E) = EXISTING DOOR AND FRAME
1. NEW WOOD DOORS TO MATCH EXISTING CONDITIONS.
2. GENERAL CONTRACTOR TO VERIFY EXISTING DOORS AND/OR FRAMES AND COORDINATE REQUIRED PREPARATION.
3. DOOR LITE KITS TO BE ANEMOSTAT LO-PRO LITE KITS.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Corridor Elevations & Casework Sections & Door Details

A6.5

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:08:01 PM

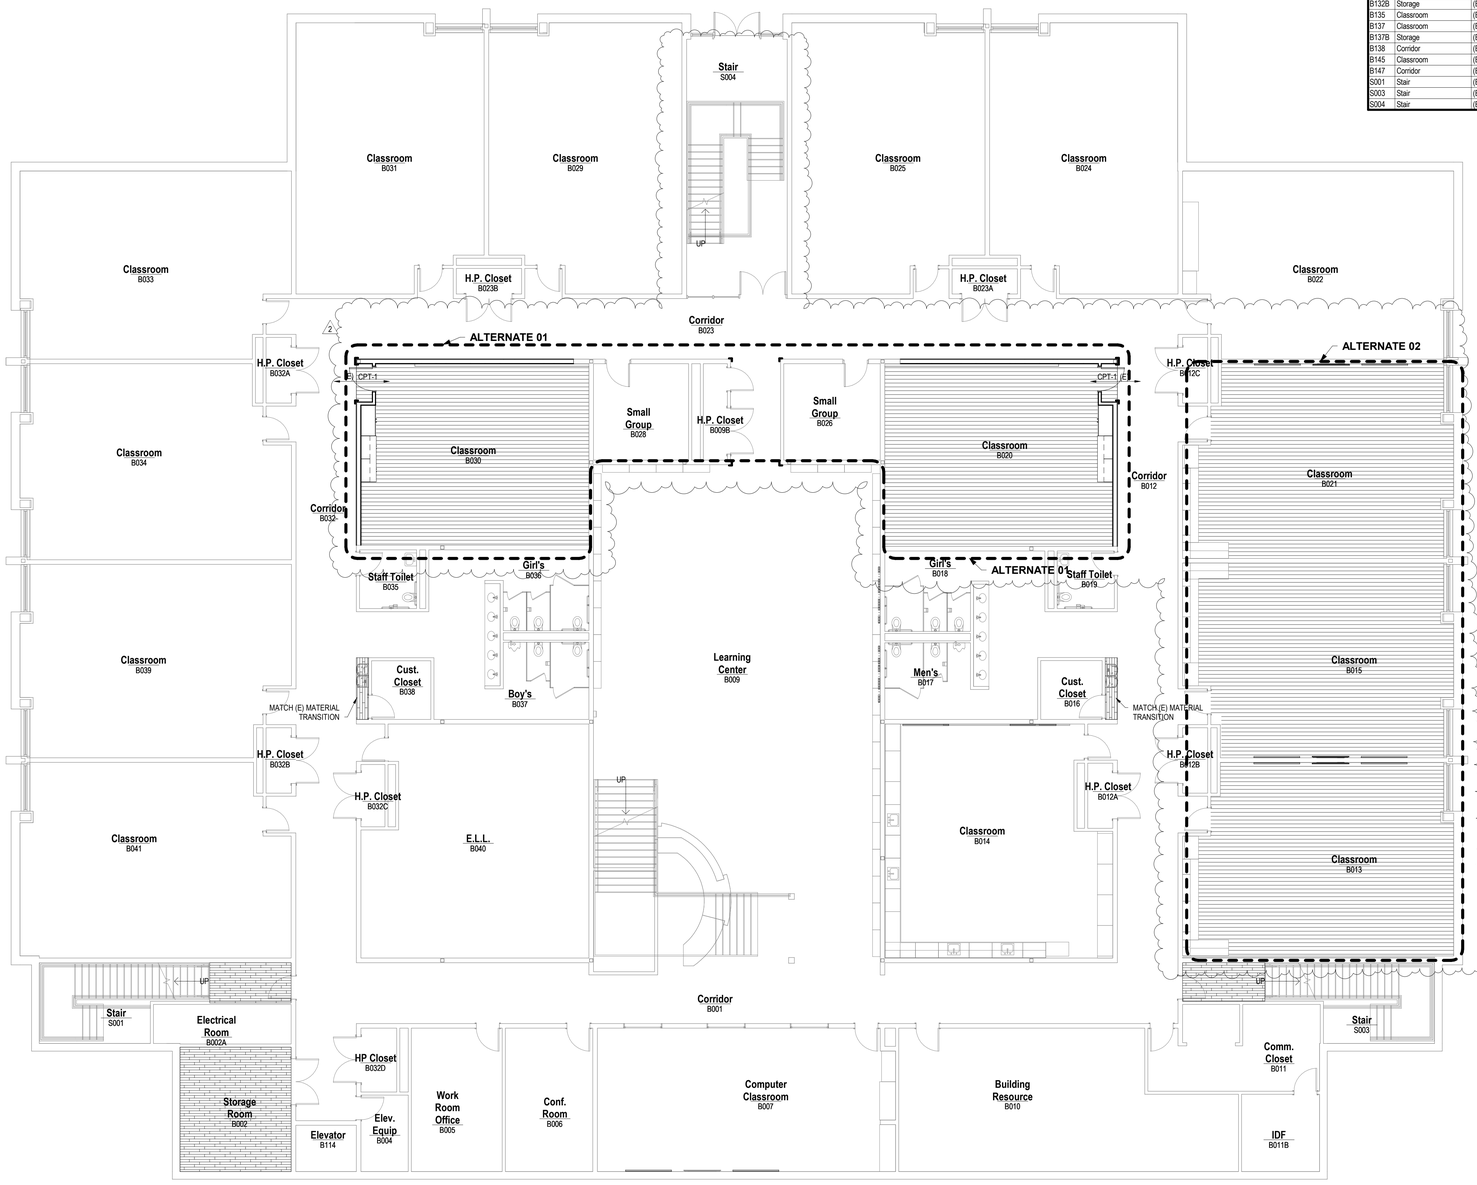

2 Lower Level Finish Plan

SCALE: 1/8" = 1'-0"

ROOM FINISH SCHEDULE

IDENTIFICATION		FLOOR			WALLS								CEILING	
					NORTH		EAST		SOUTH		WEST			
NO.	NAME	MATERIAL	FINISH	BASE	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	REMARKS
103B	PE Office	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A102	Corridor	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	-	(E) GPDW	(E)	(E) ACT	
A102B	Kitchenette	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	-	-	(E) GPDW	(E)	(E) ACT	
A105A	General Music Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A110	B&A School Care	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112	Multi-Purpose Room	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112A	Multipurpose Room Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B009	Learning Center	(E) CONC.	(E)	RB-2	(E) GPDW	PT-6	(E) GPDW	PT-6	(E) GPDW	PT-5 & PT-6	(E) GPDW	PT-6	(E)	Refer to Sheets A6.1 & A6.2 for Paint Layout
B012	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B013	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B015	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B020	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B021	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B023	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	
B030	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B032	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B102	Nurse	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B102B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B108	Record Room	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B109	Staff Lounge	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B111	Corridor	(E) CONC.	(E) CPT, LVT-1	(E) RB, RB-1	(E) GPDW	(E)	-	-	(E) GPDW	(E)	-	-	(E) ACT	
B112	Elec. Closeout	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B119	Special Ed. Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B128	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B129	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B135	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B137	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B137B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B138	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	
B145	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B147	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
S001	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S003	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S004	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	

FINISH PLAN LEGEND

L CORNER GUARD - STAINLESS STEEL

CARPET
WOM-1 (2)
LVT1
LVT2

FINISH LEGEND

FLOORING AND WALL BASE

CARPET
CPT1 TARKETT POWERBOND 6' - 11877 THREADCRAFT
COLOR: 60801 NIGHT VALE

WALK OFF MAT (2)
WOM-1 TANDUS ABRASIVE ACTION II 02578
COLOR: WINTER GRAY 19103

LUXURY VINYL TILE
LVT1 ARMSTRONG DIAMOND 10 TECHNOLOGY ARBORART
COLOR: GALENA OAK RYE NA180 6" X 48" AT 1/3 OFFSET

LVT2 ARMSTRONG DIAMOND 10 TECHNOLOGY COALESCE
COLOR: OXIDIZE PLATINUM ST883 18" X 36" AT 1/3 OFFSET

RUBBER BASE/RESILIENT BASE
RB1 ROPPE 4" BASE BLACK
RB2 MANNINGTON COMMERCIAL 4" LIGHT TEAL #254

RUBBER/RESILIENT FLOOR TRANSITIONS
TE-1 JOHNSONITE BY TARKETT SLT OR EQUAL. COLOR: BLACK

WALLS

PAINT/EPOXY PAINT

PT1 - FIELD PAINT	BENJAMIN MOORE OLYMPIC MOUNTAINS #971
PT2 - ACCENT PAINT	BENJAMIN MOORE OLD BLUE JEANS #539
PT3 - ALCOVE PAINT	BLUE TO MATCH EXISTING ALCOVE PAINT
PT4 - FRAME PAINT	TEAL TO MATCH EXISTING FRAME PAINT
PT5 - ACCENT PAINT	LIGHT BLUE TO MATCH EXISTING LEARNING CENTER PAINT
PT6 - ACCENT PAINT	PURPLE TO MATCH EXISTING LEARNING CENTER PAINT
PT7 - ACCENT PAINT	BEIGE TO MATCH EXISTING LEARNING CENTER PAINT
PT8 - FIELD PAINT	BENJAMIN MOORE STERLING SILVER #1461

CASEWORK

WOOD VENEERED PLYWOOD
WVP PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

SOLID SURFACE (1)
SS1 FORMICA CLASSICS RIVER ROCK MOSAIC 656
MATTE FINISH

FOR SPRINKLERED CLASS E BUILDING, FINISHES SHALL BE
CLASS B EXIT ENCLOSURES/PASSAGEWAYS. CLASS B: FSI 26-75, SDI 0-450
CLASS C CORRIDORS AND ROOMS. CLASS C: FSI 76-200, SDI 0-450
FLOOR FINISH PER 804 (MIN. CLASS II IN E ENCLOSURES AND CORRIDORS).

FOR CLASSROOMS, COMBUSTIBLE DECORATIVE MATERIAL LIMITS PER IFC 807 (ARTWORK/TEACHING MATERIALS ON WALLS) WILL NOT EXCEED MORE THAN 50% OF WALL SURFACE AREA.

(2)
NOTE:
WHERE EQUIPMENT IS REMOVED FROM WALLS, THE ENTIRE ASSOCIATED WALL IS TO BE REPAINTED WITH THE COLOR INDICATED

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

Lower Level Finish Plan

A9.0


Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026)_rv1
11/11/2026 8:08:02 PM

ROOM FINISH SCHEDULE

IDENTIFICATION		FLOOR			WALLS								CEILING	
					NORTH		EAST		SOUTH		WEST			
NO.	NAME	MATERIAL	FINISH	BASE	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	REMARKS
103B	PE Office	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A102	Corridor	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	-	(E) GPDW	(E)	(E) ACT	
A102B	Kitchenette	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	-	-	(E) GPDW	(E)	(E) ACT	
A105A	General Music Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A110	B&A School Care	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112	Multi-Purpose Room	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112A	Multipurpose Room Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B009	Learning Center	(E) CONC.	(E)	RB-2	(E) GPDW	PT-6	(E) GPDW	PT-6	(E) GPDW	PT-5 & PT-6	(E) GPDW	PT-6	(E)	Refer to Sheets A6.1 & A6.2 for Paint Layout
B012	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B013	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B015	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B020	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B021	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B023	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	

ROOM FINISH SCHEDULE

IDENTIFICATION		FLOOR			WALLS								CEILING	
					NORTH		EAST		SOUTH		WEST			
NO.	NAME	MATERIAL	FINISH	BASE	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	REMARKS
B030	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B032	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B102	Nurse	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B102B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B108	Record Room	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B109	Staff Lounge	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B111	Corridor	(E) CONC.	(E) CPT, LVT-1	(E) RB, RB-1	(E) GPDW	(E)	-	-	(E) GPDW	(E)	-	-	(E) ACT	
B112	Elec. Closeout	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B119	Special Ed. Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B128	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B129	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B135	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B137	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B137B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B138	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	
B145	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B147	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
S001	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S003	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S004	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	

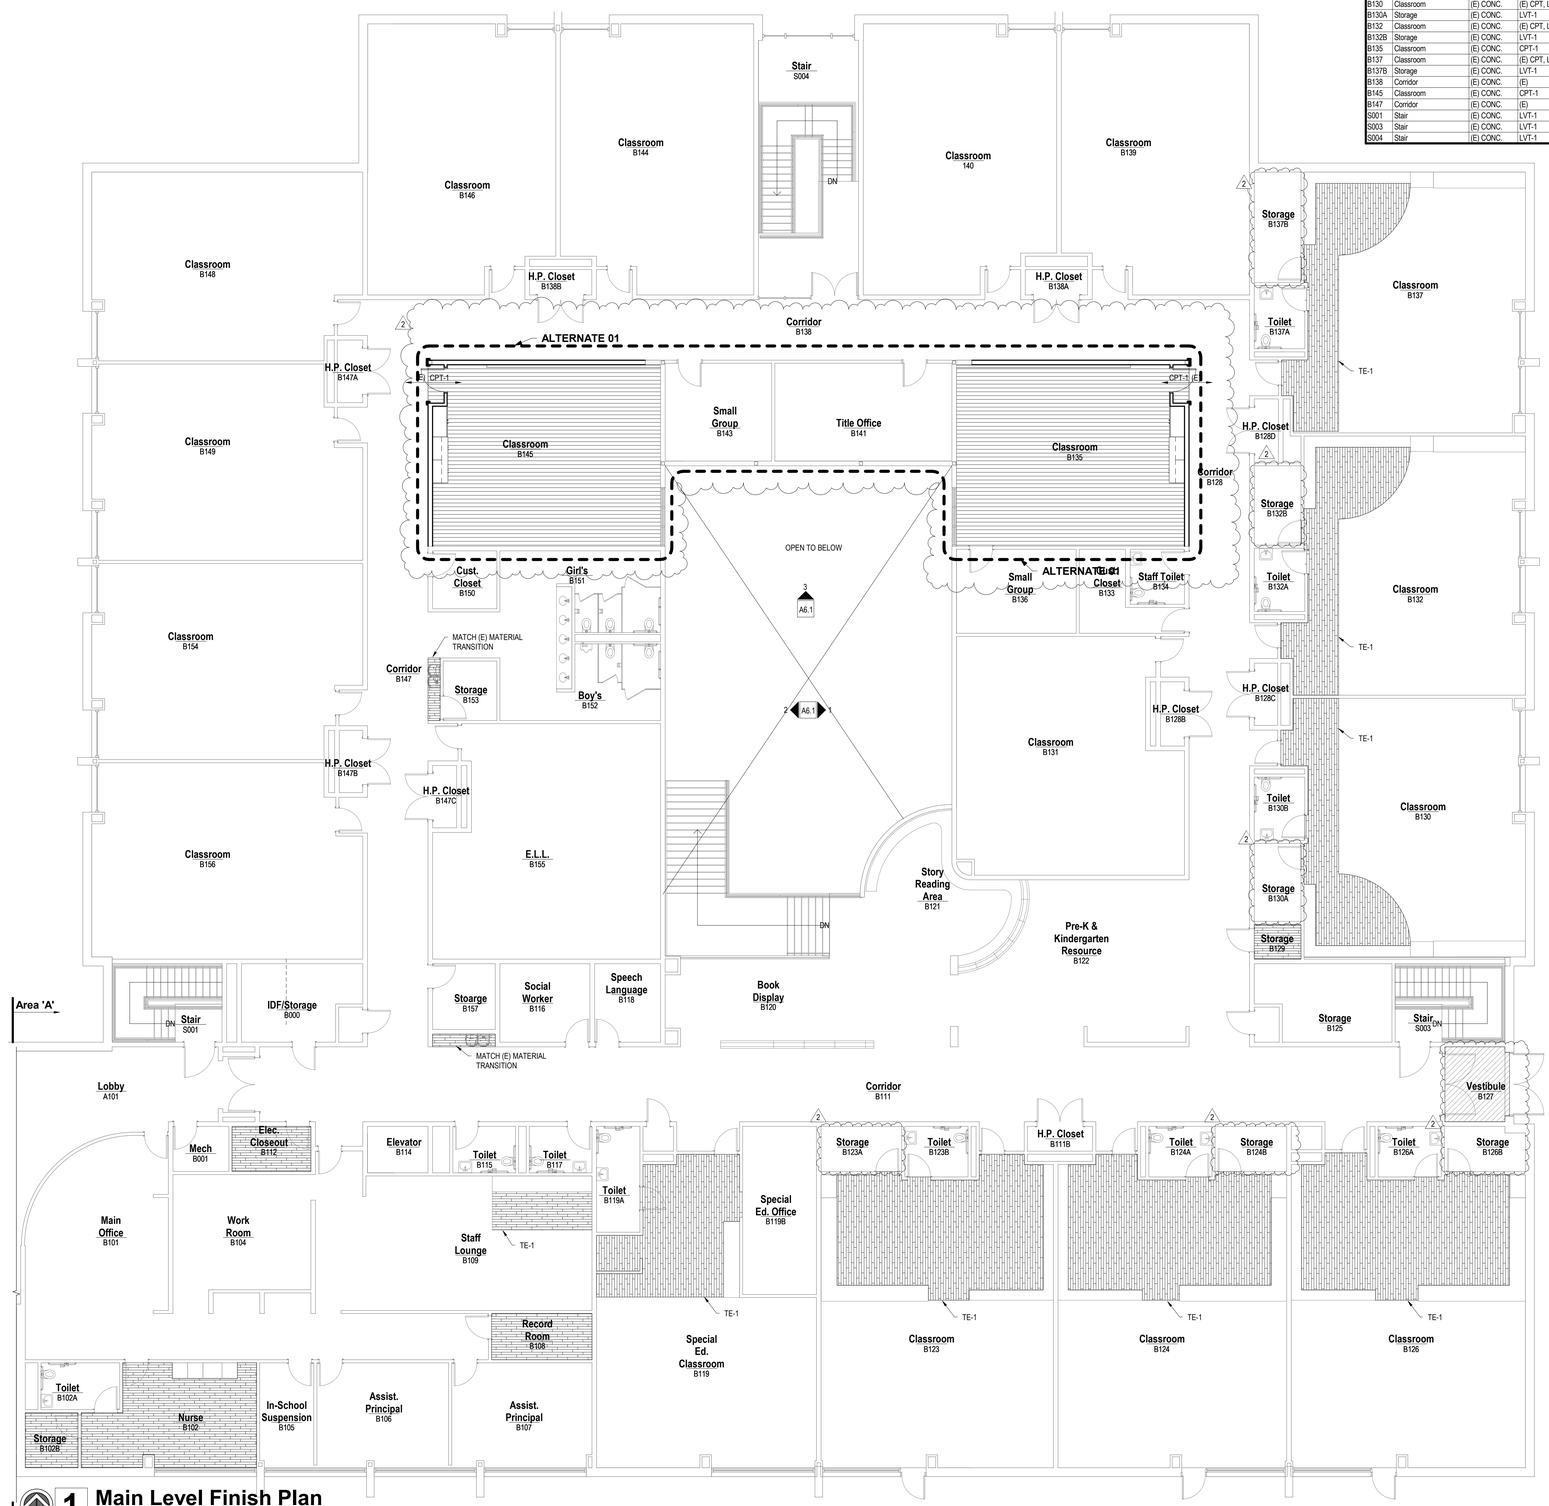

1 Main Level Finish Plan

SCALE: 1/8" = 1'-0"

FINISH PLAN LEGEND

L CORNER GUARD - STAINLESS STEEL

CARPET 2
WOM-1
LVT1
LVT2

FINISH LEGEND

FLOORING AND WALL BASE

CARPET

CPT1 TARKETT POWERBOND 6' - 11877 THREADCRAFT
COLOR: 60801 NIGHT VALE

WALK OFF MAT

WOM-1 TANDUS ABRASIVE ACTION II 02578
COLOR: WINTER GRAY 19103

LUXURY VINYL TILE

LVT1 ARMSTRONG DIAMOND 10 TECHNOLOGY ARBORART
COLOR: GALENA OAK RYE NA180 6" X 48" AT 1/3 OFFSET

LVT2 ARMSTRONG DIAMOND 10 TECHNOLOGY COALESCE
COLOR: OXIDIZE PLATINUM ST883 18" X 36" AT 1/3 OFFSET

RUBBER BASE/RESILIENT BASE

RB1 ROPPE 4" BASE BLACK
RB2 MANNINGTON COMMERCIAL 4" LIGHT TEAL #254

RUBBER/RESILIENT FLOOR TRANSITIONS

TE-1 JOHNSONITE BY TARKETT SLT OR EQUAL. COLOR: BLACK

WALLS

PAINT/EPOXY PAINT

PT1 - FIELD PAINT	BENJAMIN MOORE OLYMPIC MOUNTAINS #971
PT2 - ACCENT PAINT	BENJAMIN MOORE OLD BLUE JEANS #839
PT3 - ALCOVE PAINT	BLUE TO MATCH EXISTING ALCOVE PAINT
PT4 - FRAME PAINT	TEAL TO MATCH EXISTING FRAME PAINT
PT5 - ACCENT PAINT	LIGHT BLUE TO MATCH EXISTING LEARNING CENTER PAINT
PT6 - ACCENT PAINT	PURPLE TO MATCH EXISTING LEARNING CENTER PAINT
PT7 - ACCENT PAINT	BEIGE TO MATCH EXISTING LEARNING CENTER PAINT
PT8 - FIELD PAINT	BENJAMIN MOORE STERLING SILVER #1461

CASEWORK

WOOD VENEERED PLYWOOD

WVP PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

SOLID SURFACE

SS1 FORMICA CLASSICS RIVER ROCK MOSAIC 656
MATTE FINISH


1

FOR SPRINKLERED CLASS E BUILDING, FINISHES SHALL BE CLASS B EXIT ENCLOSURES/PASSAGEWAYS, CLASS B: FSI 26-75, SDI 0-450 CLASS C CORRIDORS AND ROOMS, CLASS C: FSI 76-200, SDI 0-450 FLOOR FINISH PER 804 (MIN. CLASS II IN E ENCLOSURES AND CORRIDORS).

FOR CLASSROOMS, COMBUSTIBLE DECORATIVE MATERIAL LIMITS PER IFC 807 (ARTWORK/TEACHING MATERIALS ON WALLS) WILL NOT EXCEED MORE THAN 50% OF WALL SURFACE AREA.

2

NOTE:
WHERE EQUIPMENT IS REMOVED FROM WALLS, THE ENTIRE ASSOCIATED WALL IS TO BE REPAINTED WITH THE COLOR INDICATED

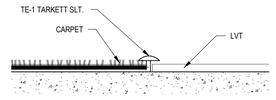

2 CPT TO LVT

SCALE: 12" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026


Main Level Finish Plan Area 'A'

A9.1

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:08:03 PM

ROOM FINISH SCHEDULE

IDENTIFICATION		FLOOR			WALLS								CEILING	
					NORTH		EAST		SOUTH		WEST			
NO.	NAME	MATERIAL	FINISH	BASE	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	REMARKS
103B	PE Office	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A102	Corridor	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	-	(E) GPDW	(E)	(E) ACT	
A102B	Kitchenette	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	-	-	(E) GPDW	(E)	(E) ACT	
A105A	General Music Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A110	B&A School Care	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112	Multi-Purpose Room	(E) CONC.	LVT-1, LVT-2	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
A112A	Multipurpose Room Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B009	Learning Center	(E) CONC.	(E)	RB-2	(E) GPDW	PT-6	(E) GPDW	PT-6	(E) GPDW	PT-5 & PT-6	(E) GPDW	PT-6	(E)	Refer to Sheets A6.1 & A6.2 for Paint Layout
B012	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B013	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B015	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B020	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B021	Classroom	(E) CONC.	CPT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B023	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	
B030	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B032	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B102	Nurse	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B102B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B108	Record Room	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B109	Staff Lounge	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B111	Corridor	(E) CONC.	(E) CPT, LVT-1	(E) RB, RB-1	(E) GPDW	(E)	-	-	(E) GPDW	(E)	-	-	(E) ACT	
B112	Elec. Closeout	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B119	Special Ed. Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B123A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B124B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B126B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B128	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	GPDW	PT-8	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
B129	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B130A	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B132B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B135	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	GPDW	PT-1	(E) GPDW	PT-2	(E) GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B137	Classroom	(E) CONC.	(E) CPT, LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
B137B	Storage	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E)	
B138	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	-	-	GPDW	PT-8	-	-	(E) ACT	
B145	Classroom	(E) CONC.	CPT-1	RB-1	GPDW	PT-2	(E) GPDW	PT-1	(E) GPDW	PT-2	GPDW	PT-1	(E) ACT	Paint (E) Soffit to Match the Wall Below
B147	Corridor	(E) CONC.	(E)	RB-2	(E) GPDW	(E)	GPDW	PT-8	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	Paint Classroom Alcove Walls and Ceiling PT-3
S001	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S003	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	
S004	Stair	(E) CONC.	LVT-1	RB-1	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) GPDW	(E)	(E) ACT	

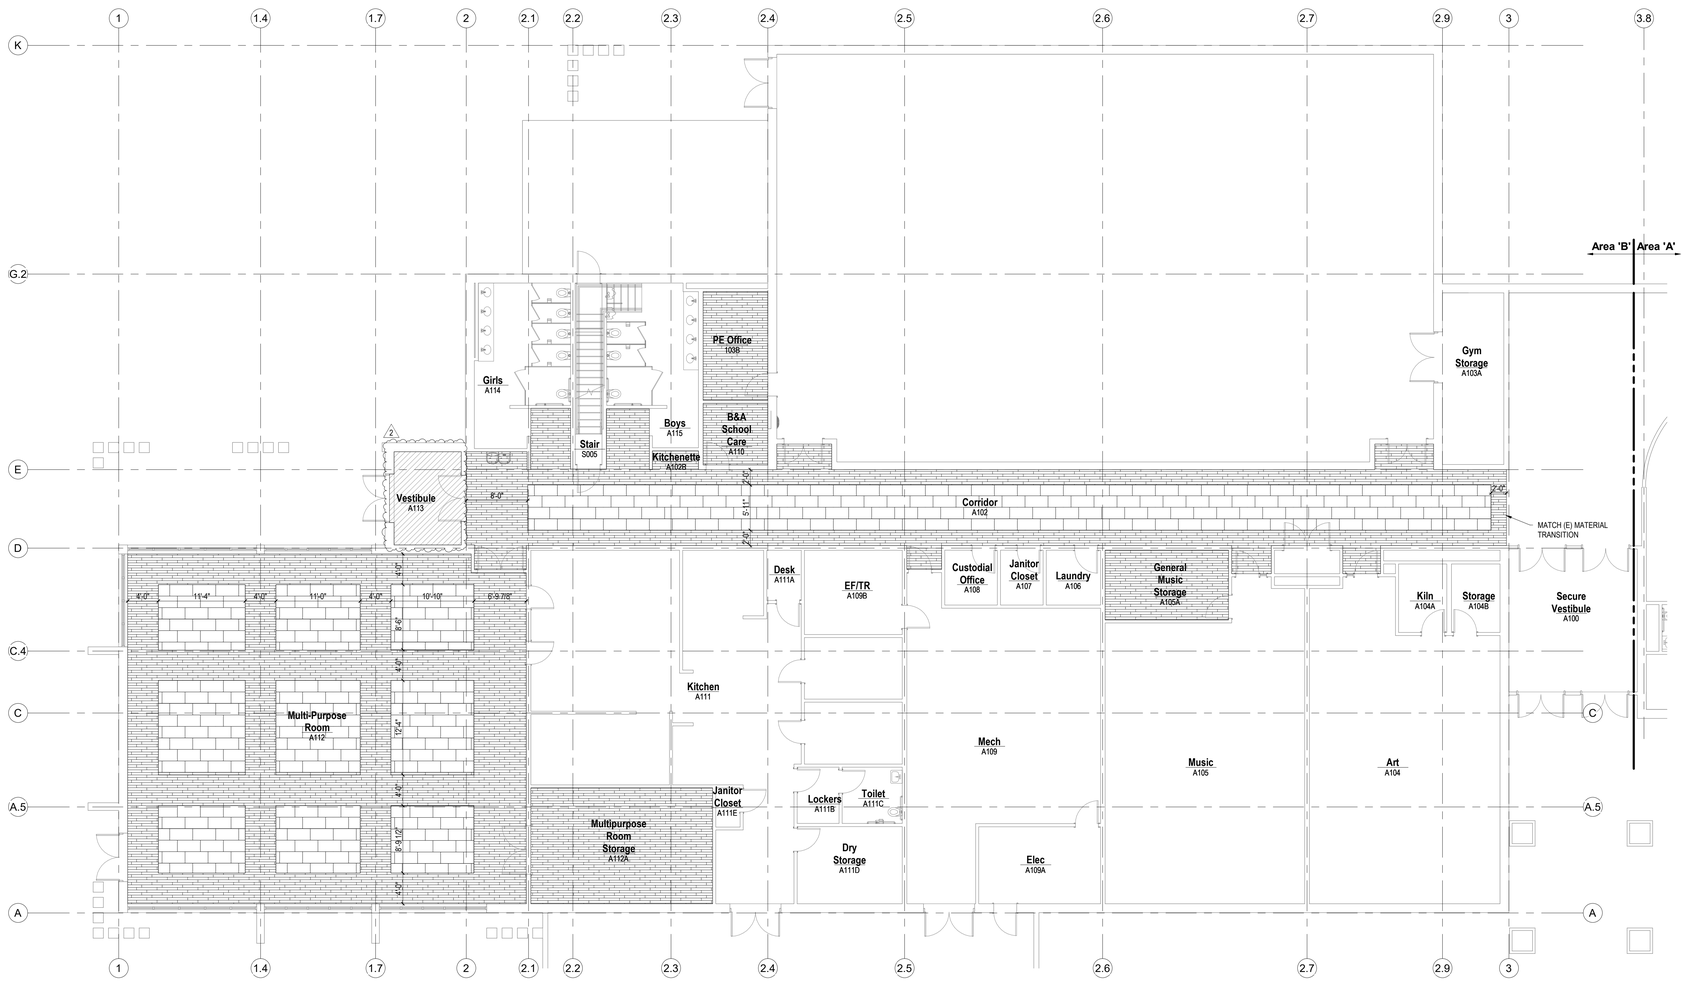

1 **Main Level Finish Plan**
SCALE: 1/8" = 1'-0"

FINISH PLAN LEGEND

L CORNER GUARD - STAINLESS STEEL

CARPET
WOM-1 (2)
LVT1
LVT2

FINISH LEGEND

FLOORING AND WALL BASE

CARPET
CPT1 TARKETT POWERBOND 6' - 11877 THREADCRAFT
COLOR: 60801 NIGHT VALE

WALK OFF MAT (2)
WOM-1 TANDUS ABRASIVE ACTION II 02578
COLOR: WINTER GRAY 19103

LUXURY VINYL TILE
LVT1 ARMSTRONG DIAMOND 10 TECHNOLOGY ARBORART
COLOR: GALENA OAK RYE NA180 6" X 48" AT 1/3 OFFSET

LVT2 ARMSTRONG DIAMOND 10 TECHNOLOGY COALESCE
COLOR: OXIDIZE PLATINUM ST883 18" X 36" AT 1/3 OFFSET

RUBBER BASE/RESILIENT BASE
RB1 ROPPE 4" BASE BLACK
RB2 MANNINGTON COMMERCIAL 4" LIGHT TEAL #254

RUBBER/RESILIENT FLOOR TRANSITIONS
TE-1 JOHNSONITE BY TARKETT SLT OR EQUAL. COLOR: BLACK

WALLS

PAINT/EPOXY PAINT

PT1 - FIELD PAINT	BENJAMIN MOORE OLYMPIC MOUNTAINS #971
PT2 - ACCENT PAINT	BENJAMIN MOORE OLD BLUE JEANS #839
PT3 - ALCOVE PAINT	BLUE TO MATCH EXISTING ALCOVE PAINT
PT4 - FRAME PAINT	TEAL TO MATCH EXISTING FRAME PAINT
PT5 - ACCENT PAINT	LIGHT BLUE TO MATCH EXISTING LEARNING CENTER PAINT
PT6 - ACCENT PAINT	PURPLE TO MATCH EXISTING LEARNING CENTER PAINT
PT7 - ACCENT PAINT	BEIGE TO MATCH EXISTING LEARNING CENTER PAINT
PT8 - FIELD PAINT	BENJAMIN MOORE STERLING SILVER #1461

CASEWORK

WOOD VENEERED PLYWOOD
WVP PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

SOLID SURFACE (1)
SS1 FORMICA CLASSICS RIVER ROCK MOSAIC 656
MATTE FINISH

FOR SPRINKLERED CLASS E BUILDING, FINISHES SHALL BE CLASS B EXIT ENCLOSURES/PASSAGEWAYS. CLASS B; FSI 26-75, SDI 0-450 CLASS C CORRIDORS AND ROOMS, CLASS C; FSI 76-200, SDI 0-450. FLOOR FINISH PER 804 (MIN. CLASS II IN E ENCLOSURES AND CORRIDORS).

FOR CLASSROOMS, COMBUSTIBLE DECORATIVE MATERIAL LIMITS PER IFC 807 (ARTWORK/TEACHING MATERIALS ON WALLS) WILL NOT EXCEED MORE THAN 50% OF WALL SURFACE AREA.

(2) NOTE:
WHERE EQUIPMENT IS REMOVED FROM WALLS, THE ENTIRE ASSOCIATED WALL IS TO BE REPAINTED WITH THE COLOR INDICATED

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	TBD
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

September 25, 2026

Main Level Finish Plan Area 'B'

A9.2

Autodesk Docs://WPS 2026 Bond Projects - Hodgkins Classroom Conversion/Hodgkins ES Classroom Conversion (Revit 2026).rvt
11/11/2026 8:08:04 PM

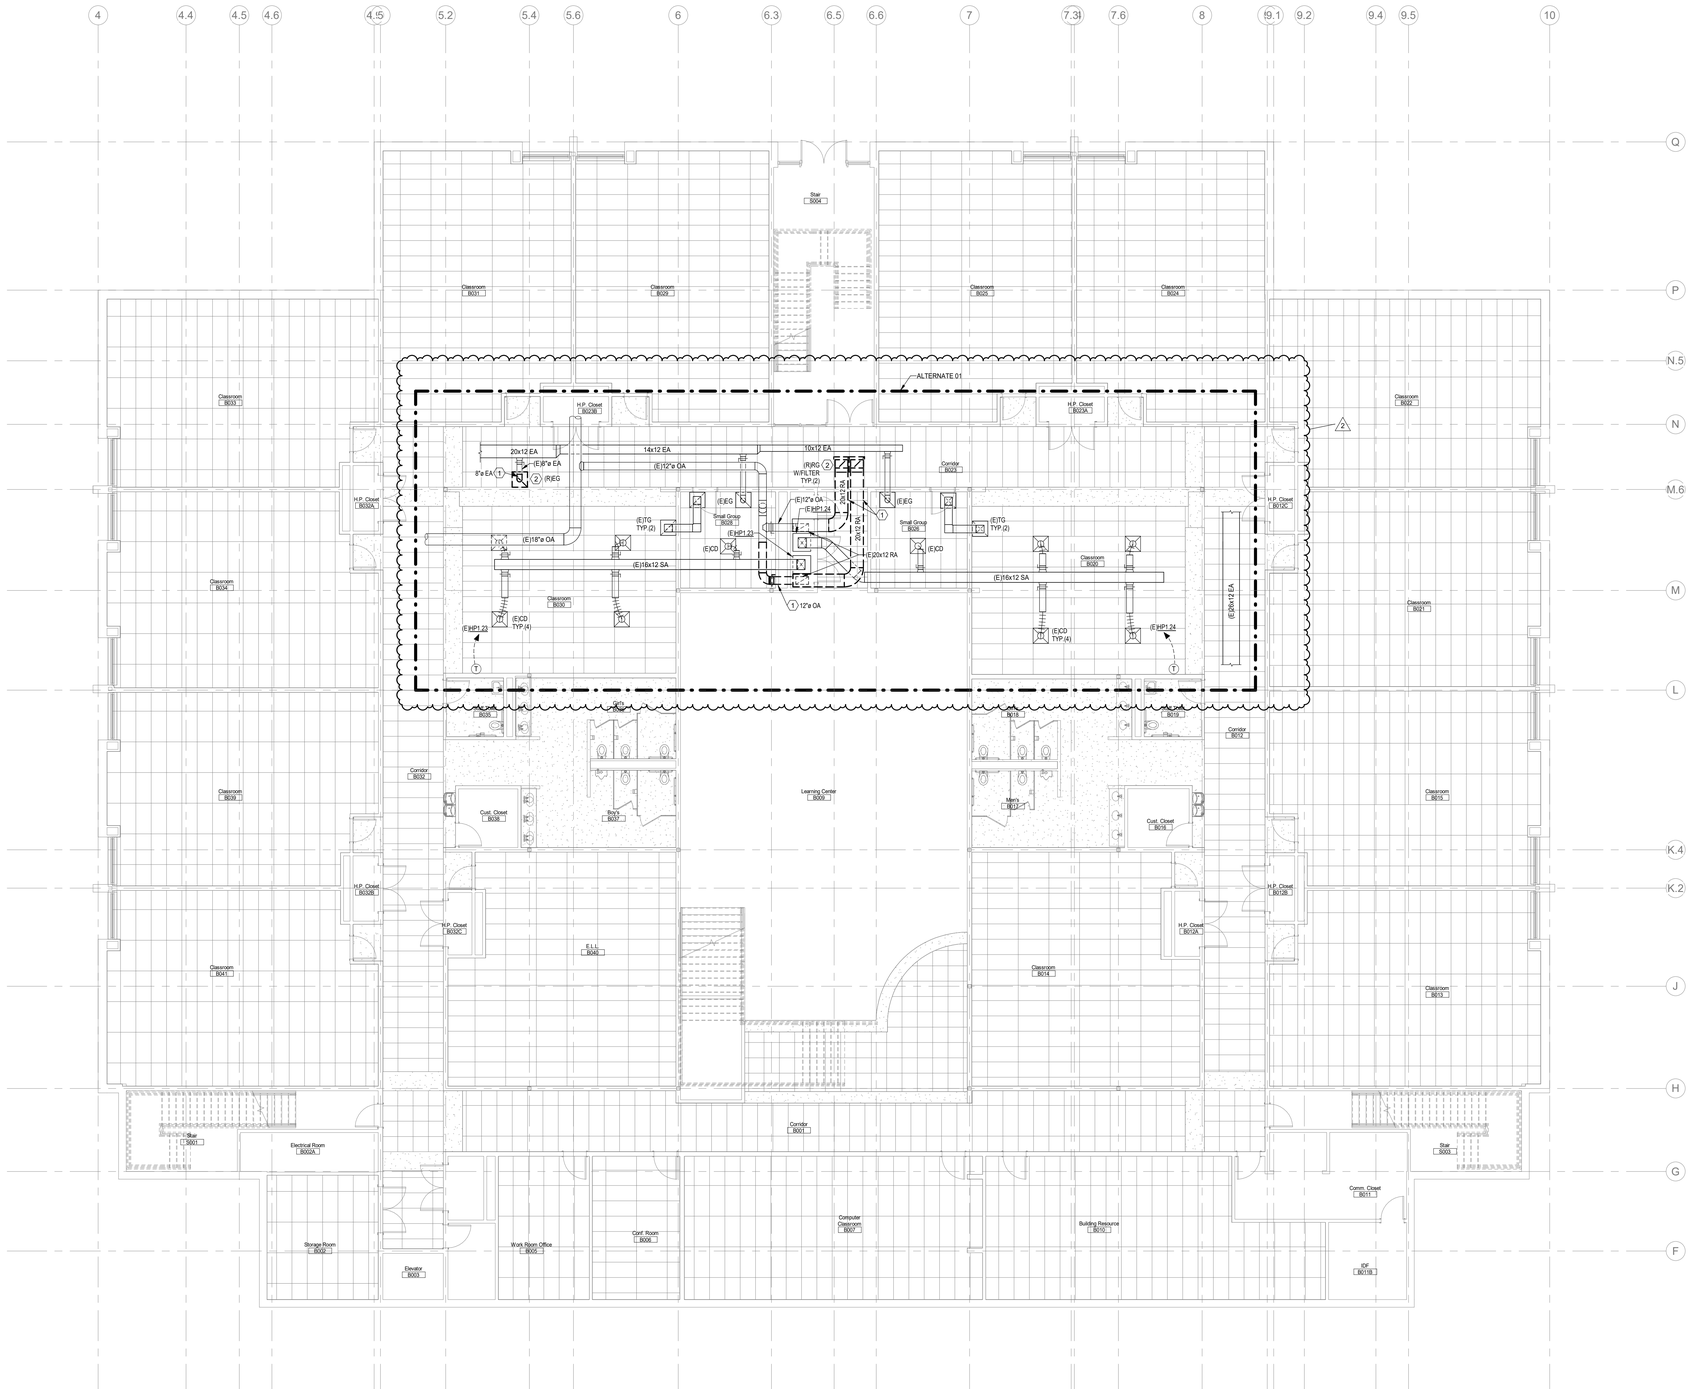

Lower Level HVAC Demolition Plan

SCALE: 1/8" = 1'-0"

HVAC DEMOLITION KEYNOTES:

1. REMOVE EXISTING DUCTWORK OF SIZE INDICATED ALONG WITH ALL HANGERS, SUPPORTS, INSULATION AND ACCESSORIES.
2. EXISTING AIR DEVICE TO BE REUSED AND RELOCATED. REFER TO NEW FLOOR PLAN FOR LOCATION.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins ES Classroom Conversion

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

November 12, 2021

Lower Level HVAC Demolition Plan

MD1.0

N:\21\27\21127-HVAC-R23.rvt
11/5/2026 3:46:47 PM

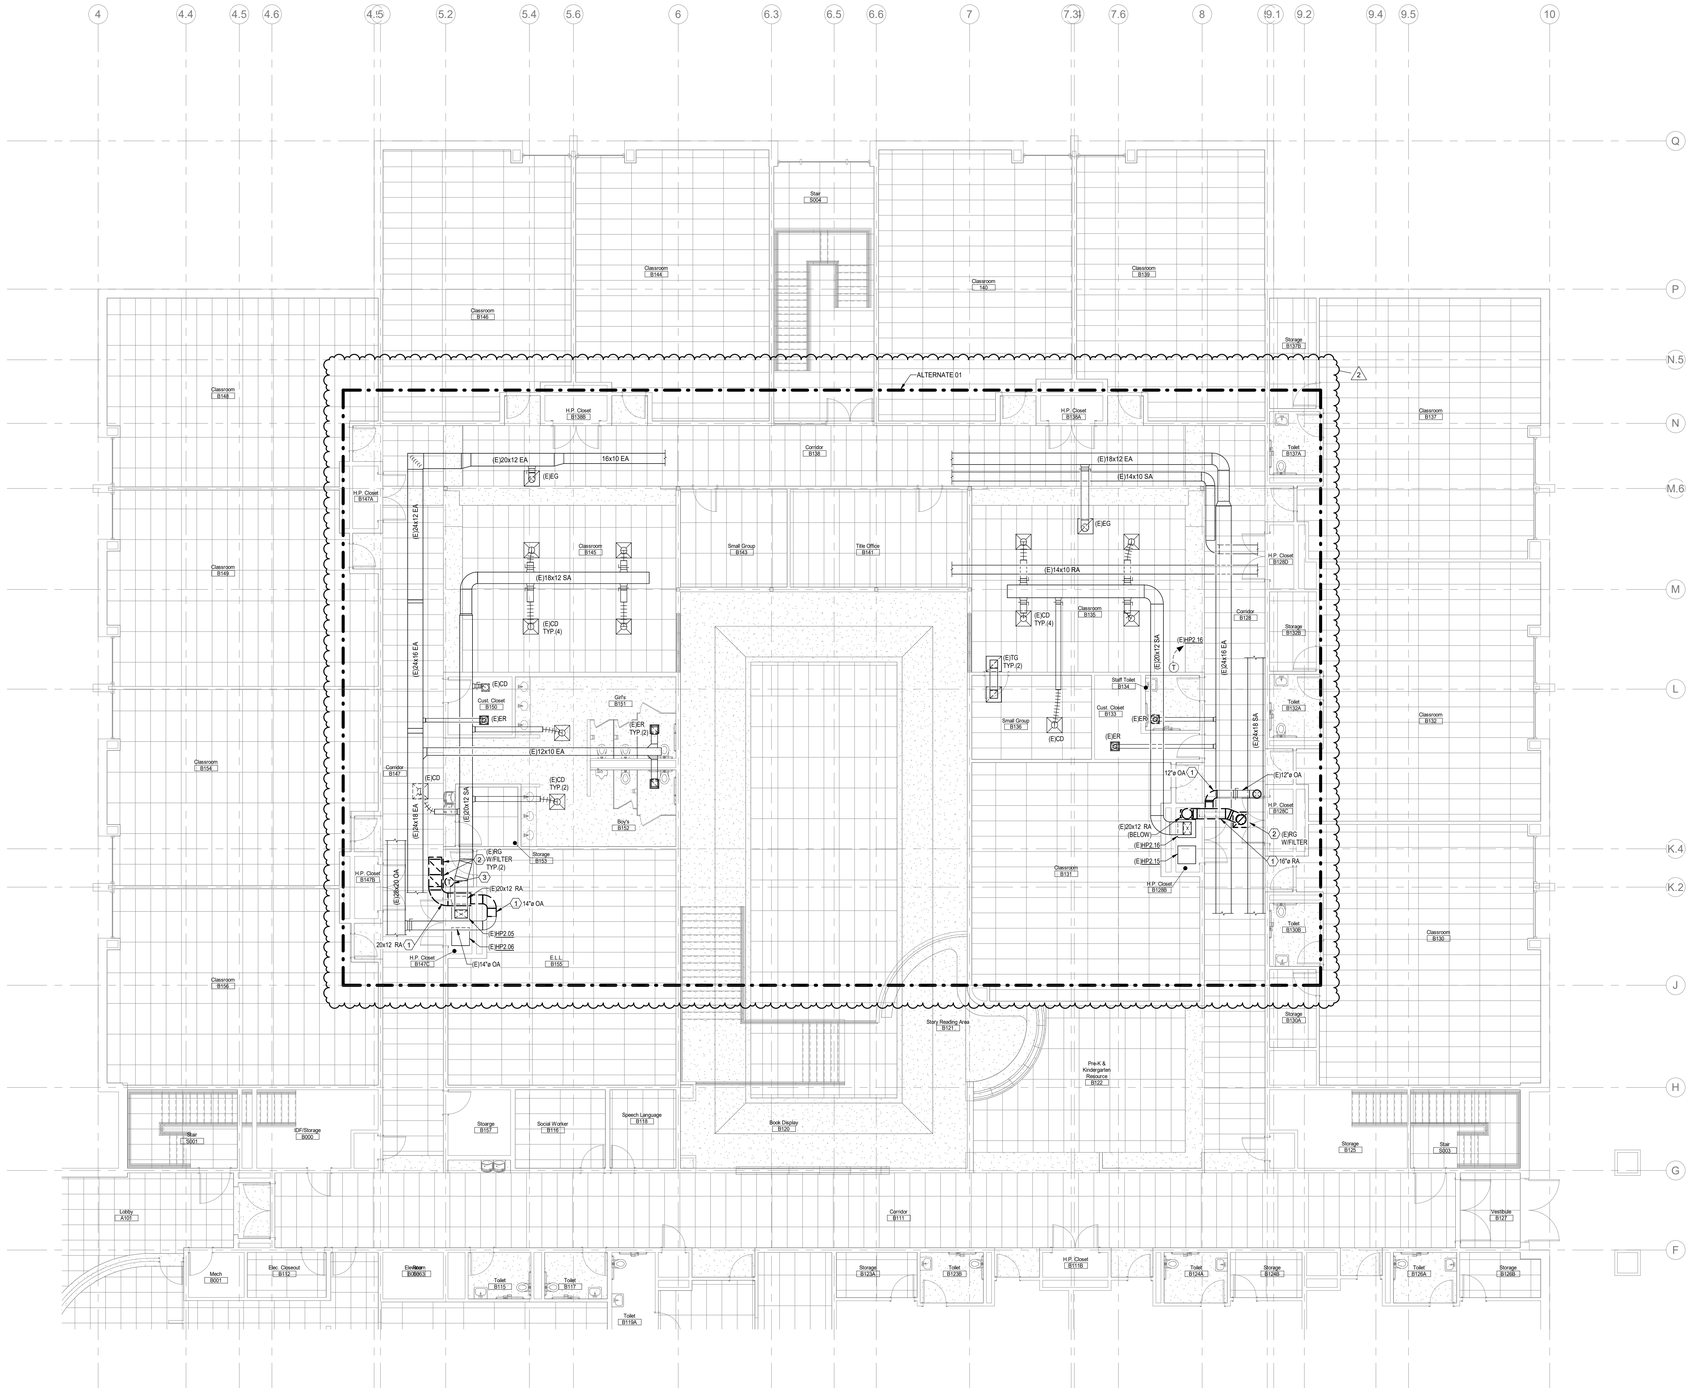

Main Level HVAC Demolition Plan

SCALE: 1/8" = 1'-0"

HVAC DEMOLITION KEYNOTES:

1. REMOVE EXISTING DUCTWORK OF SIZE INDICATED ALONG WITH ALL HANGERS, SUPPORTS, INSULATION AND ACCESSORIES.
2. EXISTING AIR DEVICE TO BE REUSED AND RELOCATED. REFER TO NEW FLOOR PLAN FOR LOCATION.
3. EXISTING THERMOSTAT TO BE REUSED AND RELOCATED. REFER TO NEW FLOOR PLAN FOR LOCATION. REMOVE ALL EXISTING CONTROL WIRING.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins ES Classroom Conversion

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

November 12, 2021

Main Level HVAC Demolition Plan

MD1.1

N:\21\27\21127-HVAC-R23.rvt
11/6/2026 3:46:48 PM

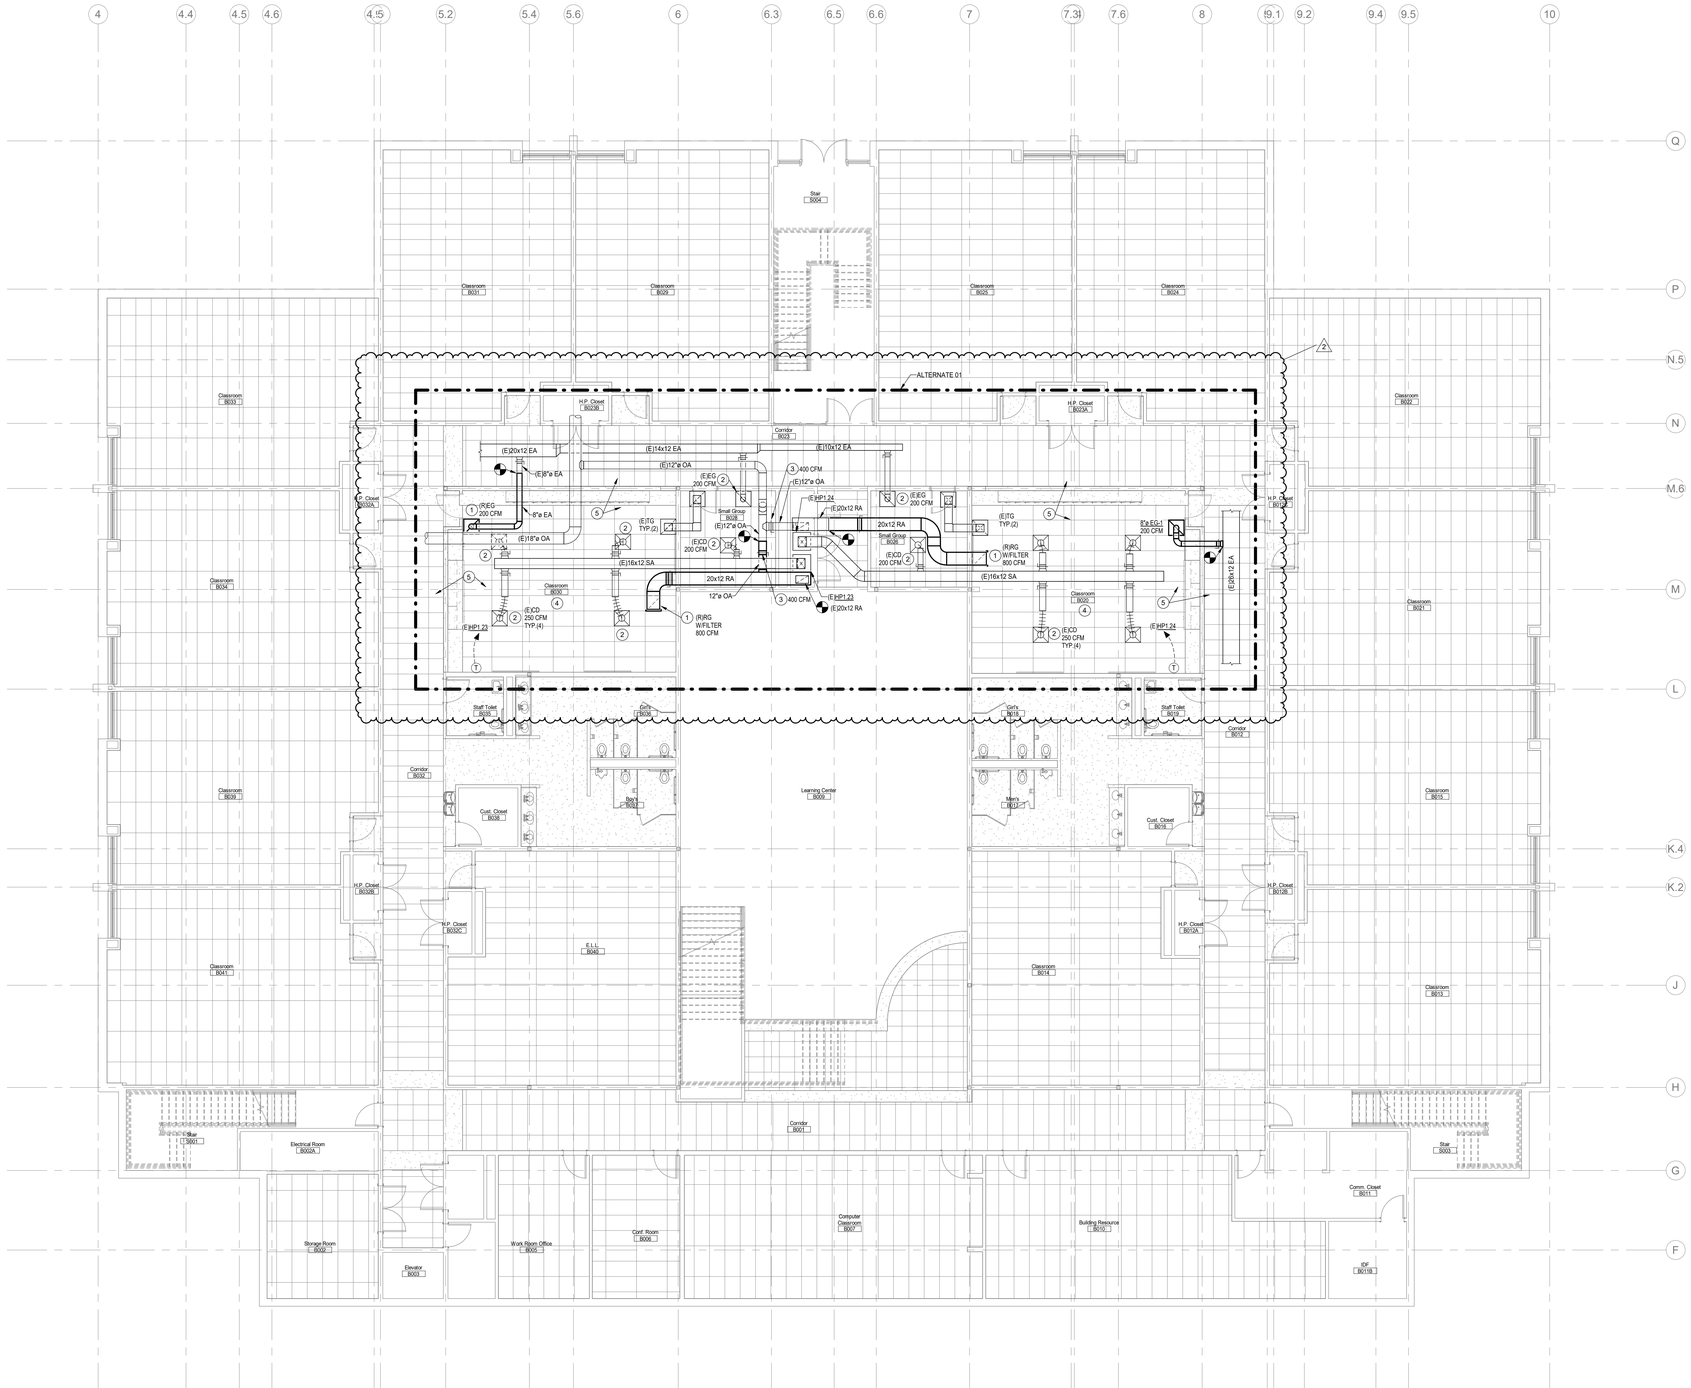

HVAC KEYNOTES:

1. RELOCATED AIR DEVICE OF TYPE INDICATED. REBALANCE TO AIRFLOW INDICATED.
2. EXISTING AIR DEVICE TO BE REINSTALLED INTO CEILING. REBALANCE TO AIRFLOW INDICATED.
3. BALANCE MANUAL VOLUME DAMPER TO AIRFLOW INDICATED.
4. OUTSIDE AIR REQUIRED: (700 SQFT x 0.12 + 18 PEOPLE x 10 CFM/PER / 0.8) = 330 CFM REQUIRED, 1,000 CFM SA x 0.40 OA FRAC = 400 CFM PROVIDED
5. RELOCATE EXISTING FIRE SPRINKLER HEADS OR PROVIDE NEW AS REQUIRED FOR NEW WALL LAYOUT. REFER TO NOTES AND SPECIFICATIONS ON COVER SHEET.

Lower Level HVAC Floor Plan

SCALE: 1/8" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins ES Classroom Conversion

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

November 12, 2021

Lower Level HVAC Floor Plan

M1.0

N:\21\27\21127-HVAC-R23.rvt
11/6/2026 3:46:45 PM

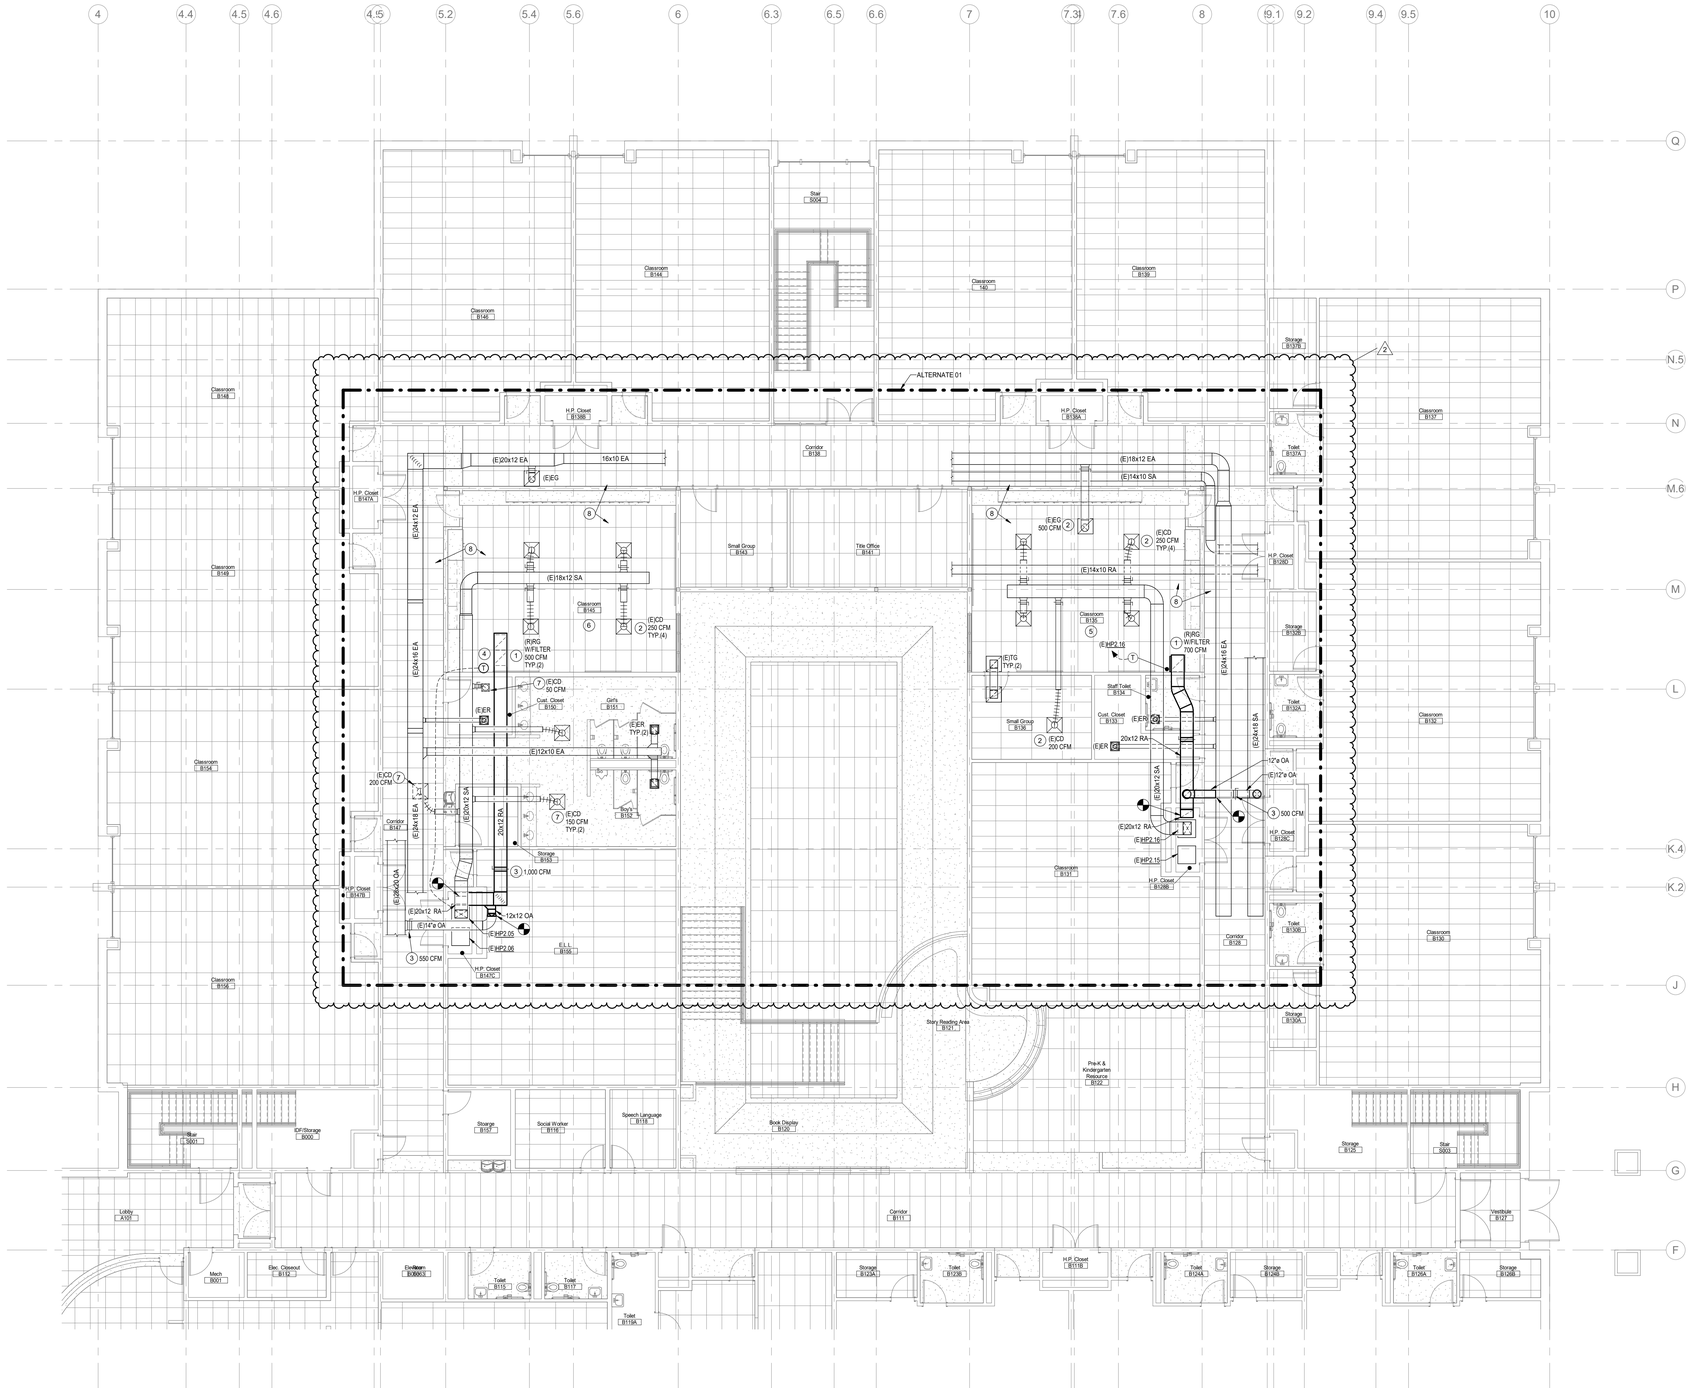

Main Level HVAC Floor Plan

SCALE: 1/8" = 1'-0"

HVAC KEYNOTES:

1. RELOCATED AIR DEVICE OF TYPE INDICATED. REBALANCE TO AIRFLOW INDICATED.
2. EXISTING AIR DEVICE TO BE REINSTALLED INTO CEILING. REBALANCE TO AIRFLOW INDICATED.
3. BALANCE MANUAL VOLUME DAMPER TO AIRFLOW INDICATED.
4. EXISTING THERMOSTAT RELOCATED TO LOCATION INDICATED. PROVIDE NEW CONTROL WIRING ROUTED TO EXISTING HEAT PUMP.
5. OUTSIDE AIR REQUIRED: (700 SQFT x 0.12 + 18 PEOPLE x 10 CFM/PER / 0.8) = 330 CFM REQUIRED, 1,000 CFM SA x 0.48 OA FRAC = 480 CFM PROVIDED
6. OUTSIDE AIR REQUIRED: (700 SQFT x 0.12 + 18 PEOPLE x 10 CFM/PER / 0.8) = 330 CFM REQUIRED, 1,000 CFM SA x 0.55 OA FRAC = 550 CFM PROVIDED
7. REBALANCE EXISTING AIR DEVICE.
8. RELOCATE EXISTING FIRE SPRINKLER HEADS OR PROVIDE NEW AS REQUIRED FOR NEW WALL LAYOUT. REFER TO NOTES AND SPECIFICATIONS ON COVER SHEET.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins ES Classroom Conversion

3475 W 67th Ave,
Denver, CO 80221


DAO No.: 2021-033

November 12, 2021

Main Level HVAC Floor Plan

M1.1

N:\21\27\21127-HVAC-R23.rvt
11/9/2026 3:46:49 PM

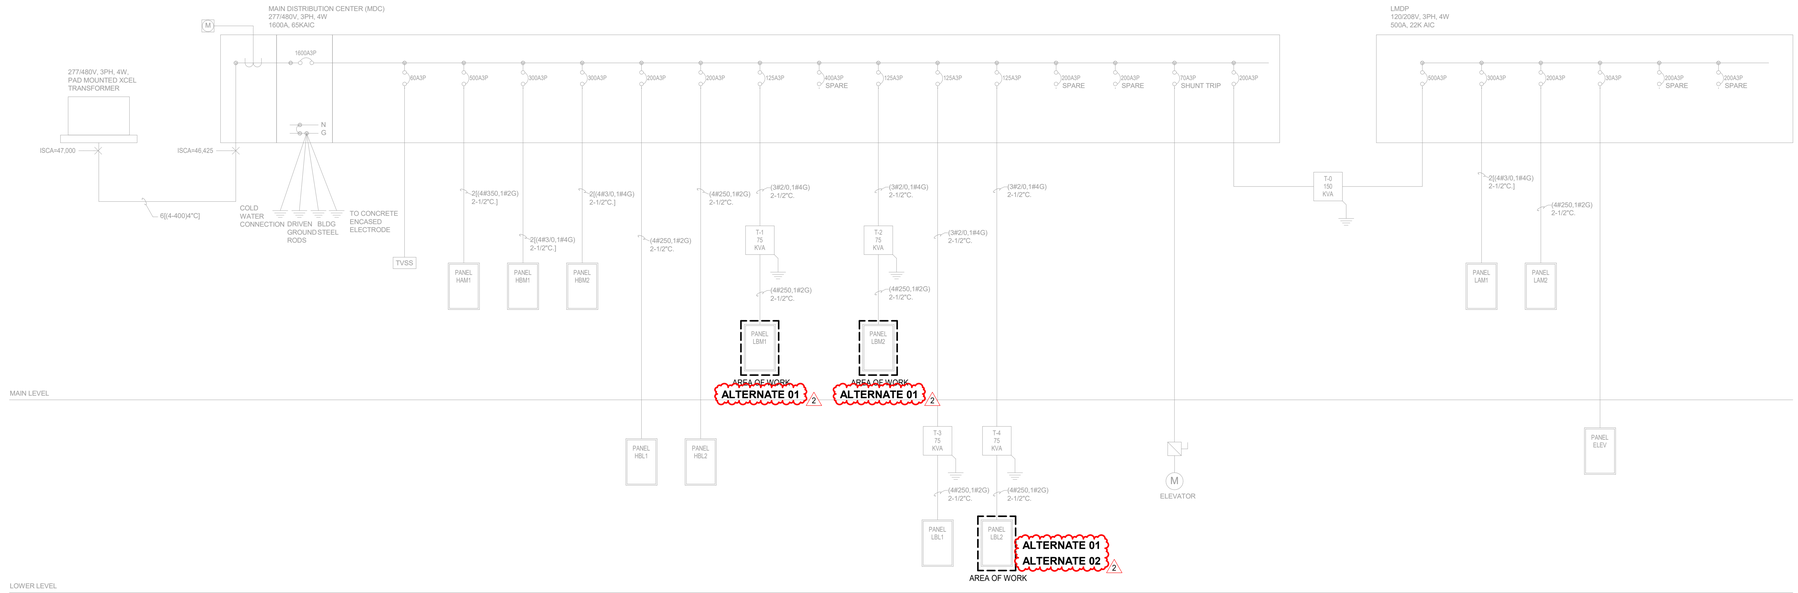

ELECTRICAL ONE-LINE DIAGRAM (FOR REFERENCE ONLY)

SCALE: NONE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033


September 25, 2026

ELECTRICAL ONE-LINE DIAGRAM

E0.3


P:\WPS\2026-0530-Hodgkins Leadership Academy 2026 Bond Project\Cad
11/6/2026 3:38:33 PM

KEYNOTES	
E3	PROVIDE POWER PACK FOR CONTROL OF CONTROLLED RECEPTACLES. CONNECT TO EXISTING OCCUPANCY SENSOR FOR AUTOMATIC CONTROL.
E4	PROVIDE CONNECTION FLUSH MOUNT IN DRYWALL FOR DOOR HOLD OPEN HARDWARE AND 120V CONNECTION TO DOOR HOLD OPEN MAGNET, WITH MAGNET HAVING ADJUSTABLE HOLD STRENGTH, FIELD COORDINATE EXACT LOCATION.
E5	PROVIDE CAMDEN CM-7000/7100 SERIES MOMENTARY SWITCH FLUSH MOUNT IN DRYWALL FOR CONTROL OF DOOR HOLD. MOUNT SWITCH WITH OPERABLE PART AT 46 INCHES MAXIMUM AFF FOR CONTROL OF DOOR HOLD.

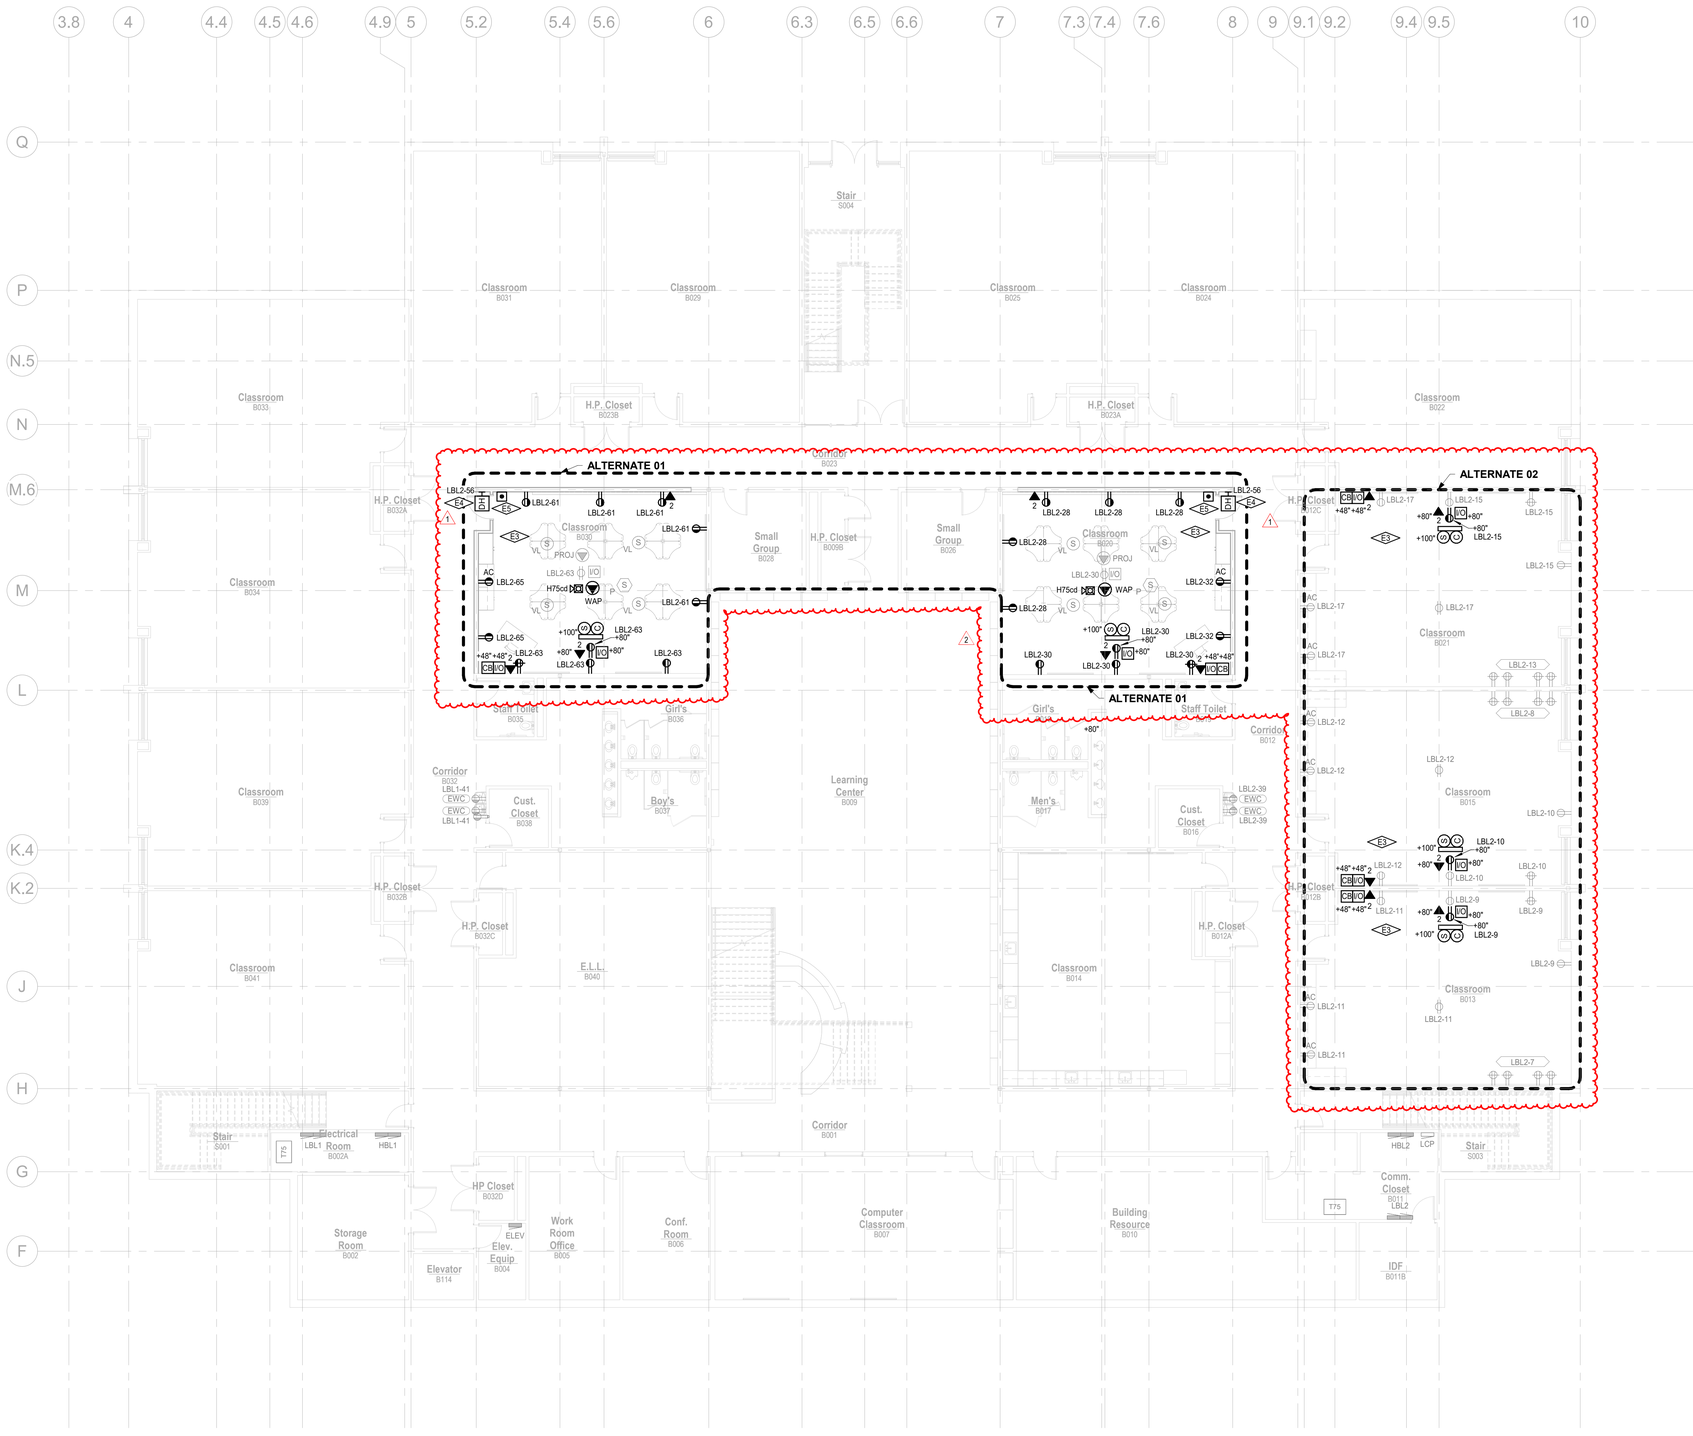

LOWER LEVEL POWER PLAN

SCALE: 1/8" = 1'-0"

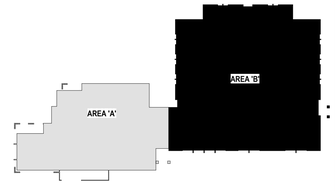

KeyPlan Area B

SCALE: NONE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026


LOWER LEVEL POWER PLAN

E1.2

P:\WPS\2025-0530 Hodgkins Leadership Academy 2026 Bond Project\Cad
11/5/2026 3:38:35 PM

KEYNOTES

E3	PROVIDE POWER PACK FOR CONTROL OF CONTROLLED RECEPTACLES. CONNECT TO EXISTING OCCUPANCY SENSOR FOR AUTOMATIC CONTROL.
E4	PROVIDE CONNECTION FLUSH MOUNT IN DRYWALL FOR DOOR HOLD OPEN HARDWARE AND 120V CONNECTION TO DOOR HOLD OPEN MAGNET, WITH MAGNET HAVING ADJUSTABLE HOLD STRENGTH, FIELD COORDINATE EXACT LOCATION.
E5	PROVIDE CAMDEN CM-7000/7100 SERIES MOMENTARY SWITCH FLUSH MOUNT IN DRYWALL FOR CONTROL OF DOOR HOLD. MOUNT SWITCH WITH OPERABLE PART AT 46 INCHES MAXIMUM AFF FOR CONTROL OF DOOR HOLD.

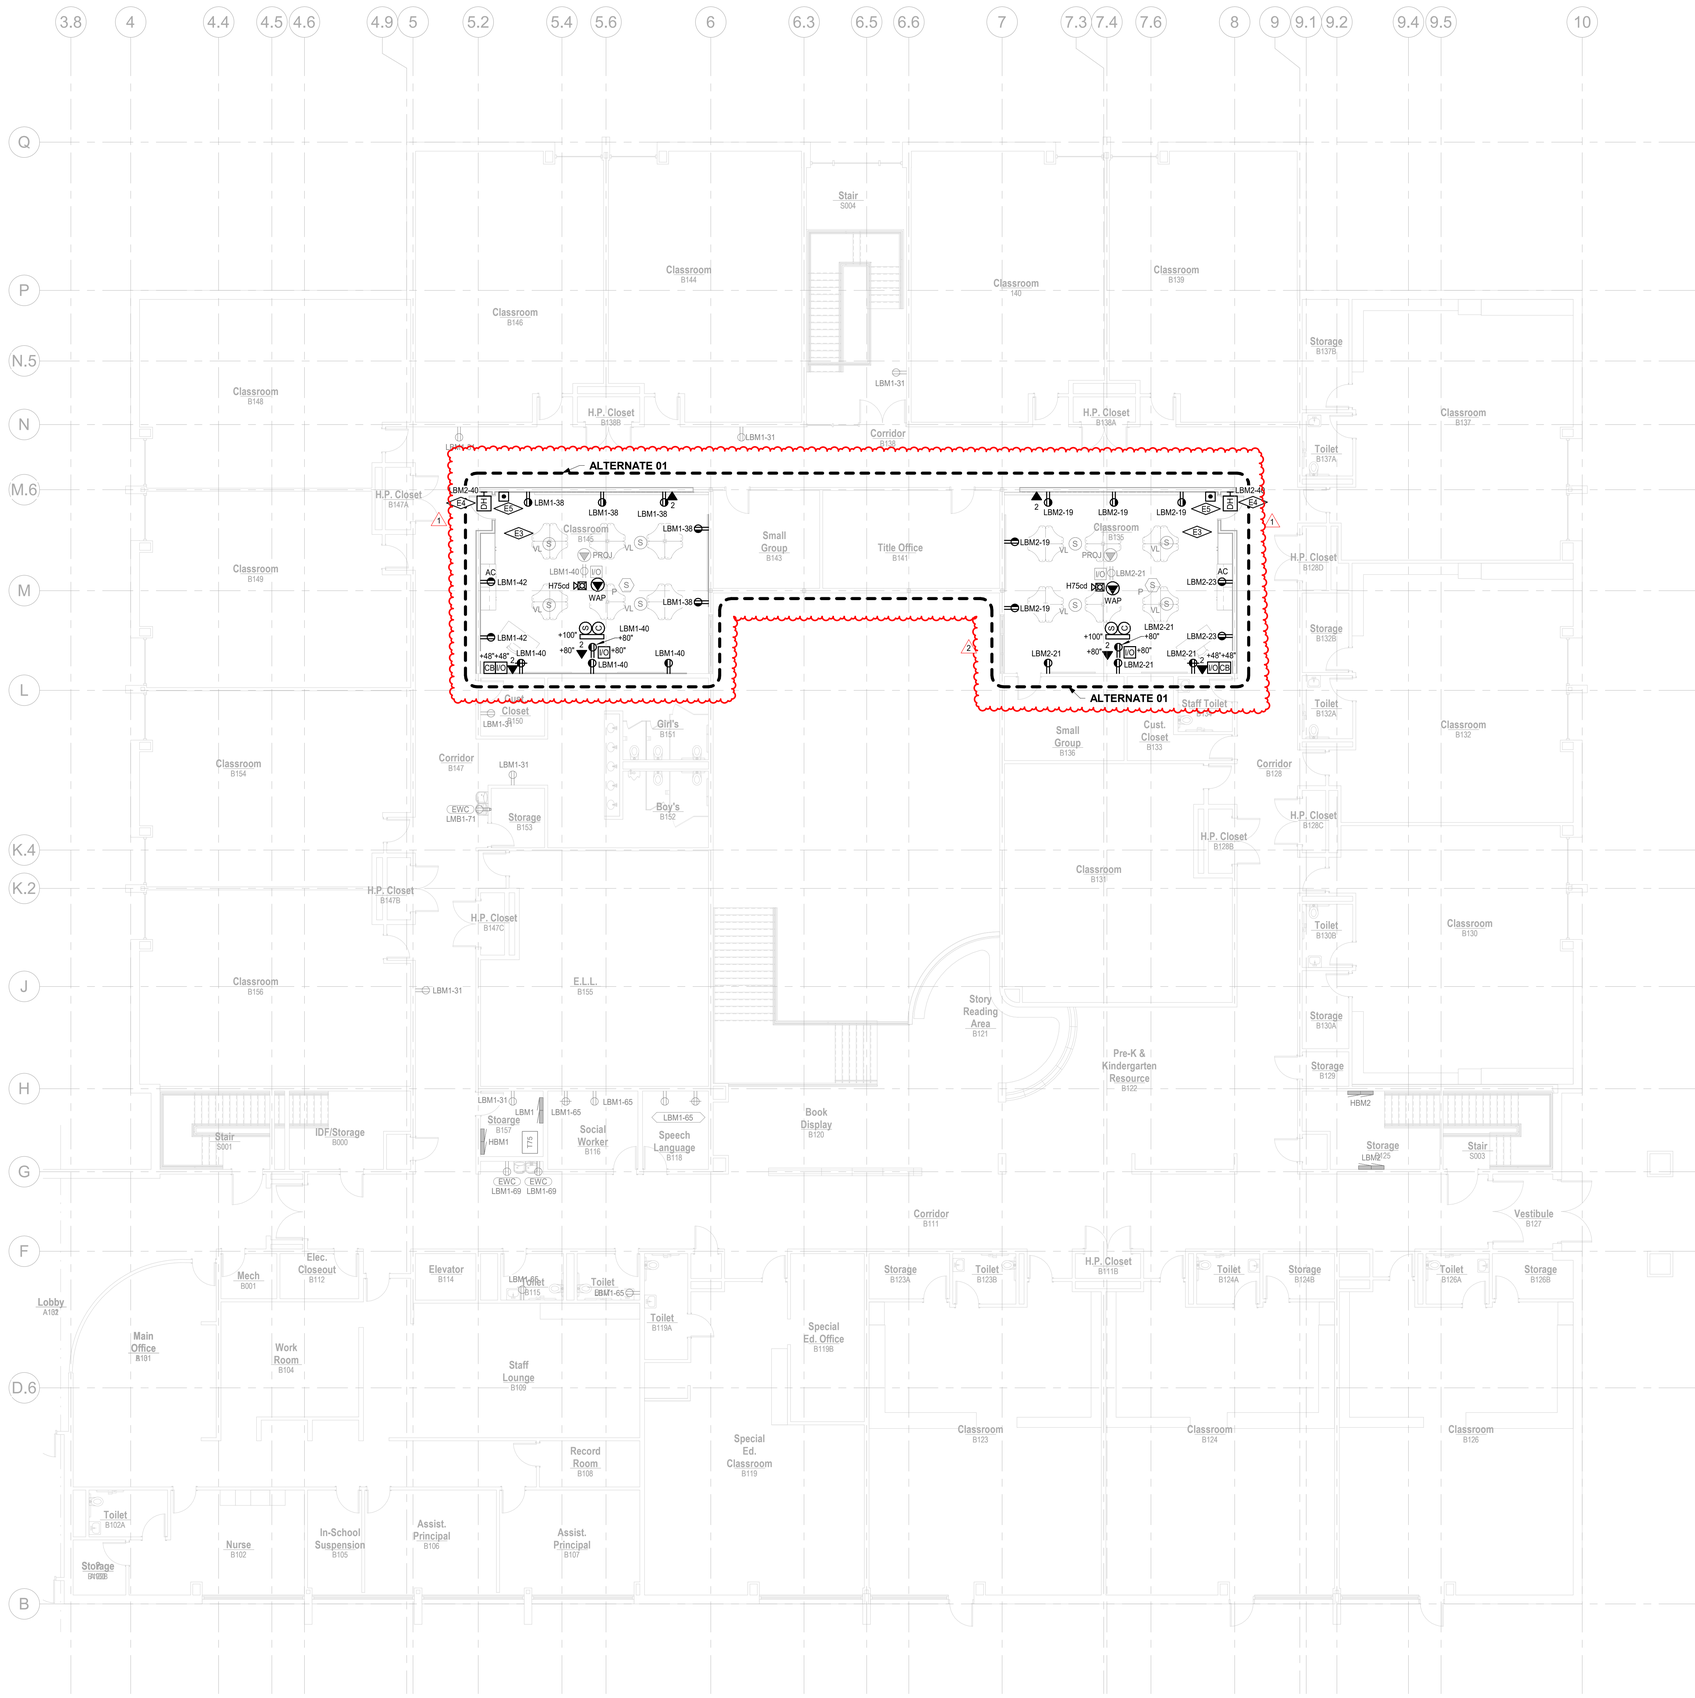

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project


3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

MAIN LEVEL POWER PLAN - AREA B

E1.3B

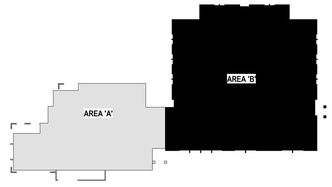


KeyPlan Area B
SCALE: NONE

MAIN LEVEL POWER PLAN - AREA B
SCALE: 1/8" = 1'-0"

P:\WPS\2026-0530-Hodgkins Leadership Academy 2026 Bond Project\Cad
11/5/2026 3:38:37 PM

KEYNOTES

E2	PROVIDE NLIGHT AIR RELAY PACK FOR CONTROLLED RECEPTACLE(S) INDICATED. PROGRAM FOR TIME-OF-DAY CONTROL AND COORDINATE SCHEDULE WITH OWNER.

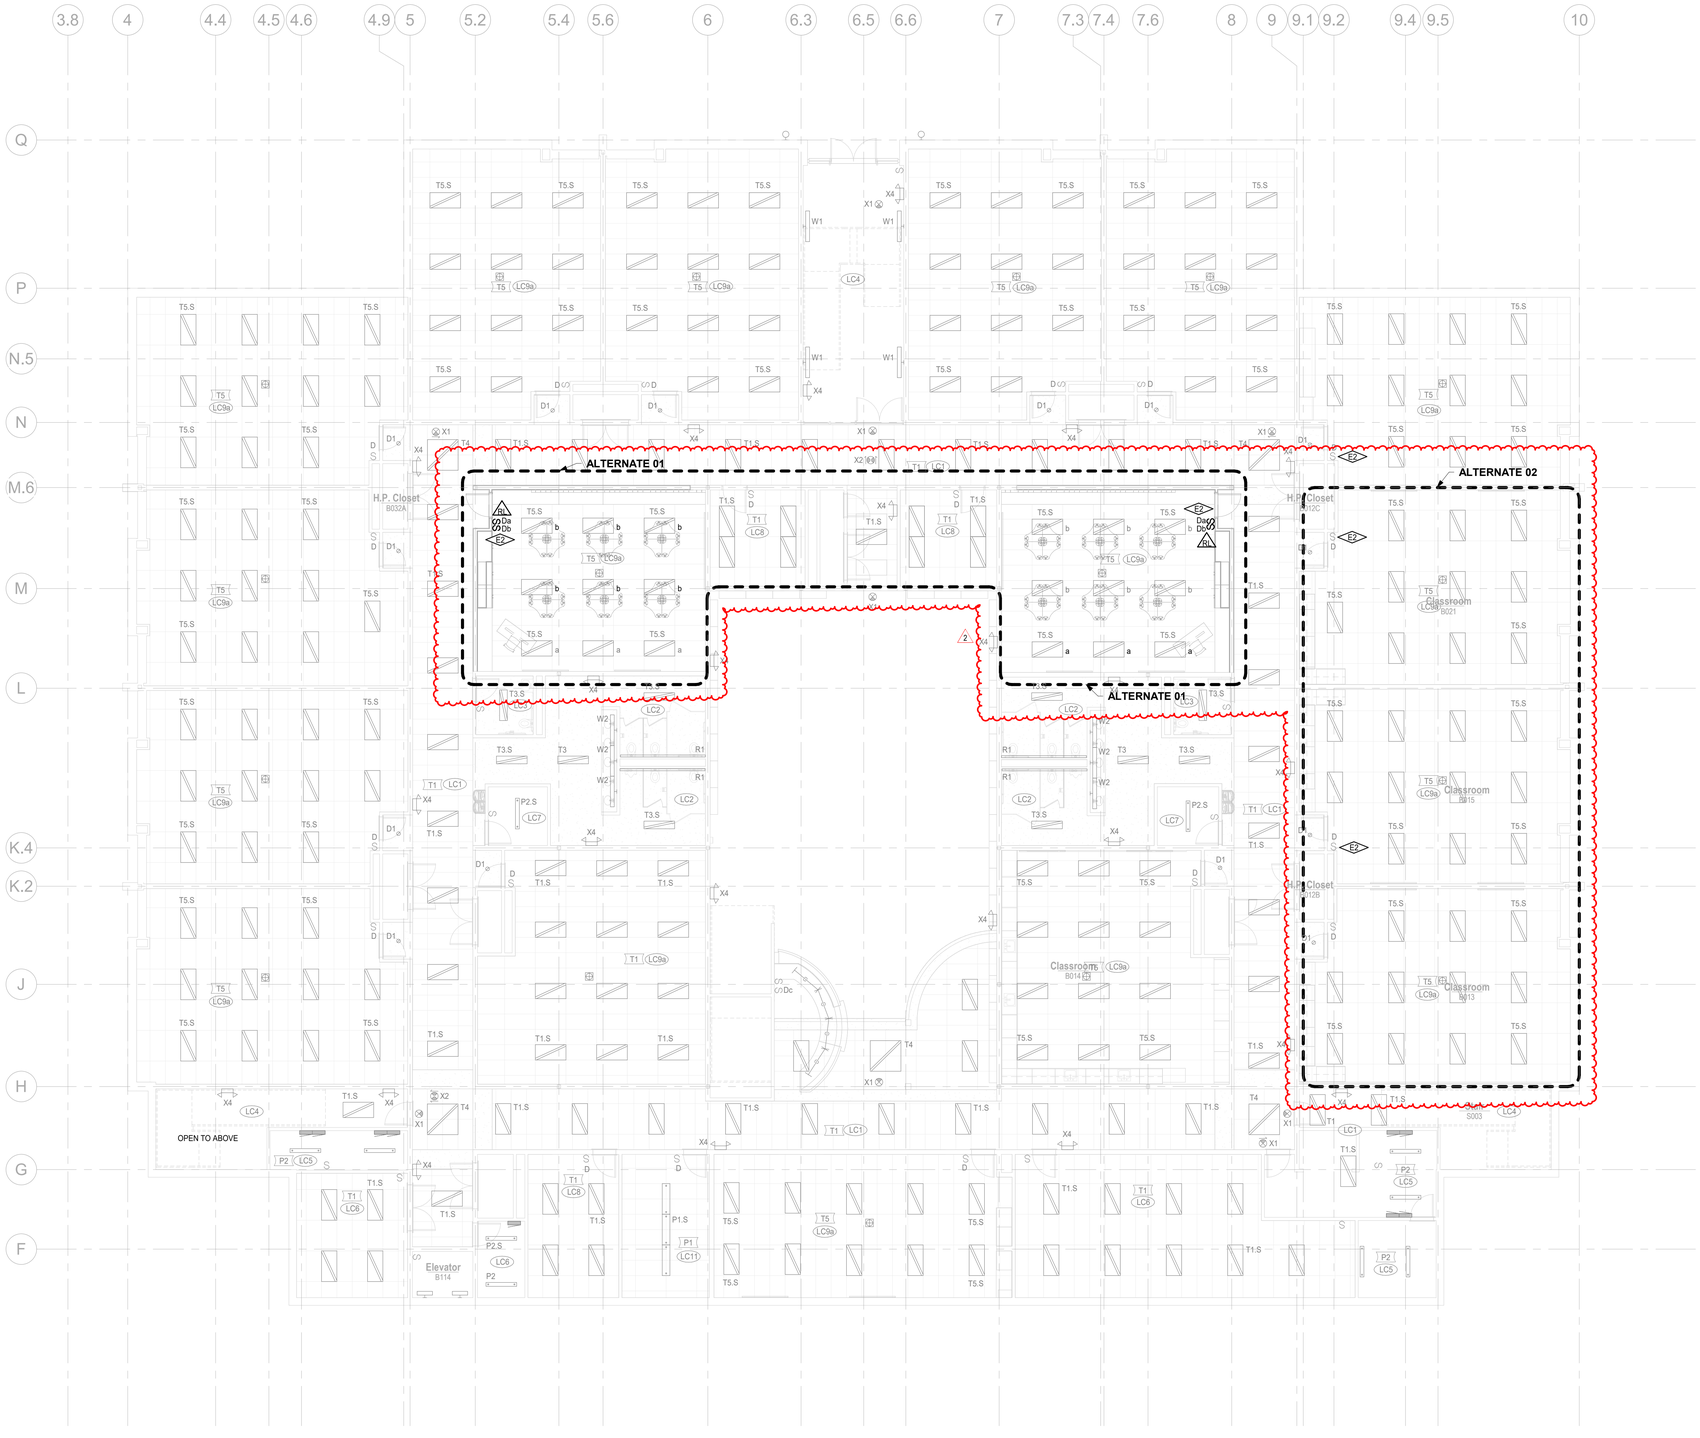

LOWER LEVEL LIGHTING PLAN

SCALE: 1/8" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026


LOWER LEVEL LIGHTING PLAN

E1.4

P:\WFS\2026-0530 Hodgkins Leadership Academy 2026 Bond Project\Cad
11/9/2026 3:38:38 PM


KEYNOTES

E2	PROVIDE NLIGHT AIR RELAY PACK FOR CONTROLLED RECEPTACLE(S) INDICATED. PROGRAM FOR TIME-OF-DAY CONTROL AND COORDINATE SCHEDULE WITH OWNER.

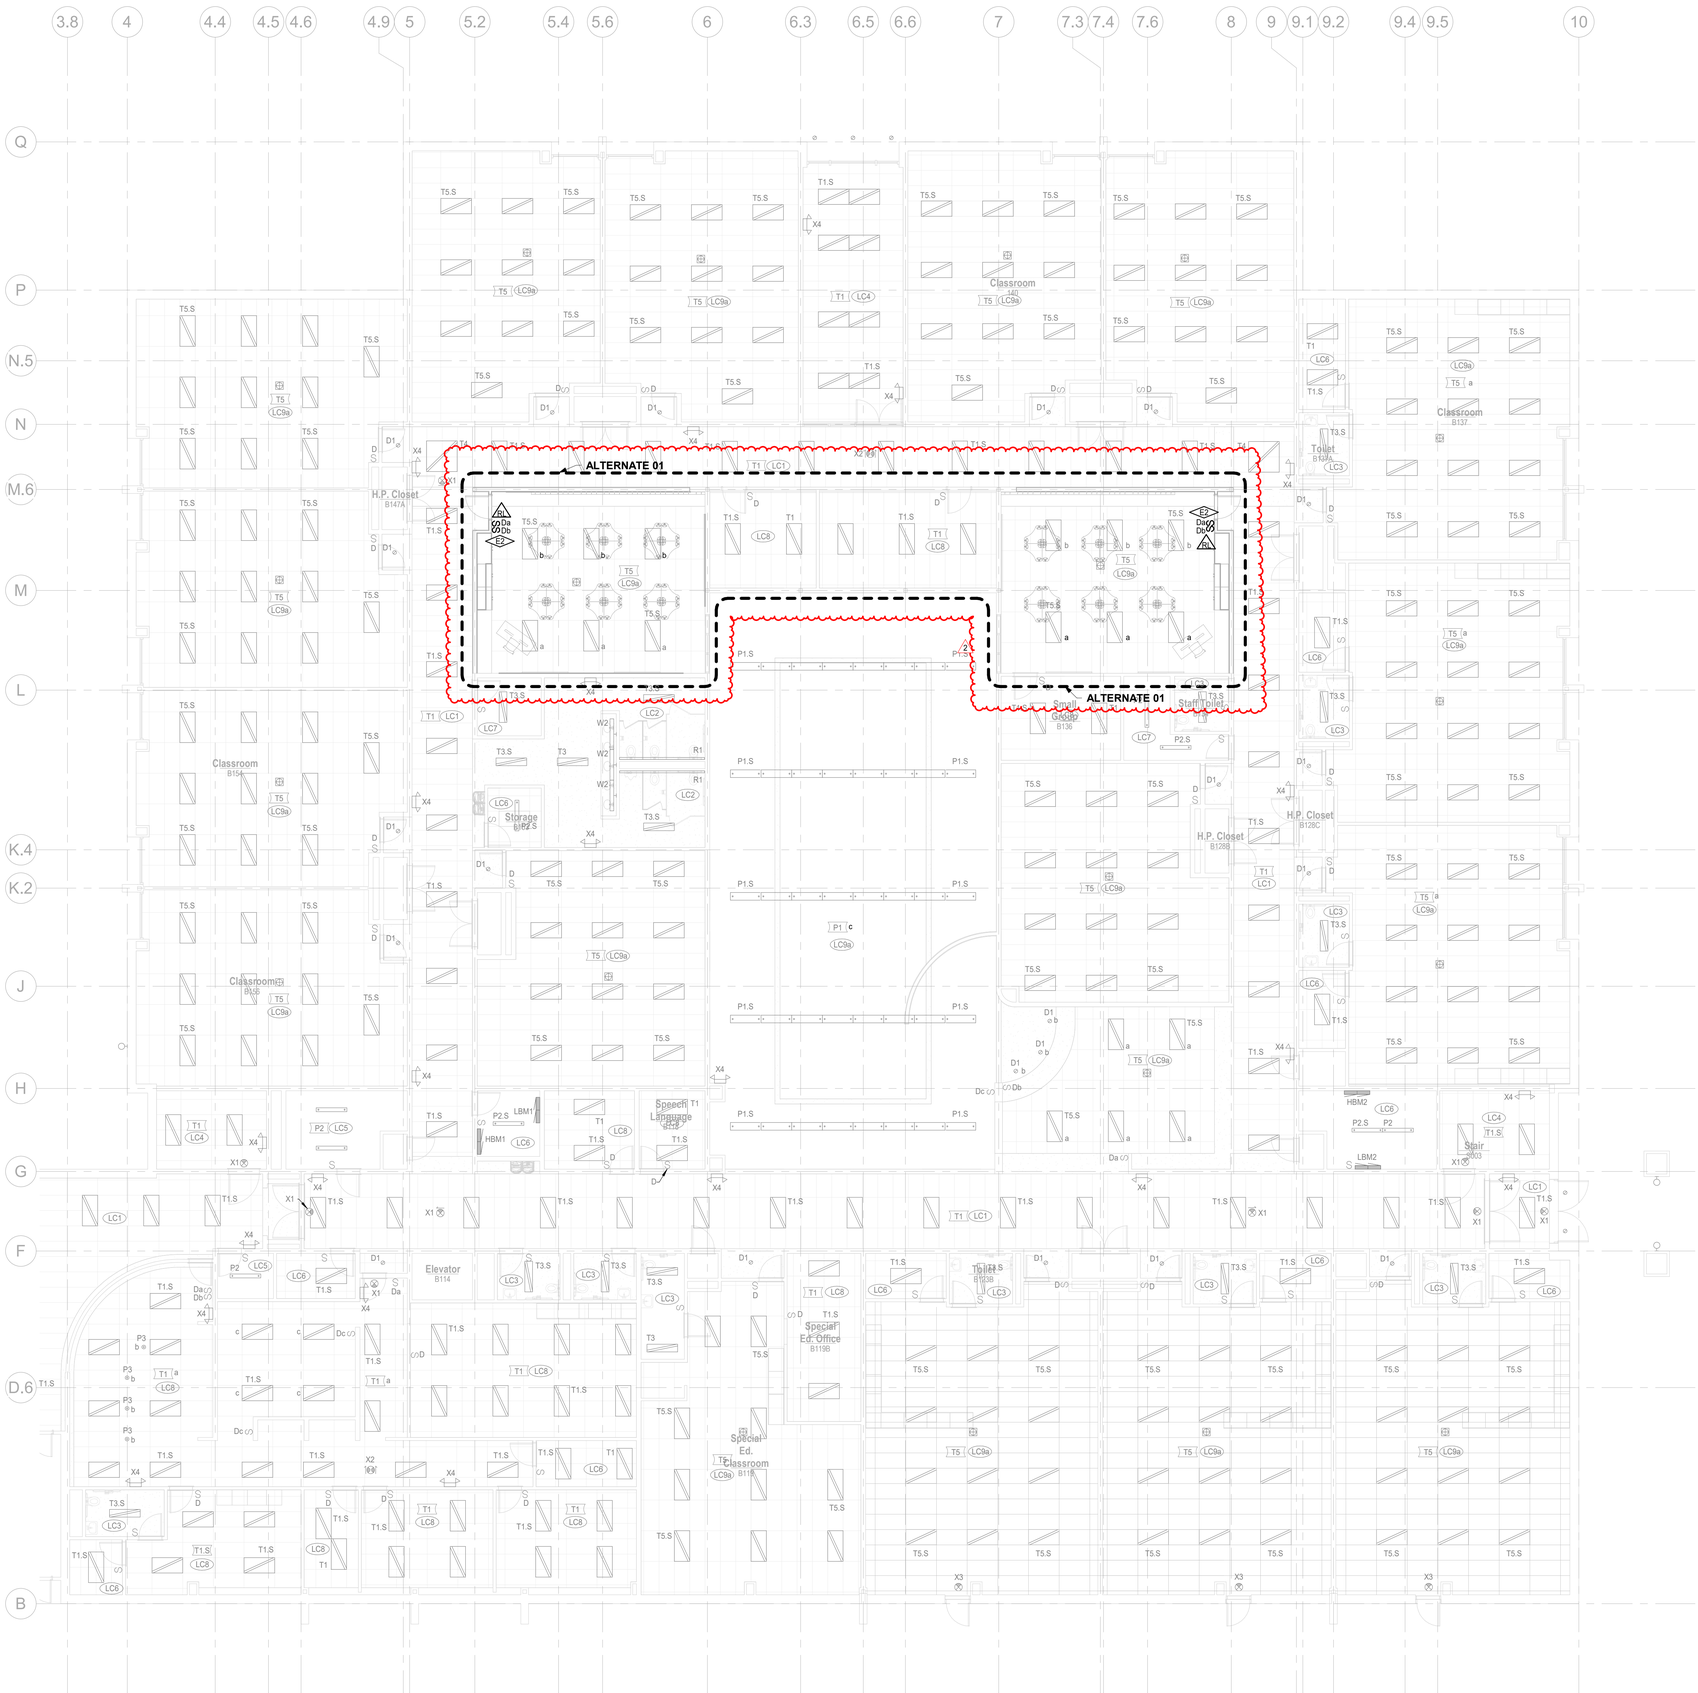

MAIN LEVEL LIGHTING PLAN - AREA B

SCALE: 1/8" = 1'-0"

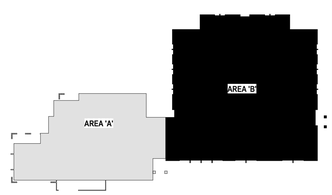

KeyPlan Area B

SCALE: NONE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

MAIN LEVEL LIGHTING PLAN - AREA B

E1.5B

P:\WPS\2026-5530 Hodgkins Leadership Academy 2026 Bond Project\Cad
11/9/2026 3:38:40 PM

EXISTING PANEL LBM1

200 A MAIN CIRCUIT BREAKER | VOLTAGE 120 / 208 V
250 A BUS | PHASE 3 PH
WIRE 4 W

NEW LOAD ON EXISTING CIRCUIT BREAKER: ALTERNATE 01 (2)

MFR : SIEMENS
MTG. : SURFACE

10000 AMPERE SHORT CIRCUIT RATING (FULLY RATED)

NOTE	DESCRIPTION	LTG	RECEPT	MOTORS	OTHER	GENERAL	TOTAL	BREAKER AMP / P	CCT	PH	CCT	BREAKER AMP / P	TOTAL	GENERAL	OTHER	MOTORS	RECEPT	LTG	DESCRIPTION	NOTE
	HP2.08A			1,789			1789	25 / 1	1	A	2	25 / 1	1789			1,789			HP2.08B	
	/			1,789			1789	/ 2	3	B	4	/ 2	1789			1,789			/	
	HP2.09A			1,789			1789	25 / 1	5	C	6	25 / 1	1789			1,789			HP2.09B	
	/			1,789			1789	/ 2	7	A	8	/ 2	1789			1,789			/	
	TELECOM RACK B158		1,800				1800	20 / 1	9	B	10	20 / 1	1800				1,800		PA RACK B113	
	TELECOM RACK B158		1,800				1800	20 / 1	11	C	12	20 / 1	1080				1,080		RECEPTACLES B113	
	TELECOM RACK B158		1,800				1800	20 / 1	13	A	14	20 / 1	1080				1,080		RECEPTACLES B155	
	ROOF RECEPT						0	20 / 1	15	B	16	20 / 1	1080				1,080		RECEPTACLES B155	
	EXIST. LOAD						0	20 / 1	17	C	18	20 / 1	1080				1,080		RECEPTACLES B155	
	RECEPTACLES B158		1,080				1080	20 / 1	19	A	20	20 / 1	1080				1,080		RECEPTACLES B154	
	RECEPTACLES B156		1,080				1080	20 / 1	21	B	22	20 / 1	1080				1,080		RECEPTACLES B154	
	RECEPTACLES B156		1,080				1080	20 / 1	23	C	24	20 / 1	1080				1,080		RECEPTACLES B154	
	RECEPTACLES B149		1,080				1080	20 / 1	25	A	26	20 / 1	1080				1,080		RECEPTACLES B148	
	RECEPTACLES B149		1,080				1080	20 / 1	27	B	28	20 / 1	1080				1,080		RECEPTACLES B148	
	RECEPTACLES B149		1,080				1080	20 / 1	29	C	30	20 / 1	1080				1,080		RECEPTACLES B148	
	RECEPTACLES B146		1,080				1080	20 / 1	31	A	32	20 / 1	1080				1,080		RECEPTACLES B144	
	RECEPTACLES B148		1,080				1080	20 / 1	33	B	34	20 / 1	1080				1,080		RECEPTACLES B144	
	RECEPTACLES B148		1,080				1080	20 / 1	35	C	36	20 / 1	1080				1,080		RECEPTACLES B144	
	RECEPTACLES B143		1,080				1080	20 / 1	37	A	38	20 / 1	**900**				**900**		**RECEPTACLES B145**	1
	RECEPTACLES B141		180				180	20 / 1	39	B	40	20 / 1	**900**				**900**		**RECEPTACLES B145**	1
	RECEPTACLES B141		1,080				1080	20 / 1	41	C	42	20 / 1	**480**				**480**		**RECEPTACLES B145**	1
	MICROWAVE			1200			1200	20 / 1	43	A	44	20 / 1	1200				1200		VENDING MACH B109	
	MICROWAVE			1200			1200	20 / 1	45	B	46	20 / 1	1200				1200		VENDING MACH B109	
	MICROWAVE			1200			1200	20 / 1	47	C	48	20 / 1	1200				1200		VENDING MACH B109	
	RECEPTACLES B157	1080					1080	20 / 1	49	A	50	20 / 1	1200				1200		REFRIGERATORS B106	
	MULTIFUNCTION DEVICE			2400			2400	20 / 1	51	B	52	20 / 1	1440				1440		RECEPT B104,B112	
	RECEPTACLES B104	1080					1080	20 / 1	53	C	54	20 / 1	1440				1440		RECEPTACLES B112	
	MULTIFUNCTION DEVICE			2400			2400	20 / 1	55	A	56	20 / 1	1080				1080		RECEPTACLES B109	
	RECEPTACLE B150	180					180	20 / 1	57	B	58	20 / 1	1200		1200				EWC	
	REFRIGERATOR B102	1200					1200	20 / 1	59	C	60	20 / 1	1200		1200				HAND DRYERS	
	RECEPT B105,B106	1440					1440	20 / 1	61	A	62	20 / 1	1080				1080		RECEPTACLES B101	
	RECEPTACLES B107	1080					1080	20 / 1	63	B	64	20 / 1	1080				1080		RECEPT CORRIDOR	
	RCPT B118,B116,B117,B115	1440					1440	20 / 1	65	C	66	20 / 1	1080				1080		RECEPTACLES B102	
	IDF B113 UPS				2500		2500	30 /	67	A	68	20 / 1	1080				1080		RECEPT CORRIDORS	
	/				2500		2500	/ 2	69	B	70	20 / 1	200		200				F.A. PANEL	
	SPARE						0	20 / 1	71	C	72	20 / 1	840			840			FCU-2	
	SPACE						0		73	A	74	2	840			840			/	
							0	30 /	75	B	76		0						SPACE	
							0	/ 2	77	C	78		0						SPACE	
	SPACE						0		79	A	80		0						SPACE	
	SPACE						0		81	B	82		0						SPACE	
	SPACE						0		83	C	84		0						SPACE	

PHASE LOADING SUMMARY — PANEL LOADING SUMMARY

LOAD TYPE (VA)	PH A	PH B	PH C
LIGHTING	0.0	0.0	0.0
RECEPTACLES	19,500.0	17,220.0	19,440.0
MOTORS	7,996.0	3,578.0	4,418.0
OTHER	6,100.0	7,500.0	2,400.0
GENERAL	0.0	0.0	0.0
TOTAL (VA)	33,596.0	28,298.0	26,258.0
NEC CALCULATED			
PHASE AMPACITY	256.3	224.7	187.8
	#REF!		
PHASE BALANCE	A-B	B-C	C-A
	19%	8%	28%

LOAD TYPE	CONNECTED LOAD KVA		NEC CALCULATED DEMAND LOAD		POWER FACTOR	DEMAND LOAD KW	
LIGHTING	0.0	KVA	x 125% = 0.0	KVA	x 95% =	0.0	KW
RECEPTACLES							
FIRST 10 KVA	10.0	KVA	x 100% = 10.0	KVA	x 100% =	10.0	KW
REMAINDER	46.2	KVA	x 50% = 23.1	KVA	x 100% =	23.1	KW
MOTORS							
LARGEST	3.6	KVA	x 125% = 4.5	KVA	x 90% =	4.0	KW
REMAINDER	12.4	KVA	x 100% = 12.4	KVA	x 90% =	11.2	KW
OTHER	16.0	KVA	x 125% = 20.0	KVA	x 100% =	20.0	KW
GENERAL	0.0	KVA	x 100% = 0.0	KVA	x 100% =	0.0	KW
TOTAL	88.2	KVA		70.0 KVA		68.3	KW

PANEL CONNECTED PF= 98%
CONNECTED AMPACITY = 244.7
NEC DEMAND AMPACITY = 194.2

GENERAL NOTES:
1. PROVIDE NEW UPDATED PANEL DIRECTORIES FOR PANELS THAT ARE INCLUDED IN THIS PROJECT.
2. PROVIDE TYPED DESCRIPTIONS OF NEW CIRCUITS BEING INSTALLED. INDICATE NEW SPARES IN PENCIL.

MDC LOAD SUMMARY

MDC CAPACITY	1600 A
EXISTING PEAK DEMAND	1174 A
NEC DEMAND FACTOR	x 125%
NEC CORRECTED PEAK DEMAND LOAD	1468 A
2025 LED UPGRADE LOAD REMOVED	257 A
2025 LED UPGRADE LOAD ADDED	171 A
2025 LED UPGRADE TOTAL BUILDING LOAD	1382 A
NEW LOAD REMOVED	10 A
NEW LOAD ADDED	12 A
NEW TOTAL BUILDING LOAD	1384 A

EXISTING PANEL LBM2

200 A MAIN CIRCUIT BREAKER | VOLTAGE 120 / 208 V
250 A BUS | PHASE 3 PH
WIRE 4 W

NEW LOAD ON EXISTING CIRCUIT BREAKER: ALTERNATE 01 (2)

MFR : SIEMENS
MTG. : SURFACE

10000 AMPERE SHORT CIRCUIT RATING (FULLY RATED)

NOTE	DESCRIPTION	LTG	RECEPT	MOTORS	OTHER	GENERAL	TOTAL	BREAKER AMP / P	CCT	PH	CCT	BREAKER AMP / P	TOTAL	GENERAL	OTHER	MOTORS	RECEPT	LTG	DESCRIPTION	NOTE
	HP2.19			1,789			1789	25 / 1	1	A	2	20 / 1	1440				1,440		RECEPTACLES B130	
	/			1,789			1789	/ 2	3	B	4	20 / 1	1440				1,440		RECEPTACLES B130	
	RECEPT CORRIDOR		1,440				1440	20 / 1	5	C	6	20 / 1	1440				1,440		RECEPTACLES B137	
	RECEPTACLES B132		1,440				1440	20 / 1	7	A	8	20 / 1	1440				1,440		RECEPTACLES B137	
	RECEPTACLES B132		1,440				1440	20 / 1	9	B	10	20 / 1	1440				1,440		RECEPTACLES B137	
	RECEPTACLES B132		1,440				1440	20 / 1	11	C	12	20 / 1	1440				1,440		RECEPTACLES B137	
	RECEPTACLES B139		1,440				1440	20 / 1	13	A	14	20 / 1	1440				1,440		RECEPTACLES B140	
	RECEPTACLES B139		1,440				1440	20 / 1	15	B	16	20 / 1	1440				1,440		RECEPTACLES B140	
	RECEPTACLES B139		1,440				1440	20 / 1	17	C	18	20 / 1	1440				1,440		RECEPTACLES B140	
1	**RECEPTACLES B135**		**900**				900	20 / 1	19	A	20	20 / 1	1440				1,440		RECEPTACLES B131	
1	**RECEPTACLES B135**		**900**				900	20 / 1	21	B	22	20 / 1	1440				1,440		RECEPTACLES B131	
1	**RECEPTACLES B135**		**480**				480	20 / 1	23	C	24	20 / 1	1440				1,440		RECEPTACLES B131	
	RECEPTACLES B136		1,440				1440	20 / 1	25	A	26	20 / 1	1440				1,440		RECEPTACLES B148	
	RECEPTACLES B136		1,440				1440	20 / 1	27	B	28	20 / 1	1440				1,440		RECEPTACLES B148	
	IRRIGATION CNTRL		600				600	20 / 1	29	C	30	20 / 1	1440				1,440		RECEPTACLES B119	
	WP RECEPT		180				180	20 / 1	31	A	32	20 / 1	1440				1,440		RECEPTACLES B119	
	ROOF RECEPT		360				360	20 / 1	33	B	34	20 / 1	1440				1,440		RECEPTACLES B122	
	RECEPTACLES B125		1,440				1440	20 / 1	35	C	36	20 / 1	1200					1,200	LRC MOTOR SHADES	
	RECEPTACLES B123		1,440				1440	20 / 1	37	A	38	20 / 1	1200					1,200	LRC MOTOR SHADES	
	RECEPTACLES B123		1,440				1440	20 / 1	39	B	40	20 / 1	200	200					DOORS B134, B146	1
	RECEPTACLES B123		1,440				1440	20 / 1	41	C	42	20 / 1	200	200					DOORS B134, B146	1
	RECEPTACLES B124		1,440				1440	20 / 1	43	A	44	20 / 1	1440				1,440		RECEPTACLES B126	
	RECEPTACLES B124		1,440				1440	20 / 1	45	B	46	20 / 1	1440				1,440		RECEPTACLES B126	
	RECEPTACLES B124		1,440				1440	20 / 1	47	C	48	20 / 1	1440				1,440		RECEPTACLES B126	
	SPACE						0		49	A	50		0						SPACE	
	SPACE						0		51	B	52		0						SPACE	
	SPACE						0		53	C	54		0						SPACE	
	SPACE						0		55	A	56		0						SPACE	
	SPACE						0		57	B	58		0						SPACE	
	SPACE						0		59	C	60		0						SPACE	
	SPACE						0		61	A	62		0						SPACE	
	SPACE						0		63	B	64		0						SPACE	
	SPACE						0		65	C	66		0						SPACE	
	SPACE						0		67	A	68		0						SPACE	
	SPACE						0		69	B	70		0						SPACE	
	SPACE						0		71	C	72		0						SPACE	
	SPACE						0		73	A	74		0						SPACE	
	SPACE						0		75	B	76		0						SPACE	
	SPACE						0		77	C	78		0						SPACE	
	SPACE						0		79	A	80		0						SPACE	
	SPACE						0		81	B	82		0						SPACE	
	SPACE						0		83	C	84		0						SPACE	

PHASE LOADING SUMMARY — PANEL LOADING SUMMARY

LOAD TYPE (VA)	PH A	PH B	PH C
LIGHTING	0.0	0.0	0.0
RECEPTACLES	18,360.0	18,540.0	18,360.0
MOTORS	2,989.0	1,789.0	1,200.0
OTHER	0.0	0.0	0.0
GENERAL	0.0	20.0	0.0
TOTAL (VA)	21,349.0	20,349.0	19,560.0
NEC CALCULATED			
PHASE AMPACITY	146.5	137.5	130.4
	#REF!		
PHASE BALANCE	A-B	B-C	C-A
	5%	4%	9%

LOAD TYPE	CONNECTED LOAD KVA		NEC CALCULATED DEMAND LOAD		POWER FACTOR	DEMAND LOAD KW	
LIGHTING	0.0	KVA	x 125% = 0.0	KVA	x 95% =	0.0	KW
RECEPTACLES							
FIRST 10 KVA	10.0	KVA	x 100% = 10.0	KVA	x 100% =	10.0	KW
REMAINDER	45.3	KVA	x 50% = 22.6	KVA	x 100% =	22.6	KW
MOTORS							
LARGEST	3.6	KVA	x 125% = 4.5	KVA	x 90% =	4.0	KW
REMAINDER	2.4	KVA	x 100% = 2.4	KVA	x 90% =	2.2	KW
OTHER	0.0	KVA	x 125% = 0.0	KVA	x 100% =	0.0	KW
GENERAL	0.0	KVA	x 100% = 0.0	KVA	x 100% =	0.0	KW
TOTAL	61.3	KVA		39.5 KVA		38.8	KW

PANEL CONNECTED PF= 98%
CONNECTED AMPACITY = 170.0
NEC DEMAND AMPACITY = 109.7

GENERAL NOTES:
1. PROVIDE NEW UPDATED PANEL DIRECTORIES FOR PANELS THAT ARE INCLUDED IN THIS PROJECT.
2. PROVIDE TYPED DESCRIPTIONS OF NEW CIRCUITS BEING INSTALLED. INDICATE NEW SPARES IN PENCIL.

EXISTING PANEL LBL2

200 A MAIN CIRCUIT BREAKER | VOLTAGE 120 / 208 V
250 A BUS | PHASE 3 PH
WIRE 4 W

NEW LOAD ON EXISTING CIRCUIT BREAKER:
1. NEW LOAD ON EXISTING CIRCUIT BREAKER: ALTERNATE 01
2. NEW LOAD ON EXISTING CIRCUIT BREAKER: ALTERNATE 02

MFR : SIEMENS
MTG. : SURFACE

10000 AMPERE SHORT CIRCUIT RATING (FULLY RATED)

NOTE	DESCRIPTION	LTG	RECEPT	MOTORS	OTHER	GENERAL	TOTAL	BREAKER AMP / P	CCT	PH	CCT	BREAKER AMP / P	TOTAL	GENERAL	OTHER	MOTORS	RECEPT	LTG	DESCRIPTION	NOTE
	HP1.07			1,789			1789	25 /	1	A	2	20 / 1	2400		2,400				TELECOM B011A	
	/			1,789			1789	/ 2	3	B	4	20 / 1	2400		2,400				TELECOM B011A	
	RECEPTACLES B011		180				180	20 / 1	5	C	6	20 / 1	2400		2,400				TELECOM B011A	
	RECEPT CORRIDOR		1,440				1440	20 / 1	7	A	8	20 / 1	1440						RECEPTACLES B010	
2	RECEPTACLES B030		900				900	20 / 1	9	B	10	20 / 1	900				1		RECEPTACLES B020	1
2	RECEPTACLES B030		900				900	20 / 1	11	C	12	20 / 1	720				1		RECEPTACLES B020	1
	RECEPT CORRIDOR		1,440				1440	20 / 1	13	A	14	20 / 1	1440				1,440		RECEPT CORRIDOR	
2	RECEPTACLES B030		900				900	20 / 1	15	B	16	20 / 1	1440				1,440		RECEPTACLES B022	
	RECEPTACLES B030		480				720	20 / 1	17	C	18	20 / 1	1440				1,440		RECEPTACLES B022	
	RECEPTACLES B024		1,440				1440	20 / 1	19	A	20	20 / 1	1440				1,440		RECEPTACLES B022	
	RECEPTACLES B024		1,440				1440	20 / 1	21	B	22	20 / 1	1440				1,440		RECEPTACLES B025	
	RECEPTACLES B024		1,440				1440	20 / 1	23	C	24	20 / 1	1440				1,440		RECEPTACLES B025	
	RECEPTACLES B014		1,440				1440	20 / 1	25	A	26	20 / 1	1440				1,440		RECEPTACLES B025	
	RECEPTACLES B014		1,440				1440	20 / 1	27	B	28	20 / 1	900				1		**RECEPTACLES B020**	1
	RECEPTACLES B014		1,440				1440	20 / 1	29	C	30	20 / 1	900				1		**RECEPTACLES B020**	1
	IDF B11A UPS				2,500		2500	30 /	31	A	32	20 / 1	480				1		**RECEPTACLES B020**	1
	/				2,500		2500	/ 2	33	B	34	20 /	840				840		/	
	SPARE						0	20 / 1	35	C	36	/ 2	840				840		/	
	RECEPTACLES B018		1,440				1440	20 / 1	37	A	38	20 / 1	1440				1,440		RECEPTACLES B011A	
	CORRIDOR B012		1,440				1440	20 / 1	39	B	40	20 / 1	1440				1,440		RECEPTACLES B007	
	RECEPTACLES B026		1,440				1440	20 / 1	41	C	42	20 / 1	1440				1,440		RECEPTACLES B007	
	SPARE						0	20 / 1	43	A	44	20 / 1	1440				1,440		RECEPTACLES B007	
	RECEPTACLES B007		1440				1440	20 / 1	45	B	46	20 / 1	1440				1,440		RECEPTACLES B007	
	RECEPTACLES B007		1440				1440	20 / 1	47	C	48	20 / 1	1440				1,440		RECEPTACLES B007	
	RECEPTACLES B006		1440				1440	20 / 1	49	A	50	20 / 1	1440				1,440		RECEPTACLES B007	
	RECEPTACLES B010		1,440				1440	20 / 1	51	B	52	30 /	0						SPARE	
	STEAM RM		1200				1200	20 / 1	53	C	54	/ 2	0						SPACE	
	HAND DRYER				1200		1200	20 / 1	55	A	56	20 / 1	20	20					DOORS B134, B146	1
	STEAM RM		1200				1200	20 / 1	57	B	58	20 / 1	0						SPACE	
2	RECEPTACLES B030		900				0	20 / 1	59	C	60	20 / 1	0						SPARE	
2	RECEPTACLES B030		900				900	20 / 1	61	A	62	20 / 1	0						SPACE	
2	RECEPTACLES B030		480				900	20 / 1	63	B	64	20 / 1	0						SPACE	
	SPACE						480	20 / 1	65	C	66	20 / 1	0						SPACE	
	SPACE						0	20 / 1	67	A	68	20 / 1	0						SPACE	
	SPACE						0	20 / 1	69	B	70	20 / 1	0						SPACE	
	SPACE						0	20 / 1	71	C	72	20 / 1	0						SPACE	
	SPACE						0	20 / 1	73	A	74	20 / 1	0						SPACE	
	SPACE						0	20 / 1	75	B	76	20 / 1	0						SPACE	
	SPACE						0	20 / 1	77	C	78	20 / 1	0						SPACE	
	SPACE						0	20 / 1	79	A	80	20 / 1	0						SPACE	
	SPACE						0	20 / 1	81	B	82	20 / 1	0						SPACE	
	SPACE						0	20 / 1	83	C	84	20 / 1	0						SPACE	

PHASE LOADING SUMMARY — PANEL LOADING SUMMARY

LOAD TYPE (VA)	PH A	PH B	PH C
LIGHTING	0.0	0.0	0.0
RECEPTACLES	20,100.0	18,660.0	16,440.0
MOTORS	1,789.0	2,629.0	840.0
OTHER	6,100.0	4,900.0	2,400.0
GENERAL	20.0	0.0	0.0
TOTAL (VA)	28,009.0	26,189.0	19,680.0
NEC CALCULATED			
PHASE AMPACITY	207.4	195.7	143.6
	#REF!		
PHASE BALANCE	A-B	B-C	C-A
	7%	33%	42%

LOAD TYPE	CONNECTED LOAD KVA		NEC CALCULATED DEMAND LOAD		POWER FACTOR	DEMAND LOAD KW	
LIGHTING	0.0	KVA	x 125% = 0.0	KVA	x 95% =	0.0	KW
RECEPTACLES							
FIRST 10 KVA	10.0	KVA	x 100% = 10.0	KVA	x 100% =	10.0	KW
REMAINDER	45.2	KVA	x 50% = 22.6	KVA	x 100% =	22.6	KW
MOTORS							
LARGEST	3.6	KVA	x 125% = 4.5	KVA	x 90% =	4.0	KW
REMAINDER	1.7	KVA	x 100% = 1.7	KVA	x 90% =	1.5	KW
OTHER	13.4	KVA	x 125% = 16.8	KVA	x 100% =	16.8	KW
GENERAL	0.0	KVA	x 100% = 0.0	KVA	x 100% =	0.0	KW
TOTAL	73.9	KVA		55.5 KVA		54.9	KW

PANEL CONNECTED PF= 99%
CONNECTED AMPACITY = 205.1
NEC DEMAND AMPACITY = 154.1

GENERAL NOTES:
1. PROVIDE NEW UPDATED PANEL DIRECTORIES FOR PANELS THAT ARE INCLUDED IN THIS PROJECT.
2. PROVIDE TYPED DESCRIPTIONS OF NEW CIRCUITS BEING INSTALLED. INDICATE NEW SPARES IN PENCIL.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
1	ACFR Revisions	10/5/2026

Revision Schedule

Westminster Public Schools

Hodgkins Leadership Academy Classroom Conversion Project

3475 W 67th Ave,
Denver, CO 80221

DAO No.: 2021-033

September 25, 2026

ELECTRICAL PANEL SCHEDULES

E3.0

P:\WPS\2026-0533-Hodgkins Leadership Academy 2026 Bond Project\Cad
11/6/2026 3:38:40 PM