DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720-273-0431
Email: dan@daoarch.com

Date: 11/12/2026
Project: Westminster Public Schools – 2026 Bond Projects – Sherrelwood Renovations
DAO Project No.: 2025-033

Addendum 001

The following revisions are to be incorporated into the Construction Documents, dated September 25, 2026

I. SPECIFICATIONS

None at this time

II. DRAWINGS

Cover – Sheet reissued in its entirety – Incorporating Sheet A9.0.

Sheet G0.0 – Sheet reissued in its entirety – Updated project description

Sheet G0.1 – Sheet reissued in its entirety – Updated Life Safety Plan and code review

Sheet AD1.0 - Sheet reissued in its entirety – Updated keynote locations

Sheet AD2.0 – Sheet reissued in its entirety – Updated demo keynote legend and defining project alternatives

Sheet A1.0 – Sheet reissued in its entirety – Updated keynotes and general plan notes

Sheet A1.1 – Sheet reissued in its entirety – Updated keynotes and general plan notes

Sheet A2.0 – Sheet reissued in its entirety – Updated notes and Design Legend, updated storefront extents throughout, and defining project alternatives

Sheet A2.1 – Sheet reissued in its entirety – Updated notes and Design Legend, updated storefront extents throughout, and defining project alternatives

Sheet A4.0 – Sheet reissued in its entirety – Updated wall sections and additional sections added for clarification of updated storefront systems

Sheet A6.0 – Sheet reissued in its entirety – Updated interior elevation, notes and equipment schedule

Sheet A6.1 – Sheet reissued in its entirety – Updated interior elevation, notes and equipment schedule

Sheet A6.2 – Sheet reissued in its entirety – Updated details to include roller shades and new storefront sill extents, addition of new window head and sill details

Sheet A9.0 – Sheet issued in its entirety – Added Equipment Plan, Finish Schedule, and Finish Legend

Sheet E1.6 – Sheet reissued in its entirety – Added I/O ports and call buttons adjacent to the teacher's desks.

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations
8095 Kalamath St. Denver, CO 80221
DAO No.: 2025-033
Construction Documents Submittal
September 25, 2026



VIEW FROM THE EAST

DRAWING INDEX

GENERAL

Cover	Cover Sheet
G0.0	Standard Symbols, Abbreviations & General Notes
G0.1	Building Code Data

ARCHITECTURE

AD1.0	Main Level Demolition Plan Area 'A'
AD1.1	Main Level Demolition Plan Area 'B'
AD2.0	Demo Exterior Elevation
A1.0	Main Level Plan Area 'A'
A1.1	Main Level Plan Area 'B'
A2.0	Exterior Elevation
A2.1	Exterior Elevation
A4.0	Wall Sections
A6.0	Interior Elevations
A6.1	Interior Elevations
A6.2	Interior Details/Door Schedule/Door & Window Details
A9.0	Equipment Plan, Finish Schedule and Finish Legend

PLUMBING

P0.0	Plumbing Cover Sheet - General Notes, Schedules & Legend
PD1.0	Main Level Demolition Plumbing Plan Area 'A'
P1.0	Main Level Plumbing Plan Area 'A'

ELECTRICAL

E0.1	Electrical Legends & Notes
E0.2	Electrical Schedules & One Line Diagram
ED1.3	Main Level Power Demo Plan - Area A
ED1.4	Main Level Fire Alarm Demo Plan - Area A
ED1.5	Basement & Main Level Electrical Demo Plan - Area B
ED1.6	Main Level Technology Demo Plan - Area A
E1.3	Main Level Power Plan - Area A
E1.5	Basement & Main Level Electrical Plan - Area B
E1.6	Main Level Technology Plan - Area A
E3.1	Electrical Details & Panel Schedules

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

OWNER:
WESTMINSTER PUBLIC SCHOOLS
7002 RALEIGH STREET
WESTMINSTER, CO 80030
CONTACT: DON CIANCIO
PHONE #: 720.542.5100

ARCHITECT:
DAO ARCHITECTURE
7230 MEADE STREET
WESTMINSTER, CO 80030
CONTACT: DAN ORECCHIO
PHONE #: 720.273.0431

MECHANICAL AND PLUMBING ENGINEERS:
THE BALLARD GROUP, INC.
2525 S WADSWORTH BLVD. SUITE 200
LAKEWOOD, CO 80227
CONTACT: ERIC BAALMAN; NATE RUST
PHONE: 303.988.4514

ELECTRICAL AND TECHNOLOGY ENGINEERS:
CATOR RUMA & ASSOCIATES, CO.
896 TABOR STREET
LAKEWOOD, CO 80401
CONTACT: KEVIN MILLER
PHONE: 303.232.6200

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations
8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

CONSTRUCTION DOCUMENTS

Cover

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:43 AM

MATERIALS SYMBOLS

EARTHWORKS

EARTH NON-COMPACTED

EARTH COMPACT/FILL

GRAVEL/POROUS FILL

CONCRETE

CONCRETE

PRECAST CONCRETE

SAND/MORTAR/PLASTER

METAL

ALUMINUM

BRASS/BRONZE

STEEL

MASONRY

CONCRETE BLOCK

COMMON/FACE BLOCK

FIRE BRICK

STRUCTURAL FACING TILE

STONE

BLUESTONE/SLATE/ SOAPSTONE/FLAGGING

LIMESTONE

RUBBLE

WOOD

FINISH

ROUGH

SHIM

PLYWOOD

GLASS

GLASS

STRUCTURAL

GLASS BLOCK

INSULATION

BATT/LOOSE FILL

RIGID

SPRAY/FOAM

FINISHES

ACOUSTICAL TILE

CARPET AND PAD

CERAMIC TILE

GYPSUM WALLBOARD

TECTUM

PARTITION INDICATIONS

CAST-IN-PLACE CONCRETE

CONCRETE MASONRY

METAL STUD

WOOD STUD

ELEVATION INDICATIONS

BRICK

CERAMIC/ PORCELAIN TILE

CONCRETE/ PLASTER/GPDW

CONCRETE MASONRY UNIT

SHEET METAL

SHINGLES/SIDING

REFERENCE SYMBOLS

1 / A1.0 SIM — DETAIL OR SECTION NUMBER; SHEET ON WHICH IT IS FOUND

No. / Sht. — SECTION REFERENCE

No. / Sht. — DETAIL REFERENCE

No. / Sht. — WALL SECTION REFERENCE

No. / Sht. — No. / Sht. — BUILDING SECTION REFERENCE

Sht. / No. — ELEVATION REFERENCE

ROOM NAME / 101 — ROOM IDENTIFIER

1t — WINDOW/OPENING IDENTIFIER

1A101 — DOOR/OPENING IDENTIFIER

1 — EXISTING GRID LINE

Level / 100'-0" — ELEVATION REFERENCE

1i — WALL TYPE REFERENCE

MATCH LINE

DEMOLITION INDICATOR

1 — REVISION INDICATOR

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT AND OWNER IN ORDER TO MODIFY PLANS ACCORDINGLY.

2. ALL DISCIPLINES SHALL BE RESPONSIBLE FOR THEIR SCOPE OF WORK. THIS WORK IS TO BE SCHEDULED AND COMPLETED WITH THE GENERAL CONTRACTORS FULL KNOWLEDGE.

3. ALL HOT WORK ACTIVITIES (I.E. USING HEAT GUNS, SOLDERING, BRAZING, WELDING, GRINDING, METAL CUTTING, ETC.) OR OTHER ACTIVITIES INVOLVING FLAMES OR SPARKS SHALL BE PRECEDED BY OBTAINING AN APPROVED HOT WORK PERMIT. (IF HOT WORK REQUIRED)

4. THE PROJECT STAGING AREA / CONSTRUCTION ACTIVITIES SHALL NOT CAUSE THE OBSTRUCTION OF PATHS OF EGRESS INSIDE THE BUILDING, BLOCK EXIT DISCHARGE FROM THE BUILDING, OR IMPEDE EMERGENCY VEHICLE ACCESS TO THE BUILDING. CORRIDORS MAY NOT BE USED AS STAGING AREAS OR AS AREAS FOR DEBRIS COLLECTION.

5. ALL NECESSARY MEASURES SHALL BE TAKEN TO PREVENT THE NUISANCE ACTUATION OF ANY NEARBY SMOKE OR DUCT DETECTORS BY CONSTRUCTION ACTIVITIES THAT CREATE DUST OR FUMES INSIDE THE BUILDING.

6. THE CONTRACTOR SHALL NOT HANDLE OR DISABLE ANY FIRE SYSTEMS DEVICES. ONLY BUILDING FIRE SYSTEMS PERSONNEL MAY HANDLE OR DISABLE EXISTING FIRE SYSTEMS. ANY OUTAGES REQUIRED FOR THE EXISTING FIRE SYSTEMS SHALL BE PERFORMED ACCORDING TO WPS PROCEDURES.

7. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.

STANDARD ABBREVIATIONS

A/E	ARCHITECT/ENGINEER	CONN	CONNECTION	GALV	GALVANIZED	MO	MASONRY OPENING	SLA	SLATE
AB	ANCHOR BOLT	CONSTR	CONSTRUCTION	GB	GRAB BAR	MOD	MODULE	SLP	SLOPE
ABBR	ABBREVIATE	CONT	CONTINUOUS	GDRL	GUARD RAIL	MTD	MOUNTED	SLS	SUB-FLOOR LEVELING SYSTEM
ABV	ABOVE	CONTR	CONTRACTOR	GENL	GENERAL	MTG	MEETING	SLV	SLEEVE
AC	AIR CONDITIONING	COORD	COORDINATE	GENL CONTR	GENERAL CONTRACTOR	MTL	METAL	SM	SHEET METAL
ACID RES	ACID RESISTANT	CORR	CORRIDOR	GFI	GROUND FAULT INTERRUPTER	MTR	MORTAR	SMLS	SEAMLESS
ACOUS	ACOUSTICAL	COV PL	COVER PLATE	GL	GLASS	MULL	MULLION	SP	SPACING
ACOUS INSUL	ACOUSTICAL INSULATION	CPRS	COMPRESSIBLE	GL BLK	GLASS BLOCK	MULT	MULTIPLE	SPCL	SPECIAL
ACOUS PNL	ACOUSTICAL PANEL	CPT	CARPET	GLU LAM	GLUE LAMINATED	MVBL	MOVABLE	SPEC	SPECIFICATION
ACOUS PLAS	ACOUSTICAL PLASTER	CRCMF	CIRCUMFERENCE	GLZ	GLAZING	N	NORTH	SPKLR	SPRINKLER
ACOUS TILE	ACOUSTICAL TILE	CRS	COLD ROLLED STEEL	GLZ CMU	GLAZED CONCRETE MASONRY UNIT	N/A	NOT APPLICABLE	SPKR	SPEAKER
ACT	ACTUAL	CSG	CASING	GND	GROUND	NEG	NEGATIVE	SPRT	SUPPORT
AD	AREA DRAIN	CSK	COUNTERSUNK	GPDW	GYPSUM DRY WALL	NF	NEAR FACE	SQFT	SQUARE FOOT
ADC	AUTOMATIC DOOR CLOSER	CSMT	CASEMENT	GR BM	GRADE BEAM	NIC	NOT IN CONTRACT	SQ	SQUARE
ADDL	ADDITIONAL	CSWK	CASEWORK	GR	GRADE	NO	NUMBER	SQIN	SQUARE INCH
ADDM	ADDENDUM	CT	CERAMIC TILE	GRTG	GRATING	NOM	NOMINAL	SQYD	SQUARE YARD
ADJ	ADJUSTABLE	C TV	CABLE TELEVISION	GUT	GUTTER	NS	NEAR SIDE	SSK	SERVICE SINK
ADJC	ADJACENT	CUB	CUBICLE	GYP	GYPSUM	NTS	NOT TO SCALE	SS	STAINLESS STEEL
AF	ACCESS FLOOR	CUR	CURRENT	GYP PLAS	GYPSUM PLASTER	O/O	OUT TO OUT	SSM	SOLID SURFACING MATERIAL
AFF	ABOVE FINISHED FLOOR	CW	COLD WATER	H	HIGH	OA	OVERALL	ST	STAIN
AFG	ABOVE FINISHED GRADE	DBL GLZ	DOUBLE GLAZING	H&CW	HOT & COLD WATER	OC	ON CENTER	ST	STREET
AFS	ABOVE FINISHED SLAB	DEPT	DEPARTMENT	HB	HOSE BIBB	OD	OUTSIDE DIAMETER	STAG	STAGGERED
AGGR	AGGREGATE	DET	DETAIL	HC	HOLLOW CORE	OD	OVERFLOW DRAIN	STC	SOUND TRANSMISSION CLASS
AHR	ANCHOR	DF	DRINKING FOUNTAIN	HC	HANDICAP	OF	OUTSIDE FACE	STD	STANDARD
AHU	AIR HANDLING UNIT	DF	DRAPERY FABRIC	HCMU	HOLLOW CONCRETE MASONRY UNIT	OFCI	OWNER FURNISHED CONTRACTOR INSTALL	STIR	STIRRUP
ALD	ALUMINUM DOOR	DFR	DOOR FRAME	HD	HEAVY DUTY	OFF	OFFICE	STL JST	STEEL JOIST
ALM	ALARM	DH	DOUBLE HUNG	HDJT	HEAD JOINT	OFOI	OWNER FURNISHED OWNER INSTALLED	STL PL	STEEL PLATE
ALT	ALTERNATE	DIA	DIAMETER	HDBD	HARDBOARD	OH	OVERHEAD	STL	STEEL
ALUM	ALUMINUM	DIM	DIMENSION	HDR	HEADER	OHD	OVERHEAD DOOR	STN	STONE
AMB	AMBIENT	DIST	DISTANCE	HDWD	HARDWOOD	OPER	OPERABLE	STOR	STORAGE
AMPL	AMPLIFIER	DIV	DIVIDER	HGT	HEIGHT	OPNG	OPENING	STRUCT	STRUCTURAL
AMT	AMOUNT	DIW	DEIONIZED WATER	HLB	HORIZONTAL LOUVER BLINDS	OPP	OPPOSITE	STRUCT STL	STRUCTURAL STEEL
ANN	ANNUNCIATOR	DJ	DOUBLE JOIST	HM	HOLLOW METAL	OPT	OPTIONAL	SUPPL	SUPPLEMENT
ANOD	ANODIZED	DL	DRAPERY LINER	HMD	HOLLOW METAL DOOR	ORIG	ORIGINAL	SURF	SURFACE
ANT	ANTENNA	DMPF	DAMPPROOFING	HMF	HOLLOW METAL FRAME	OVHD	OVERHEAD	SUSP	SUSPENDED
AP	ACCESS PANEL	DN	DOWN	HNDRL	HAND RAIL	OXY	OXYGEN	SUSP CLG	SUSPENDED CEILING
APPX	APPENDIX	DO	DITTO	HO	HOLD-OPEN	OZ	OUNCE	SVB	SHEET VINYL BASE
ARCH	ARCHITECT(URAL)	DR	DOOR	HORIZ	HORIZONTAL	PC	PRECAST	SVF	SHEET VINYL FLOOR
ASB	ASBESTOS	DR CLSR	DOOR CLOSURE	HR	HOUR	PAR	PARALLEL	SYM	SYMBOL
ASC	ABOVE SUSPENDED CEILING	DS	DOWNSPOUT	HS	HIGH STRENGTH	PARG	PARGING	SYMM	SYMMETRICAL
ASPH	ASPHALT	DST	DOOR STOP	HSB	HIGH STRENGTH BOLT	PB	PANIC BAR	SYST	SYSTEM
ASYM	ASYMMETRICAL	DT	DRAIN TILE	HTG	HEATING	PBD	PARTICLE BOARD	T&B	TOP & BOTTOM
AV	AUDIO VISUAL	DUPL	DUPLICATE	HVAC	HEATING, VENTILATION, AIR CONDITIONING	PC	PORTLAND CEMENT	T&G	TONGUE & GROOVE
AVE	AVENUE	DVTL	DOVETAIL	HW	HOT WATER	PCPLAS	PORTLAND CEMENT PLASTER	T	TABLE
AWC	ACOUSTICAL WALL COVERING	DW	DISHWASHER	HYD	HYDRANT	PED	PEDESTAL	TB	TACKBOARD
AWP	ACOUSTICAL WALL PANEL	DWG	DRAWING	ID	INSIDE DIAMETER	PERF	PERFORATED	TB-xx	TEST BORING-xx (E.G. TB-1)
B&B	BALLED AND BURLAPPED	DWL	DOWEL	IF	INSIDE FACE	PERIM	PERIMETER	TC	TOP OF CURB
BAF	BAFFLE	DWR	DRAWER	INCAND	INCANDESCENT	PERM	PERMANENT	TD	TRENCH DRAIN
BAL	BALANCE	DWTR	DUMBWAITER	INL	INLET	PERP	PERPENDICULAR	TE	TRANSITION EDGE
BB	BULLETIN BOARD	E	EAST	INSTL	INSTALLATION	PF	PANEL FABRIC	TECH	TECHNICAL
BC	BOTTOM OF CURB	EA	EACH	INSUL	INSULATION	PFP	PRE-FINISHED PANELS	TEMP	TEMPORARY
BD	BOARD	EF	EACH FACE	INTR	INTERIOR	PGBD	PEGBOARD	TER	TERRAZZO
BEV	BEVEL	EJ	EXPANSION JOINT	INV	INVERT	PH	PHASE	THK	THICK
BF	BOTH FACES	EL	ELEVATION	INV EL	INVERT ELEVATION	PL	PLASTIC LAMINATE	THRES	THRESHOLD
BFF	BELOW FINISH FLOOR	ELEC	ELECTRICAL	JAN	JANITOR	PLAM	PLASTIC LAMINATE	THRU	THROUGH
BFP	BACKFLOW PREVENTER	ELEV	ELEVATOR	JC	JANITOR'S CLOSET	PLAS	PLASTER	TKBD	TACKBOARD
BITUM	BITUMINOUS	EMER	EMERGENCY	JST	JOIST	PLAT	PLATFORM	TLT	TOILET
BJT	BED JOINT	EMER SHR	EMERGENCY SHOWER	JT	JOINT	PLBG	PLUMBING	TMPD	TEMPERED
BL	BASE LINE	ENAM	ENAMEL	KB	KNEE BRACE	PLYWD	PLYWOOD	TMPD GL	TEMPERED GLASS
BLDG	BUILDING	ENCL	ENCLOSURE	KO	KNOCKOUT	POL	POLISHED	TNL	TUNNEL
BLK	BLOCK	ENGR	ENGINEER	KOP	KNOCKOUT PANEL	POLY	POLYSTYRENE	TO	TOP OF
BLKG	BLOCKING	ENTR	ENTRANCE	KPL	KICK PLATE	POLYISO	POLYISOCYANURATE	TOF	TOP OF FLANGE
BLKHD	BULKHEAD	EO	ELECTRICAL OUTLET	KWY	KEYWAY	POS	POSITIVE	TOFF	TOP OF FINISH FLOOR
BLST	BALLAST	EP	ELECTRICAL PANEL	L	LEFT	PR	PAIR	TOJ	TOP OF JOIST
BM	BEAM	EPS	EXPANDED POLYSTYRENE	LAB	LABORATORY	PREFAB	PREFABRICATED	TOL	TOLERANCE
BO	BOTTOM OF	EPX	EPOXY FLOOR	LAT	LAY-IN ACOUSTICAL TILE	PRELIM	PRELIMINARY	TOS	TOP OF STEEL
BOC	BACK OF CURB	EQL SP	EQUALLY SPACED	LAV	LAVATORY	PRKG	PARKING	TOT	TOTAL
BOW	BOTTOM OF WALL	EQ	EQUAL	LB	POUND	PROJ	PROJECT	TOW	TOP OF WALL
BP	BASE PLATE	EQUIP	EQUIPMENT	LBR	LUMBER	PS	PROJECTION SCREEN	TRNBKL	TURNBUCKLE
BRCG	BRACING	EQUIV	EQUIVALENT	LCMU	LIGHTWEIGHT CONCRETE MASONRY UNIT	PT	PAINT	TS	TUBE STEEL
BRDG JST	BRIDGING JOIST	ERECT	ERECTION	LD BRG	LOAD BEARING	PT	PORCELAIN TILE	TV	TELEVISION
BRG	BEARING	ESCAL	ESCALATOR	LDG	LANDING	PTN	PARTITION	TYP	TYPICAL
BRG PL	BEARING PLATE	ESMT	EASEMENT	LF	LINEAR FOOT	PVC	POLYVINYL CHLORIDE	UF	UPHOLSTERY FABRIC
BRK	BRICK	EST	ESTIMATE	LG	LENGTH	PVG	PAVING	UFD	UNDER FLOOR DUCT
BRKT	BRACKET	EW	EACH WAY	LH	LEFT HAND	PVMT	PAVEMENT	UG	UNDERGROUND
BRS	BRASS	EXC	EXCAVATE	LHR	LEFT HAND REVERSE	PWR	POWER	UL	UNDERWRITERS LABORATORY
BRZ	BRONZE	EXG	EXISTING	LIN	LINOLEUM	QT	QUARRY TILE	ULT	ULTIMATE
BS	BOTH SIDES	EXH HD	EXHAUST HOOD	LIQ	LIQUID	QTY	QUANTITY	UNEX	UNEXCAVATED
BSMT	BASEMENT	EXH FN	EXHAUST FAN	LKR	LOCKER	QUAL	QUALITY	UNFIN	UNFINISHED
BTM	BOTTOM	EXP	EXPANSION	LKR RM	LOCKER ROOM	R	RISER	UNO	UNLESS NOTED OTHERWISE
BUR	BUILT-UP ROOF	EXSP	EXPOSED	LL	LIVE LOAD	RAD	RADIUS	UPS	UNINTERRUPTIBLE POWER SUPPLY
BW	BOTH WAYS	EXST	EXISTING	LNTL	LINTEL	RB	RUBBER BASE	UR	URINAL
BOW	BOTTOM OF WALL	EXST GR	EXISTING GRADE	LOC	LOCATION	RBR	RUBBER	UTIL	UTILITY
C/C	CENTER TO CENTER	EXT	EXTERIOR	LONG	LONGITUDINAL	RC	REINFORCED CONCRETE	V	VOLT
C&G	CURB AND GUTTER	EXTN	EXTENSION	LRG	LARGE	RCP	REINFORCED CONCRETE PIPE	VAC	VACUUM
CAB	CABINET	EIFS	EXTERIOR INSULATION & FINISH SYSTEM	LS	LUMP SUM	RD	ROOF DRAIN	VAV	VARIABLE AIR VOLUME
CARP	CARPET	F BRK	FIRE BRICK	LT	LIGHT	REC	RECESSED	VB	VAPOR BARRIER
CAV	CAVITY	F/F	FACE TO FACE	LT WT	LIGHTWEIGHT	RECD	RECEIVED	VB	VINYL BASE
CB	CATCH BASIN	FBD	FIBERBOARD	LTG	LIGHTING	RECPT	RECEPTACLE	VCT	VINYL COMPOSITION TILE
CCTV	CLOSED CIRCUIT TELEVISION	FC	FIRE COATED	LVL	LEVEL	RECT	RECTANGULAR	VDB	VISUAL DISPLAY BOARD
CEM	CEMENT	FD	FLOOR DRAIN	LVR	LOUVER	REF	REFERENCE	VERT	VERTICAL
CEM PLAS	CEMENT PLASTER	FDN	FOUNDATION	LW PLAS	LIGHTWEIGHT PLASTER	REINF	REINFORCEMENT	VEST	VESTIBULE
CER	CERAMIC	FEC	FIRE EXTINGUISHER CABINET	LWC	LIGHTWEIGHT CONCRETE	REM	REMOVABLE	VIB	VIBRATION
CER TILE	CERAMIC TILE	FF	FACTORY FINISH	M	METER	REQD	REQUIRED	VNR	VENEER
C FLG	COUNTER FLASHING	FFE	FINISH FLOOR ELEVATION	MAINT	MAINTENANCE	RESIL	RESILIENT	VOL	VOLUME
CH BD	CHALKBOARD	FGL	FIBERGLASS	MARB	MARBLE	RFM	RECESSED FLOOR MAT	VR	VAPOR RETARDER
CG	CORNER GUARD	FIN GR	FINISH GRADE	MAS	MASONRY	RFG	ROOFING	VT	VINYL TILE
CHAN	CHANNEL	FIN FL	FINISH FLOOR	MATL	MATERIAL	RH	RIGHT HAND	VWC	VINYL WALL COVERING
CHFR	CHAMFER	FIN	FINISH	MAX	MAXIMUM	RHR	RIGHT HAND REVERSE	W	WITH
CHK	CHECK	FL	FLOWLINE	MB	MARKERBOARD	RND	ROUND	WW	WALL TO WALL
CI	CAST IRON	FLDG	FOLDING	MBR	MEMBER	RO	ROUGH OPENING	WO	WITHOUT
CIP	CAST IN PLACE	FLG	FLANGE	MC	METAL CLAD	RST	RUBBER STAIR TREAD	W	WEST
CIR	CIRCLE	FLR	FLOOR	MDF	MEDIUM DENSITY FIBERBOARD	RT	RUBBER TILE	WC	WATER CLOSET
CJ	CONTROL JOINT	FLR SK	FLOOR SINK	MDO	MEDIUM DENSITY OVERLOAD	RV	ROOF VENT	WC	WALL COVERING
CL	CENTER LINE	FLR PL	FLOOR PLATE	ME	MATCH EXISTING	RVS	REVERSE	WCPT	WALL CARPET
CLG	CEILING	FLR FIN	FLOOR FINISH	ME	MISCELLANEOUS EQUIPMENT	S	SOUTH	WD	WOOD
CLG DIFF	CEILING DIFFUSER	FLT GL	FLOAT GLASS	MECH	MECHANICAL	S	SEATING	WDD	WOOD DOOR
CLG HT	CEILING HEIGHT	FLOUR	FLUORESCENT	MED	MEDIUM	SALV	SALVAGE	WDW	WINDOW
CLL	CONTRACT LIMIT LINE	FOC	FACE OF CONCRETE	MEMB	MEMBRANE	SB	SPLASH BLOCK	WF	WOOD FLOORING
CLOS	CLOSET	FOM	FACE OF MASONRY	MEZZ	MEZZANINE	SC	SOLID CORE	WF	WIDE FLANGE
CLR	CLEAR	FOS	FACE OF STUD	MFG	MANUFACTURING	SCH	SCHEDULE	WGL	WIRE GLASS
CLSR	CLOSURE	FPL	FIREPLACE	MFR	MANUFACTURER	SCMU	SOLID CONCRETE MASONRY UNIT	WH	WALL HUNG
CMPST	COMPOSITE	FPRF	FIREPROOFING	MH	MANHOLE	SCRN	SCREEN	WHSE	WAREHOUSE
CMU	CONCRETE MASONRY UNIT	FRM	FRAME	MIL	MILLIMETER	SD	STORM DRAIN	WL	WIND LOAD
CNR	CORNER	FRNT	FRONT	MIN	MINIMUM	SECT	SECTION	WLD	WELDED
CNTR	COUNTER	FS	FULL SIZE	MIR	MIRROR	SF	SYSTEMS FURNITURE	WR	WATER RESISTANT
CO	CLEANOUT	FSP	FIRE STANDPIPE	MISC	MISCELLANEOUS	SGL	SINGLE	WS	WEATHERSTRIPPING
COL	COLUMN	FSTNR	FASTENER	MK	MARK	SHR	SHOWER	WSCT	WAINSCOT
COMM	COMMERCIAL	FTG	FOOTING	MKRBD	MARKERBOARD	SHTHG	SHEATHING	WT	WEIGHT
COMPL	COMPLETE	FURR	FURRING	ML	MATCH LINE	SHVL	SHELVES	WTR	WATER
CONC	CONCRETE	FUT	FUTURE	MLC	METAL LABORATORY CASEWORK	SIM	SIMILAR	WTRPRF	WATERPROOFING
CONC FL	CONCRETE FLOOR	FXTR	FIXTURE	MLDG	MOLDING	SJ	SLIP JOINT	WWM	WELDED WIRE MESH
CONF	CONFERENCE	GA	GYPSUM ASSOCIATION	MLWK	MILLWORK	SK	SINK	X SECT	CROSS SECTION


PROJECT DESCRIPTION

ARCHITECTURALLY, THIS PROJECT ENTAILS THE REPLACEMENT OF EXISTING CASEWORK AND EXTERIOR WINDOWS, STAINING THE EXTERIOR EXISTING BRICK AND PAINTING EXTERIOR COMPONENTS, INSTALLATION OF NEW FASCIA AND PARAPET CAPS, AND PAINTING OF INTERIOR CLASSROOM

THE PLUMBING SCOPE ENTAILS THE REPLACEMENT OF EXISTING CLASSROOM SINKS, FAUCETS AND BUBBLERS.

THE ELECTRICAL SCOPE ENTAILS THE REMOVAL OF EXISTING PLUGMOLDWIREMOLD AND REPLACEMENT WITH SURFACE MOUNTED CONDUIT AND JUNCTION BOXES, THE INSTALLATION OF POWER AND DATA NEW CLASSROOM MONITORS, REMOVAL AND REINSTALLATION OF SECURITY MOTION SENSORS WHERE THEY ARE MOUNTED ON TEACHERS CABINETS, VOICE LIFT POWER AND INTERCOM SYSTEM UPGRADES

VICINITY MAP

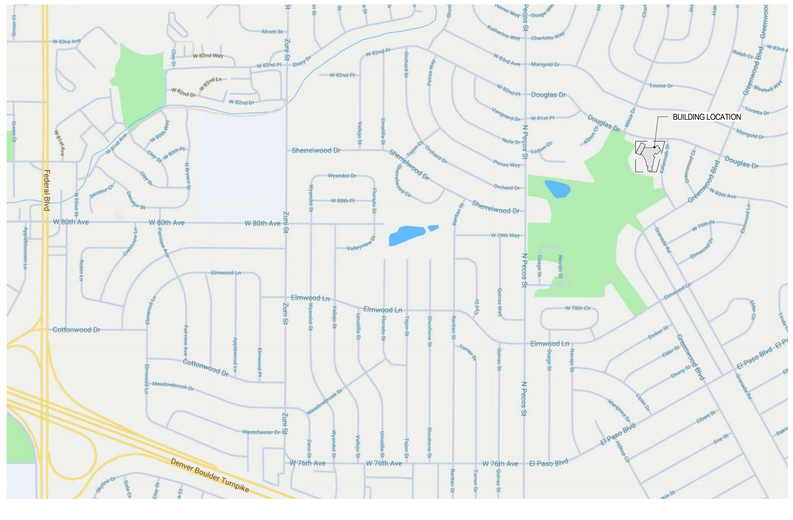

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/17/2025 11:10:43 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
1	ACFR Comment Response #1	TBD

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

Standard Symbols, Abbreviations & General Notes

G0.0

APPLICABLE BUILDING CODES

All new work shall comply with the requirements of the codes and standards adopted by the State of Colorado.
The primary Applicable Codes and Standards are:

The 2021 International Code Series:
- The 2021 International Existing Building Code (IEBC)
- The 2021 International Building Code (IBC)
- The 2021 International Fire Code (IFC)
- The 2021 International Mechanical Code (IMC)
- The 2021 International Energy Conservation Code (IECC)

The 2024 Colorado Plumbing Code (CPC)
The 2024 Colorado Fuel Gas Code (CFGC)
The 2023 National Electrical Code
The 2017 ICC A117.1, Accessible and Usable Buildings and Facilities
The 2023 Colorado Model Electric Ready and Solar Ready Code

CODE REVIEW

This project entails an office remodel at Sherrelwood Elementary School in Westminster, CO.
This building is an existing E Occupancy and will remain an E Occupancy.

In general, the Architectural scope entails the replacement of existing casework and exterior windows, staining the exterior brick and painting exterior components, the replacement of an existing metal panel partition wall with a new framed wall and door, a new accordion door, and the replacement of markerboards. The plumbing scope entails the replacement of classroom sinks, faucets and bubblers. The electrical scope entails the removal of existing plugmold/wiremold and replacement with surface mounted conduit and junction boxes, the installation of new classroom monitors, removal and reinstallation of security motion sensors where they are mounted on teachers cabinets, voice lift power and intercom system upgrades.

2021 IEBC
The project will follow the Prescriptive compliance method, per section 301.1.1 of the 2021 IEBC. The project is considered an Alteration per section 403 of the 2021 IEBC. As such, any alterations shall comply with the requirements for the 2021 International Building Code, and the existing building shall be no less conforming to the provisions of the IBC than the existing building was prior to the alteration.
Per section 410.7 the alteration affects an area containing a primary function, and the route to the primary function area shall be accessible. The accessible route to the primary function area shall include toilet facilities and drinking fountains serving the area of primary function. See the Life Safety Plan for the accessible route.

Chapter 3 - Provisions for All Compliance Methods
301 - Administration
- 301.2 Repairs - Repairs shall comply with the requirements of Chapter 4.
- 301.3 Alteration, addition, or change of occupancy - The alteration of this existing building shall comply with section 301.3.1.
  - 301.3.1 - Prescriptive compliance method - Alterations complying with Chapter 5 of this code in buildings complying with the International Fire Code shall be considered in compliance with the provisions of this code

302 - General Provisions
- 302.3 Existing Materials - Materials already in use in a building in compliance with requirements or approvals in effect at the time of their erection or installation shall be permitted to remain in use unless determined by the code official to be unsafe.
- 302.4 New and replacement materials - Except as otherwise required or permitted by this code, materials permitted by the applicable code shall be used. Like materials shall be permitted for repairs or alterations, provided that unsafe conditions are not created. Hazardous materials shall not be used where the code for new construction would not permit their use in buildings of similar occupancy, purpose, and location.

306 - Accessibility For Existing Buildings
- 306.7 Alterations - A facility that is altered shall comply with the applicable provisions in Chapter 11 of the International Building Code, ICC A117.1 and the provisions of Section 306..7.1, unless technically infeasible. Where compliance with this sectio nis technically infeasible, the alteration shall provide access to the maximum extent technically feasible.
  - 306.7.1 Alterations affecting an area of primary function - Where an alteration affects the accessibility to, or contains an area of primary function, the route to the primary function area shall be accessible. The accessible route to the primary function area shall include toilet facilities and drinking fountains serving the area of primary function.
    - Exception 2. This provision does not apply to alterations limited solely to windows, hardware, operating controls, electrical outlets and signs.
  - 306.7.2 - Accessible means of egress. Accessible means of egress required by Chapter 10 of the International Building Code are not required to be added in existing facilities.

Chapter 4 - Repairs
401 - General
- 401.2 Compliance - The work shall not make the building less complying than it was before the repair was undertaken.

403 - Fire Protection
- 403.1 General - Repairs shall be done in a manner that maintains the level of fire protection provided.

404 - Means of Egress
- 404.1 General - Repairs shall be done in a manner that maintains the level of protection provided for the means of egress.

Chapter 5 - Prescriptive Compliance Method
503 - Alterations
- 503.1 General - Alterations to any building or structure shall comply with the requirements of the International Building Code for new construction. Alterations shall be such that the existing building or structure is not less complying with the provisions of the International Building Code than the existing building or structure was prior to the alteration.
- 503.17 Locking arrangements in educational occupancies - In Group E occupancies...egress doors with locking arrangements designed to keep intruders from entering the room shall comply with Section 1010.2.8 of the International Building Code.

505 - Windows and Emergency Escape Openings
- 505.1 Replacement Windows - The installation or replacement of windows shall be as required for new installations.

2021 IBC
Chapter 3 - Use Occupancy Classification
305 - Educational: Group E - Educational Group E occupancy includes, among others, the use of a building or structure, or a portion thereof, by six or more persons at any one time for education purposes through the 12th grade.

Chapter 5 - General Building Heights and Areas
Existing building height and area are to remain as-is and are not being modified by this project.

Chapter 6 - Types of Construction
602 - Construction Classification
- 602.3 - Type IIIB - The existing building is assumed to be type IIIB, as the exterior walls are of noncombustible materials, and the interior building elements are of any material permitted by the IBC.

Chapter 7 - Fire and Smoke Protection Features
707 - Fire Barriers
- 707.3.10 Fire Areas - Existing Fire Areas will not be altered by the scope of this project.

722 - Calculated Fire Resistance - Existing masonry wall construction at existing corridor wall locations is of sufficient thickness to meet a 1-hour fire resistance rating, per 2021 IBC table 721.1(2)

Chapter 8 - Interior Finishes
803 - Wall and Ceiling Finishes
- 803.1 - Interior wall and ceiling finish materials shall be classified for fire performance and smoke development in accordance with section 803.1.1
- 803.13 - Interior finish requirements based on occupancy - Per Table 803.13
  - E Occupancy (non-sprinklered) - Exit enclosures and exit passageways - Class A;
  - Corridors - Class B;
  - Rooms and Enclosed Spaces - Class C

Chapter 9 - Fire Protection Systems
903 - Automatic Fire Sprinklers
- 903.2 - Where Required - Automatic sprinklers will not be required as the building is an existing structure. [The existing main level is un-sprinklered and the existing basement is sprinklered]

906 - Portable Fire Extinguishers
- 906.1 Where required - Portable fire extinguishers shall be installed in E Occupancies
- 906.3 Size and Distribution - Educational occupancies are considered a light hazard occupancy. Per table 906.3, the minimum rating for a single extinguisher shall be 2-A, the maximum floor area per unit A shall be 3,000 square feet, the maximum area per extinguisher shall be 11,250 square feet, and the maximum travel distance shall be 75 feet.

907 - Fire Alarm and Detection Systems - The building is equipped throughout with an existing Fire Alarm system.
REFERENCE: 2021 IFC Chapter 11 Construction Requirements for Existing Buildings
1103.7 Fire Alarm Systems - An approved fire alarm system shall be installed in existing buildings and structures in accordance with Sections 1103.7.1 through 1103.7.6 and provide occupant notification in accordance with Section 907.5 unless other requirements are provided by other sections of this code.
Exception: Occupancies with an existing, previously approved fire alarm system.

Chapter 10 - Means of Egress
1001 - Administration
- 1001.2 Minimum Requirements - It shall be unlawful to alter a building or structure in a manner that will reduce the number of exits or the capacity of the means of egress to less that required by this code.

1003 - General Means of Egress
- 1003.2 Ceiling height - The means of egress shall have a ceiling height of not less than 7'-6"

1004 - Occupant Load
- 1004.1 Design Occupant Load - In determining means of egress requirements, the number of occupants for whom means of egress facilities shall be provided shall be determined in accordance with this section. Refer to the Occupant Load table on this sheet

1005 - Means of Egress Sizing
- 1005.3.2 Other egress components - The capacity, in inches, or means of egress components other than stairways shall be calculated by multiplying the occupant load served by each component by a means of egress capacity factor of .2 inch per occupant.
- 1005.5 Distribution of egress capacity - Where more than one exit, or access to more than one exit, is required, the means of egress shall be configured such that the loss of any one exit, or access to one exit, shall not reduce the available capacity to less than 50 percent of the required capacity.

1006 - Number of Exits and Exit Access Doorways
- 1006.2 Egress from Spaces - Rooms, areas, or spaces, shall be provided with the number of exits or access to exits in accordance with this section.
  - 1006.2.1 Egress based on occupant load and common path of egress travel (CPET) distance - Two exits or exit access doorways from any space where the design occupant load or the common path of egress travel distance exceeds the values listed in table 1006.2.1
    - E Occupancy - Greater than 49 occupants, or more than 75' CPET distance.

1007 - Exit and Exit Access Doorway Configuration
- 1007.1.1 Two exits or exit access doorways - Where two exits or exit access doorways are required from any portion of the exit access, the exit doors or exit access doorways shall be placed a distance apart equal to no less than one-half of the length of the maximum overall diagonal dimension of the building or area to be served measured in a straight line between exit doors or exit access doorways.

1009 - Accessible Means of Egress
- 1009.1 Accessible means of egress required - *Exception 1: Accessible means of egress are not required to be provided in existing buildings.*

1010 - Doors, Gates and Turnstiles
- 1010.1.1 Size of Doors - The minimum width of each door opening shall be sufficient for the occupant load thereof and shall provide a clear width of 32 inches.
- 1010.1.2 Door Swing - Doors shall swing in the direction of egress travel where serving a room or area containing an occupant load of 50 or more persons.

1013 - Exit Signs
- 1013.1 Where Required - Exits and exit access doors shall be marked by an approved exit sign readily visible from any direction of egress travel.

1017 - Exit Access Travel Distance
- 1017.2 Limitations - Exit Access Travel Distance shall not exceed the values given in table 1017.2
  - Table 1017.2 - E Occupancy (non-sprinklered) - 200'

1020 - Corridors
- Corridors shall be fire-resistance rated in accordance with table 1020.1. The corridor walls required to be fire-resistance rated shall comply with section 708 for fire partitions.
  - Table 1020.1 - E occupancy, greater than 30 occupants served by corridor, non-sprinklered -1 hour.

Chapter 11 - Accessibility
1103 - Scoping Requirements
- 1103.1 Where required - Sites, buildings, structures, facilities, elements and spaces, temporary or permanent shall be accessible to individuals with disabilities.

1104 - Accessible Route
- 1104.1 Site arrival points. At least one accessible route within the site shall be provided from public transportation stops, accessible parking, accessible passenger loading zones, and public streets or sidewalks to the accessible building entrance served.
- 1104.2 Within a site. At least one accessible route shall connect accessible buildings, accessible facilities, accessible elements and accessible spaces that are on the same site.
- 1104.3 Connected spaces. When a building or portion of a building is required to be accessible, at least one accessible route shall be provided to each portion of the building, to accessible building entrances connection accessible pedestrian walkways and to the public way

Chapter 13 - Energy Efficiency
The only exterior work that is occurring which affects the envelope is the like for like replacement of new doors in existing frames. The envelope will be made no less conforming than it was prior to the project.

Chapter 29 - Plumbing Systems
The existing plumbing fixture count has not been altered as a result of this project, and the occupant load has not been increased from existing conditions, as such, the fixture count remains the same.

Occupant Load Table


Number	Name	Occupancy Classification	Area	Area Function	SF Per Occupant	Occupant Load	Required Exiting Width
48	Boiler Room	(none)	672 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	3	0.5
49	Storage Room	(IBC) E	760 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	3	0.6
2			1432 SF			6	1.2
Classroom Wing							
1	<varies>	(IBC) E	422 SF	IBC_Educational: Classroom area	20 SF	22	4.3
1B	Office	(IBC) B	219 SF	IBC_Business areas	100 SF	3	0.5
2	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
3	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
4	Classroom	(IBC) E	610 SF	IBC_Educational: Classroom area	20 SF	31	6.2
5	Classroom	(IBC) E	617 SF	IBC_Educational: Classroom area	20 SF	31	6.3
6	Classroom	(IBC) E	607 SF	IBC_Educational: Classroom area	20 SF	31	6.2
7	Classroom	(IBC) E	609 SF	IBC_Educational: Classroom area	20 SF	31	6.2
8	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
9	Classroom	(IBC) E	606 SF	IBC_Educational: Classroom area	20 SF	31	6.2
10	Classroom	(IBC) E	604 SF	IBC_Educational: Classroom area	20 SF	31	6.1
11	Classroom	(IBC) E	607 SF	IBC_Educational: Classroom area	20 SF	31	6.2
12	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
13	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
14	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
15	Classroom	(IBC) E	609 SF	IBC_Educational: Classroom area	20 SF	31	6.2
16	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
17	Classroom	(IBC) E	608 SF	IBC_Educational: Classroom area	20 SF	31	6.2
18	Storage	(IBC) S-1	129 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
19	Storage	(IBC) S-1	132 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
23	Restroom	(none)	124 SF	(none)		0	0
24	Restroom	(none)	149 SF	(none)		0	0
25	Restroom	(none)	24 SF	(none)		0	0
26	Restroom	(none)	24 SF	(none)		0	0
27	Library	(IBC) E	1355 SF	IBC_Library: Reading rooms	50 SF	28	5.5
27a	Office	(IBC) B	68 SF	IBC_Business areas	100 SF	1	0.2
27b	Work Room	(IBC) E	75 SF	IBC_Business areas	100 SF	1	0.2
28	Work Room	(IBC) B	333 SF	IBC_Business areas	100 SF	4	0.8
29	Storage	(IBC) S-1	149 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
30	Restroom	(none)	156 SF	(none)		0	0
30a	Storage	(IBC) E	85 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
31	Restroom	(none)	171 SF	(none)		0	0
31a	Storage	(IBC) E	66 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.1
32	Storage	(IBC) B	140 SF	IBC_Kitchens, commercial	200 SF	1	0.2
32a	Storage	(IBC) B	68 SF	IBC_Kitchens, commercial	200 SF	1	0.2
33	Custodial	(none)	59 SF	(none)		0	0
34	Kitchen	(IBC) B	361 SF	IBC_Kitchens, commercial	200 SF	2	0.5
35	Serving Counter	(IBC) E	144 SF	IBC_Kitchens, commercial	200 SF	1	0.2
37	Vestibule	(none)	58 SF	(none)		0	0
38	Vestibule	(none)	59 SF	(none)		0	0
41	Storage	(IBC) S-1	292 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.3
42	Office	(IBC) B	158 SF	IBC_Business areas	100 SF	2	0.4
43	Music Room	(IBC) E	960 SF	IBC_Educational: Classroom area	20 SF	48	9.7
100	Vestibule	(none)	129 SF	(none)		0	0
101a	Corridor	(none)	2421 SF	(none)		0	0
101b	Corridor	(none)	933 SF	(none)		0	0
101c	Corridor	(none)	950 SF	(none)		0	0
101d	Corridor	(none)	772 SF	(none)		0	0
101e	Corridor	(none)	343 SF	(none)		0	0
102	Reception	(IBC) B	403 SF	IBC_Business areas	100 SF	5	0.9
103	Infirmary	(IBC) B	87 SF	IBC_Business areas	100 SF	1	0.3
104	Work Area	(IBC) B	91 SF	IBC_Business areas	100 SF	1	0.3
105	Flex	(IBC) B	186 SF	IBC_Business areas	100 SF	2	0.5
106	Storage	(IBC) S-1	0 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	0	0
107	Secretary	(IBC) B	127 SF	IBC_Business areas	100 SF	2	0.4
109	Work Room	(IBC) B	466 SF	IBC_Business areas	100 SF	5	1
110	MDF	(none)	75 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.1
111	Office	(IBC) B	150 SF	IBC_Business areas	100 SF	2	0.4
112	Lounge	(IBC) B	220 SF	IBC_Business areas	100 SF	3	0.5
A	Classroom	(IBC) E	732 SF	IBC_Educational: Classroom area	20 SF	37	7.4
B	Classroom	(IBC) E	731 SF	IBC_Educational: Classroom area	20 SF	37	7.4
Classroom Wing: 62			24531 SF			711	142.1
Gymnasium							
40	Gymnasium	(IBC) A-3	3192 SF	IBC_Assembly: without fixed seats - Concentrated (chairs only - not fixed)	7 SF	456	91.3
Gymnasium: 1			3192 SF			456	91.3
Grand total: 65			29154 SF			1173	234.5

EGRESS TRAVEL DISTANCES


PATH NAME	DISTANCE
0A	81' - 2"
1A	126' - 4"
1B	88' - 10"
1C	69' - 10"

LIFE SAFETY SYMBOLS

- FEC — FIRE EXTINGUISHER CABINET (EXISTING)
- FE — FIRE EXTINGUISHER (WALL HUNG) (EXISTING)
- 1 HOUR FIRE PARTITION (EXISTING)
- XX — PATH OF EGRESS TRAVEL (FOR CUMULATIVE DISTANCES REFER TO SCHEDULE)
- EXIT DISCHARGE
- P: XX" / R: XX" — WIDTH PROVIDED / WIDTH REQUIRED
- ACCESSIBLE TRAVEL ROUTE
- OUT OF SCOPE

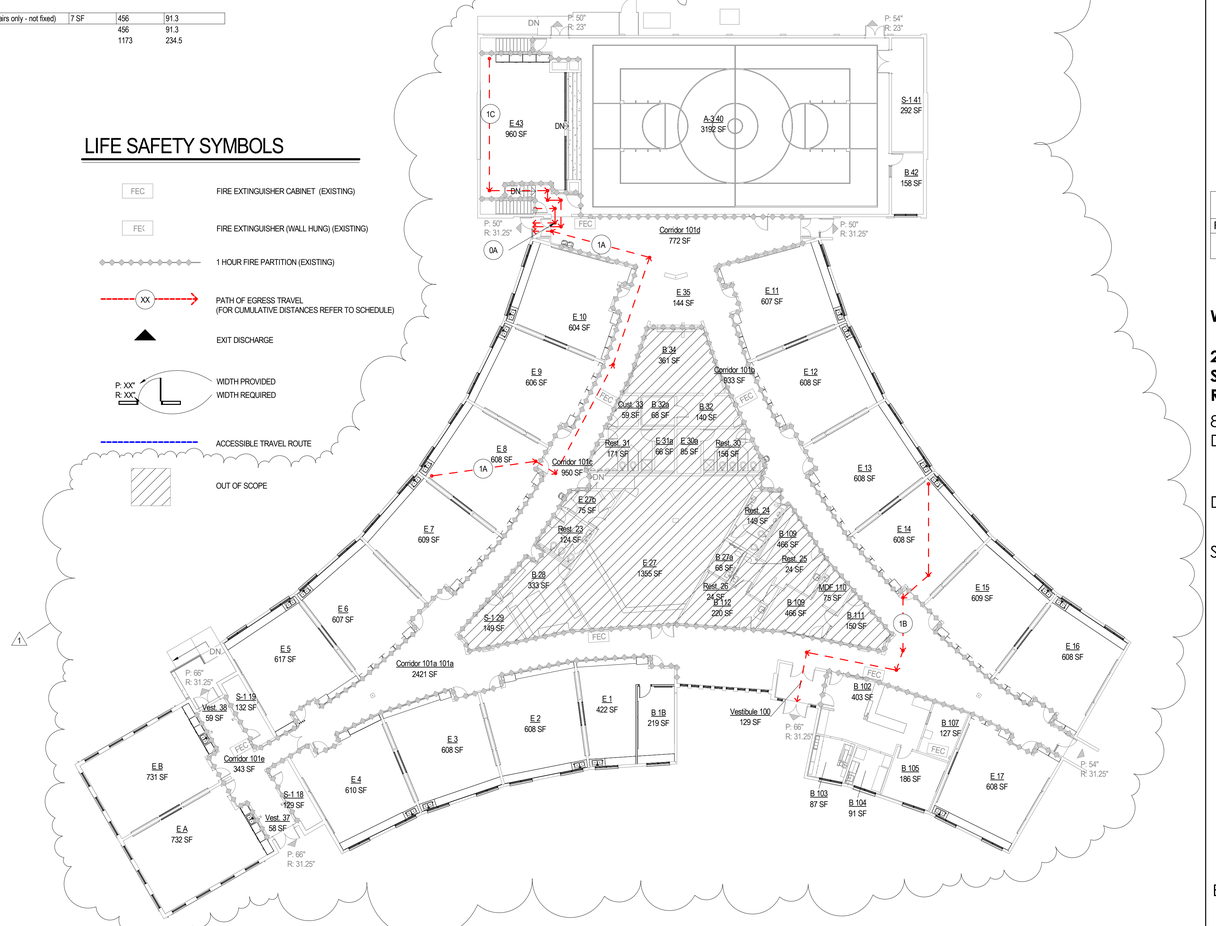

Life Safety Plan
SCALE: 1/16" = 1'-0"



Basement Life Safety Plan
SCALE: 1/16" = 1'-0"

NOTE:
THE GYMNASIUM IS SHOWN SPLIT OUT FROM THE REST OF THE SCHOOL, FOR COMPARISON OF THE OCCUPANT LOAD OF THE AFTER HOURS ASSEMBLY SPACES AND THE EDUCATIONAL SPACES. THE OCCUPANT LOAD FOR THE BUILDING IS BASED ON THE COMBINED TOTAL.

THE BASEMENT IS EQUIPPED WITH AN EXISTING AUTOMATIC SPRINKLER SYSTEM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
1	ACFR Comment Response #1	TBD
Revision Schedule		

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations
8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026


Building Code Data

G0.1

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:44 AM

DEMOLITION KEY NOTES

1. REMOVE EXISTING WINDOW SYSTEM IN ITS ENTIRETY. WHERE PRESENT, EXISTING STEEL COLUMNS TO REMAIN. PATCH AND PREPARE SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING CASEWORK. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE EXISTING SINK IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
4. REMOVE EXISTING SECURITY GATE IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES ARE REQUIRED FOR NEW CONSTRUCTION
5. REMOVE EXISTING INTERIOR SLOPED GYP WALL IN ALL ITS ENTIRETY. EXISTING EXTERIOR BRICK WALL BEHIND IS TO REMAIN. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
6. REMOVE EXISTING ACCORDION DOOR IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES FOR NEW CONSTRUCTION.
7. REMOVE EXISTING MARKERBOARD AND TACKBOARD IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES FOR NEW CONSTRUCTION.
8. REMOVE EXISTING PANEL WALL SYSTEM AND ASSOCIATED DOORS IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES FOR NEW CONSTRUCTION.
9. REMOVE EXISTING BRICK WING WALL IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES FOR NEW CONSTRUCTION

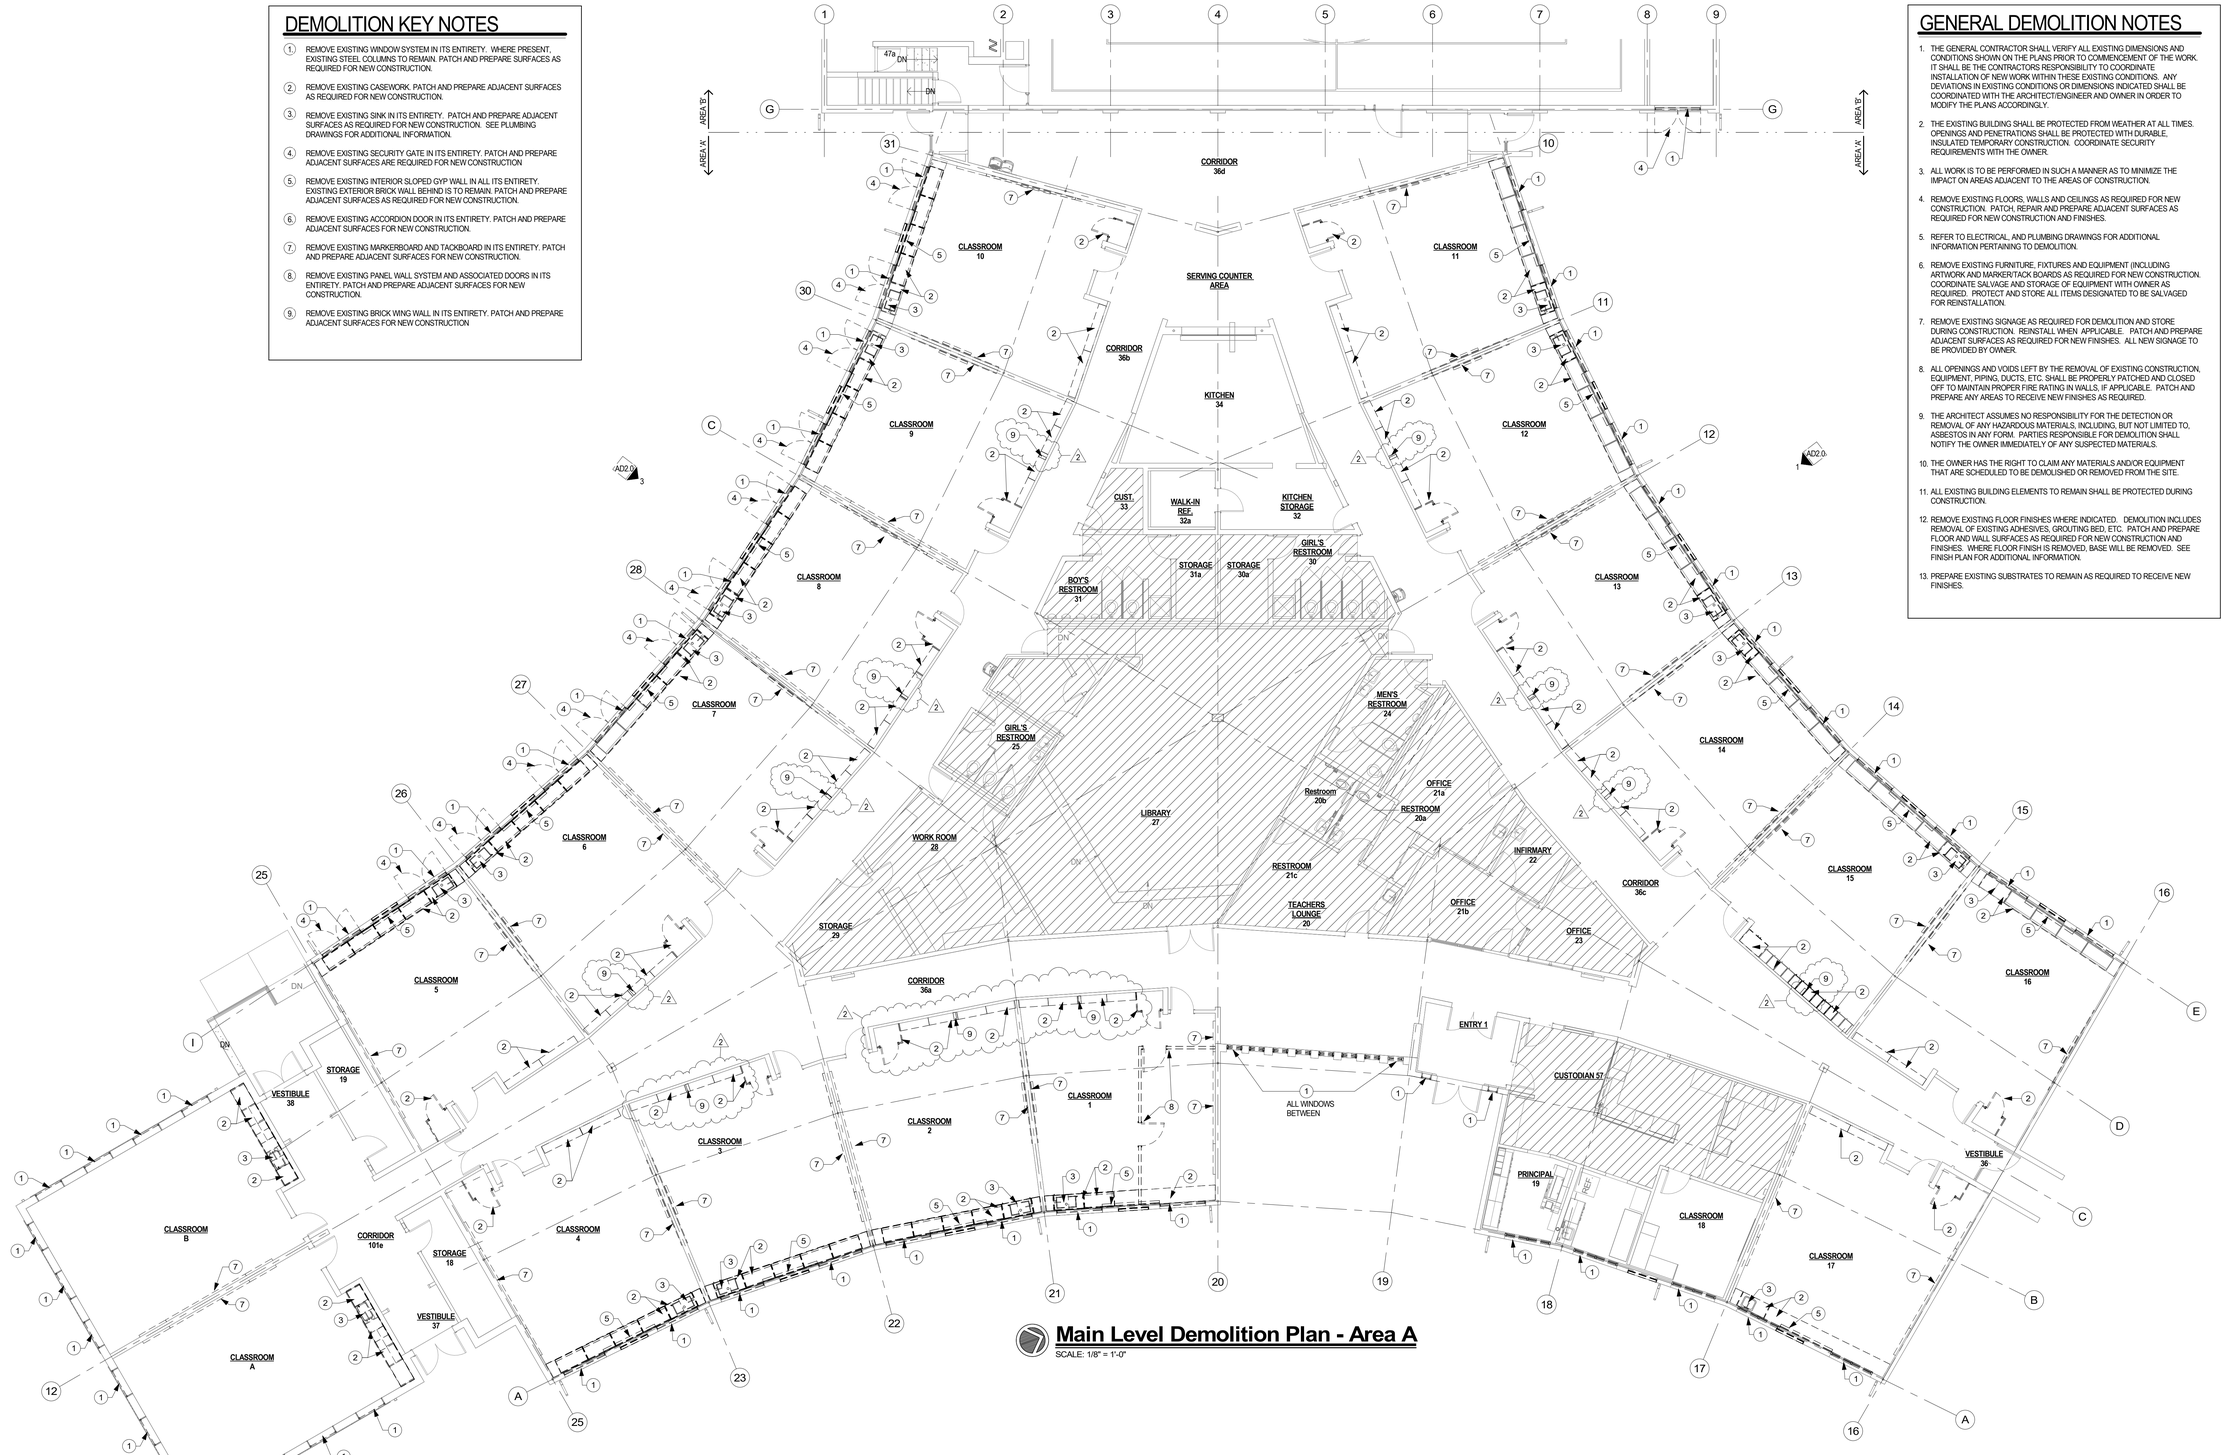


Main Level Demolition Plan - Area A

SCALE: 1/8" = 1'-0"

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

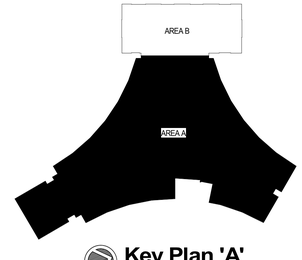

Key Plan 'A'

SCALE: 1" = 60'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood
Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026


Main Level Demolition Plan
Area 'A'

AD1.0

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:46 AM

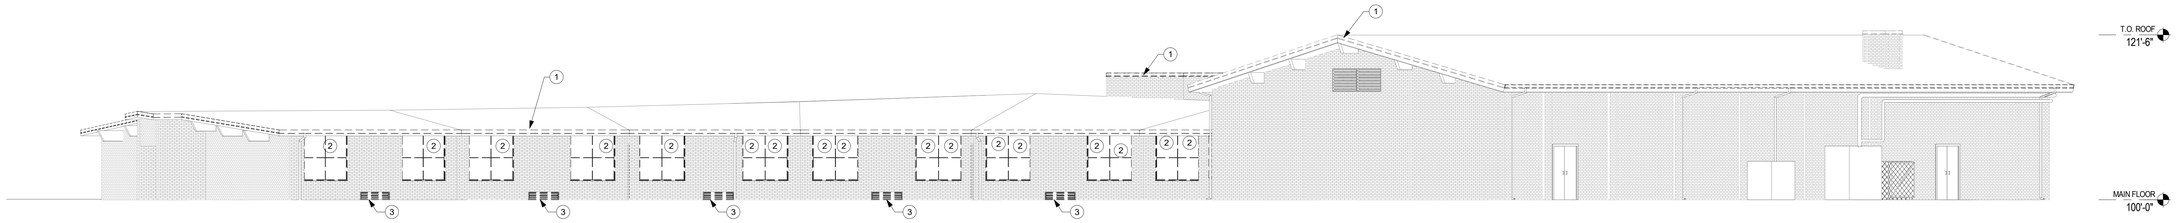

1 Overall North Demo Elevation
SCALE: 1/8" = 1'-0"

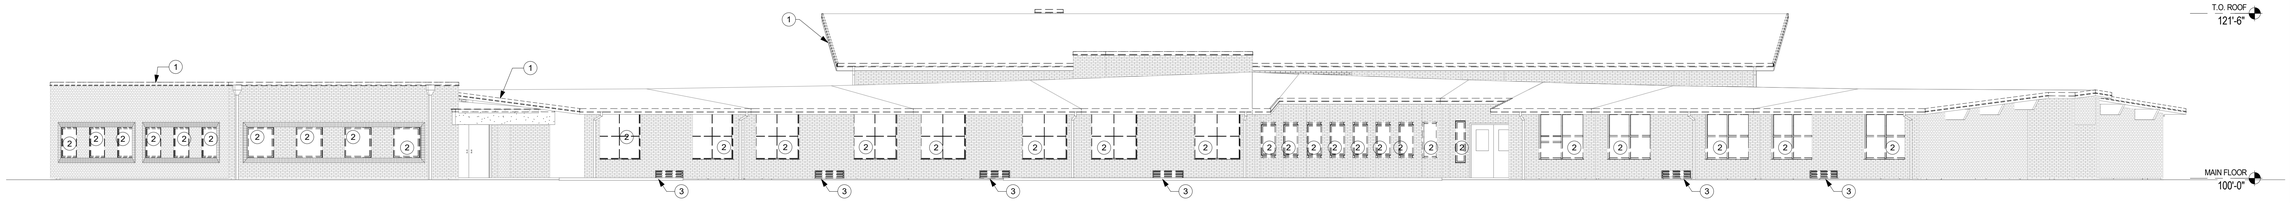

2 Overall East Demo Elevation
SCALE: 1/8" = 1'-0"

3 Overall West Demo Elevation
SCALE: 1/8" = 1'-0"

DEMO ELEVATION KEY NOTES

1. REMOVE EXISTING PARAPET AND FASCIA CAPS IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING WINDOW SYSTEM IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE EXISTING LOUVER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
4. REMOVE EXISTING SECURITY GATE IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES ARE REQUIRED FOR NEW CONSTRUCTION

NOTE: ALTERNATE 01 - BASE BID IS TO INCLUDE THE REPAIR AND PAINTING OF THE EXISTING EXTERIOR SOFFITS THROUGHOUT.
PROVIDE ALTERNATE 01 FOR SOFFIT REPLACEMENT THROUGHOUT IF REPAIR IS NOT FEASIBLE.

GENERAL ELEV. DEMO. NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATION IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO ELECTRICAL AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
7. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.
8. REPAIR DAMAGED AND WEATHERED BRICK AND MORTAR AS REQUIRED TO RECEIVE NEW FINISHES.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026

Demo Exterior Elevation

AD2.0

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:19:48 AM

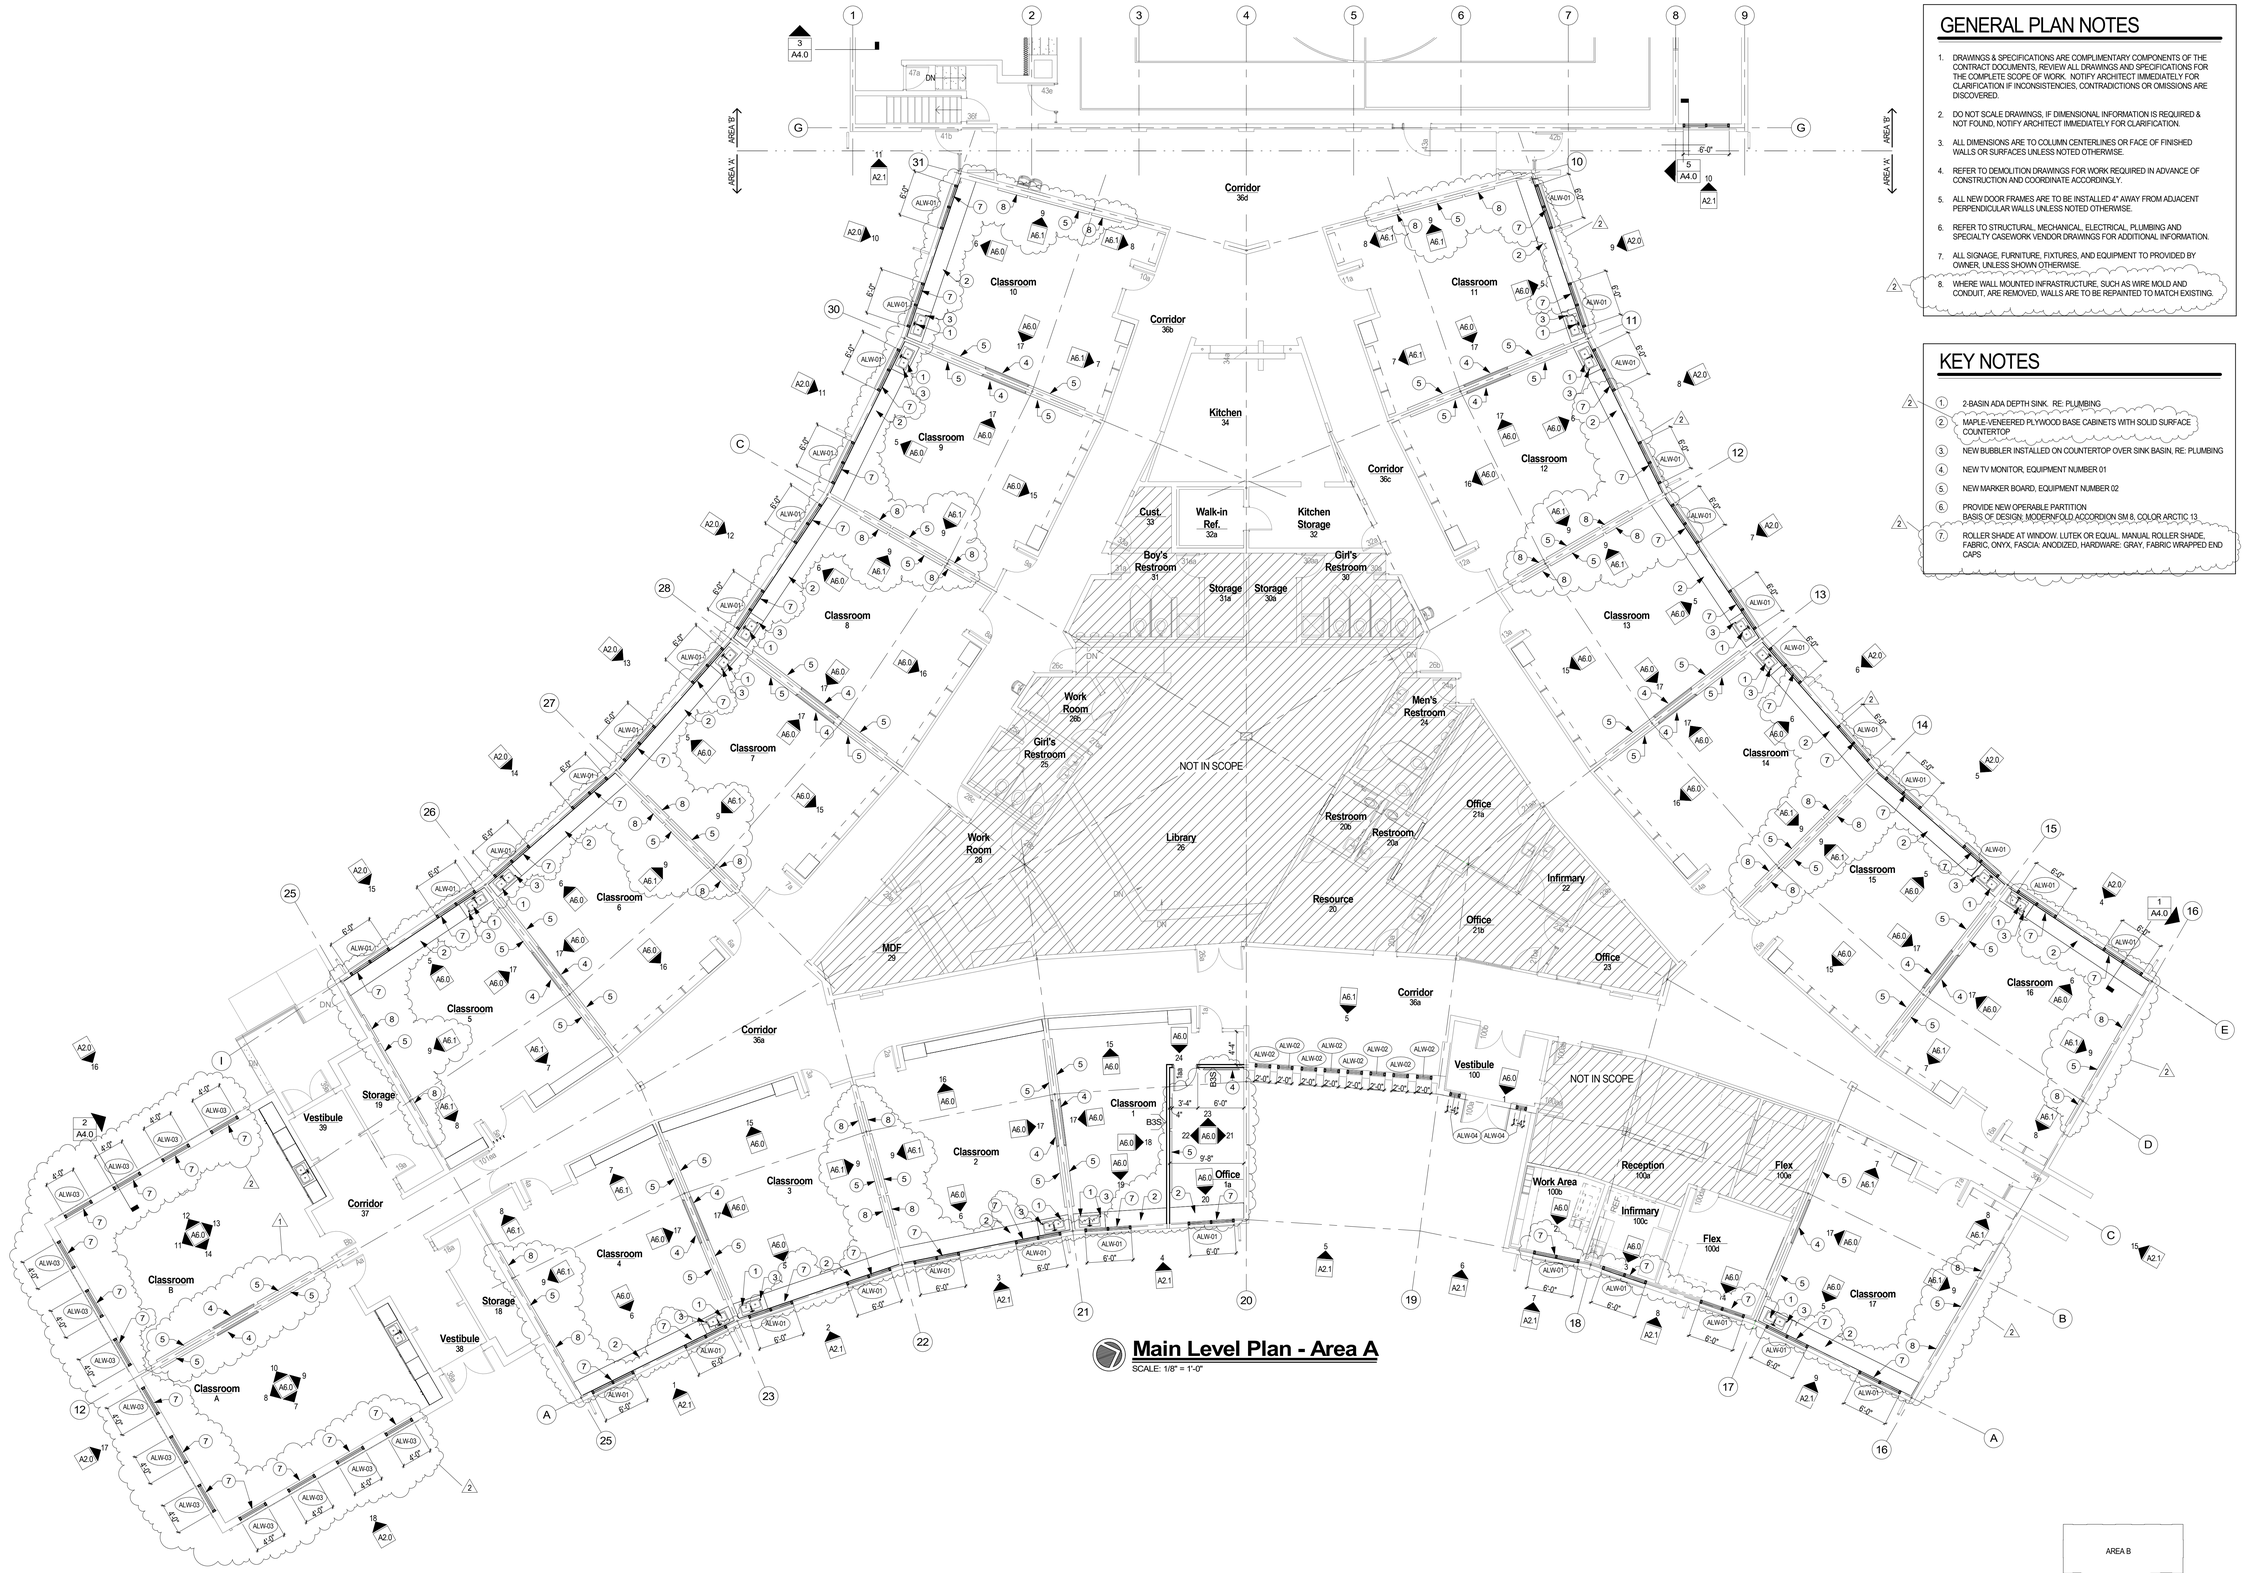

Main Level Plan - Area A

SCALE: 1/8" = 1'-0"

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS. IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL NEW DOOR FRAMES ARE TO BE INSTALLED 4" AWAY FROM ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING AND SPECIALTY CASEWORK VENDOR DRAWINGS FOR ADDITIONAL INFORMATION.
7. ALL SIGNAGE, FURNITURE, FIXTURES, AND EQUIPMENT TO PROVIDED BY OWNER, UNLESS SHOWN OTHERWISE.
8. WHERE WALL MOUNTED INFRASTRUCTURE, SUCH AS WIRE MOLD AND CONDUIT, ARE REMOVED, WALLS ARE TO BE REPAINTED TO MATCH EXISTING.


KEY NOTES

1. 2-BASIN ADA DEPTH SINK. RE: PLUMBING
2. MAPLE-VENEERED PLYWOOD BASE CABINETS WITH SOLID SURFACE COUNTERTOP
3. NEW BUBBLER INSTALLED ON COUNTERTOP OVER SINK BASIN, RE: PLUMBING
4. NEW TV MONITOR, EQUIPMENT NUMBER 01
5. NEW MARKER BOARD, EQUIPMENT NUMBER 02
6. PROVIDE NEW OPERABLE PARTITION BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR ARCTIC 13
7. ROLLER SHADE AT WINDOW. LUTEK OR EQUAL. MANUAL ROLLER SHADE. FABRIC: ONYX, FASCIA: ANODIZED, HARDWARE: GRAY, FABRIC WRAPPED END CAPS

WALL PARTITION TYPES

B3S — 5/8" TYPE 'X' GPDW, 3-5/8" 20 GAUGE METAL STUDS AT 16" O.C. WITH SOUND BATT INSULATION BETWEEN STUDS, 5/8" TYPE 'X' GPDW. FROM FINISHED FLOOR TO STRUCTURE ABOVE.

NOTES:
1) PROVIDE BACKING IN WALLS FOR ALL NEW EQUIPMENT AND SHELVING AS REQUIRED.
2) SOUND CAULK WHERE WALLS WITH THE 'S' SUFFIX MEET THE ROOF DECK AND AT ANY LOCATIONS WITH ALUMINUM MULLION CLOSURES.

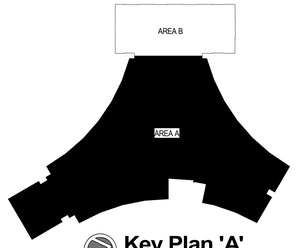

Key Plan 'A'

SCALE: 1" = 60'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
1	ACFR Comment Response #1	TBD

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations
8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026

Main Level Plan Area 'A'


A1.0

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:49 AM

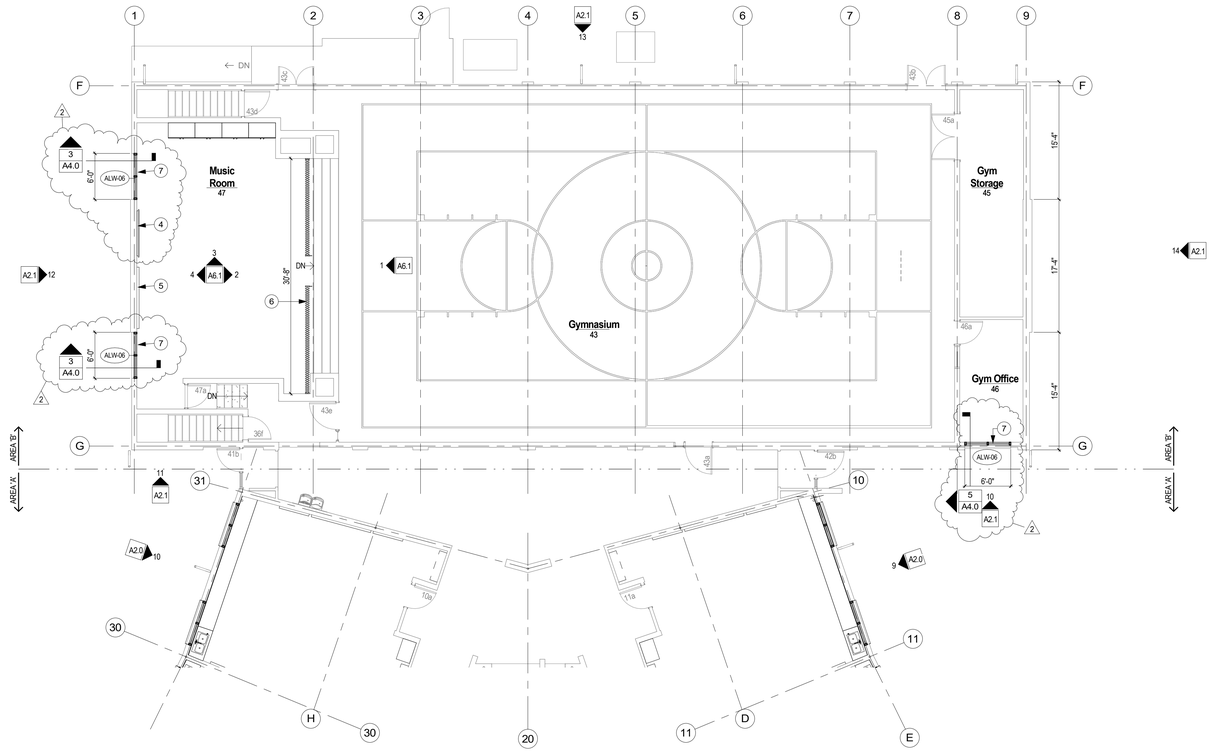


1 Main Level Plan - Area B

SCALE: 1/8" = 1'-0"

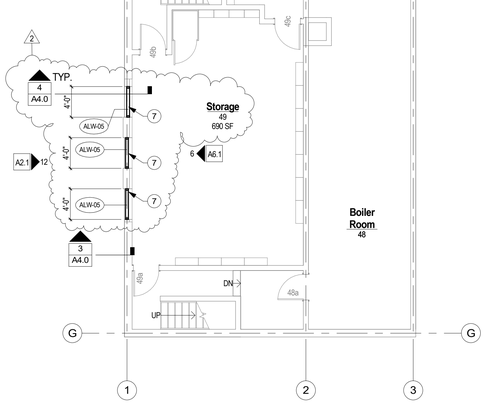

2 Basement Life Safety Plan

SCALE: 1/8" = 1'-0"

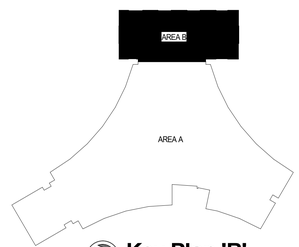

Key Plan 'B'

SCALE: 1" = 60'-0"

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS. IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL NEW DOOR FRAMES ARE TO BE INSTALLED 4" AWAY FROM ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING AND SPECIALTY CASEWORK VENDOR DRAWINGS FOR ADDITIONAL INFORMATION.
7. ALL SIGNAGE, FURNITURE, FIXTURES, AND EQUIPMENT TO PROVIDED BY OWNER, UNLESS SHOWN OTHERWISE.
8. WHERE WALL MOUNTED INFRASTRUCTURE, SUCH AS WIRE MOLD AND CONDUIT, ARE REMOVED, WALLS ARE TO BE REPAINTED TO MATCH EXISTING.

KEY NOTES

1. 2-BASIN ADA DEPTH SINK. RE: PLUMBING
2. MAPLE-VENEERED PLYWOOD BASE CABINETS WITH SOLID SURFACE COUNTERTOP
3. NEW BUBBLER INSTALLED ON COUNTERTOP OVER SINK BASIN, RE: PLUMBING
4. NEW TV MONITOR, EQUIPMENT NUMBER 01
5. NEW MARKER BOARD, EQUIPMENT NUMBER 02
6. PROVIDE NEW OPERABLE PARTITION
   BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR ARCTIC 13
7. ROLLER SHADE AT WINDOW. LUTEK OR EQUAL. MANUAL ROLLER SHADE. FABRIC: ONYX, FASCIA: ANODIZED, HARDWARE: GRAY, FABRIC WRAPPED END CAPS

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
Revision Schedule		

Westminster Public Schools

2026 Bond Projects
Sherrelwood
Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026


Main Level Plan Area 'B'

A1.1


Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:50 AM

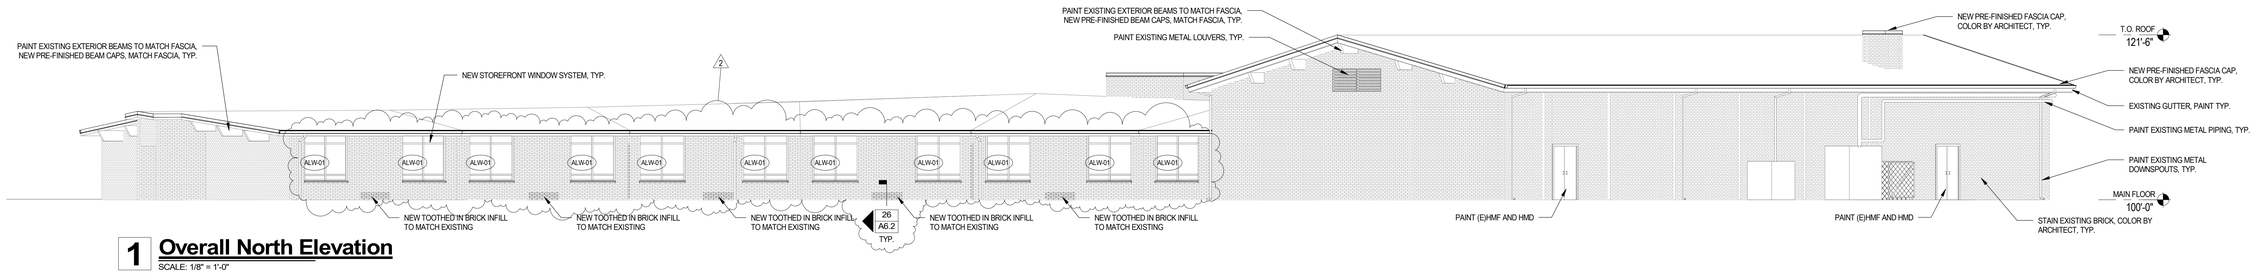


1 Overall North Elevation
SCALE: 1/8" = 1'-0"

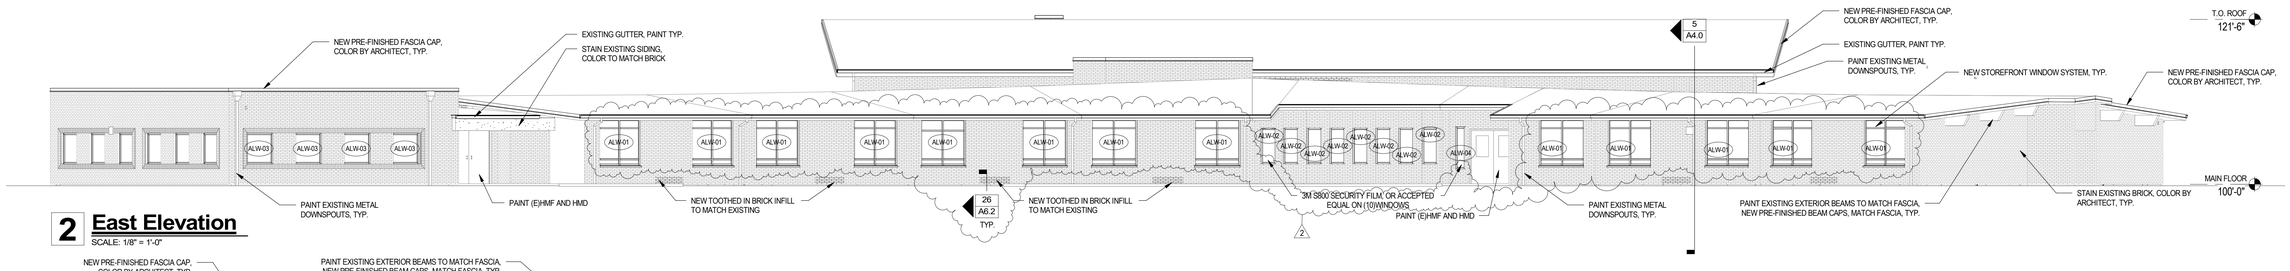

2 East Elevation
SCALE: 1/8" = 1'-0"

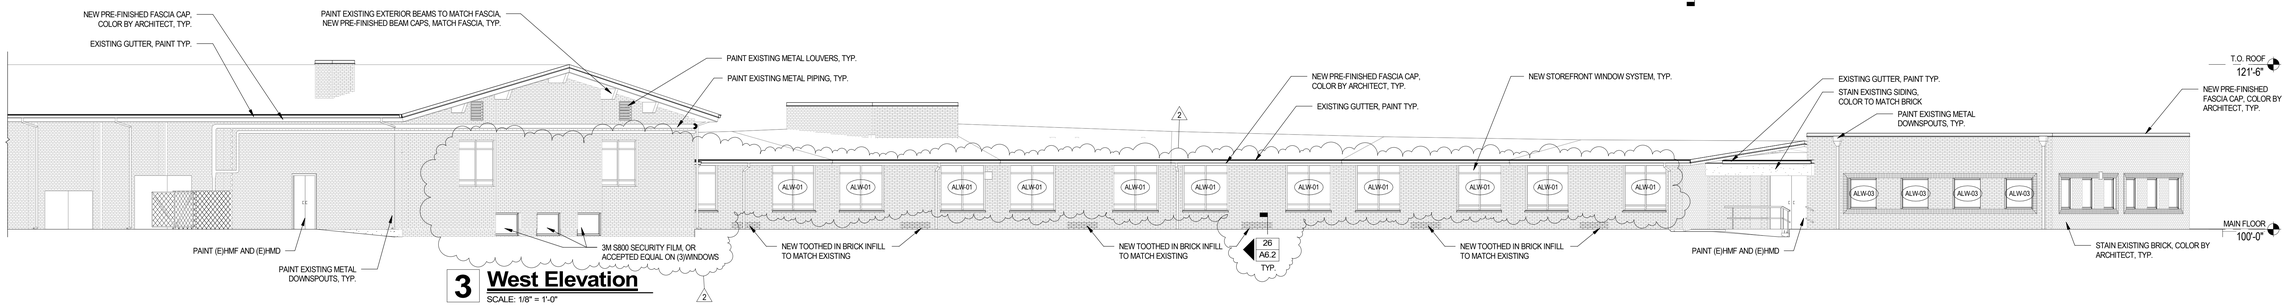

3 West Elevation
SCALE: 1/8" = 1'-0"

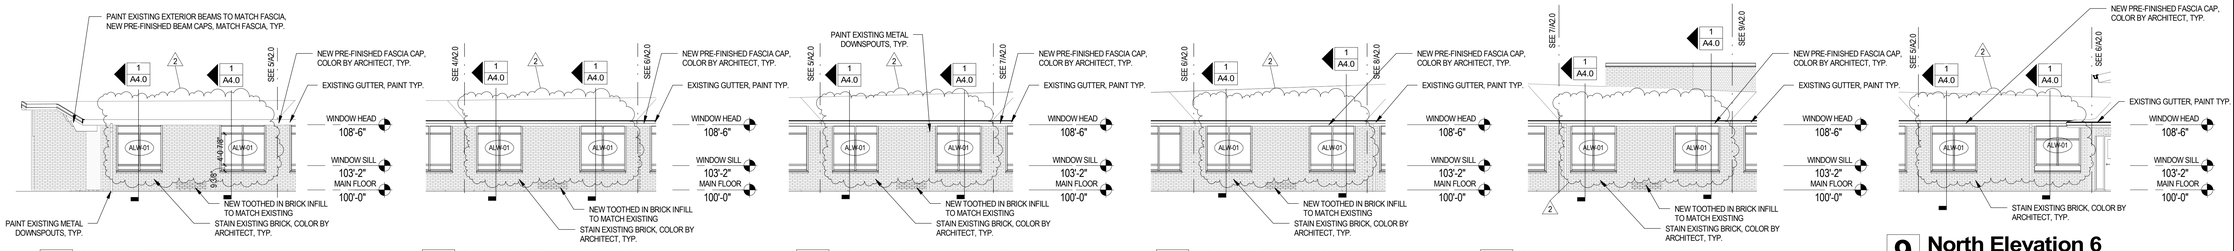

4 North Elevation 1
SCALE: 1/8" = 1'-0"


5 North Elevation 2
SCALE: 1/8" = 1'-0"

6 North Elevation 3
SCALE: 1/8" = 1'-0"

7 North Elevation 4
SCALE: 1/8" = 1'-0"

8 North Elevation 5
SCALE: 1/8" = 1'-0"

9 North Elevation 6
SCALE: 1/8" = 1'-0"

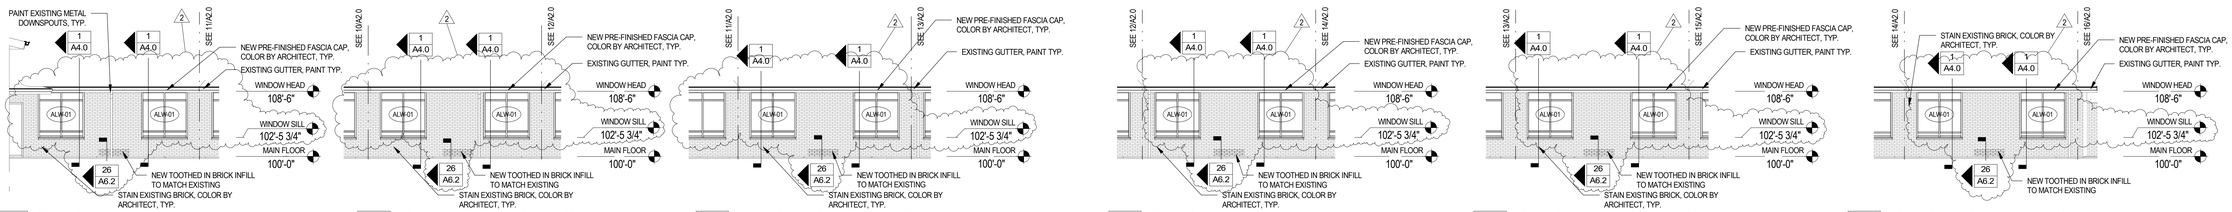

10 South Elevation 1
SCALE: 1/8" = 1'-0"


11 South Elevation 2
SCALE: 1/8" = 1'-0"

12 South Elevation 3
SCALE: 1/8" = 1'-0"

13 South Elevation 4
SCALE: 1/8" = 1'-0"

14 South Elevation 5
SCALE: 1/8" = 1'-0"

15 South Elevation 6
SCALE: 1/8" = 1'-0"

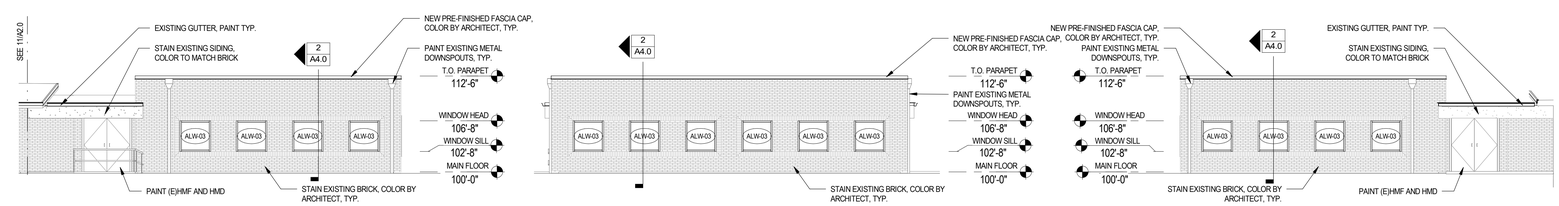

16 West Elevation 1
SCALE: 1/8" = 1'-0"

17 Southeast Elevation 1
SCALE: 1/8" = 1'-0"

18 East Elevation 1
SCALE: 1/8" = 1'-0"

BASIS OF DESIGN LEGEND

EXISTING BRICK

1. ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING, COLOR SELECTED BY ARCHITECT
2. NEW PRE-FINISHED PARAPET CAPS AND FLASHING, BASIS OF DESIGN: SHERWIN-WILLIAMS GENESIS, COLOR: COPPER PENNY
3. ALL EXTERIOR DOORS AND FRAMES TO BE PAINTED. COLOR TO BE SELECTED ONCE STAIN COLOR IS SELECTED.

BRICK REPAIR SCOPE GENERAL NOTES:
1. CONTRACTOR TO FIELD VERIFY EXTENTS OF ALL CRACKED AND/OR DAMAGED BRICK. CONFIRM WITH OWNER FOR DIRECTION ON REPAIR AND REPLACEMENT
2. CONTRACTOR TO PROVIDE NOT-TO-EXCEED PRICING FOR BRICK RE-POINTING AND REPAIR IN AREAS INDICATED ON THE DRAWINGS, ESTIMATED AT 1,800 SF. CONTRACTOR TO PROVIDE UNIT PRICING FOR ADDITIONAL AREAS OF REPAIR, AND/OR TO CREDIT AREAS INDICATED THAT ARE FOUND TO NOT NEED REPAIR.

NOTE

ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

BASE BID IS TO INCLUDE THE REPAIR AND PAINTING OF THE EXISTING EXTERIOR SOFFITS THROUGHOUT.
PROVIDE ALTERNATE 01 FOR SOFFIT REPLACEMENT THROUGHOUT IF REPAIR IS NOT FEASIBLE.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations
8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026


Exterior Elevation

A2.0


Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:54 AM

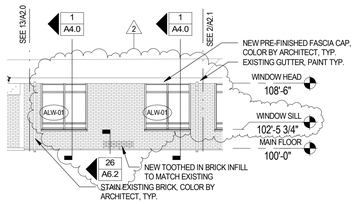


1 East Elevation 2
SCALE: 1/8" = 1'-0"

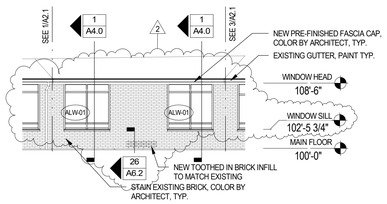


2 East Elevation 3
SCALE: 1/8" = 1'-0"

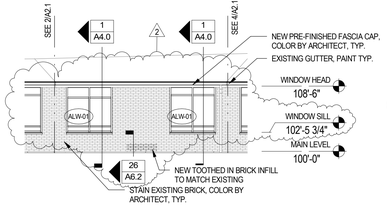


3 East Elevation 4
SCALE: 1/8" = 1'-0"

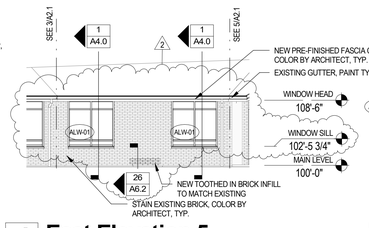


4 East Elevation 5
SCALE: 1/8" = 1'-0"

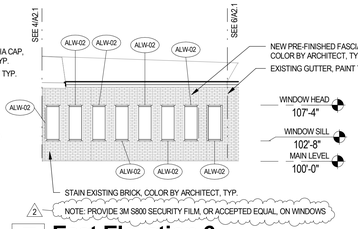


5 East Elevation 6
SCALE: 1/8" = 1'-0"

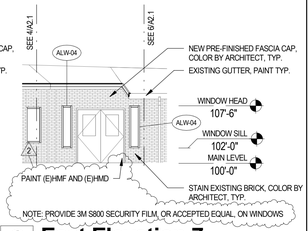


6 East Elevation 7
SCALE: 1/8" = 1'-0"

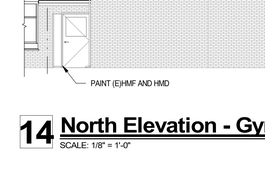


7 East Elevation 8
SCALE: 1/8" = 1'-0"

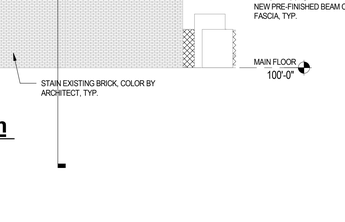

8 East Elevation 9
SCALE: 1/8" = 1'-0"

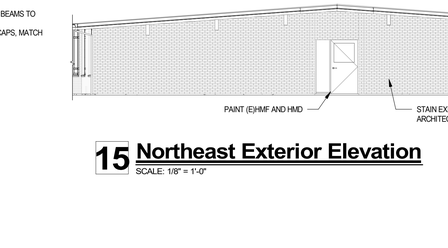

9 East Elevation 10
SCALE: 1/8" = 1'-0"

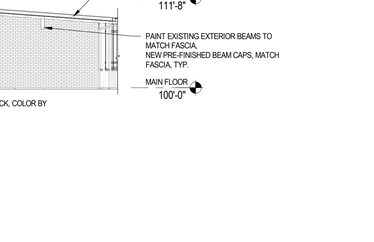

10 East Elevation - Gym North
SCALE: 1/8" = 1'-0"

11 East Elevation - Gym South
SCALE: 1/8" = 1'-0"

12 South Elevation - Gym
SCALE: 1/8" = 1'-0"

13 West Elevation - Gym
SCALE: 1/8" = 1'-0"

14 North Elevation - Gym
SCALE: 1/8" = 1'-0"

15 Northeast Exterior Elevation
SCALE: 1/8" = 1'-0"

NOTE

2 ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

BASE BID IS TO INCLUDE THE REPAIR AND PAINTING OF THE EXISTING EXTERIOR SOFFITS THROUGHOUT. PROVIDE ALTERNATE 01 FOR SOFFIT REPLACEMENT THROUGHOUT IF REPAIR IS NOT FEASIBLE.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026

Exterior Elevation

A2.1

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2025).rvt
11/12/2026 11:10:55 AM

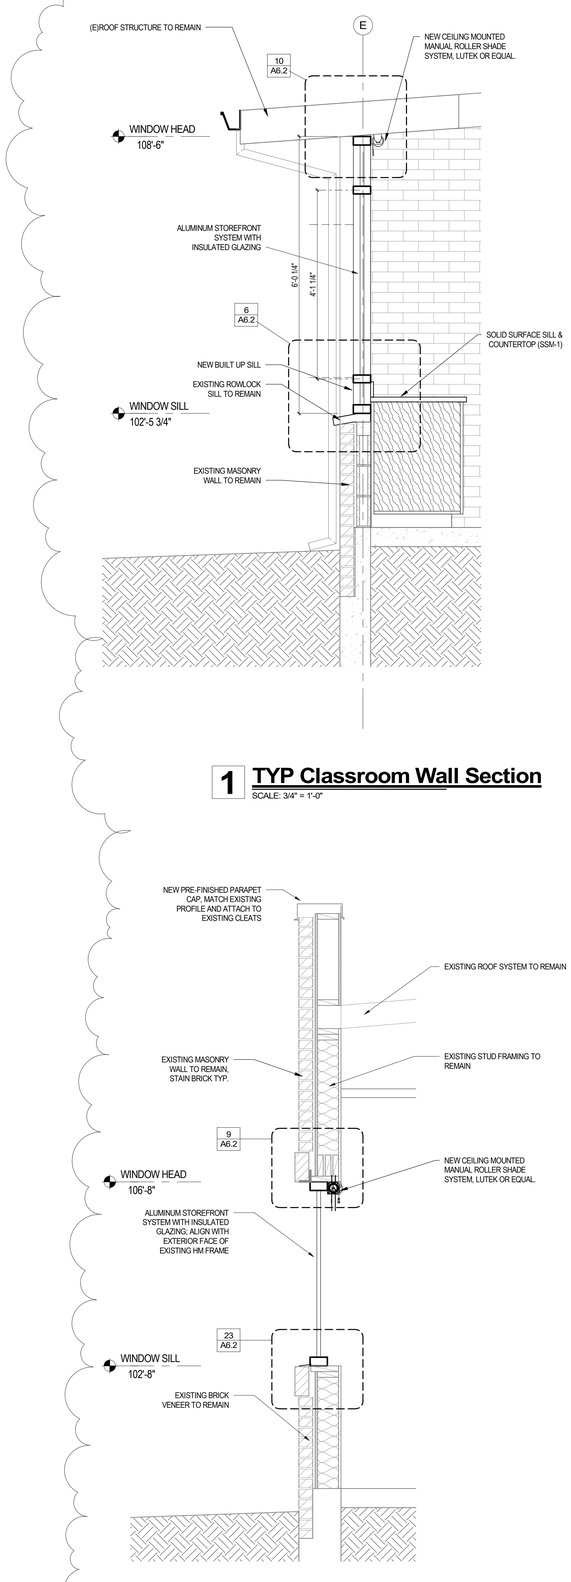


1 TYP Classroom Wall Section

SCALE: 3/4" = 1'-0"


2 Wall Section - Addition

SCALE: 3/4" = 1'-0"

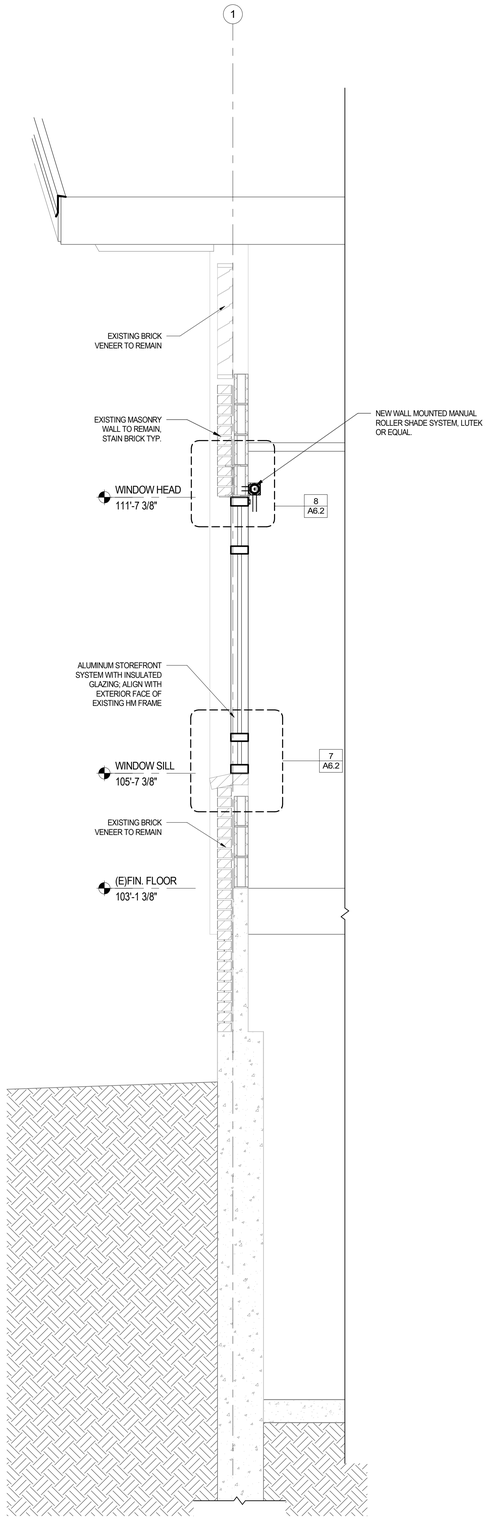


3 Wall Section - Stage

SCALE: 3/4" = 1'-0"

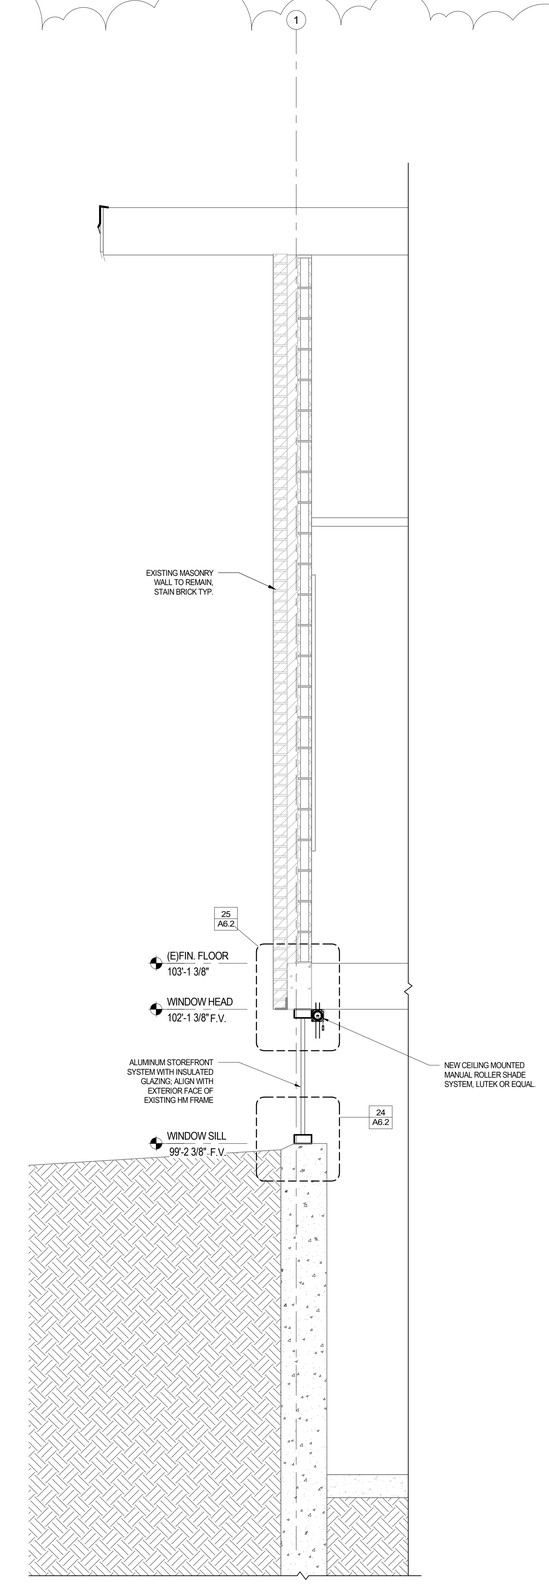

4 Wall Section - Storage

SCALE: 3/4" = 1'-0"

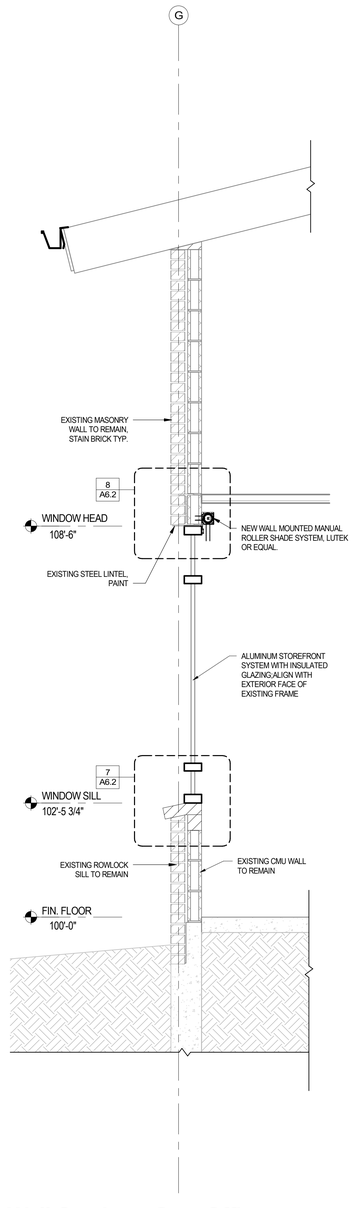

5 Wall Section - Gym Office

SCALE: 3/4" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026


Wall Sections

A4.0


Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:55 AM

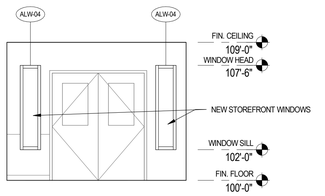


1 Vestibule (100) East
SCALE: 1/4" = 1'-0"

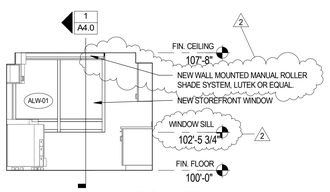


2 Work Area (100b) East
SCALE: 1/4" = 1'-0"

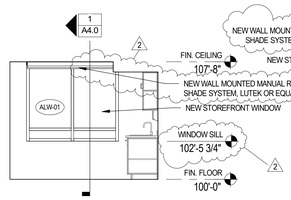


3 Infirmary (100c) East
SCALE: 1/4" = 1'-0"

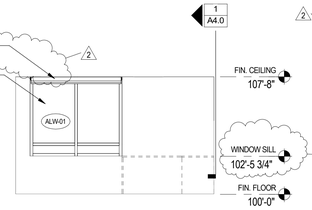


4 Flex (100d) East
SCALE: 1/4" = 1'-0"

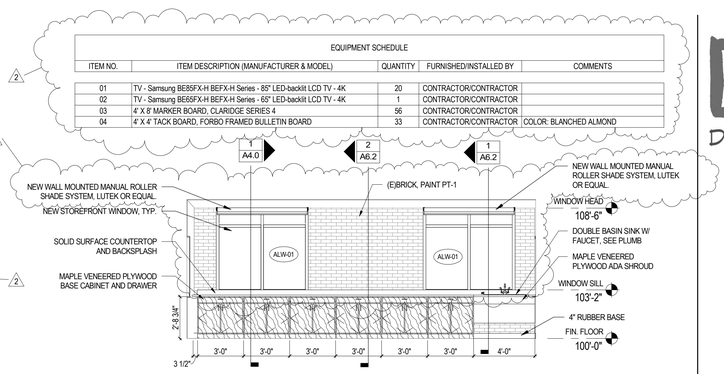


5 Typical Classroom Elevation 1
SCALE: 1/4" = 1'-0"

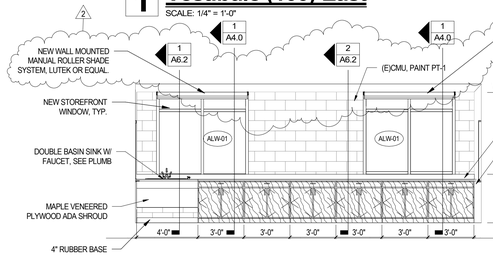


6 Typical Classroom Elevation 2
SCALE: 1/4" = 1'-0"

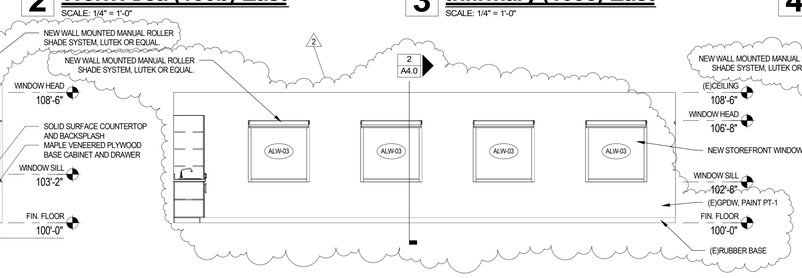


7 Classroom A - Northeast Elevation
SCALE: 1/4" = 1'-0"

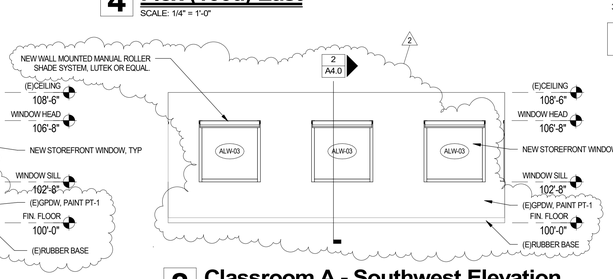


8 Classroom A - Southwest Elevation
SCALE: 1/4" = 1'-0"

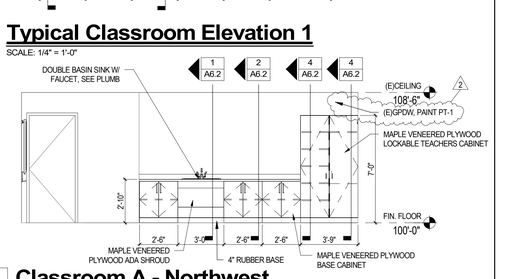


9 Classroom A - Northwest
SCALE: 1/4" = 1'-0"

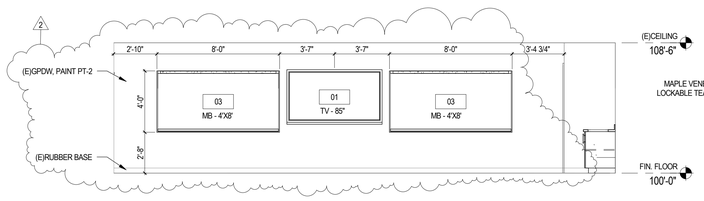


10 Classroom A - SouthWest
SCALE: 1/4" = 1'-0"

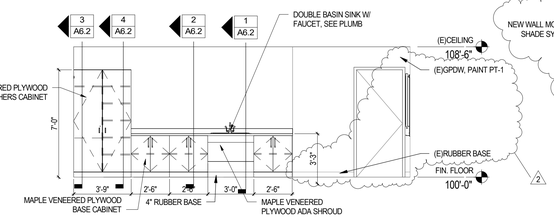


13 Classroom B - Northwest
SCALE: 1/4" = 1'-0"

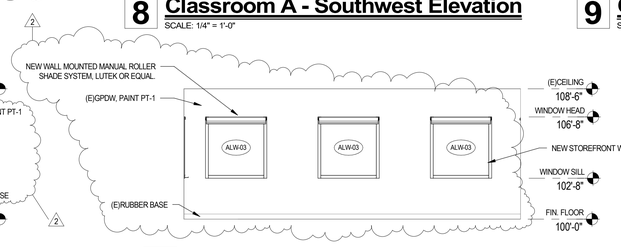


11 Classroom B - Southeast Elevation
SCALE: 1/4" = 1'-0"

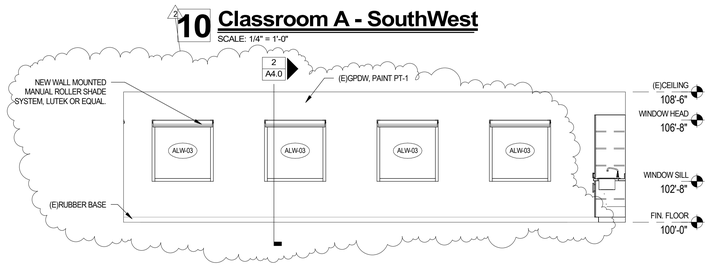

10 Classroom A - SouthWest
SCALE: 1/4" = 1'-0"

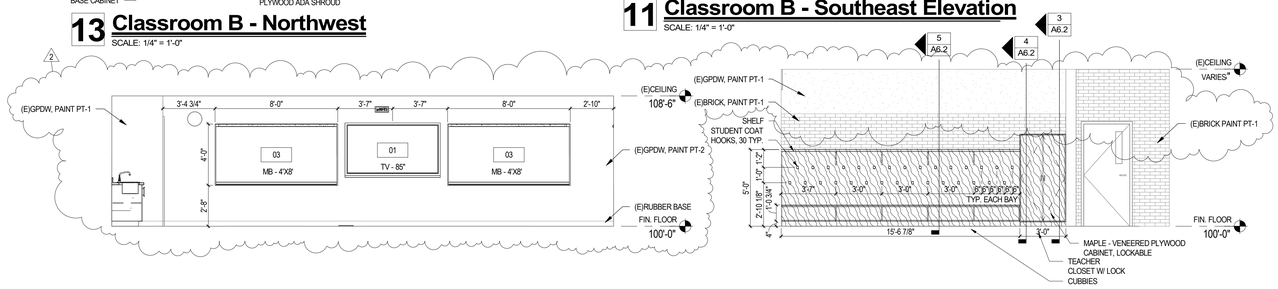


12 Classroom B - Southwest Elevation
SCALE: 1/4" = 1'-0"

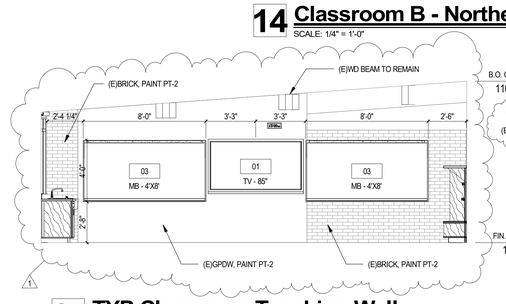


16 TYP Classroom LH Teacher Cabinet
SCALE: 1/4" = 1'-0"


14 Classroom B - Northeast
SCALE: 1/4" = 1'-0"

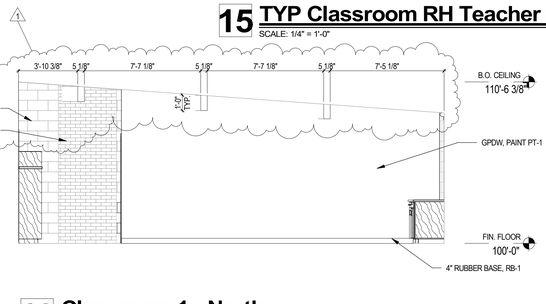


15 TYP Classroom RH Teacher Cabinet
SCALE: 1/4" = 1'-0"

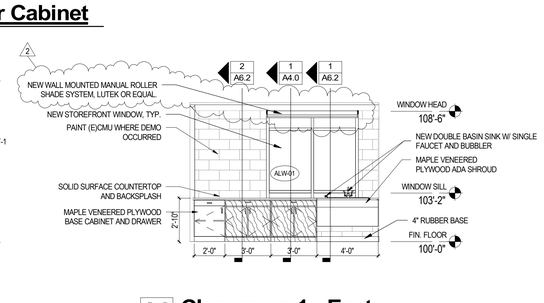


19 Classroom 1 - East
SCALE: 1/4" = 1'-0"

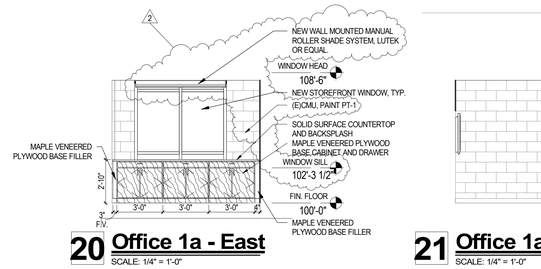

20 Office 1a - East
SCALE: 1/4" = 1'-0"

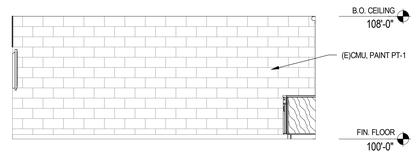


21 Office 1a - North
SCALE: 1/4" = 1'-0"

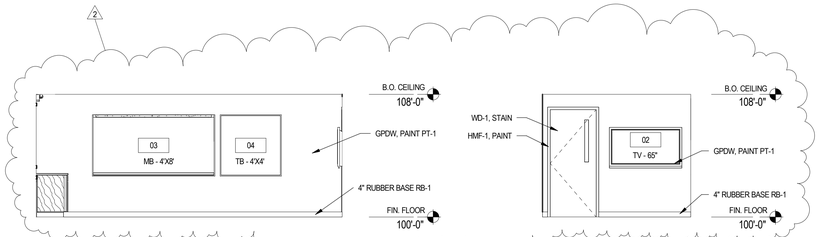

22 Office 1a - South
SCALE: 1/4" = 1'-0"

23 Office 1a - West
SCALE: 1/4" = 1'-0"

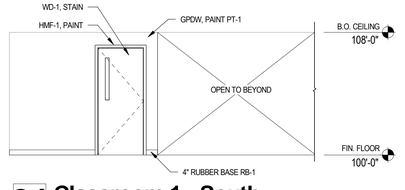

24 Classroom 1 - South
SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026
1	ACFR Comment Response #1	TBD

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221


DAO No.: 2025-033

September 25, 2026


Interior Elevations

A6.0


Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2025).rvt
11/12/2026 11:10:56 AM

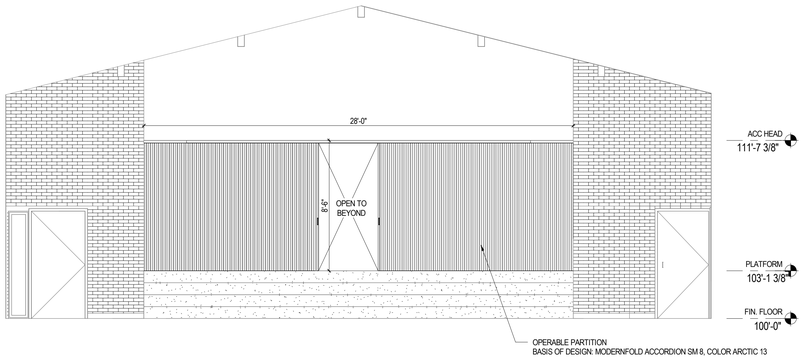


1 Gymnasium 43 - East
SCALE: 1/4" = 1'-0"

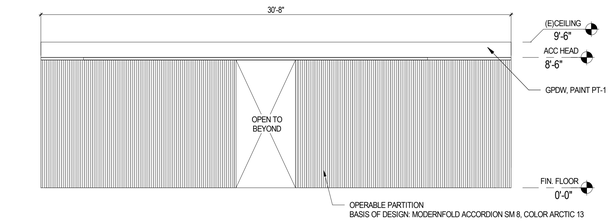


2 Music Room 47 - North
SCALE: 1/4" = 1'-0"

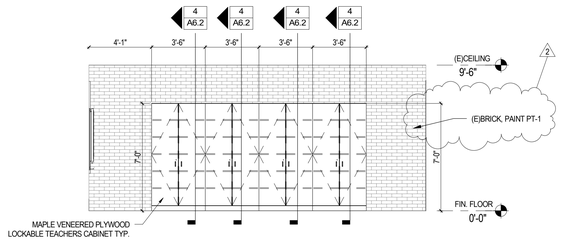


3 Music Room 47 - West
SCALE: 1/4" = 1'-0"

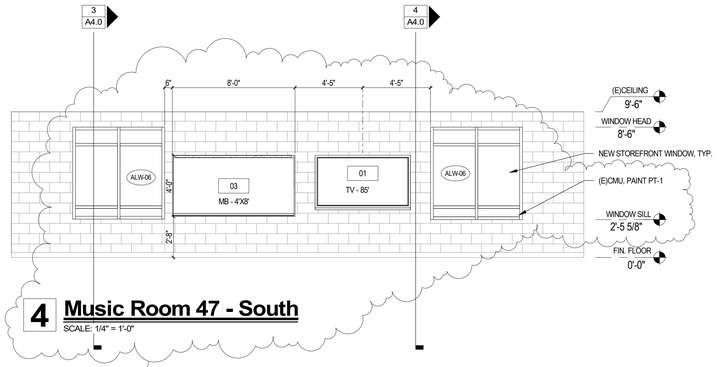


4 Music Room 47 - South
SCALE: 1/4" = 1'-0"

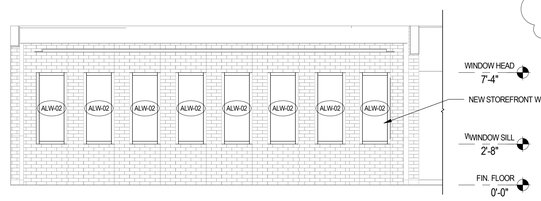


5 Corridor 36a - East
SCALE: 1/4" = 1'-0"

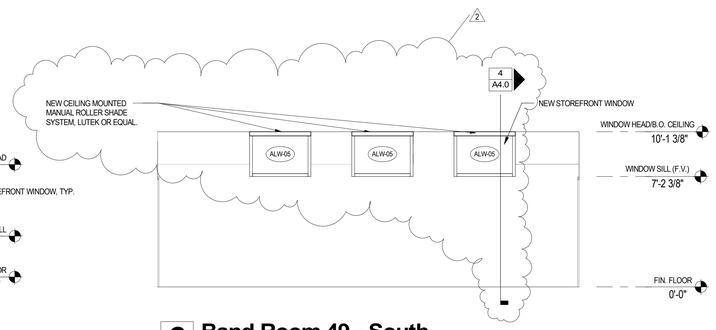


6 Band Room 49 - South
SCALE: 1/4" = 1'-0"

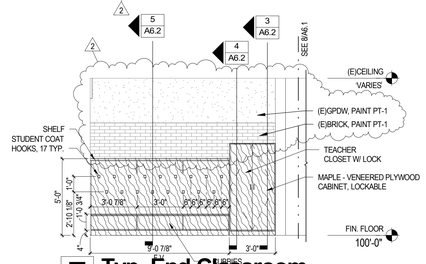

7 Typ. End Classroom
SCALE: 1/4" = 1'-0"

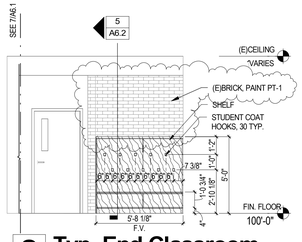

8 Typ. End Classroom
SCALE: 1/4" = 1'-0"

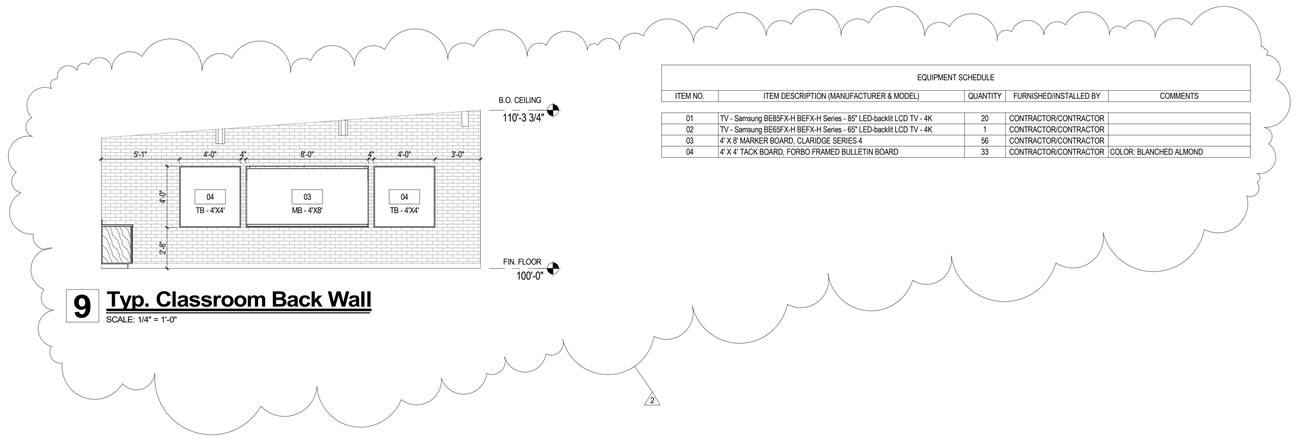

9 Typ. Classroom Back Wall
SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE

ITEM NO.	ITEM DESCRIPTION (MANUFACTURER & MODEL)	QUANTITY	FURNISHED/INSTALLED BY	COMMENTS
01	TV - Samsung BE85FX-H BEFX-H Series - 85" LED-backlit LCD TV - 4K	20	CONTRACTOR/CONTRACTOR	
02	TV - Samsung BE65FX-H BEFX-H Series - 65" LED-backlit LCD TV - 4K	1	CONTRACTOR/CONTRACTOR	
03	4' X 8' MARKER BOARD, CLARIDGE SERIES 4	56	CONTRACTOR/CONTRACTOR	
04	4' X 4' TACK BOARD, FORBO FRAMED BULLETIN BOARD	33	CONTRACTOR/CONTRACTOR	COLOR: BLANCHED ALMOND

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood
Renovations

8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

Interior Elevations

A6.1

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:56 AM


CASEWORK GENERAL NOTES

1. ALL CASEWORK SHALL BE CONSTRUCTED TO MEET THE FOLLOWING AWI CONSTRUCTION GRADES:
   WOOD VENEERED PLYWOOD CASEWORK
   -GRADE = CUSTOM
   -SOLID SURFACE COUNTERTOPS AND BACKSPLASH
2. TYPICAL MATERIALS:
   -HEAVY DUTY DRAWER SLIDES
   -FIVE KNUCKLE HINGES
   -WIRE PULLS
   -METAL SHELF CLIPS ON RECESSED K.V. STANDARDS


3. SEE SHEET A9.0 FOR FINISHES.

4. RECESS ALL KV STANDARDS PER DETAIL 1 ON SHEET A6.1 (THIS SHEET).


5. PROVIDE CASEWORK LOCKS ON ALL DOORS AND DRAWERS IN THE INFIRMARY CASEWORK, AND ALL BOTTOM DRAWERS OF THE RECEPTION DESK CASEWORK.

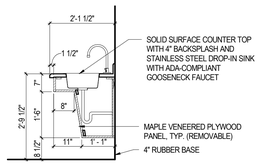


1 Casework Section
SCALE: 1/2" = 1'-0"

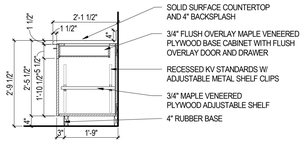


2 Casework Section
SCALE: 1/2" = 1'-0"

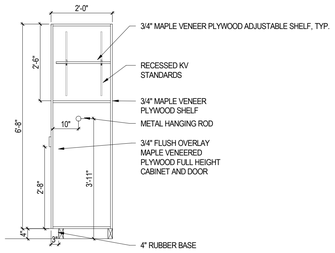


3 Teachers Cabinet - Wardrobe
SCALE: 1/2" = 1'-0"

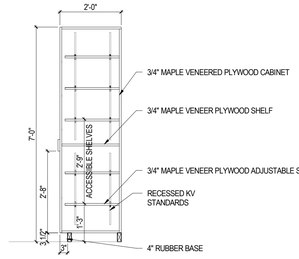


4 Teachers Cabinet
SCALE: 1/2" = 1'-0"




5 Classroom Shelf
SCALE: 1/2" = 1'-0"

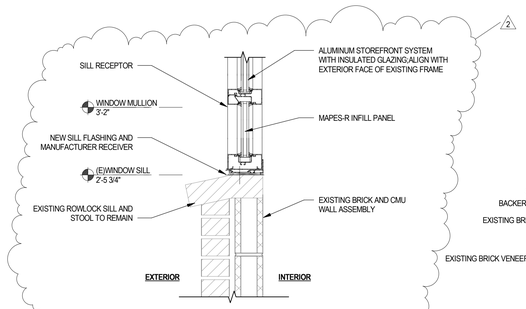


6 Window Will Detail
SCALE: 1 1/2" = 1'-0"

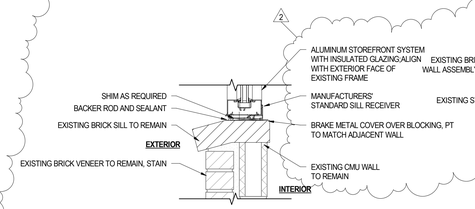


7 Window Will Detail
SCALE: 1 1/2" = 1'-0"




8 Window Head Detail
SCALE: 1 1/2" = 1'-0"

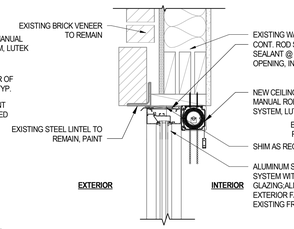


9 Window Head Detail
SCALE: 1 1/2" = 1'-0"

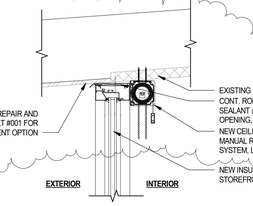


10 Window Head Detail
SCALE: 1 1/2" = 1'-0"

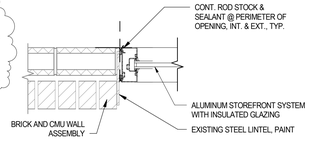


11 Window Head Detail
SCALE: 1 1/2" = 1'-0"

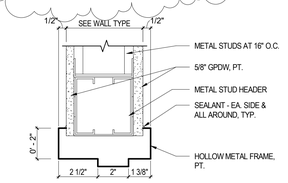


12 HMF-1 Frame Head Detail
SCALE: 3" = 1'-0"

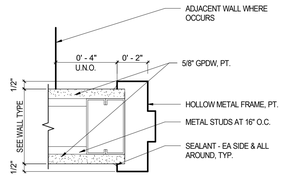


13 HMF-1 Frame Jamb Detail
SCALE: 3" = 1'-0"

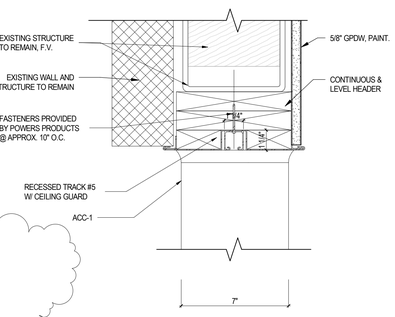


14 ACC - 1 FRAME HEAD DETAIL
SCALE: 3" = 1'-0"

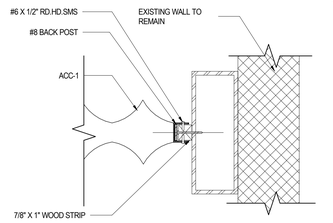


15 ACC - 1 FRAME JAMB DETAIL
SCALE: 3" = 1'-0"

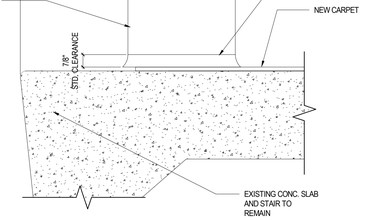

16 ACC - 1 FRAME SILL DETAIL
SCALE: 3" = 1'-0"

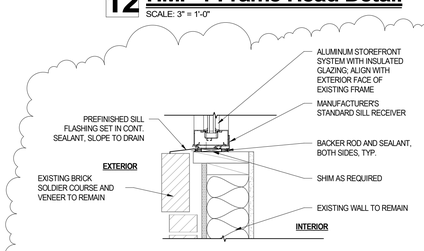


23 Window Sill Detail
SCALE: 1 1/2" = 1'-0"

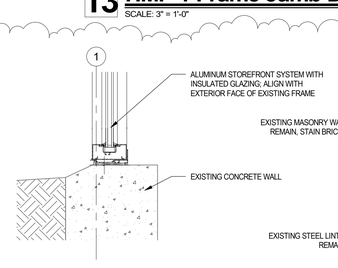


24 Window Sill Detail
SCALE: 1 1/2" = 1'-0"


25 Window Head Detail
SCALE: 1 1/2" = 1'-0"

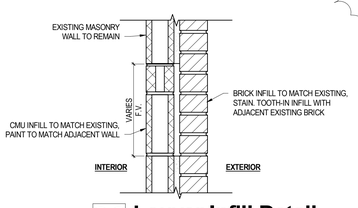


26 Louver Infill Detail
SCALE: 1 1/2" = 1'-0"



WD-1/ HMD-1
FLUSH WOOD DOOR W/ LITE / HM DOOR W/ LITE



HMF-1
HM FRAME

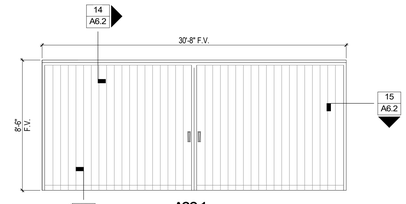


ACC-1
ACCORDION DOOR
BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR ARCTIC 13

Door and Frame Types

DOOR AND FRAME SCHEDULE

IDENTIFICATION			DOOR			FRAME	DOOR/FRAME		
			DIMENSIONS						
DOOR NO.	ROOM NO.	ROOM NAME	W1	H	TYPE	TYPE	FIRE RATING	HARDWARE	REMARKS
1aa	1a	Office	3' - 0"	7' - 0"	WD-1	HMF-1	NA	01	Narrow Lite

DOOR NOTES:
1. NEW WOOD DOORS TO BE PAINT GRADE SOLID CORE DOORS, PAINT
2. GENERAL CONTRACTOR TO VERIFY EXISTING DOORS AND/OR FRAMES AND COORDINATE REQUIRED PREPARATION.
3. DO NOT PAINT ANY NEW OR EXISTING PRE-FINISHED DOOR MULLIONS.
4. DOOR LITE KITS TO BE ANEMOSTAT LO-PRO.
5. PREPARE EXISTING DOORS WHICH ARE TO RECEIVE NEW PAINT AS REQUIRED FOR NEW FINISH.
6. PROVIDE SAFETY GLAZING OR FIRE-PROTECTION RATED GLAZING IN LOCATIONS REQUIRED BY CURRENT LOCAL CODE. NOTIFY ARCHITECT WITH QUESTIONS.

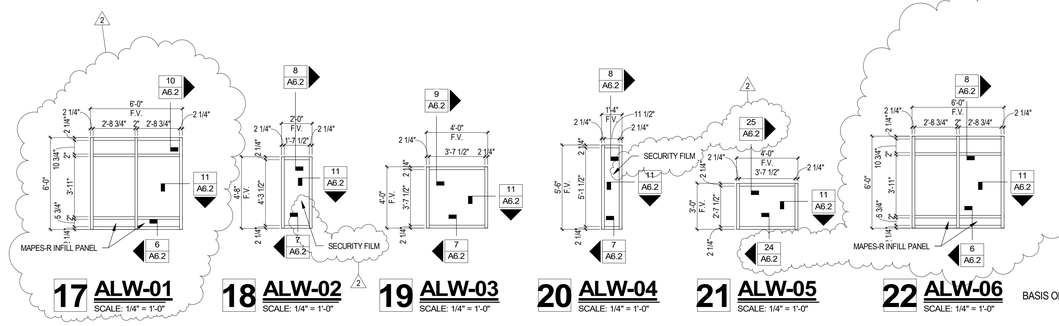

17 ALW-01
SCALE: 1/4" = 1'-0"

18 ALW-02
SCALE: 1/4" = 1'-0"

19 ALW-03
SCALE: 1/4" = 1'-0"

20 ALW-04
SCALE: 1/4" = 1'-0"

21 ALW-05
SCALE: 1/4" = 1'-0"

22 ALW-06
SCALE: 1/4" = 1'-0"

BASIS OF DESIGN: KAWNEER 451 UT

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

Interior Details/Door Schedule/Door & Window Details

A6.2

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:57 AM

ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR MATERIAL	FLOOR FINISH	FLOOR BASE	WALLS NORTH MATERIAL	WALLS NORTH FINISH	WALLS EAST MATERIAL	WALLS EAST FINISH	WALLS SOUTH MATERIAL	WALLS SOUTH FINISH	WALLS WEST MATERIAL	WALLS WEST FINISH	CEILING MATERIAL	CEILING FINISH	COMMENTS
1	Classroom	(e) CONC.	(e)	RB-1/(E)RB	GPDW/(e)BRICK	PT-1	GPDW/(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
1a	Office	(e) CONC.	(e)	RB-1	(e)BRICK	PT-1	(e)BRICK	PT-1	GPDW	PT-1	GPDW	PT-1			
2	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1			
3	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
4	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1			
5	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1			
6	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
7	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1			
8	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
9	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2			
10	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1			
11	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1			
12	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2			
13	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1			
14	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2			
15	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1	(e)BRICK	PT-1			
16	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
17	Classroom	(e) CONC.	(e)	(e)RB	(e)BRICK	PT-1	(e)BRICK	PT-1	(e)BRICK/(e)GPDW	PT-2	(e)BRICK	PT-1			
18	Storage	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
19	Storage	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
32	Kitchen Storage	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
32a	Walk-in Ref.	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
34	Kitchen	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
36a	Corridor	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
36b	Corridor	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
36c	Corridor	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
36d	Corridor	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
37	Corridor	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
38	Vestibule	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
39	Vestibule	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
43	Gymnasium	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
45	Gym Storage	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
46	Gym Office	(e) CONC.	(e)	(e)RB	(e)CMU	PT-1	(e)CMU	PT-1	(e)CMU	PT-1	(e)CMU	PT-1			
47	Music Room	(e) CONC.	(e)	(e)RB	(e)CMU	PT-1	(e)CMU	PT-1	(e)CMU	PT-1	(e)CMU	PT-1			
48	Boiler Room	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
49	Storage	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
100	Vestibule	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
100b	Work Area	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
100c	Infirmary	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
100d	Flex	(e) CONC.	(e)	(e)RB	(e)	(e)	(e)	(e)	(e)	(e)	(e)	(e)			
A	Classroom	(e) CONC.	(e)	(e)RB	(e)GPDW	PT-1	(e)GPDW	PT-1	(e)GPDW	PT-1	(e)GPDW	PT-2			
B	Classroom	(e) CONC.	(e)	(e)RB	(e)GPDW	PT-1	(e)GPDW	PT-2	(e)GPDW	PT-1	(e)GPDW	PT-1			

FINISH LEGEND

WALL BASE

RUBBER BASE/RESILIENT BASE

RB1 BLACK ROPPE 4" BASE

WALLS

PAINT

PT-1 FIELD PAINT: BENJAMIN MOORE OLYMPIC MOUNTAINS #971

PT-2 ACCENT PAINT: BENJAMIN MOORE ANDES SUMMIT CSP-600

CASEWORK

SOLID SURFACE COUNTERTOP

SS1 FORMICA CLASSICS RIVER ROCK MOSAIC 656 MATTE FINISH

WOOD VENEERED PLYWOOD


WV1 PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

FINISH PLAN LEGEND


L CG-1 - CORNER GUARD - STAINLESS STEEL CORNER GUARDS (4'-0" TALL, 2" WIDE LEGS), SCREW FASTENED WITH COUNTERSUNK SCREWS.

EQUIPMENT SCHEDULE

ITEM NO.	ITEM DESCRIPTION (MANUFACTURER & MODEL)	QUANTITY	FURNISHED/INSTALLED BY	COMMENTS
01	TV - Samsung BE85FX-H BEFX-H Series - 85" LED-backlit LCD TV - 4K	20	CONTRACTOR/CONTRACTOR	
02	TV - Samsung BE65FX-H BEFX-H Series - 65" LED-backlit LCD TV - 4K	1	CONTRACTOR/CONTRACTOR	
03	4' X 8' MARKER BOARD, CLARIDGE SERIES 4	56	CONTRACTOR/CONTRACTOR	
04	4' X 4' TACK BOARD, FORBO FRAMED BULLETIN BOARD	33	CONTRACTOR/CONTRACTOR	COLOR: BLANCHED ALMOND

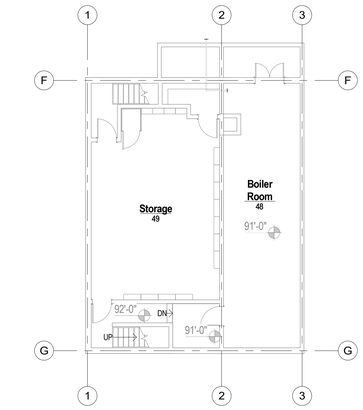

Basement Equipment Plan
SCALE: 3/32" = 1'-0"

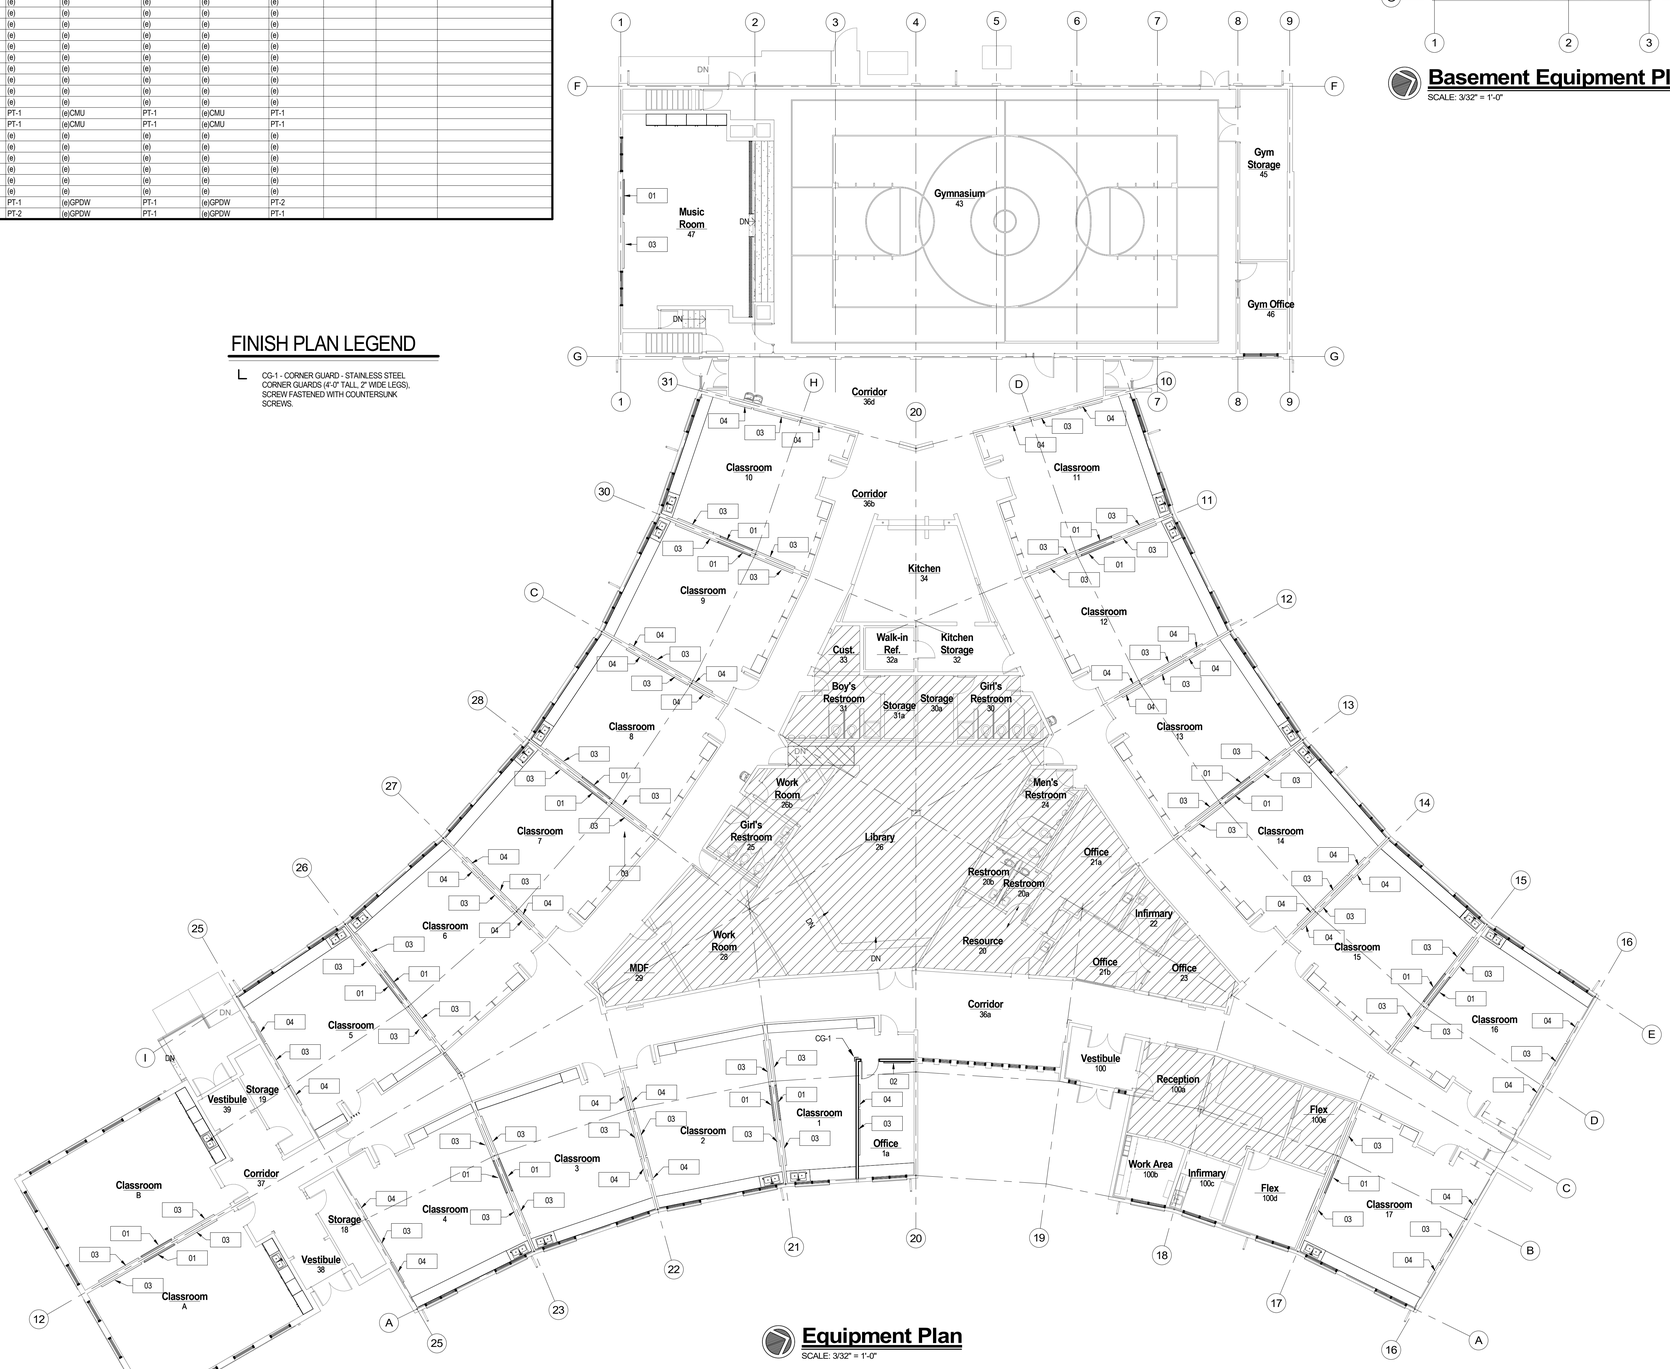

Equipment Plan
SCALE: 3/32" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date
2	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Sherrelwood
Renovations

8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033


September 25, 2026

Equipment Plan, Finish Schedule and Finish Legend

A9.0

Autodesk Docs://WPS 2026 Bond Projects - Sherrelwood Renovations/WPS - Sherrelwood Elementary (Revit 2026).rvt
11/12/2026 11:10:57 AM


KEYNOTES

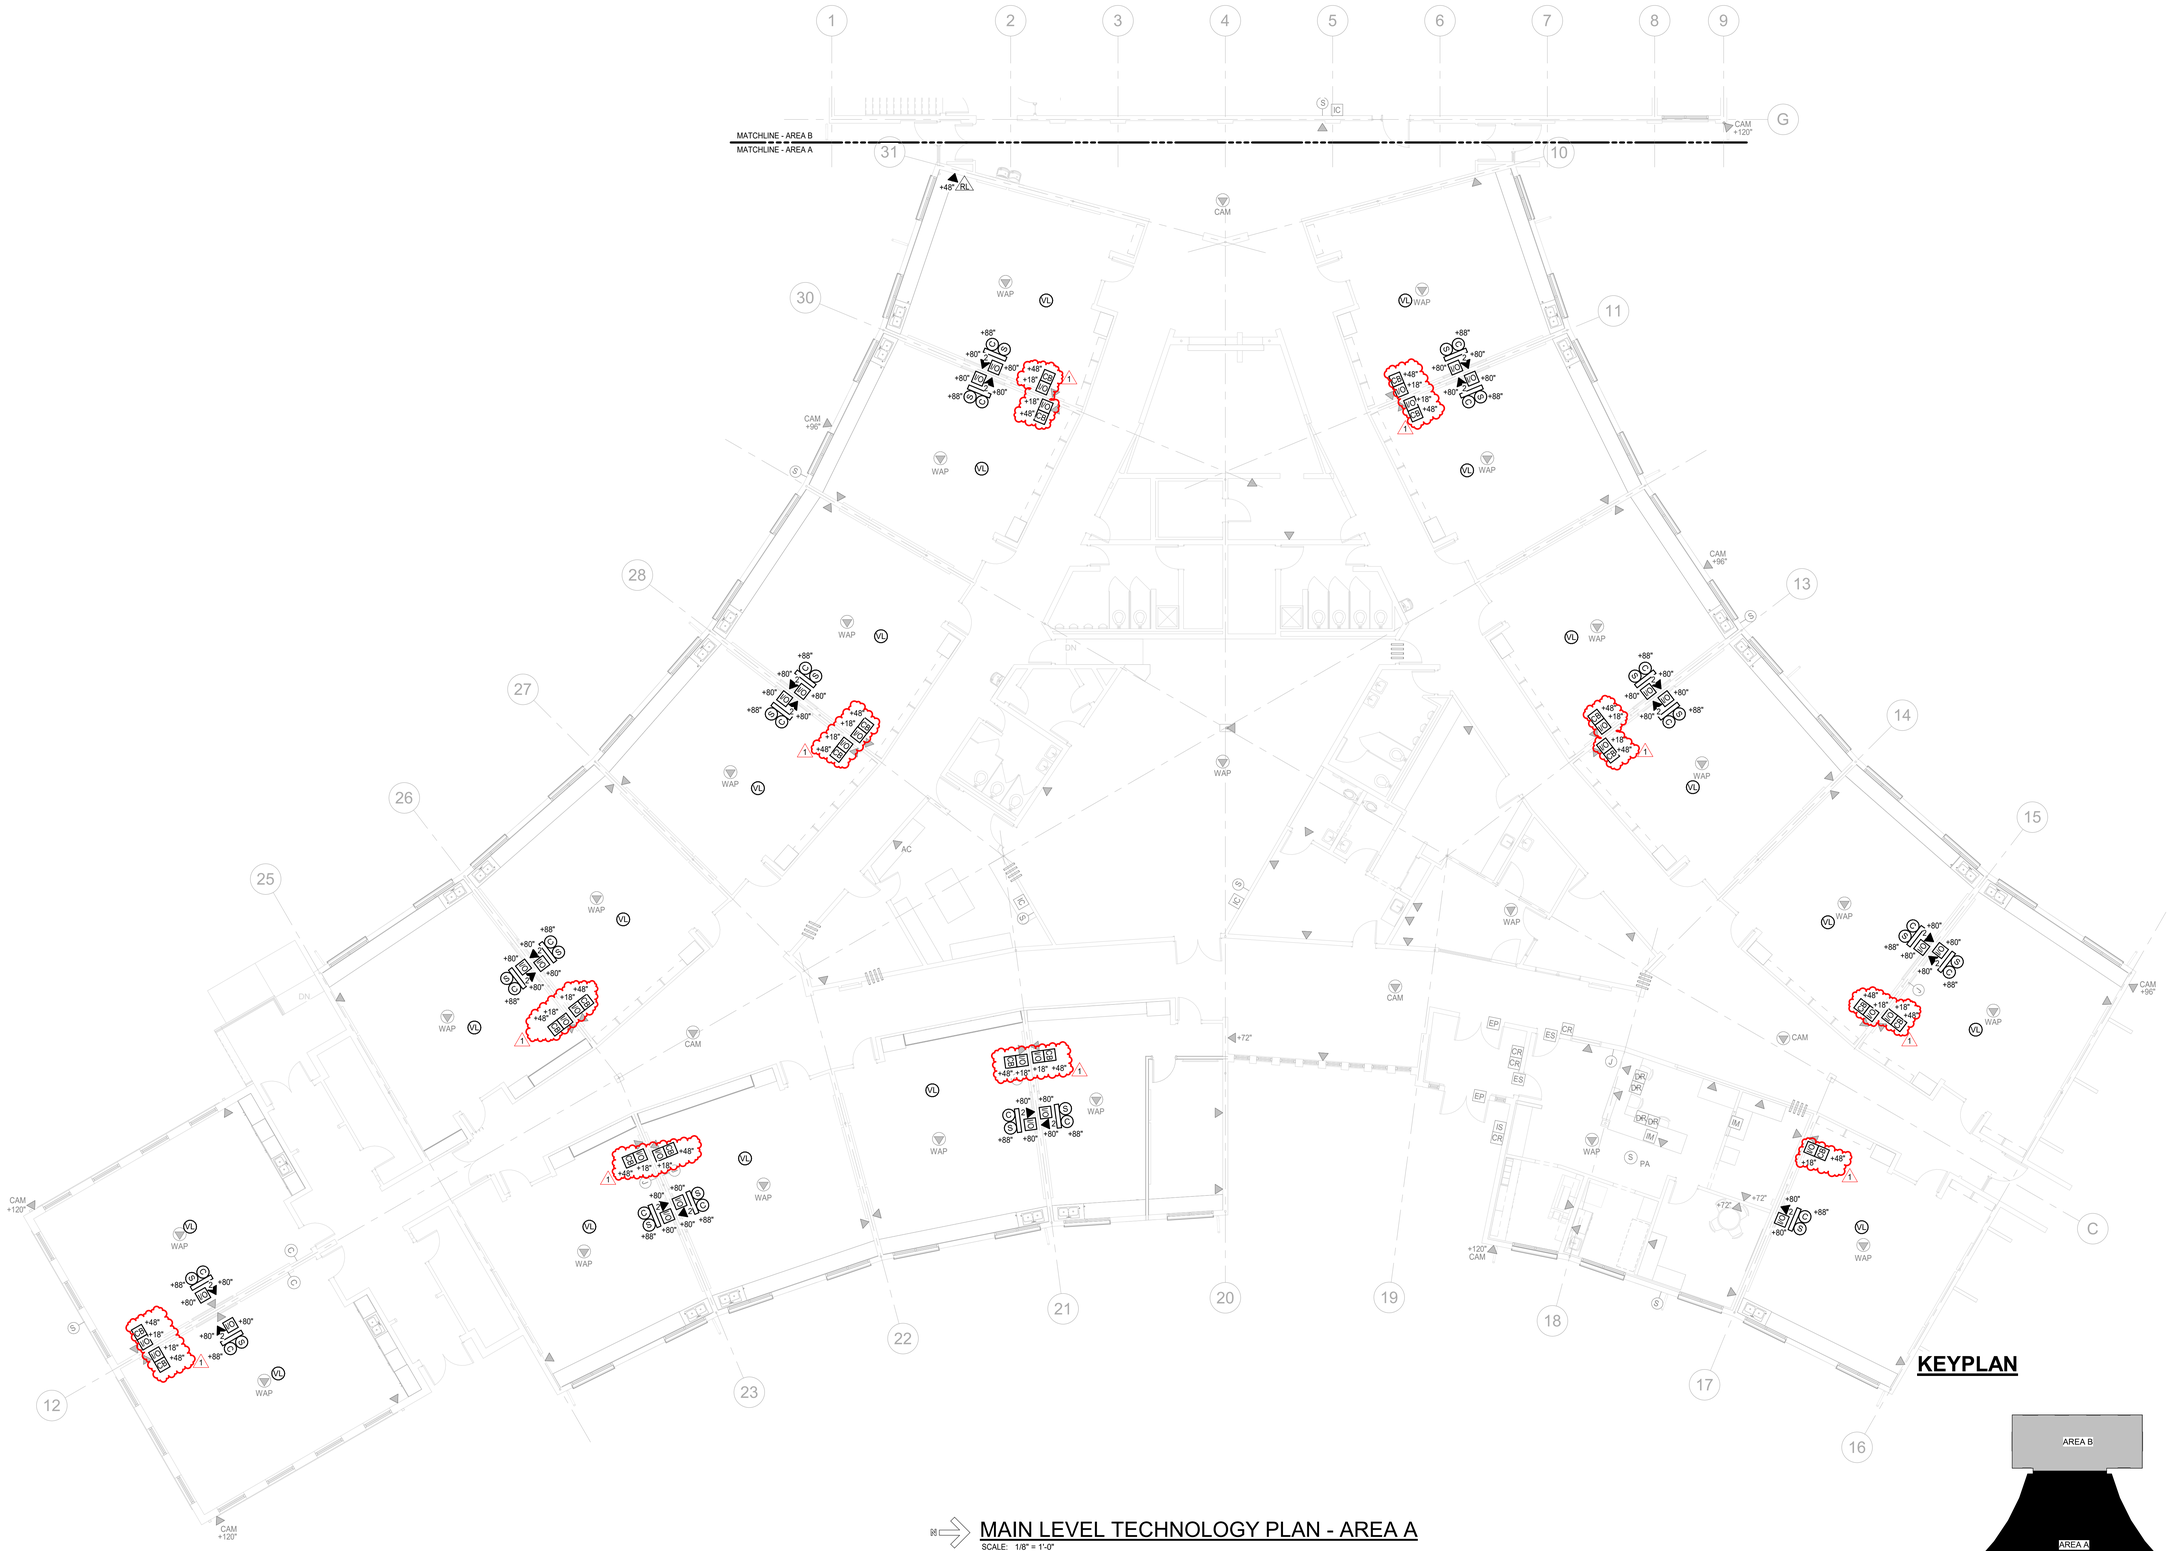

MAIN LEVEL TECHNOLOGY PLAN - AREA A

SCALE: 1/8" = 1'-0"

KEYPLAN

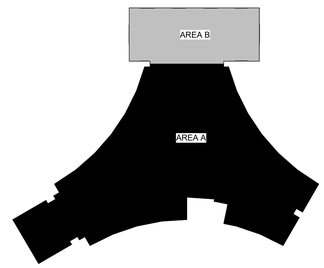

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
1	Addendum 01	11/12/2026

Revision Schedule

Westminster Public Schools

2026 Bond Projects - Sherrelwood Renovations

8095 Kalamath St.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

MAIN LEVEL TECHNOLOGY PLAN - AREA A

E1.6

P:\WPS\2025-0531 Sherrelwood Elementary 2026 Bond Project\Cad
11/10/2026 9:14:32 AM