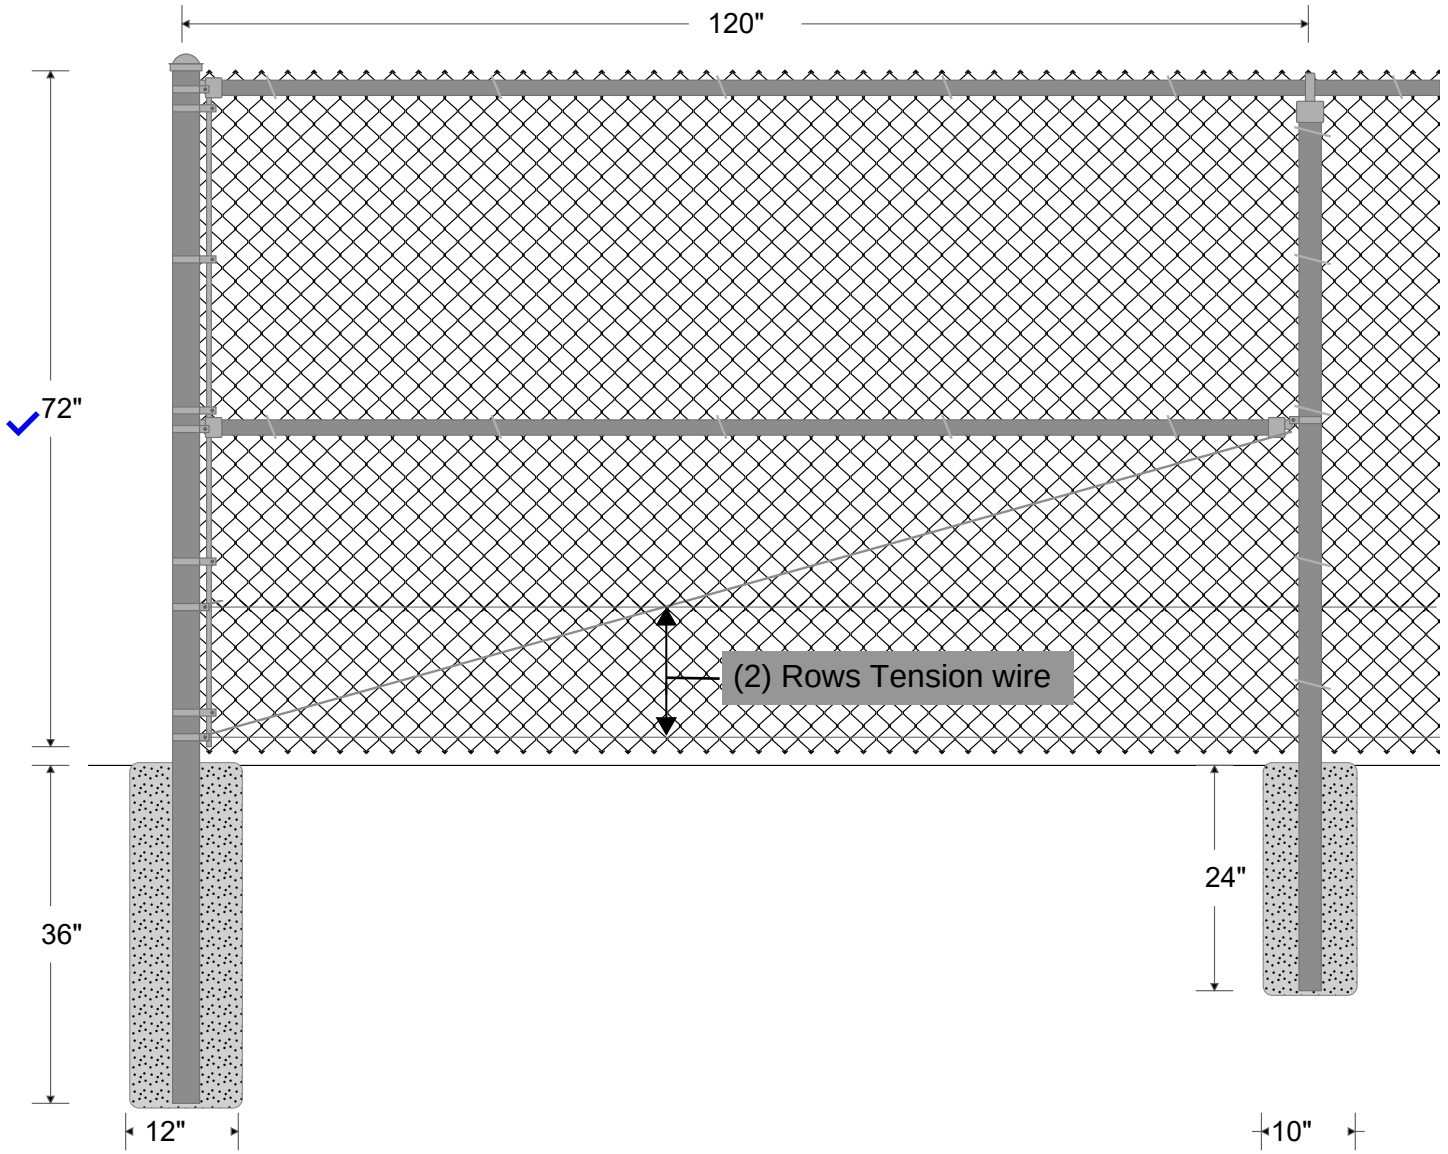


FABRIC: 72" 9 GA. GALVANIZED (2" Mesh) KK CHAIN LINK FABRIC.

TOP RAIL: 1 5/8" O.D. DQ-40 PIPE, 1.83 lbs. per foot. Top rail 21' in length, joined with 1 5/8" SLEEVE.

LINE POST: 2 3/8" O.D. FULL WEIGHT PIPE, 3.65 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 10" diameter, 24" depth.

TERMINAL POST: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 12" diameter, 36" depth.

BRACING: Terminal posts braced and trussed to the nearest line post with 1 5/8" O.D. DQ-40 PIPE and 3/8" TRUSS ROD & TRUSS ROD TIGHTENER.

TENSION WIRE: 9 GA. SMOOTH WIRE TENSION WIRE attached to bottom of fence fabric with 9 GA. STEEL HOG RING spaced 24" on center.

FITTINGS: REGULAR BRACE BAND & CARRIAGE BOLT, PRESSED STEEL RAIL-END, PRESSED STEEL EYE-TOP, PRESSED STEEL CAP, 3/16" X 5/8" TENSION BAR, REGULAR TENSION BAND & CARRIAGE BOLT.

TIE WIRE: 8 1/4" 12 GA. STEEL TIE WIRE & 7 1/2" 12 GA. STEEL TIE WIRE spaced 15" on center for line posts & 24" on center for rails.

POST FOOTING: HAND MIXED CONCRETE.

SPLIT RAIL FENCE
EXCEPTIONAL WORK—EVERY TIME

SPLIT RAIL FENCE COMPANY
8065 Brandon Dr
LITTLETON, COLORADO 80125
303-791-1997

LINE OF FENCE

Drawn: 06/01/2022
File: