
Westminster Public Schools

Harris Park Elementary Renovations
4300 W. 75th Avenue
Westminster, CO 80030
DAO No.: 2025-033
Construction Documents Submittal
September 25th, 2026

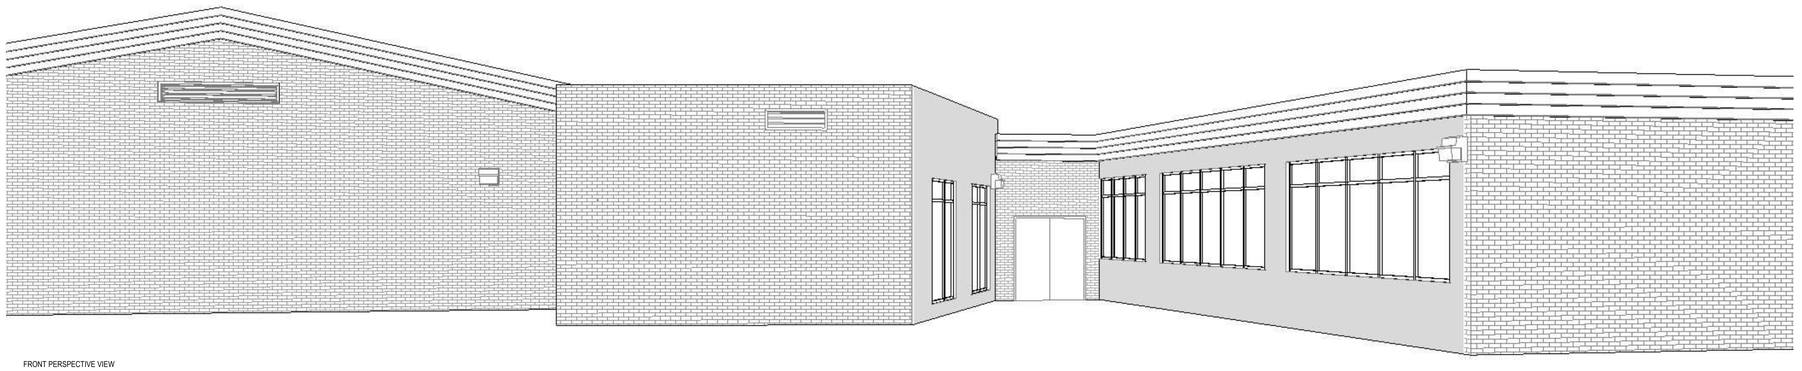

FRONT PERSPECTIVE VIEW

NOTE:
CIVIL DOCUMENTATION NOT INCLUDED AT THIS TIME. IT WILL BE ISSUED AS AN ADDENDUM AT A LATER DATE

DRAWING INDEX

GENERAL

Cover	Cover Sheet
G0.0	Standard Symbols, Abbreviations & General Notes
G0.1	Building Code Data

ARCHITECTURE

AD1.0	Demolition First Floor Plan
AD2.0	Demo Exterior Elevations
A1.0	First Floor Plan
A1.2	Equipment Plan
A2.0	Exterior Elevations
A4.0	Wall Sections
A6.0	Casework Sections and Exterior Frame Types and Door Schedule
A6.1	Door and Window Details
A6.2	Interior Elevations
A6.3	Interior Elevations
A9.0	Finish Plan

PLUMBING

P0.00	Plumbing Cover Sheet - General Notes, Schedules & Legend
PD1.0	First Floor - Demolition Plumbing Plan
P1.0	First Floor Plumbing Plan

ELECTRICAL

E0.01	Electrical Legends, Schedules, & Notes
E0.11	Electrical One Line Diagram
ED1.11	First Floor Power Demo Plan
ED1.12	First Floor Technology Demo Plan
E1.11	First Floor Power Plan
E1.12	First Floor Technology Plan
E2.01	Electrical Details
E3.01	Electrical Panel Schedules

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

OWNER:
WESTMINSTER PUBLIC SCHOOLS
7002 RALEIGH STREET
WESTMINSTER, CO 80030
CONTACT: DON CIANCIO
PHONE #: 720-542-5100

ARCHITECT:
DAO ARCHITECTURE
7230 MEADE STREET
WESTMINSTER, CO 80030
CONTACT: DAN ORECCHIO
PHONE #: 720.273.0431

ELECTRICAL ENGINEERS:
CATOR RUMA & ASSOCIATES, CO.
896 TABOR STREET
LAKEWOOD, CO 80401
CONTACT: KEVIN MILLER / BRITTANY LAZZERI
PHONE: 303-232-6200

PLUMBING AND MECHANICAL ENGINEERS:
THE BALLARD GROUP
2525 S WADSWORTH BLVD SUITE 200
LAKEWOOD, CO 80227
CONTACT: NATE RUST
PHONE: 303-867-6847

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026

Construction Documents

Cover

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:16:25 PM

MATERIALS SYMBOLS

EARTHWORKS

EARTH NON-COMPACTED

EARTH COMPACT/FILL

GRAVEL/POROUS FILL

CONCRETE

CONCRETE

PRECAST CONCRETE

SAND/MORTAR/PLASTER

METAL

ALUMINUM

BRASS/BRONZE

STEEL

MASONRY

CONCRETE BLOCK

COMMON/FACE BLOCK

FIRE BRICK

STRUCTURAL FACING TILE

STONE

BLUESTONE/SLATE/ SOAPSTONE/FLAGGING

LIMESTONE

RUBBLE

WOOD

FINISH

ROUGH

SHIM

PLYWOOD

GLASS

GLASS

STRUCTURAL

GLASS BLOCK

INSULATION

BATT/LOOSE FILL

RIGID

SPRAY/FOAM

FINISHES

ACOUSTICAL TILE

CARPET AND PAD

CERAMIC TILE

GYPSUM WALLBOARD

TECTUM

PARTITION INDICATIONS

CAST-IN-PLACE CONCRETE

CONCRETE MASONRY

METAL STUD

WOOD STUD

ELEVATION INDICATIONS

BRICK

CERAMIC/ PORCELAIN TILE


CONCRETE/ PLASTER/GPDW

CONCRETE MASONRY UNIT

SHEET METAL


SHINGLES/SIDING

VICINITY MAP

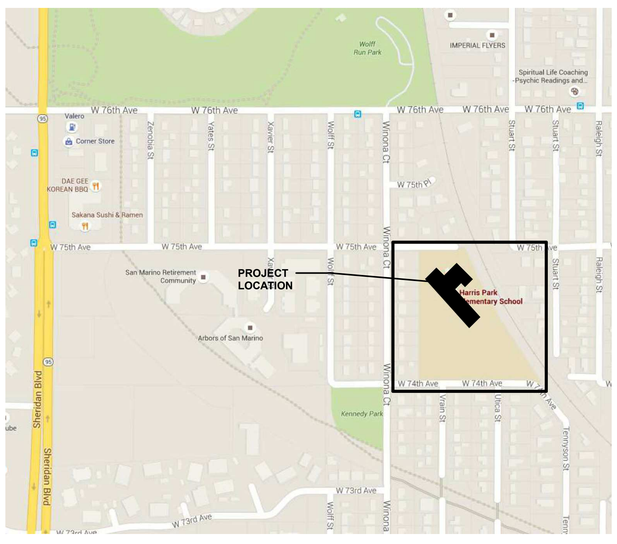

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:02 PM

REFERENCE SYMBOLS

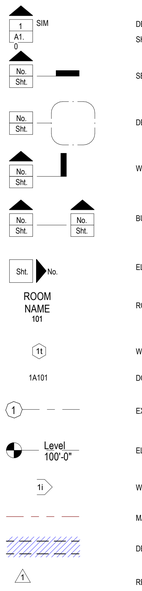

DETAIL OR SECTION NUMBER

SHEET ON WHICH IT IS FOUND

SECTION REFERENCE

DETAIL REFERENCE

WALL SECTION REFERENCE

BUILDING SECTION REFERENCE

ELEVATION REFERENCE

ROOM IDENTIFIER

WINDOW/OPENING IDENTIFIER

DOOR/OPENING IDENTIFIER

EXISTING GRID LINE

ELEVATION REFERENCE

WALL TYPE REFERENCE

MATCH LINE

DEMOLITION INDICATOR

REVISION INDICATOR

STANDARD ABBREVIATIONS

A/E	ARCHITECT/ENGINEER
AB	ANCHOR BOLT
ABBR	ABBREVIATE
ABV	ABOVE
AC	AIR CONDITIONING
ACID RES	ACID RESISTANT
ACOUS	ACOUSTICAL
ACOUS INSUL	ACOUSTICAL INSULATION
ACOUS PNL	ACOUSTICAL PANEL
ACOUS PLAS	ACOUSTICAL PLASTER
ACOUS TILE	ACOUSTICAL TILE
ACT	ACTUAL
AD	AREA DRAIN
ADC	AUTOMATIC DOOR CLOSER
ADDL	ADDITIONAL
ADDM	ADDENDUM
ADJ	ADJUSTABLE
ADJC	ADJACENT
AF	ACCESS FLOOR
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AFS	ABOVE FINISHED SLAB
AGGR	AGGREGATE
AHR	ANCHOR
AHU	AIR HANDLING UNIT
ALD	ALUMINUM DOOR
ALM	ALARM
ALT	ALTERNATE
ALUM	ALUMINUM
AMB	AMBIENT
AMPL	AMPLIFIER
AMT	AMOUNT
ANN	ANNUNCIATOR
ANOD	ANODIZED
ANT	ANTENNA
AP	ACCESS PANEL
APPX	APPENDIX
ARCH	ARCHITECT(URAL)
ASB	ASBESTOS
ASC	ABOVE SUSPENDED CEILING
ASPH	ASPHALT
ASYM	ASYMMETRICAL
AV	AUDIO VISUAL
AVE	AVENUE
AWC	ACOUSTICAL WALL COVERING
AWP	ACOUSTICAL WALL PANEL
B&B	BALLED AND BURLAPPED
BAF	BAFFLE
BAL	BALANCE
BB	BULLETIN BOARD
BC	BOTTOM OF CURB
BD	BOARD
BEV	BEVEL
BF	BOTH FACES
BFF	BELOW FINISH FLOOR
BFP	BACKFLOW PREVENTER
BITUM	BITUMINOUS
BJT	BED JOINT
BL	BASE LINE
BLDG	BUILDING
BLK	BLOCK
BLKG	BLOCKING
BLKHD	BULKHEAD
BLST	BALLAST
BM	BEAM
BO	BOTTOM OF
BOC	BACK OF CURB
BOW	BOTTOM OF WALL
BP	BASE PLATE
BRCG	BRACING
BRDG JST	BRIDGING JOIST
BRG	BEARING
BRG PL	BEARING PLATE
BRK	BRICK
BRKT	BRACKET
BRS	BRASS
BRZ	BRONZE
BS	BOTH SIDES
BSMT	BASEMENT
BTM	BOTTOM
BUR	BUILT-UP ROOF
BW	BOTH WAYS
BOW	BOTTOM OF WALL
C/C	CENTER TO CENTER
C&G	CURB AND GUTTER
CAB	CABINET
CARP	CARPET
CAV	CAVITY
CB	CATCH BASIN
CCTV	CLOSED CIRCUIT TELEVISION
CEM	CEMENT
CEM PLAS	CEMENT PLASTER
CER	CERAMIC
CER TILE	CERAMIC TILE
C FLG	COUNTER FLASHING
CH BD	CHALKBOARD
CG	CORNER GUARD
CHAN	CHANNEL
CHFR	CHAMFER
CHK	CHECK
CI	CAST IRON
CIP	CAST IN PLACE
CIR	CIRCLE
CJ	CONTROL JOINT
CL	CENTER LINE
CLG	CEILING
CLG DIFF	CEILING DIFFUSER
CLG HT	CEILING HEIGHT
CLL	CONTRACT LIMIT LINE
CLOS	CLOSET
CLR	CLEAR
CLSR	CLOSURE
CMPST	COMPOSITE
CMU	CONCRETE MASONRY UNIT
CNR	CORNER
CNTR	COUNTER
CO	CLEANOUT
COL	COLUMN
COMM	COMMERCIAL
COMPL	COMPLETE
CONC	CONCRETE
CONC FL	CONCRETE FLOOR
CONF	CONFERENCE
CONN	CONNECTION
CONSTR	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
COORD	COORDINATE
CORR	CORRIDOR
COV PL	COVER PLATE
CPRS	COMPRESSIBLE
CPT	CARPET
CRCMF	CIRCUMFERENCE
CRS	COLD ROLLED STEEL
CSG	CASING
CSK	COUNTERSUNK
CSMT	CASEMENT
CSWK	CASEWORK
CT	CERAMIC TILE
C TV	CABLE TELEVISION
CUB	CUBICLE
CUR	CURRENT
CW	COLD WATER
DBL GLZ	DOUBLE GLAZING
DEPT	DEPARTMENT
DET	DETAIL
DF	DRINKING FOUNTAIN
DF	DRAPERY FABRIC
DFR	DOOR FRAME
DH	DOUBLE HUNG
DIA	DIAMETER
DIM	DIMENSION
DIST	DISTANCE
DIV	DIVIDER
DIW	DEIONIZED WATER
DJ	DOUBLE JOIST
DL	DRAPERY LINER
DMPF	DAMPPROOFING
DN	DOWN
DO	DITTO
DR	DOOR
DR CLSR	DOOR CLOSURE
DS	DOWNSPOUT
DST	DOOR STOP
DT	DRAIN TILE
DUPL	DUPLICATE
DVTL	DOVETAIL
DW	DISHWASHER
DWG	DRAWING
DWL	DOWEL
DWR	DRAWER
DWTR	DUMBWAITER
E	EAST
EA	EACH
EF	EACH FACE
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATOR
EMER	EMERGENCY
EMER SHR	EMERGENCY SHOWER
ENAM	ENAMEL
ENCL	ENCLOSURE
ENGR	ENGINEER
ENTR	ENTRANCE
EO	ELECTRICAL OUTLET
EP	ELECTRICAL PANEL
EPS	EXPANDED POLYSTYRENE
EPX	EPOXY FLOOR
EQL SP	EQUALLY SPACED
EQ	EQUAL
EQUIP	EQUIPMENT
EQUIV	EQUIVALENT
ERECT	ERECTION
ESCAL	ESCALATOR
ESMT	EASEMENT
EST	ESTIMATE
EW	EACH WAY
EXC	EXCAVATE
EXG	EXISTING
EXH HD	EXHAUST HOOD
EXH FN	EXHAUST FAN
EXP	EXPANSION
EXSP	EXPOSED
EXST	EXISTING
EXST GR	EXISTING GRADE
EXT	EXTERIOR
EXTN	EXTENSION
EIFS	EXTERIOR INSULATION & FINISH SYSTEM
F BRK	FIRE BRICK
F/F	FACE TO FACE
FBD	FIBERBOARD
FC	FIRE COATED
FD	FLOOR DRAIN
FDN	FOUNDATION
FEC	FIRE EXTINGUISHER CABINET
FF	FACTORY FINISH
FFE	FINISH FLOOR ELEVATION
FGL	FIBERGLASS
FIN GR	FINISH GRADE
FIN FL	FINISH FLOOR
FIN	FINISH
FL	FLOWLINE
FLDG	FOLDING
FLG	FLANGE
FLR	FLOOR
FLR SK	FLOOR SINK
FLR PL	FLOOR PLATE
FLR FIN	FLOOR FINISH
FLT GL	FLOAT GLASS
FLOUR	FLUORESCENT
FOC	FACE OF CONCRETE
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FPL	FIREPLACE
FPRF	FIREPROOFING
FRM	FRAME
FRNT	FRONT
FS	FULL SIZE
FSP	FIRE STANDPIPE
FSTNR	FASTENER
FTG	FOOTING
FURR	FURRING
FUT	FUTURE
FXTR	FIXTURE
GA	GYPSUM ASSOCIATION
GALV	GALVANIZED
GB	GRAB BAR
GDRL	GUARD RAIL
GENL	GENERAL
GENL CONTR	GENERAL CONTRACTOR
GFI	GROUND FAULT INTERRUPTER
GL	GLASS
GL BLK	GLASS BLOCK
GLU LAM	GLUE LAMINATED
GLZ	GLAZING
GLZ CMU	GLAZED CONCRETE MASONRY UNIT
GND	GROUND
GPDW	GYPSUM DRY WALL
GR BM	GRADE BEAM
GR	GRADE
GRTG	GRATING
GUT	GUTTER
GYP	GYPSUM
GYP PLAS	GYPSUM PLASTER
H	HIGH
H&CW	HOT & COLD WATER
HB	HOSE BIBB
HC	HOLLOW CORE
HC	HANDICAP
HCMU	HOLLOW CONCRETE MASONRY UNIT
HD	HEAVY DUTY
HDJT	HEAD JOINT
HDBD	HARDBOARD
HDR	HEADER
HDWD	HARDWOOD
HGT	HEIGHT
HLB	HORIZONTAL LOUVER BLINDS
HM	HOLLOW METAL
HMD	HOLLOW METAL DOOR
HMF	HOLLOW METAL FRAME
HNDRL	HAND RAIL
HO	HOLD-OPEN
HORIZ	HORIZONTAL
HR	HOUR
HS	HIGH STRENGTH
HSB	HIGH STRENGTH BOLT
HTG	HEATING
HVAC	HEATING, VENTILATION, AIR CONDITIONING
HW	HOT WATER
HYD	HYDRANT
ID	INSIDE DIAMETER
IF	INSIDE FACE
INCAND	INCANDESCENT
INL	INLET
INSTL	INSTALLATION
INSUL	INSULATION
INTR	INTERIOR
INV	INVERT
INV EL	INVERT ELEVATION
JAN	JANITOR
JC	JANITOR'S CLOSET
JST	JOIST
JT	JOINT
KB	KNEE BRACE
KO	KNOCKOUT
KOP	KNOCKOUT PANEL
KPL	KICK PLATE
KWY	KEYWAY
L	LEFT
LAB	LABORATORY
LAT	LAY-IN ACOUSTICAL TILE
LAV	LAVATORY
LB	POUND
LBR	LUMBER
LCMU	LIGHTWEIGHT CONCRETE MASONRY UNIT
LD BRG	LOAD BEARING
LDG	LANDING
LF	LINEAR FOOT
LG	LENGTH
LH	LEFT HAND
LHR	LEFT HAND REVERSE
LIN	LINOLEUM
LIQ	LIQUID
LKR	LOCKER
LKR RM	LOCKER ROOM
LL	LIVE LOAD
LNTL	LINTEL
LOC	LOCATION
LONG	LONGITUDINAL
LRG	LARGE
LS	LUMP SUM
LT	LIGHT
LT WT	LIGHTWEIGHT
LTG	LIGHTING
LVL	LEVEL
LVR	LOUVER
LW PLAS	LIGHTWEIGHT PLASTER
LWC	LIGHTWEIGHT CONCRETE
M	METER
MAINT	MAINTENANCE
MARB	MARBLE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MB	MARKERBOARD
MBR	MEMBER
MC	METAL CLAD
MDF	MEDIUM DENSITY FIBERBOARD
MDO	MEDIUM DENSITY OVERLOAD
ME	MATCH EXISTING
ME	MISCELLANEOUS EQUIPMENT
MECH	MECHANICAL
MED	MEDIUM
MEMB	MEMBRANE
MEZZ	MEZZANINE
MFG	MANUFACTURING
MFR	MANUFACTURER
MH	MANHOLE
MIL	MILLIMETER
MIN	MINIMUM
MIR	MIRROR
MISC	MISCELLANEOUS
MK	MARK
MKRBD	MARKERBOARD
ML	MATCH LINE
MLC	METAL LABORATORY CASEWORK
MLDG	MOLDING
MLWK	MILLWORK
MO	MASONRY OPENING
MOD	MODULE
MTD	MOUNTED
MTG	MEETING
MTL	METAL
MTR	MORTAR
MULL	MULLION
MULT	MULTIPLE
MVBL	MOVABLE
N	NORTH
N/A	NOT APPLICABLE
NEG	NEGATIVE
NF	NEAR FACE
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NS	NEAR SIDE
NTS	NOT TO SCALE
O/O	OUT TO OUT
OA	OVERALL
OC	ON CENTER
OD	OUTSIDE DIAMETER
OD	OVERFLOW DRAIN
OF	OUTSIDE FACE
OFCI	OWNER FURNISHED CONTRACTOR INSTALL
OFF	OFFICE
OFOI	OWNER FURNISHED OWNER INSTALLED
OH	OVERHEAD
OHD	OVERHEAD DOOR
OPER	OPERABLE
OPNG	OPENING
OPP	OPPOSITE
OPT	OPTIONAL
ORIG	ORIGINAL
OVHD	OVERHEAD
OXY	OXYGEN
OZ	OUNCE
P/C	PRECAST
PAR	PARALLEL
PARG	PARGING
PB	PANIC BAR
PBD	PARTICLE BOARD
PC	PORTLAND CEMENT
PCPLAS	PORTLAND CEMENT PLASTER
PED	PEDESTAL
PERF	PERFORATED
PERIM	PERIMETER
PERM	PERMANENT
PERP	PERPENDICULAR
PF	PANEL FABRIC
PFP	PRE-FINISHED PANELS
PGBD	PEGBOARD
PH	PHASE
PL	PLASTIC LAMINATE
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PLAT	PLATFORM
PLBG	PLUMBING
PLYWD	PLYWOOD
POL	POLISHED
POLY	POLYSTYRENE
POLYISO	POLYISOCYANURATE
POS	POSITIVE
PR	PAIR
PREFAB	PREFABRICATED
PRELIM	PRELIMINARY
PRKG	PARKING
PROJ	PROJECT
PS	PROJECTION SCREEN
PT	PAINT
PT	PORCELAIN TILE
PTN	PARTITION
PVC	POLYVINYL CHLORIDE
PVG	PAVING
PVMT	PAVEMENT
PWR	POWER
QT	QUARRY TILE
QTY	QUANTITY
QUAL	QUALITY
R	RISER
RAD	RADIUS
RB	RUBBER BASE
RBR	RUBBER
RC	REINFORCED CONCRETE
RCP	REINFORCED CONCRETE PIPE
RD	ROOF DRAIN
REC	RECESSED
RECD	RECEIVED
RECPT	RECEPTACLE
RECT	RECTANGULAR
REF	REFERENCE
REINF	REINFORCEMENT
REM	REMOVABLE
REQD	REQUIRED
RESIL	RESILIENT
RFM	RECESSED FLOOR MAT
RFG	ROOFING
RH	RIGHT HAND
RHR	RIGHT HAND REVERSE
RND	ROUND
RO	ROUGH OPENING
RST	RUBBER STAIR TREAD
RT	RUBBER TILE
RV	ROOF VENT
RVS	REVERSE
S	SOUTH
S	SEATING
SALV	SALVAGE
SB	SPLASH BLOCK
SC	SOLID CORE
SCH	SCHEDULE
SCMU	SOLID CONCRETE MASONRY UNIT
SCRN	SCREEN
SD	STORM DRAIN
SECT	SECTION
SF	SYSTEMS FURNITURE
SGL	SINGLE
SHR	SHOWER
SHTHG	SHEATHING
SHVL	SHELVES
SIM	SIMILAR
SJ	SLIP JOINT
SK	SINK
SLA	SLATE
SLP	SLOPE
SLS	SUB-FLOOR LEVELING SYSTEM
SLV	SLEEVE
SM	SHEET METAL
SMLS	SEAMLESS
SP	SPACING
SPCL	SPECIAL
SPEC	SPECIFICATION
SPKLR	SPRINKLER
SPKR	SPEAKER
SPRT	SUPPORT
SQFT	SQUARE FOOT
SQ	SQUARE
SQIN	SQUARE INCH
SQYD	SQUARE YARD
SSK	SERVICE SINK
SS	STAINLESS STEEL
SSM	SOLID SURFACING MATERIAL
ST	STAIN
ST	STREET
STAG	STAGGERED
STC	SOUND TRANSMISSION CLASS
STD	STANDARD
STIR	STIRRUP
STL JST	STEEL JOIST
STL PL	STEEL PLATE
STL	STEEL
STN	STONE
STOR	STORAGE
STRUCT	STRUCTURAL
STRUCT STL	STRUCTURAL STEEL
SUPPL	SUPPLEMENT
SURF	SURFACE
SUSP	SUSPENDED
SUSP CLG	SUSPENDED CEILING
SVB	SHEET VINYL BASE
SVF	SHEET VINYL FLOOR
SYM	SYMBOL
SYMM	SYMMETRICAL
SYST	SYSTEM
T&B	TOP & BOTTOM
T&G	TONGUE & GROOVE
T	TABLE
TB	TACKBOARD
TB-xx	TEST BORING-xx (E.G. TB-1)
TC	TOP OF CURB
TD	TRENCH DRAIN
TE	TRANSITION EDGE
TECH	TECHNICAL
TEMP	TEMPORARY
TER	TERRAZZO
THK	THICK
THRES	THRESHOLD
THRU	THROUGH
TKBD	TACKBOARD
TLT	TOILET
TMPD	TEMPERED
TMPD GL	TEMPERED GLASS
TNL	TUNNEL
TO	TOP OF
TOF	TOP OF FLANGE
TOFF	TOP OF FINISH FLOOR
TOJ	TOP OF JOIST
TOL	TOLERANCE
TOS	TOP OF STEEL
TOT	TOTAL
TOW	TOP OF WALL
TRNBKL	TURNBUCKLE
TS	TUBE STEEL
TV	TELEVISION
TYP	TYPICAL
UF	UPHOLSTERY FABRIC
UFD	UNDER FLOOR DUCT
UG	UNDERGROUND
UL	UNDERWRITERS LABORATORY
ULT	ULTIMATE
UNEX	UNEXCAVATED
UNFIN	UNFINISHED
UNO	UNLESS NOTED OTHERWISE
UPS	UNINTERRUPTIBLE POWER SUPPLY
UR	URINAL
UTIL	UTILITY
V	VOLT
VAC	VACUUM
VAV	VARIABLE AIR VOLUME
VB	VAPOR BARRIER
VAV	VINYL BASE
VCT	VINYL COMPOSITION TILE
VDB	VISUAL DISPLAY BOARD
VERT	VERTICAL
VEST	VESTIBULE
VIB	VIBRATION
VNR	VENEER
VOL	VOLUME
VR	VAPOR RETARDER
VT	VINYL TILE
VWC	VINYL WALL COVERING
W	WITH
W/W	WALL TO WALL
W/O	WITHOUT
W	WEST
WC	WATER CLOSET
WC	WALL COVERING
WCPT	WALL CARPET
WD	WOOD
WDD	WOOD DOOR
WDW	WINDOW
WF	WOOD FLOORING
WF	WIDE FLANGE
WGL	WIRE GLASS
WH	WALL HUNG
WHSE	WAREHOUSE
WL	WIND LOAD
WLD	WELDED
WR	WATER RESISTANT
WS	WEATHERSTRIPPING
WSCT	WAINSCOT
WT	WEIGHT
WTR	WATER
WTRPRF	WATERPROOFING
WWM	WELDED WIRE MESH
X SECT	CROSS SECTION

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON PLANS PRIOR TO COMMENCEMENT OF THE WORK . IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT AND OWNER IN ORDER TO MODIFY PLANS ACCORDINGLY .
2. ALL DISCIPLINES SHALL BE RESPONSIBLE FOR THEIR SCOPE OF WORK . THIS WORK IS TO BE SCHEDULED AND COMPLETED WITH THE GENERAL CONTRACTOR'S FULL KNOWLEDGE.
3. ALL HOT WORK ACTIVITIES (I.E. USING HEAT GUNS, SOLDERING, BRAZING, WELDING, GRINDING, METAL CUTTING, ETC.) OR OTHER ACTIVITIES INVOLVING FLAMES OR SPARKS SHALL BE PRECEDED BY OBTAINING AN APPROVED HOT WORK PERMIT. (IF HOT WORK REQUIRED)
4. THE PROJECT STAGING AREA / CONSTRUCTION ACTIVITIES SHALL NOT CAUSE THE OBSTRUCTION OF PATHS OF EGRESS INSIDE THE BUILDING, BLOCK EXIT DISCHARGE FROM THE BUILDING, OR IMPEDE EMERGENCY VEHICLE ACCESS TO THE BUILDING. CORRIDORS MAY NOT BE USED AS STAGING AREAS OR AS AREAS FOR DEBRIS COLLECTION.
5. ALL NECESSARY MEASURES SHALL BE TAKEN TO PREVENT THE NUISANCE ACTUATION OF ANY NEARBY SMOKE OR DUCT DETECTORS BY CONSTRUCTION ACTIVITIES THAT CREATE DUST OR FUMES INSIDE THE BUILDING.
6. THE CONTRACTOR SHALL NOT HANDLE OR DISABLE ANY FIRE SYSTEMS DEVICES. ONLY BUILDING FIRE SYSTEMS PERSONNEL MAY HANDLE OR DISABLE EXISTING FIRE SYSTEMS. ANY OUTAGES REQUIRED FOR THE EXISTING FIRE SYSTEMS SHALL BE PERFORMED ACCORDING TO THE BUILDING PROCEDURES.
7. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
8. ALL WORK IS TO BE PERFORMED ACCORDING TO WESTMINSTER PUBLIC SCHOOLS BUILDING & CONSTRUCTION STANDARDS.
9. CONTRACTOR TO PROVIDE FINAL CLEANING SERVICES IN ALL CLASSROOMS PRIOR TO PROJECT COMPLETION, AND NO LATER THAN THE DATE THAT THE OWNER OCCUPIES THE CLASSROOMS, AHEAD OF STAFF AND STUDENTS RETURNING TO THE SCHOOL."

PROJECT DESCRIPTION

THIS PROJECT ENTAILS RENOVATIONS AT THE EXISTING WESTMINSTER PUBLIC SCHOOLS BUILDING AT THE HARRIS PARK ELEMENTARY WHICH IS LOCATED AT 4300 W. 75TH AVENUE IN WESTMINSTER, CO.

THIS PROJECT ENTAILS THE REPLACEMENT OF WATERPROOFING AND INSTALLATION OF FOUNDATION DRAINAGE SYSTEMS IN ORDER TO MITIGATE WATER INTRUSION INTO A PORTION OF THE EXISTING SCHOOL. EXTERIOR GRADE AND FLATWORK WILL BE REMOVED AND RE-INSTALLED AS REQUIRED TO REPLACE THE FAILING EXISTING DAMPPROOFING.

ARCHITECTURALLY, THE WORK WILL INCLUDE THE REPLACEMENT OF FINISHES, FIXTURES, AND CASEWORK THROUGHOUT THE MAJORITY OF THE BUILDING. ALL OF THE EXTERIOR WINDOWS OF THE BUILDING WILL BE REPLACED. THE EXTERIOR DOORS OF THE MODULAR BUILDINGS WILL BE REPLACED. THE EXTERIOR BRICK OF THE BUILDING WILL BE STAINED AND THE METAL SIDING ON THE MODULARS WILL BE PAINTED TO MATCH.

PLUMBING IN THE BUILDING EXISTING BUILDING IS ANTICIPATED TO BE UPGRADED WITH REPLACEMENT OF CLASSROOM SINKS. AND INSTALLING A NEW FOUNDATION DRAIN AROUND THE GYM.

ELECTRICALLY, EXISTING ELECTRICAL INFRASTRUCTURE WILL BE UPGRADED IN THE CLASSROOMS, WHICH INCLUDES THE REMOVAL OF THE EXISTING "MICRO-PANELS.", MAG-HOLDS ON THE CLASSROOM DOORS, UPDATED POWER AND DATA FOR TEACHING WALLS, AND THE ADDITION OF VOICE LIFT IN ALL THE CLASSROOMS.

NO LANDSCAPE, MECHANICAL, STRUCTURAL OR FIRE ALARM SCOPE ARE ANTICIPATED AS PART OF THIS PROJECT.

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2025-033

September 25th, 2026

Standard Symbols, Abbreviations & General Notes

G0.0

CODE ANALYSIS

This project entails the alteration of Harris Park Elementary School located at 4500 W. 75th Ave. Westminster, CO 80030.
This building is an existing E Occupancy building, and the building occupancy, area, and height are not being modified as a result of this project.
This project is an alteration per section 503 of the 2021 International Existing Building Code. Alterations shall comply with the requirements of the International Building Code for new construction. Alterations shall be such that the building is no less conforming to the provisions of the International Building Code than the existing building was prior to the alteration.

2021 IEBC

Chapter 3 - Provisions For All Compliance Methods
302 - General Provisions
302.3 Existing materials - Materials already in use in a building in compliance with requirements or approvals in effect at the time of their erection or installation shall be permitted to remain in use unless determined by the code official to be unsafe.
302.4 New and replacement materials - Except as otherwise required or permitted by this code, materials permitted by the applicable code for new construction shall be used.
306 - Accessibility For Existing Buildings
306.7 Alterations - A facility that is altered shall comply with the applicable provisions in Chapter 11 of the International Building Code, ICC A117.1 and the provisions of Sections 06.7.1 through 306.7.16, unless technically infeasible. Where compliance with this section is technically infeasible, the alteration shall provide access to the maximum extent technically feasible.
306.7.1 Alterations affecting an area of primary function - Where an *alteration* affects the accessibility to, or contains an area of *primary function*, the route to the *primary function* area shall be accessible. The accessible route to the *primary function* area shall include toilet *facilities* and drinking fountains serving the area of *primary function*.
306.7.2 - Accessible means of egress. Accessible means of egress required by Chapter 10 of the International Building Code are not required to be added in existing facilities.

Chapter 4 - Repairs
Not Applicable.

Chapter 5 - Prescriptive Compliance Method
503 - Alterations
503.1 General - *Alterations* to any building or structure shall comply with the requirements of the *International Building Code* for new construction. *Alterations* shall be such that the *existing building* or structure is not less complying with the provisions of the *International Building Code* than the *existing building* or structure was prior to the *alteration*.
503.17 Locking arrangements in educational occupancies - In Group E occupancies...egress doors with locking arrangements designed to keep intruders from entering the room shall comply with Section 1010.2.8 of the *International Building Code*.
505 - Windows and Emergency Escape Openings
505.1 Replacement Windows - The installation or replacement of windows shall be as required for new installations.

2021 IBC

Chapter 3 - Use and Occupancy Classification
305 - Educational: Group E
305.1 The use of a building or structure, or a portion thereof, by six or more persons at any one time for educational purposes through the 12th grade.

Chapter 4 - Special Detailed Requirements Based on Use and Occupancy
Not Applicable

Chapter 5 - General Building Heights and Areas
Existing building height and area are to remain as-is and are not being modified by this project.

Chapter 6 - Types of Construction
602 - Construction Classification
Type IIIB - Primary Structural Frame - 0 hours
Bearing Walls - Exterior - 2 hours; Interior - 0 hours
Nonbearing walls and partitions - Exterior - (E Occupancy, Type IIIB, between 10' and 30' separation) - 1 hours
Nonbearing walls and partitions - Interior - 0 hours
Floor construction and secondary members - 0 hours
Roof construction and secondary members - 0 hours

Chapter 7 - Fire and Smoke Protection Features
708 - Fire Partitions
708.1 General - The following wall assemblies shall comply with this section: Corridor walls as required by Section 1020.3.
708.6 Openings - Openings in a fire partition shall be protected in accordance with Section 716.
716 - Opening Protectives
716.1(2) - Doors in corridor walls which are required to be 1-hour fire resistance rated fire partitions shall be 20 minute rated.
716.1(3) - Windows in corridor walls which are required to be 1-hour fire resistance rated fire partitions shall be 45 minute rated.


Chapter 8 - Interior Finishes
803 - Wall and Ceiling Finishes
803.1 - Interior wall and ceiling finish materials shall be classified for fire performance and smoke development in accordance with section 803.1.1.
803.13 - Interior finish requirements based on group. - Per Table 803.13
E (non-sprinklered) - Exit enclosures and exit passageways - Class A; Corridors - Class B; Rooms and Enclosed Spaces - Class C.
804 - Interior Floor Finish
804.4.2 Minimum Critical Radiant Flux - In all occupancies, *interior floor finish* and floor covering materials in enclosures for *stairways* and *ramps*, exit passageways, *corridors* and rooms or spaces not separated from corridors by partitions extending from the floor to the underside of the ceiling shall withstand a minimum critical radiant flux. The minimum critical radiant flux shall be not less than Class II in Groups E.

Chapter 9 - Fire Protection Systems
901 - General
901.2 - Fire Protection Systems - Fire protection systems shall installed, repaired, operated and maintained in accordance with this code and the International Fire Code.
Fire alarm and detection systems shall be installed as required by this code and the International Fire Code.
Fire Protection System design information will be a deferred submittal by the respective sub-contractors if required.
Fire Protection Systems are existing and will not be affected.
906 - Portable Fire Extinguishers
906.1 - Portable fire extinguishers shall be installed in the following locations:
1. In new E Occupancies.
2. Within 30 feet distance of travel from commercial cooking equipment.
906.3 - Size and Distribution
Light (Low) Hazard Occupancy (E) - Minimum 2-A Rating, Max 3000 square feet per unit A (6000 square feet), 11,250 square feet max. floor area.
75 feet max. travel distance.

Chapter 10 - Means of Egress
1003.2 - Ceiling Height - The means of egress shall have a ceiling height of not less than 7'-6".
1004.1 - The design occupant load for the space is not being modified by this project.
1005.1 - Means of Egress Sizing - See occupant load table
1010.1 - Doors. Means of egress doors shall meet the requirements of this section.
1010.1.1 - Size of Doors - Doors shall have a minimum clear opening width of 32".
1013.1 - Exit Signs - Where Required - Exits and exit access doors shall be marked by an approved exit sign readily visible from any direction of egress travel.
1017 - Exit Access Travel Distance - Per table 1017.2
E (Non-sprinklered) - 200'

Chapter 11 - Accessibility
1104 - Accessible Route
1104.1 - Site Arrival Points. Accessible routes within the site shall be provided from public transportation stops; accessible parking; accessible passenger loading zones; and public streets or sidewalks to the accessible building entrance served.
1105 - Accessible Entrances
1105.1 - Public Entrances. In addition to accessible entrances required by sections 1105.1.1 through 1105.1.6, at least 60 percent of all public entrances shall be accessible.
1106 - Parking and Passenger Loading Facilities
1106.1 - Required per table 1106.1 - 1-25 spaces require a minimum of 1 accessible spaces - 2 accessible spaces have been provided.

Chapter 29 -Plumbing Systems
Section 2902 - Minimum Plumbing Facilities
The existing square footage of the school is not being modified by this project, as such, the building is being made no less conforming than the existing conditions.

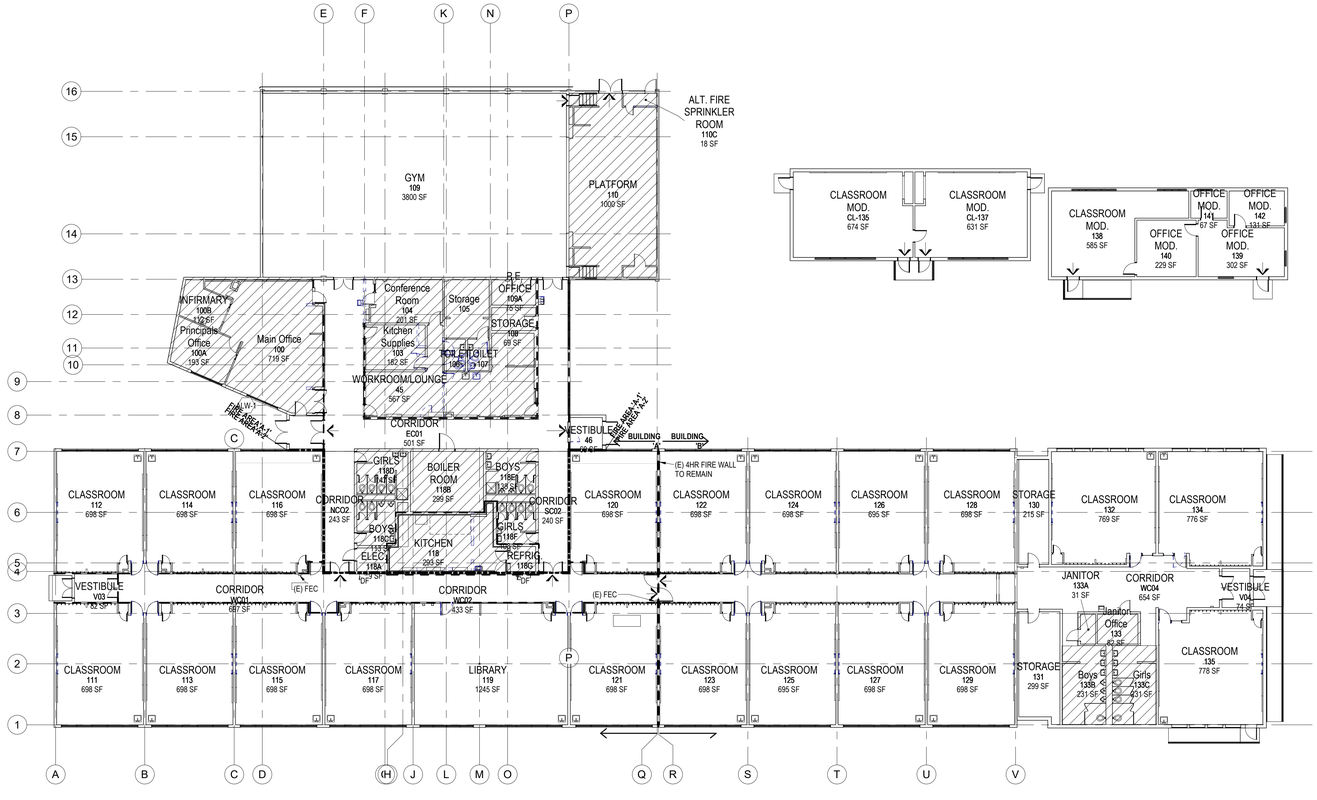

WORKING NORTH
TRUE NORTH

First Floor Life Safety Plan

SCALE: 1/16" = 1'-0"

APPLICABLE DESIGN CODES

The 2021 International Existing Building Code (IEBC)
The 2021 International Building Code (IBC)
The 2024 Colorado Plumbing Code (CPC)
The 2023 National Electrical Code (NEC)

GENERAL NOTES

1. Items which are not included in the scope of this project are not required to be brought up to code.
2. Items which are included in the scope of this project must meet the requirements of the currently adopted codes.
3. The existing egress configuration is compliant based on the IEBC code requirements, and there are no dead-end corridors.
4. This project scope entails no change to the building occupancy.

LIFE SAFETY LEGEND

PROJECT BOUNDARY
FEC — FIRE EXTINGUISHER CABINET
2 HOUR FIRE PARTITION (EXISTING)
2 HOUR FIRE BARRIER
3 HOUR FIRE
SMOKE BARRIER
XX — PATH OF TRAVEL (FOR CUMULATIVE DISTANCES REFER TO SCHEDULE)
EXIT DISCHARGE
P: XX" / R: XX" — WIDTH PROVIDED / WIDTH REQUIRED
ACCESSIBLE ROUTE

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

1	AHJ REVIEW COMMENT RESPONSES	10/28/2022

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026

Building Code Data

G0.1

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:06 PM

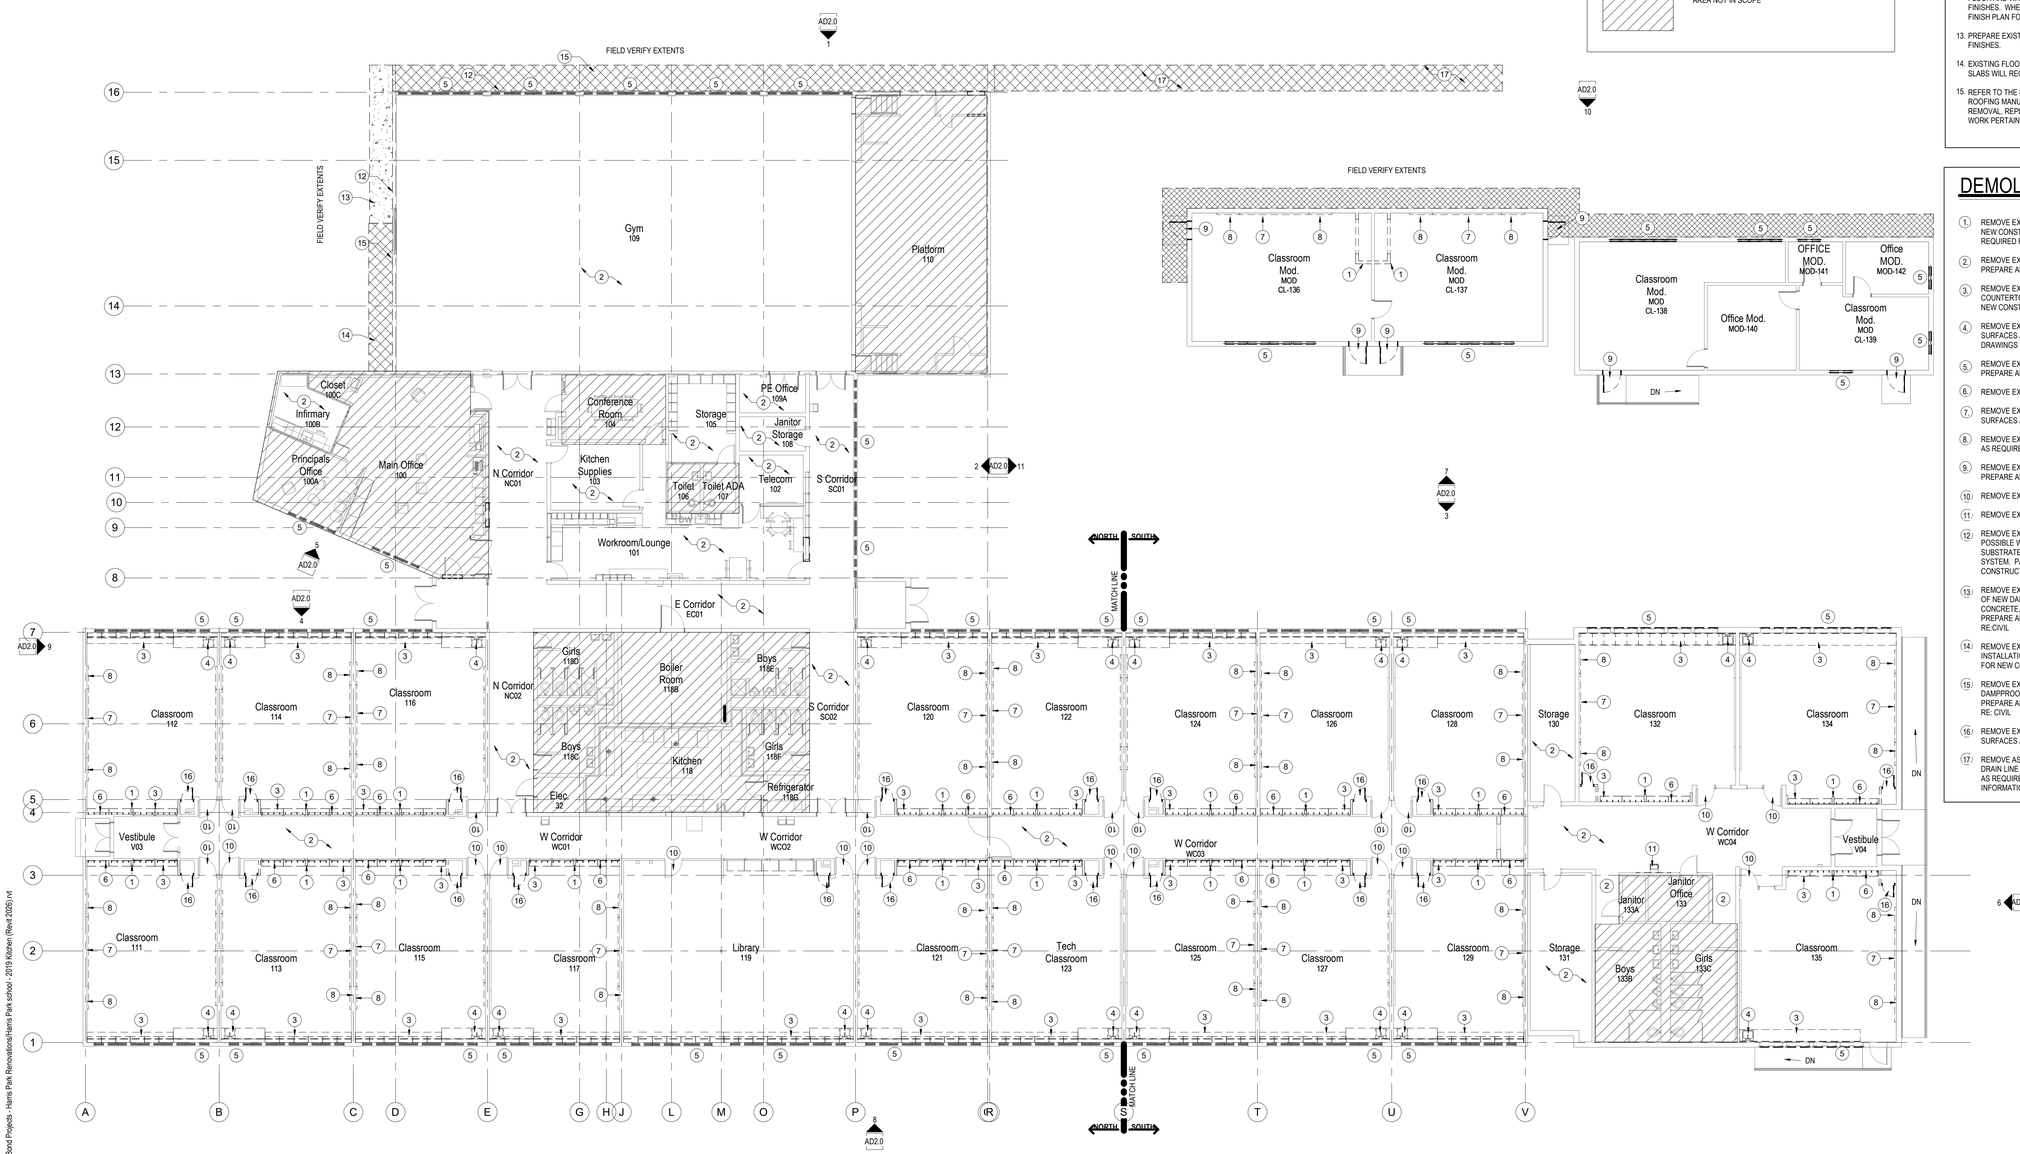

WORKING NORTH

TRUE NORTH

First Floor Demolition Plan North

SCALE: 3/32" = 1'-0"

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS) AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. OWNER HAS RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT IS SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.
14. EXISTING FLOOR SLABS ARE CONCRETE. ANY DEMOLITION OF EXISTING FLOOR SLABS WILL REQUIRE GPR X-RAY PRIOR TO DEMOLITION.
15. REFER TO THE NATIONAL ROOFING CONTRACTOR'S ASSOCIATION ROOFING MANUAL FOR ADDITIONAL INFORMATION PERTAINING TO THE REMOVAL, REPLACEMENT, AND DETAIL RECOMMENDATIONS FOR ALL WORK PERTAINING TO THE EXISTING ROOF SYSTEM.

DEMOLITION KEY NOTES

1. REMOVE EXISTING WALL ASSEMBLY IN ITS ENTIRETY OR AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING FLOOR FINISH MATERIAL IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE EXISTING CASEWORK IN ITS ENTIRETY, AND ANY ASSOCIATED COUNTERTOP. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
4. REMOVE EXISTING SINK IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
5. REMOVE EXISTING WINDOW ASSEMBLY IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
6. REMOVE EXISTING COAT HOOKS
7. REMOVE EXISTING MARKER BOARD. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
8. REMOVE EXISTING TACK BOARD. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
9. REMOVE EXISTING DOOR AND FRAME ASSEMBLY IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
10. REMOVE EXISTING DOOR STOP FROM DOOR
11. REMOVE EXISTING DRINKING FOUNTAIN AND ASSOCIATED TILE SURROUND
12. REMOVE EXISTING DAMPPROOFING SYSTEM IN ITS ENTIRETY, TO THE EXTENT POSSIBLE WITHOUT DAMAGING EXISTING BRICK. PREPARE REMAINING SUBSTRATE AS REQUIRED FOR INSTALLATION OF NEW DAMPPROOFING SYSTEM. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
13. REMOVE EXISTING CONCRETE SIDEWALK AS REQUIRED FOR INSTALLATION OF NEW DAMPPROOFING SYSTEM. PROTECT ADJACENT EXISTING CONCRETE, PAVEMENT, AND BUILDING ELEMENTS TO REMAIN. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. RE:CIVIL
14. REMOVE EXISTING LANDSCAPE MATERIAL AS REQUIRED AND STORE FOR RE-INSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
15. REMOVE EXISTING BACKFILL AS REQUIRED FOR INSTALLATION OF NEW DAMPPROOFING SYSTEM AND STORE FOR REINSTALLATION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. RE: CIVIL
16. REMOVE EXISTING TEACHERS CABINET. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
17. REMOVE ASPHALT AS REQUIRED FOR INSTALLATION OF NEW FOUNDATION DRAIN LINE AND NEW DRYWELL. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. SEE CIVIL FOR ADDITIONAL INFORMATION.

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026


Demolition First Floor Plan

AD1.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:07 PM

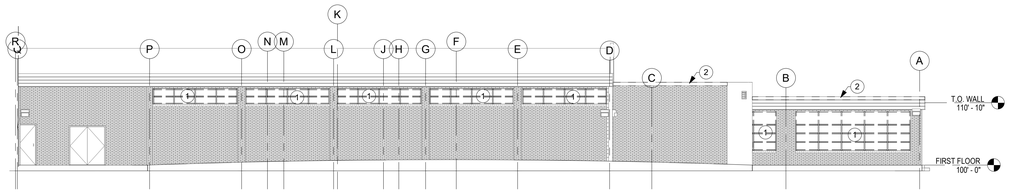

1 North Elevation - Demolition
SCALE: 3/32" = 1'-0"

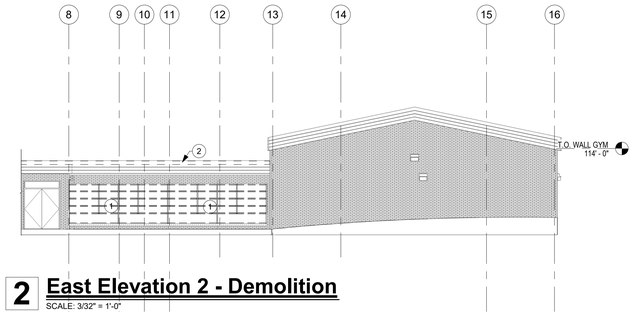


2 East Elevation 2 - Demolition
SCALE: 3/32" = 1'-0"

GENERAL ELEV. DEMO. NOTES


1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATION IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO ELECTRICAL AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
7. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.
8. REPAIR DAMAGED AND WEATHERED BRICK AND MORTAR AS REQUIRED TO RECEIVE NEW FINISHES.

DEMO ELEVATION KEY NOTES


1. REMOVE EXISTING WINDOW SYSTEM IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING PARAPET CAP IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
3. REMOVE DOOR IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
4. REMOVE EXISTING LOUVER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION

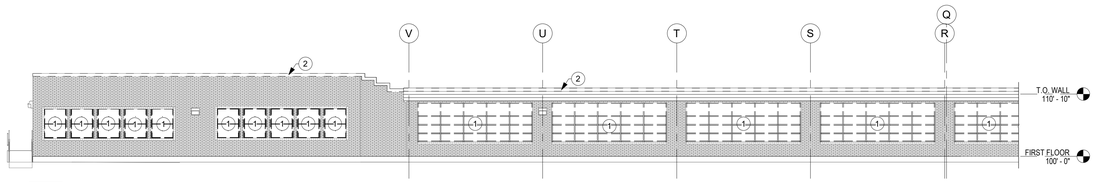


3 North Elevation 2- Demolition
SCALE: 3/32" = 1'-0"

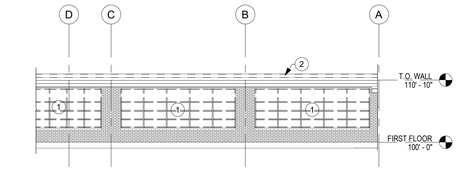


4 South West Elevation - Demolition
SCALE: 3/32" = 1'-0"

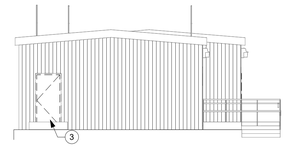


11 West Elevation - Modulars Demolition
SCALE: 1/8" = 1'-0"

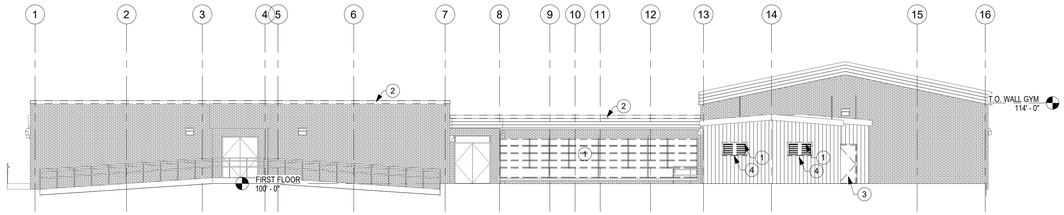

6 East Elevation - Demolition
SCALE: 3/32" = 1'-0"

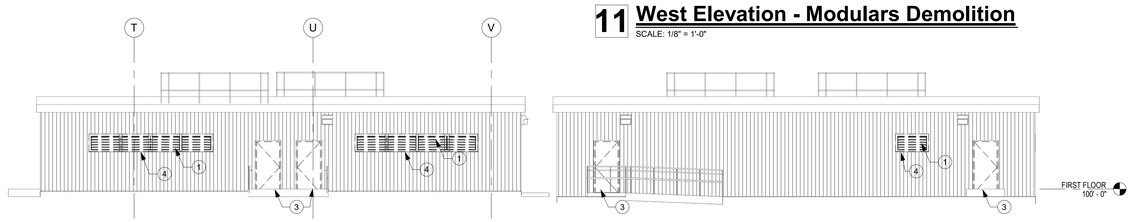


7 South Elevation - Modulars Demolition
SCALE: 1/8" = 1'-0"

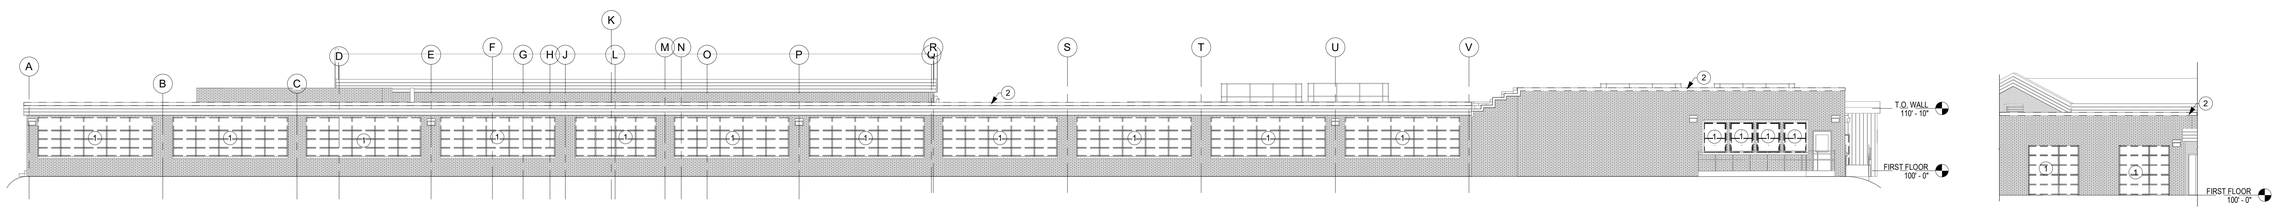


8 South Elevation - Demolition
SCALE: 3/32" = 1'-0"

5 North West Elevation - Demolition
SCALE: 3/32" = 1'-0"

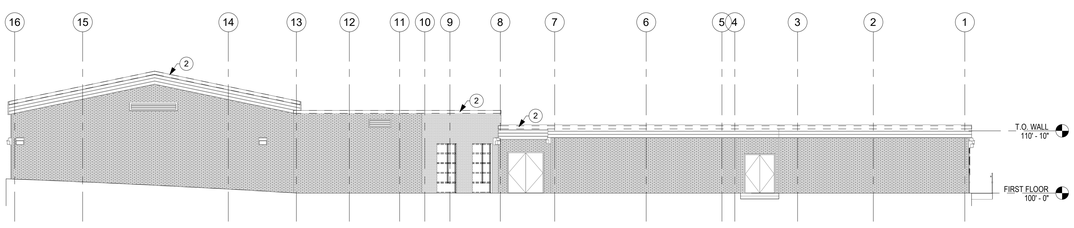

9 West Elevation - Demolition
SCALE: 3/32" = 1'-0"

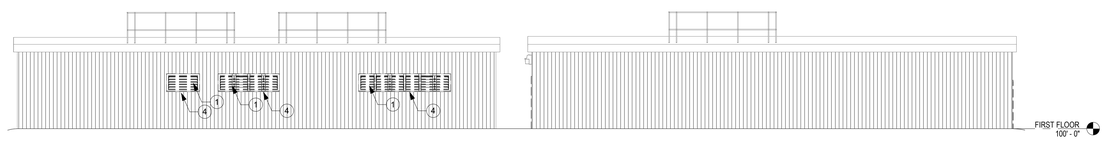

10 North Elevation - Modulars Demolition
SCALE: 1/8" = 1'-0"

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2025-033

September 25th, 2026

Demo Exterior Elevations

AD2.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:12 PM

GENERAL NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS. REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. REFER TO ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
6. INTERIOR SIGNAGE TO BE PROVIDED BY OWNER.
7. FURNITURE AND EQUIPMENT PROVIDED BY OWNER.
8. WHERE WIRE-MOLD IS REMOVED, CMU IS TO BE REPAINTED TO MATCH EXISTING.

KEY NOTES


1. MAPLE-VENEERED PLYWOOD BASE CABINETS WITH SOLID SURFACE COUNTERTOP
2. SINGLE BASIN ADA SINK WITH BUBBLER. RE: PLUMBING
3. MAPLE-VENEERED PLYWOOD SHELF WITH COAT HOOKS BELOW
4. NOT USED
5. POLISHED CONCRETE FLOOR
6. NEW STOREFRONT SYSTEM
7. FULL-HEIGHT WOOD-VENEERED CABINET WITH DOOR LOCK
8. NOT USED
9. NEW HIGH-LOW DRINKING FOUNTAINS WITH BOTTLE FILLER. INSTALL STAINLESS STEEL PLATE ON WALL BEHIND.
10. NEW MAGHOLD ON EXISTING DOOR
11. REPLACE BACKFILL REMOVED FOR INSTALLATION OF NEW DAMPPROOFING. COMPACT IN 8" LIFTS TO MINIMUM COMPACTION OF 95% OR MORE AS DETERMINED BY APPLICABLE ASTM TESTING.
12. NEW CONCRETE SIDEWALK. PROVIDE 6" CONCRETE PAVING OVER 6" CDOT CLASS 6 AGGREGATE BASE COURSE. SEE 8/A8.0.
13. DOUBLE BASIN ADA SINK. RE: PLUMBING
14. NEW LEARNING WALL
15. MODIFY BACK OF CABINET AS REQUIRED FOR EXISTING ROOF DRAIN
16. INSTALL COVER PLATE ON EACH SIDE OF EXISTING MICRO PANEL AND PAINT TO MATCH WALL
17. STAIN BASKETBALL COURT STRIPING. COLOR TO BE SELECTED BY ARCHITECT
18. BELOW GRADE DRYWELL AND DRAIN LINE CONNECTED FROM THE NEW FOUNDATION DRAIN. RE: CIVIL

WALL TYPES

1 5/8" TYPE 'X' GPDW ON 6" 20 GAUGE METAL STUDS AT 16" O.C.

NOTE: PROVIDE BACKING IN WALLS FOR ALL NEW EQUIPMENT AND SHELVING AS REQUIRED.

AREA NOT IN SCOPE

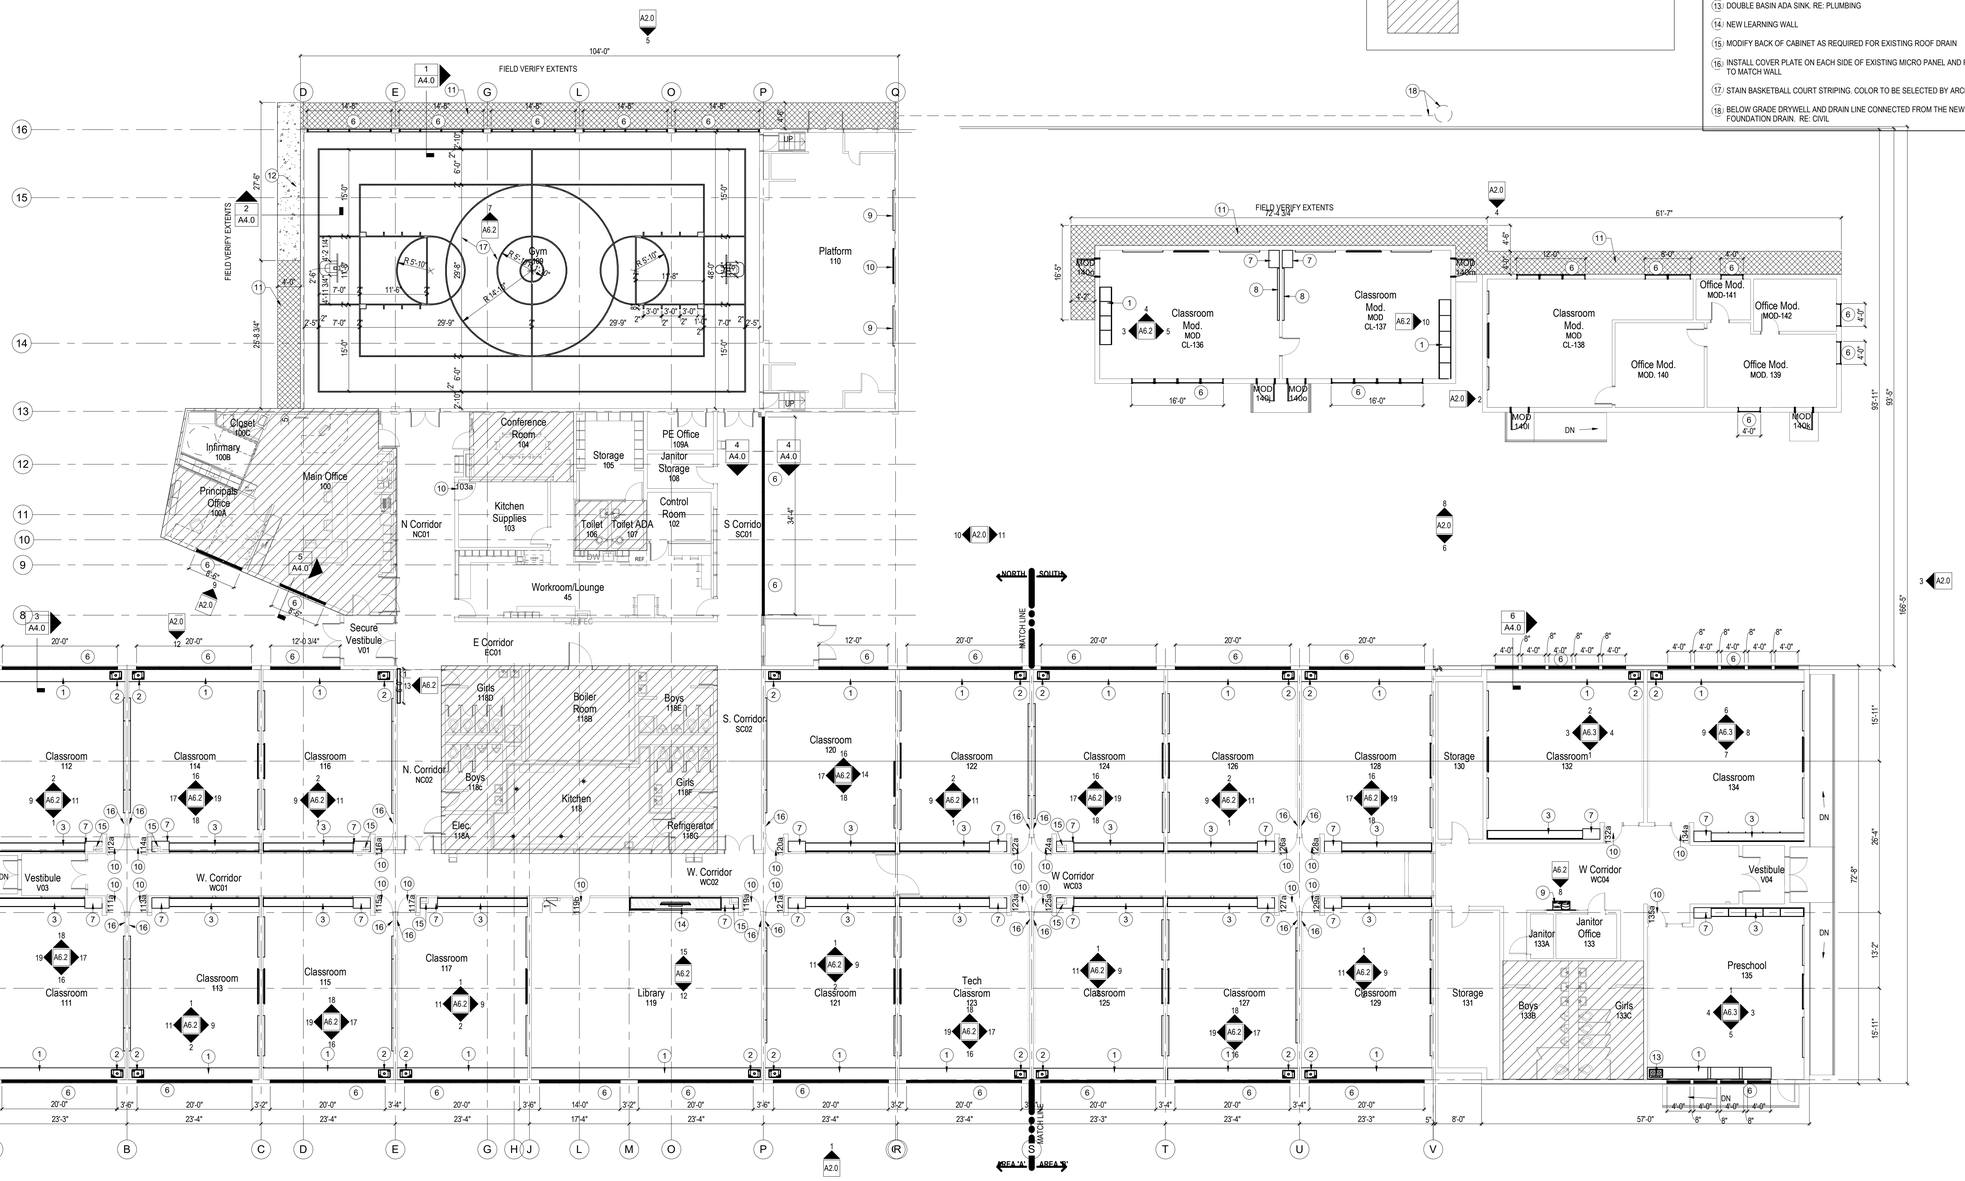

First Floor Plan North

SCALE: 3/32" = 1'-0"

WORKING NORTH

TRUE NORTH

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2025-033


September 25th, 2026

First Floor Plan

A1.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:13 PM

EQUIPMENT SCHEDULE				
ITEM DESCRIPTION (MANUFACTURER & MODEL)	QUANTITY	FURNISHED/INSTALLED BY	COMMENTS	Type Mark
4' X 7' MARKER BOARD, CLARIDGE SERIES 4	42	CONTRACTOR/CONTRACTOR		001
TV-85"	23	OWNER/CONTRACTOR		002
4' X 12' MARKER BOARD, CLARIDGE SERIES 4	11	CONTRACTOR/CONTRACTOR		003
4' X 4' TACK BOARD, FORBO BULLETIN BOARD	24	CONTRACTOR/CONTRACTOR		004
4' X 4' MARKER BOARD	1	CONTRACTOR/CONTRACTOR		005

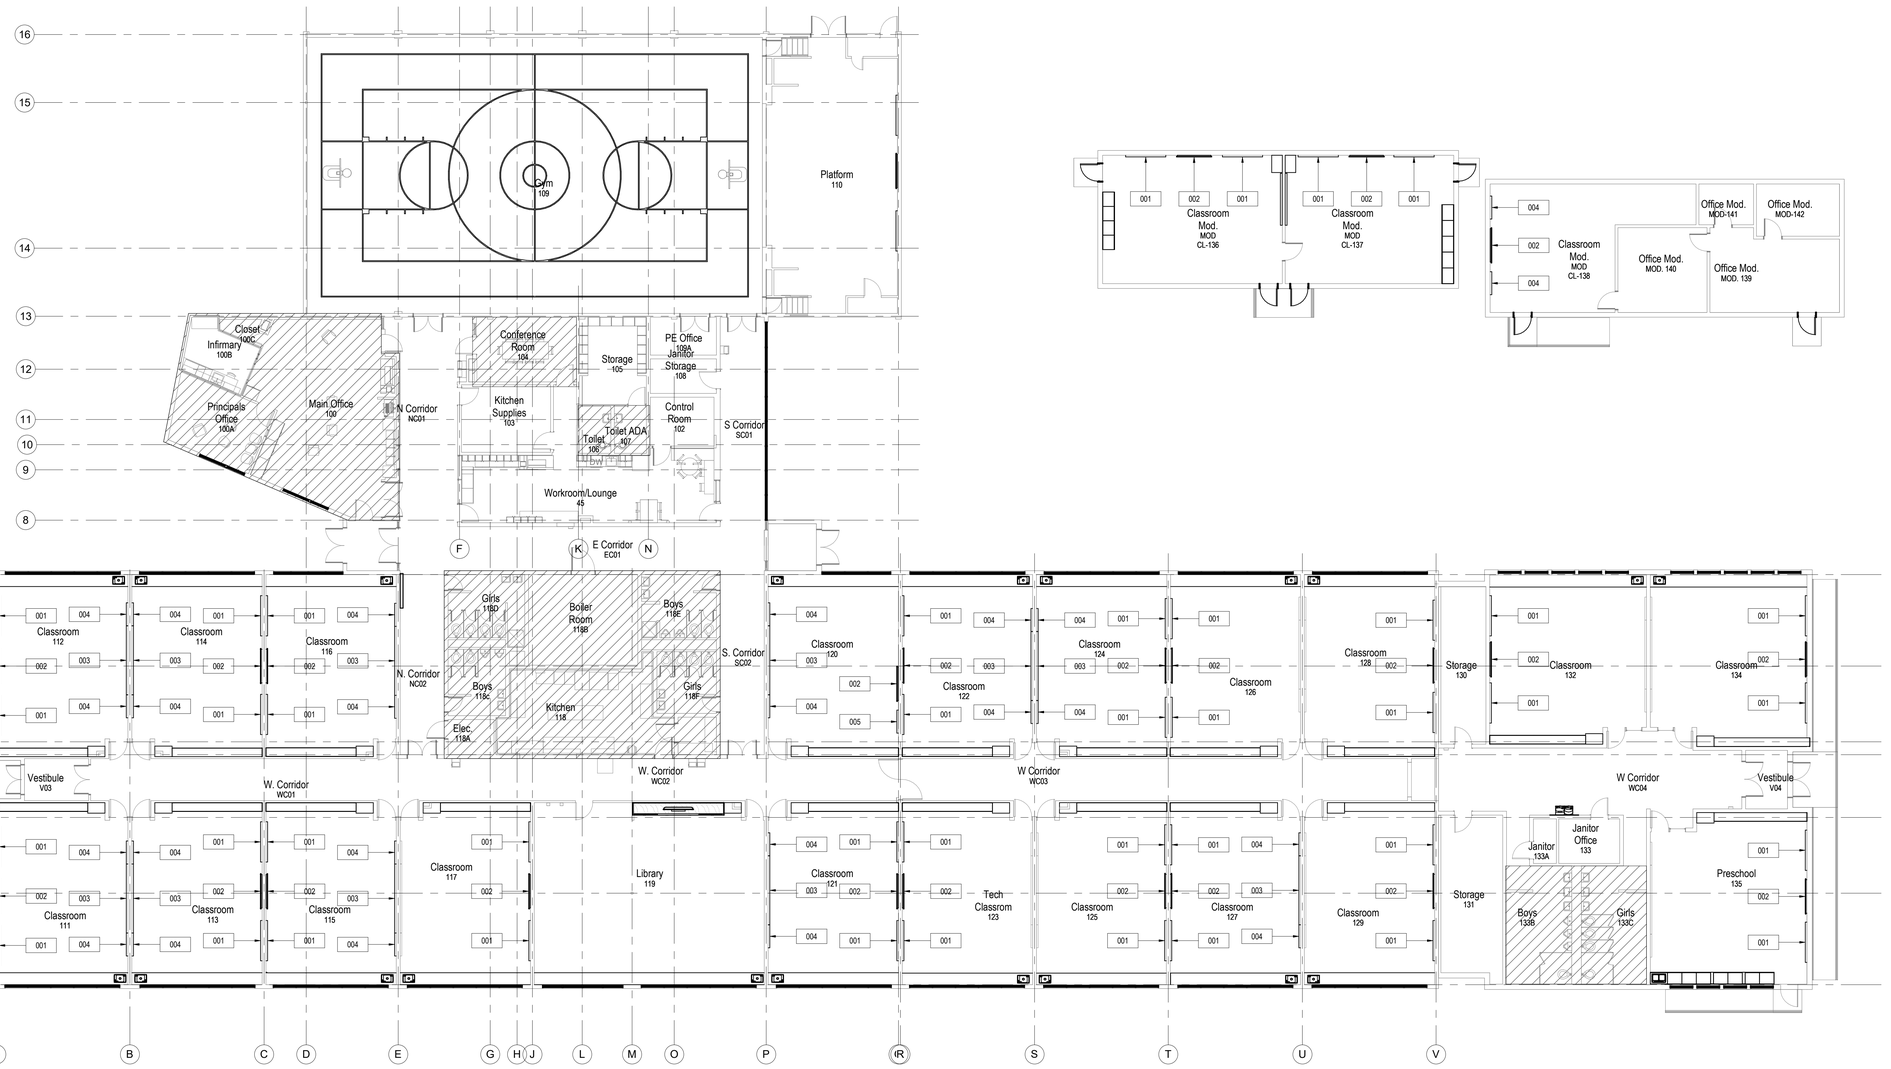

1 **FIRST FLOOR**
SCALE: 3/32" = 1'-0"

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026

Equipment Plan

A1.2

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:16 PM

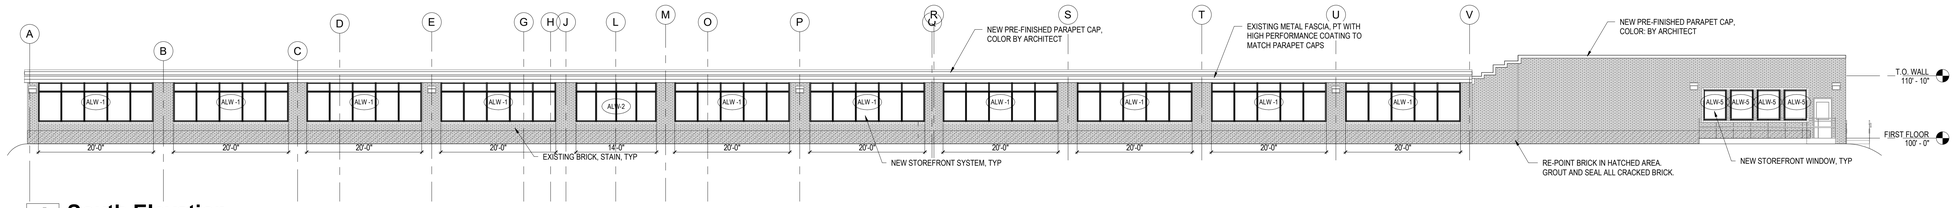

1 South Elevation

SCALE: 3/32" = 1'-0"

BASIS OF DESIGN LEGEND


EXISTING BRICK

ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING, COLOR SELECTED BY ARCHITECT

NEW PRE-FINISHED PARAPET CAPS AND FLASHING, BASIS OF DESIGN: SHERWIN-WILLIAMS GENESIS. COLOR: COPPER PENNY


BRICK REPAIR SCOPE GENERAL NOTES:

1. CONTRACTOR TO FIELD VERIFY EXTENTS OF ALL CRACKED AND/OR DAMAGED BRICK. CONFIRM WITH OWNER FOR DIRECTION ON REPAIR AND REPLACEMENT
2. CONTRACTOR TO PROVIDE NOT-TO-EXCEED PRICING FOR BRICK RE-POINTING AND REPAIR IN AREAS INDICATED ON THE DRAWINGS, ESTIMATED AT 2,300 SF. CONTRACTOR TO PROVIDE UNIT PRICING FOR ADDITIONAL AREAS OF REPAIR, AND/OR TO CREDIT AREAS INDICATED THAT ARE FOUND TO NOT NEED REPAIR.



2 West Elevation Modular 2

SCALE: 3/32" = 1'-0"

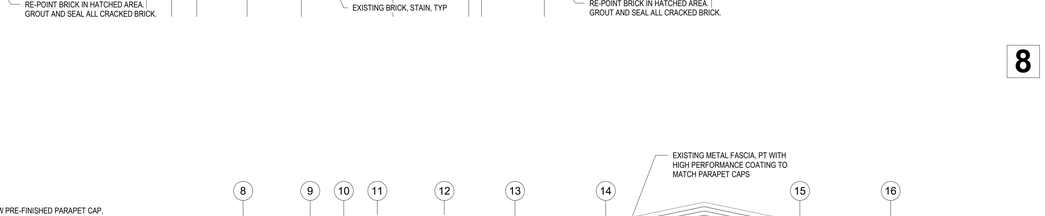


3 East Elevation

SCALE: 3/32" = 1'-0"




4 North Elevation - Modulars

SCALE: 3/32" = 1'-0"

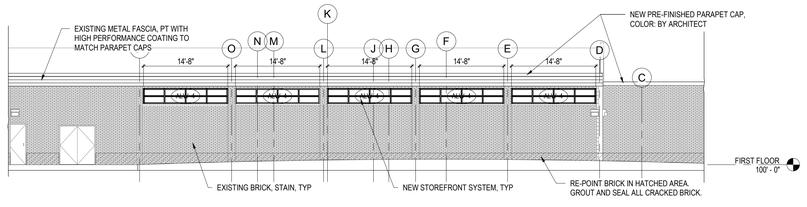


5 North Elevation

SCALE: 3/32" = 1'-0"

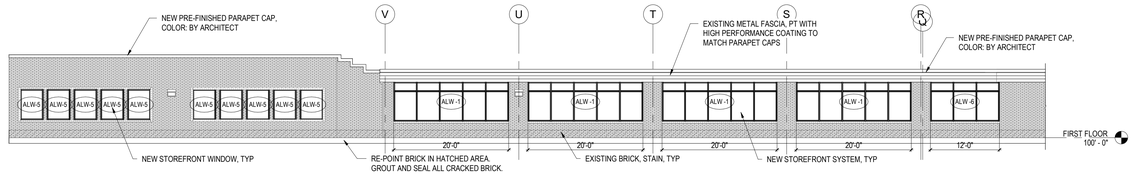


6 North Elevation 2

SCALE: 3/32" = 1'-0"

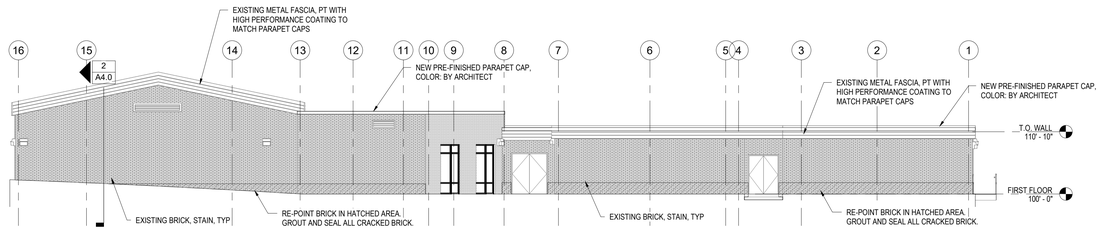


7 West Elevation

SCALE: 3/32" = 1'-0"

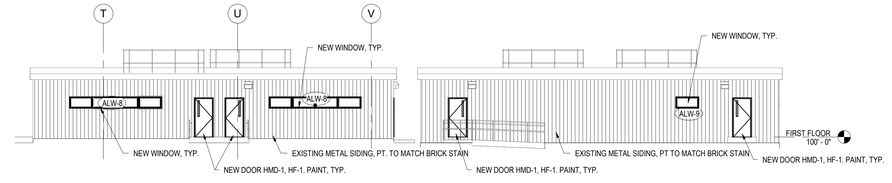


8 South Elevation - Modulars

SCALE: 3/32" = 1'-0"

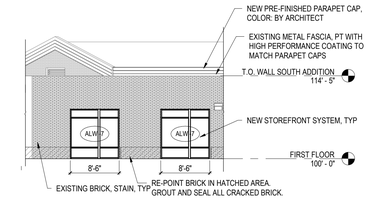


9 Northwest Elevation

SCALE: 3/32" = 1'-0"

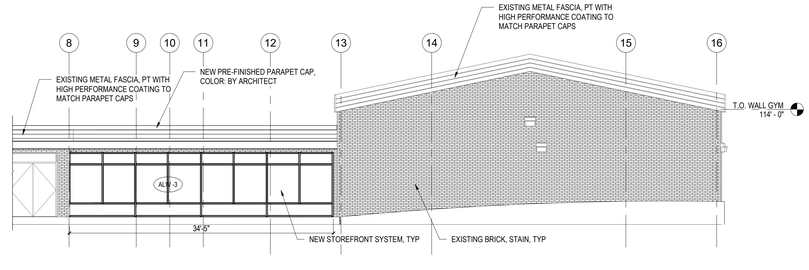


10 East Elevation 2

SCALE: 1/8" = 1'-0"

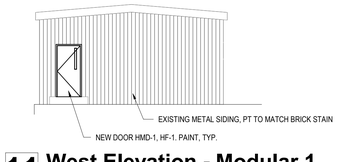

11 West Elevation - Modular 1

SCALE: 1/8" = 1'-0"

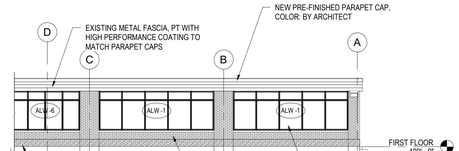

12 Southwest Elevation

SCALE: 3/32" = 1'-0"

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026

Exterior Elevations


A2.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2026 1:04:22 PM

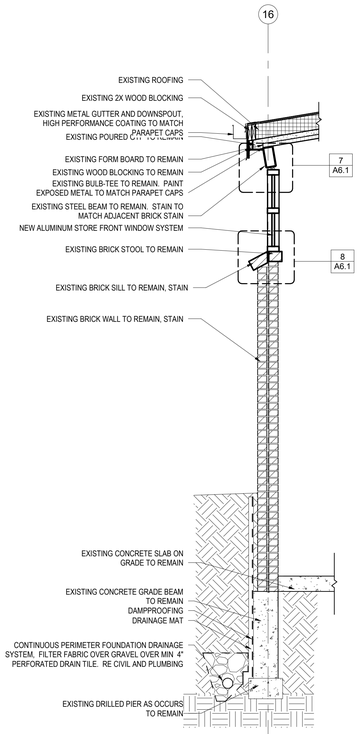


1 North Gym Wall Section

SCALE: 1/2" = 1'-0"

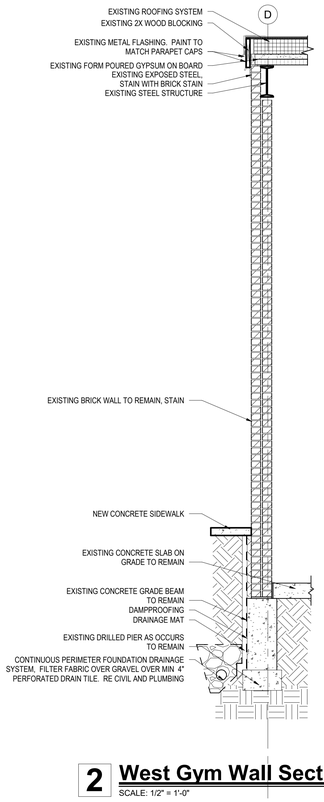


2 West Gym Wall Section

SCALE: 1/2" = 1'-0"

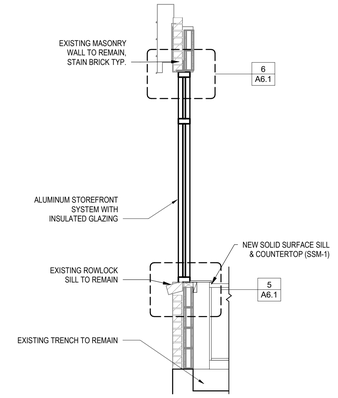


3 Typical Classroom Section

SCALE: 1/2" = 1'-0"

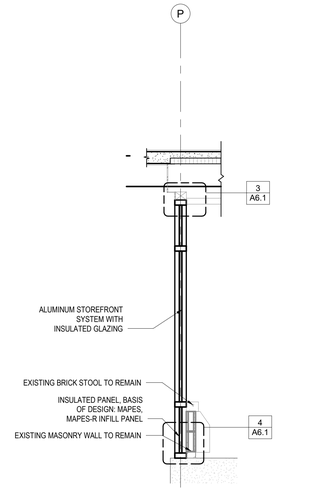


4 East Corridor Wall

SCALE: 1/2" = 1'-0"

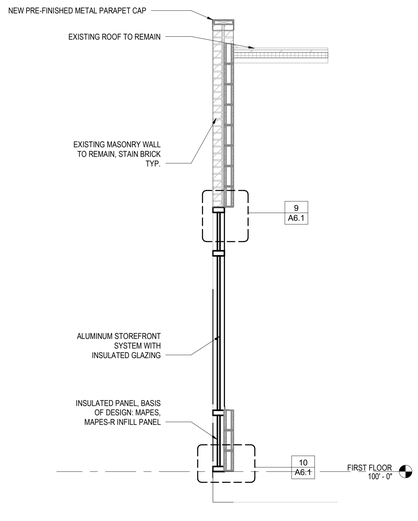


5 MAIN OFFICE WALL SECTION

SCALE: 1/2" = 1'-0"

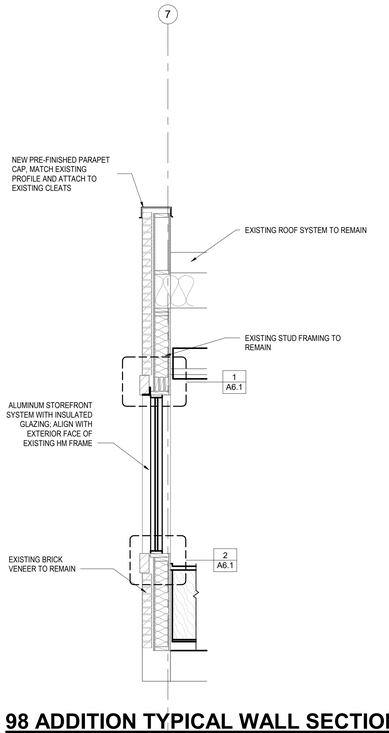


6 98 ADDITION TYPICAL WALL SECTION

SCALE: 1/2" = 1'-0"

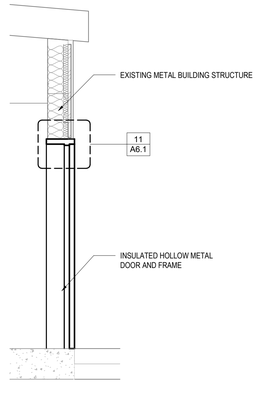

7 Modular Buidling Door Section

SCALE: 1/2" = 1'-0"

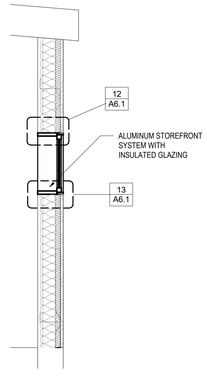

8 Modular Building Window Section

SCALE: 1/2" = 1'-0"

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026


Wall Sections

A4.0


Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2026 1:04:22 PM

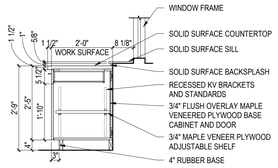


1 Base Cabinet
SCALE: 1/2" = 1'-0"

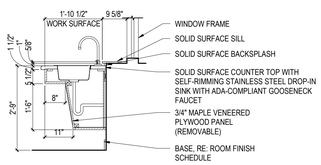

2 Sink Base Cabinet - ADA
SCALE: 1/2" = 1'-0"

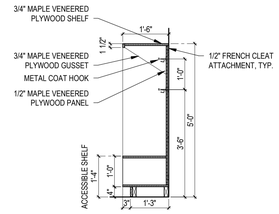


3 Classroom Shelf
SCALE: 1/2" = 1'-0"




4 Sink Base Cabinet - ADA
SCALE: 1/2" = 1'-0"

CASEWORK GENERAL NOTES


1. ALL CASEWORK SHALL BE CONSTRUCTED TO MEET THE FOLLOWING AWI CONSTRUCTION GRADES:
   WOOD VENEERED PLYWOOD CASEWORK
   -GRADE = CUSTOM
   -SOLID SURFACE COUNTERTOPS AND BACKSPLASH, COLOR TO BE SELECTED BY ARCHITECT
2. TYPICAL MATERIALS:
   -HEAVY DUTY DRAWER SLIDES
   -FIVE KNUCKLE HINGES
   -WIRE PULLS
   -METAL SHELF CLIPS ON RECESSED K.V. STANDARDS
3. SEE SHEET A9.0 FOR FINISHES.
4. RECESS ALL KV STANDARDS PER DETAIL 20 ON SHEET A6.0




5 Base Cabinet Only
SCALE: 1/2" = 1'-0"

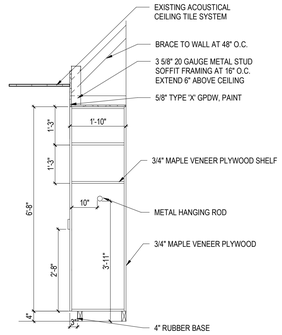


6 Teachers Cabinet
SCALE: 1/2" = 1'-0"

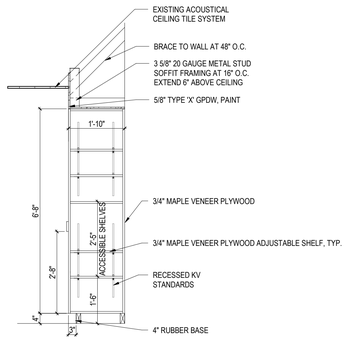


7 Teacher's Cabinet
SCALE: 1/2" = 1'-0"

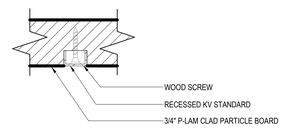


8 Typ. Recessed KV Standard
SCALE: 1/2" = 1'-0"

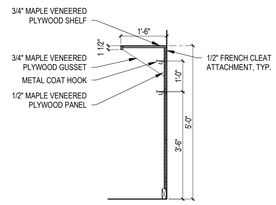


9 Coat Hook Shelf
SCALE: 1/2" = 1'-0"

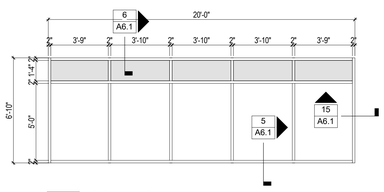


10 ALW-1
SCALE: 1/4" = 1'-0"

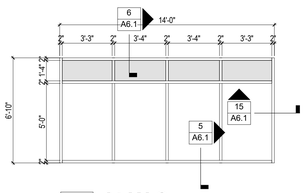


11 ALW-2
SCALE: 1/4" = 1'-0"

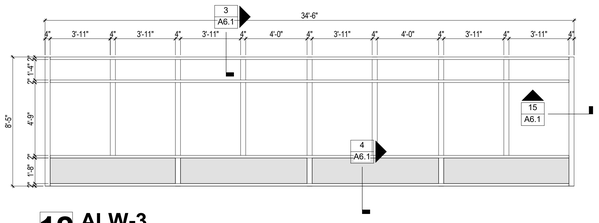


12 ALW-3
SCALE: 1/4" = 1'-0"

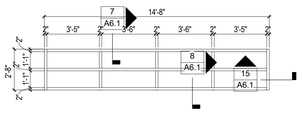


13 ALW-4
SCALE: 1/4" = 1'-0"




14 ALW-5
SCALE: 1/4" = 1'-0"




15 ALW-6
SCALE: 1/4" = 1'-0"




16 ALW-7
SCALE: 1/4" = 1'-0"

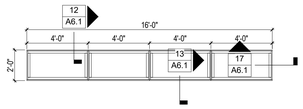


17 ALW-8
SCALE: 1/4" = 1'-0"



18 ALW-9
SCALE: 1/4" = 1'-0"




19 ALW-10
SCALE: 1/4" = 1'-0"



20 ALW-11
SCALE: 1/4" = 1'-0"

DOOR AND FRAME SCHEDULE

DOOR NO.	ROOM NO.	ROOM NAME	DOOR DIMENSIONS W	DOOR DIMENSIONS H	DOOR TYPE	FRAME TYPE	DOOR/FRAME FIRE RATING	HARDWARE	REMARKS
103a	103	Kitchen Supplies	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
111a	111	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
112a	112	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
113a	113	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
114a	114	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
115a	115	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
116a	116	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
117a	117	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
119a	119	Library	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
119b	119	Library	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
120a	120	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
121a	121	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
122a	122	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
123a	123	Tech Classrom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
124a	124	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
125a	125	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
126a	126	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
127a	127	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
128a	128	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
129a	129	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
132a	132	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
134a	134	Classroom	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
135a	135	Preschool	3' - 0"	6' - 8"	(E)WD	(E)HMF		EX-01	New Maghold, Existing Hardware to Remian
MOD 140j	MOD CL-136	Classroom Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite
MOD 140k	MOD. 139	Office Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite
MOD 140l	MOD CL-138	Classroom Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite
MOD 140m	MOD CL-137	Classroom Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite
MOD 140n	MOD CL-136	Classroom Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite
MOD 140o	MOD CL-137	Classroom Mod.	3' - 0"	6' - 8"	HMD-1	HMF-1		01	Storeroom, Small Lite



HMD-1
HOLLOW METAL DOOR W/ LITE

HMF-1
HM FRAME

21 Door and Frame Types
SCALE: 1/4" = 1'-0"

BASIS-OF-DESIGN:
1. EXTERIOR HOLLOW METAL DOORS: CURRIES 707 Q-MAX OR EQUAL
2. ALL LITES WITHIN DOORS ARE TO HAVE ANEMOSTAT LOPRO LITE KITS
2. EXTERIOR STOREFRONT: KAWNEER 451 UT WITH INSULATED GLAZING. COLOR:CLEAR ANNODIZE

INSULATED PANELS, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026


Casework Sections and Exterior Frame Types and Door Schedule

A6.0


Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2026 1:04:22 PM

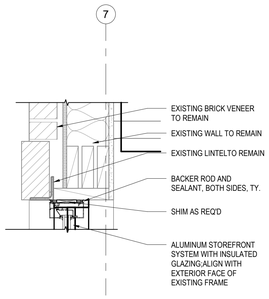


1 Detail 1
SCALE: 1 1/2" = 1'-0"

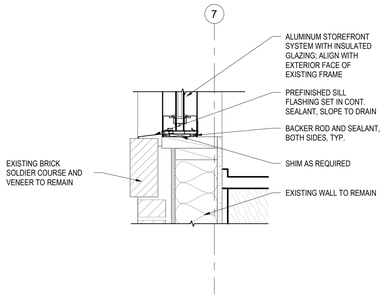


2 Detail 2
SCALE: 1 1/2" = 1'-0"

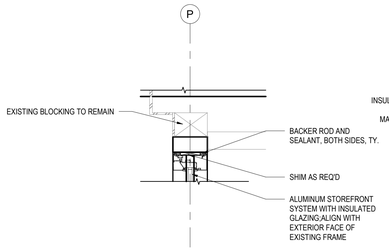


3 Detail 3
SCALE: 1 1/2" = 1'-0"

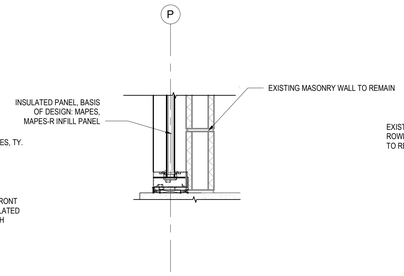


4 Detail 4
SCALE: 1 1/2" = 1'-0"

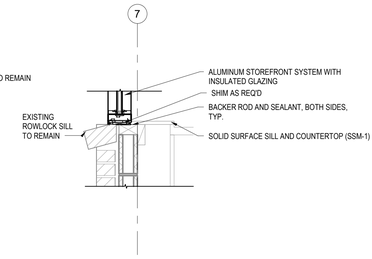


5 Detail 5
SCALE: 1" = 1'-0"

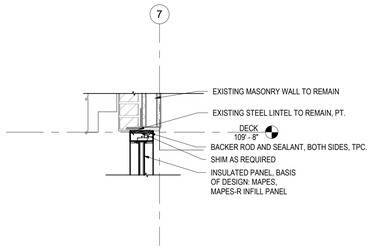


6 Detail 6
SCALE: 1" = 1'-0"

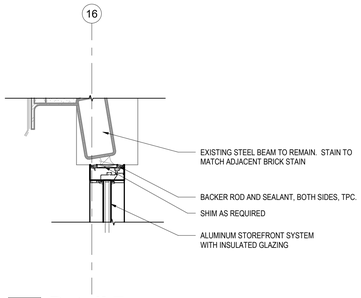


7 Detail 7
SCALE: 1 1/2" = 1'-0"

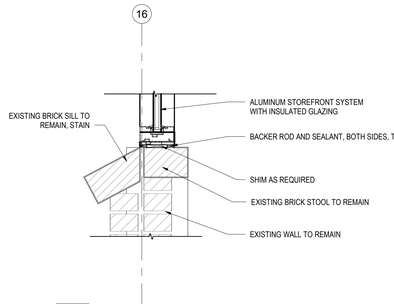


8 Detail 8
SCALE: 1 1/2" = 1'-0"

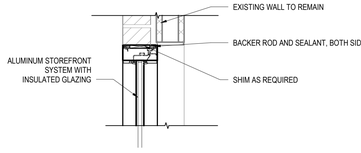


9 Detail 9
SCALE: 1 1/2" = 1'-0"

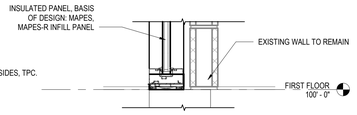


10 Detail 10
SCALE: 1 1/2" = 1'-0"

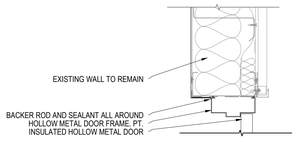


11 HM DOOR HEAD
SCALE: 1 1/2" = 1'-0"

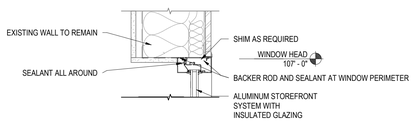


12 DETAIL 11
SCALE: 1 1/2" = 1'-0"

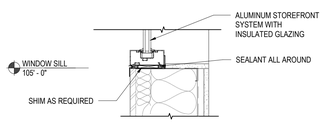


13 Detail 12
SCALE: 1 1/2" = 1'-0"

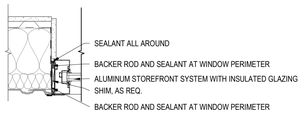


14 Detail 13
SCALE: 1 1/2" = 1'-0"



15 Detail 14
SCALE: 1 1/2" = 1'-0"

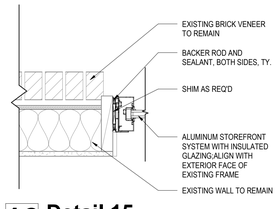

16 Detail 15
SCALE: 1 1/2" = 1'-0"

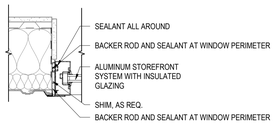

17 Detail 16
SCALE: 1 1/2" = 1'-0"

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026

Door and Window Details


A6.1

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2026 1:04:23 PM

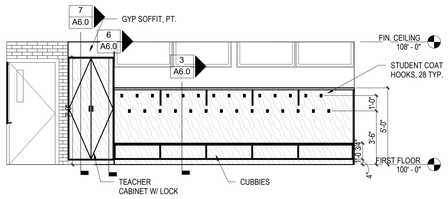


1 Typical Classroom Coat Hook Wall

SCALE: 1/4" = 1'-0"

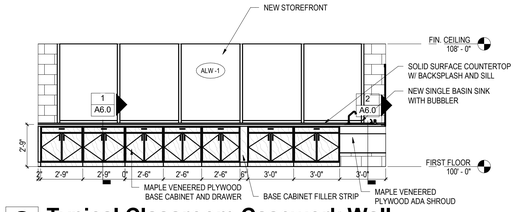


2 Typical Classroom Casework Wall

SCALE: 1/4" = 1'-0"

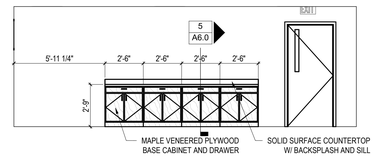


3 North Modular Casework Wall

SCALE: 1/4" = 1'-0"

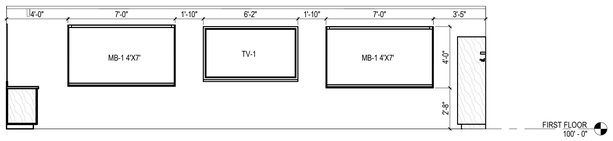


4 Typical North Modular Teaching Wall

SCALE: 1/4" = 1'-0"

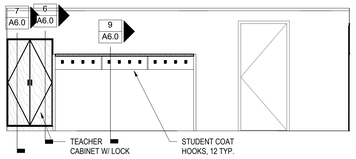


5 Typical Modular Coat Hook Wall

SCALE: 1/4" = 1'-0"

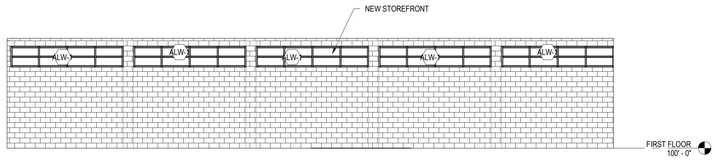


7 North Gym Elevation

SCALE: 1/8" = 1'-0"

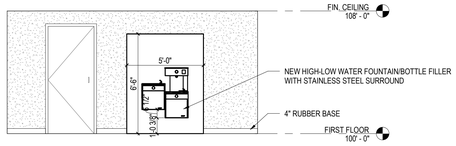


8 Drinking Fountain Elevation

SCALE: 1/4" = 1'-0"

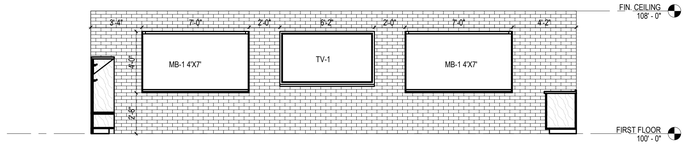


9 Typical Classroom Teaching Wall

SCALE: 1/4" = 1'-0"

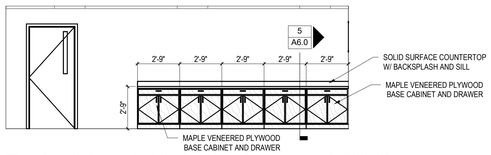


10 Typical South Modular Casework Wall

SCALE: 1/4" = 1'-0"

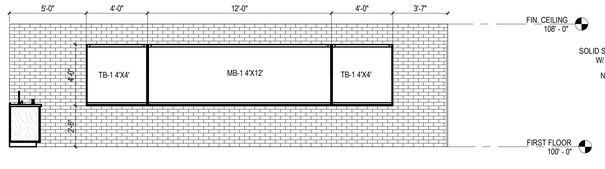


11 Typical Classroom Whiteboard Wall

SCALE: 1/4" = 1'-0"

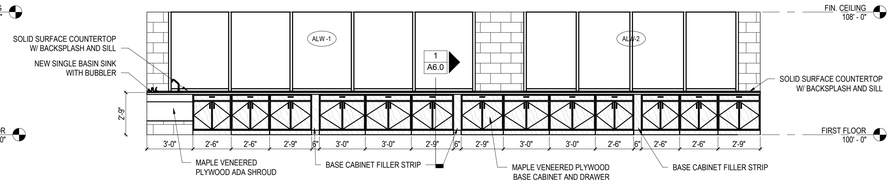


12 Library Casework Wall

SCALE: 1/4" = 1'-0"

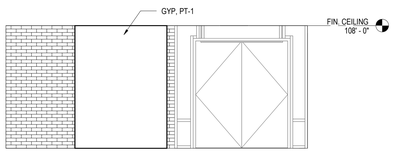


13 Chase Wall Elevation

SCALE: 1/4" = 1'-0"

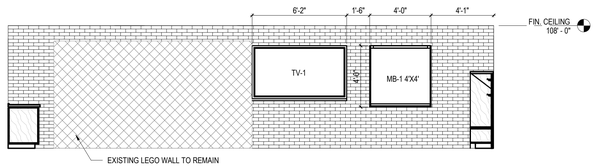


14 Classroom 120 Teaching Wall Elevation

SCALE: 1/4" = 1'-0"

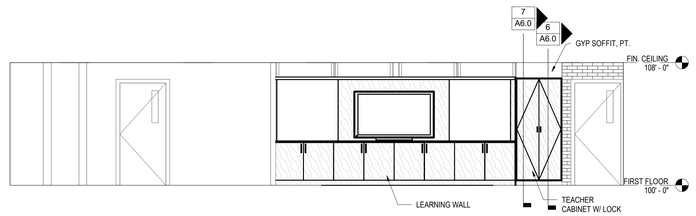


15 Library Teaching Wall Elevation

SCALE: 1/4" = 1'-0"

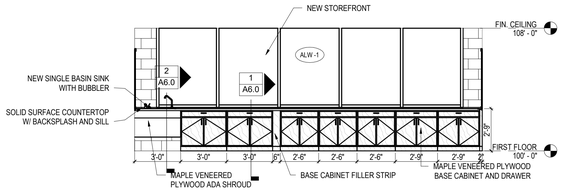


16 Typical Classroom Casework Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

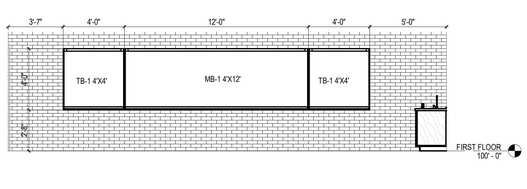


17 Typical Classroom Whiteboard Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

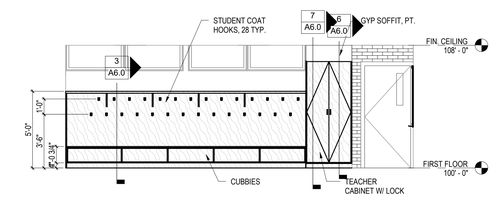

18 Typical Classroom Coat Hook Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

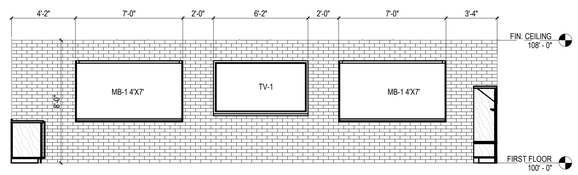

19 Typical Classroom Teaching Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

3	RFI #25	03/13/2023
2	ASI 002	1/5/2023
1	AHJ REVIEW COMMENT RESPONSES	10/28/2022

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2025-033

September 25th, 2026

Interior Elevations


A6.2

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2026).rvt
9/25/2026 1:04:27 PM

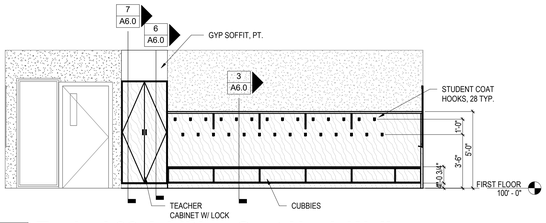


1 Typical 98 Addition Coat Hook Wall

SCALE: 1/4" = 1'-0"

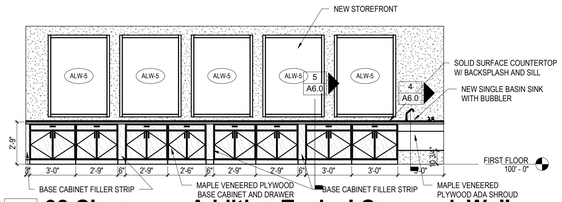


2 98 Classroom Addition Typical Casework Wall

SCALE: 1/4" = 1'-0"

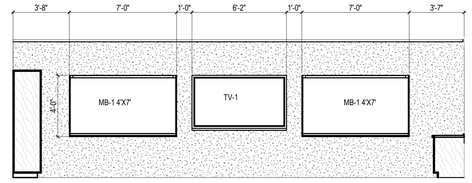


3 98 Classroom Addition Typical Teaching Wall

SCALE: 1/4" = 1'-0"

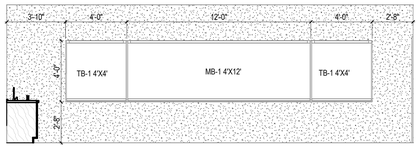


4 98 Classroom Addition Typical Whiteboard Wall

SCALE: 1/4" = 1'-0"

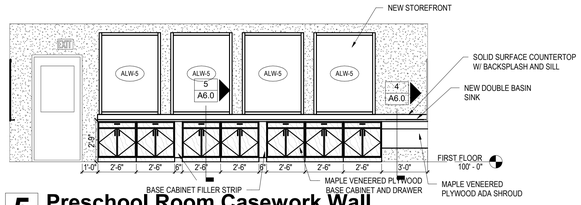

5 Preschool Room Casework Wall

SCALE: 1/4" = 1'-0"

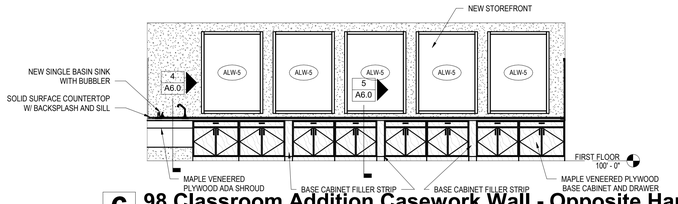

6 98 Classroom Addition Casework Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

7 98 Classroom Addition Coat Hook Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

8 98 Classroom Addition Teaching Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

9 98 Classroom Addition Whiteboard Wall - Opposite Hand

SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE

7230 Meade Street
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2025-033

September 25th, 2026

Interior Elevations

A6.3

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2026 1:04:28 PM

FINISH LEGEND

CONCRETE
- SC-1 SEALED CONCRETE
- SPC-1 STAINED AND POLISHED CONCRETE COLOR: AMERIPOLISH GRAY
- SPC-2 STAINED AND POLISHED CONCRETE COLOR: AMERIPOLISH BLACK

CARPET
- CPT-1 TARKETT COROLLARY 39402 VARIFORM

WALK OFF MAT
- WOM-1 TANDUS ABRASIVE ACTION II 02578 COLOR: WINTER GRAY 19103

PORCELAIN CERAMIC TILE
- PCT-1 CROSSVILLE TILE COLOR BLOX 2.0 COLOR: TREEHOUSE

RUBBER BASE/RESILIENT BASE
- RB-1 ROPPE 4" COVE BASE, GATEWAY WG

LVT
- LVT-1 ARMSTRONG SPETTRO DESIGN 18"X36" NILE NIGHT W/ CUSTOM COLORWAY TO BE SELECTED BY THE ARCHITECT

WOOD VENEERED PLYWOOD
- WVP PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

SOLID SURFACE (COUNTERS AND WINDOW SILLS)
- SSM-1 FORMICA CLASSICS RIVER ROCK MOSAIC 656 MATTE FINISH

ROLLER WINDOW COVERING
- WIC-1 LUTEK (TYPICAL NEW WINDOW SHADE) MANUAL ROLLER SHADE FABRIC: ONYX FASCIA: ANODIZED HARDWARE: GRAY FABRIC WRAPPED END CAPS

PAINT
- PT-1 BENJAMIN MOORE OLYMPIC MOUNTAINS

LVT

CERAMIC TILE

WALK OFF MATT


CARPET

POLISHED CONCRETE SPC-1

POLISHED CONCRETE SPC-2


SEALED CONCRETE

CARPET TO CONCRETE
MANUFACTURER:SCHLUTER STYSTEMS
PRODUCT: VINPRO-U
MATERIAL/FINISH: STAINLESS STEEL, 304
VERIFY HEIGHT REQUIRED




2 CPT TO CONC - VINPRO
SCALE: 12" = 1'-0"

PORCELAIN TILE TO CARPET
MANUFACTURER: SCHLUTER SYSTEMS
PRODUCT: RENO-U, EU100
MATERIAL/FINISH: STAINLESS STEEL, 304
VERIFY HEIGHT REQUIRED

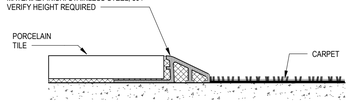

4 PCT TO CPT - RENO-U
SCALE: 12" = 1'-0"


LVT TO CONCRETE
MANUFACTURER:SCHLUTER STYSTEMS
PRODUCT: VINPRO-U
MATERIAL/FINISH: STAINLESS STEEL, 304
VERIFY HEIGHT REQUIRED

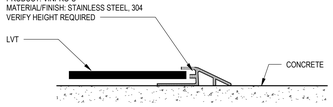

3 LVT TO CONC - VINPRO
SCALE: 12" = 1'-0"

ROOM NUMBER	NAME	FLOOR MATERIAL	FLOOR FINISH	BASE	WALLS NORTH FINISH	WALLS EAST FINISH	WALLS SOUTH FINISH	WALLS WEST FINISH
45	Workroom/Lounge	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
100B	Infirmary	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
102	Control Room	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
103	Kitchen Supplies	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
105	Storage	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
108	Janitor Storage	(E) VCT	SC-1	RB-1	(E)	(E)	(E)	(E)
109	Gym	(E) WOOD	SPC-1	RB-1	(E)	(E)	(E)	(E)
109A	PE Office	(E) VCT	SC-1	RB-1	(E)	(E)	(E)	(E)
110	Platform	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
111	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
112	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
113	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
114	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
115	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
116	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
117	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
119	Library	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
120	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
121	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
122	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
123	Tech Classrom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
124	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
125	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
126	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
127	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
128	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
129	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
130	Storage	(E) VCT	CPT-1	RB-1	(E)	(E)	(E)	(E)
131	Storage	(E) VCT	CPT-1	RB-1	(E)	(E)	(E)	(E)
132	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
133	Janitor Office	(E) VCT	LVT-1	RB-1	(E)	(E)	(E)	(E)
133A	Janitor	(E) VCT	PCT-1	RB-1	(E)	(E)	(E)	(E)
134	Classroom	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
135	Preschool	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
EC01	E Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
MOD CL-136	Classroom Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD CL-137	Classroom Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD CL-138	Classroom Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD-141	Office Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD-142	Office Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD. 139	Office Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
MOD. 140	Office Mod.	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
NC01	N Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
NC02	N. Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
SC01	S Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
SC02	S. Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
V01	Secure Vestibule	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
V03	Vestibule	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
V04	Vestibule	(E) CPT	(E)	(E)	(E)	(E)	(E)	(E)
WC01	W. Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
WC02	W. Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
WC03	W Corridor	(E) VCT	SPC-1	RB-1	(E)	(E)	(E)	(E)
WC04	W Corridor	(E) VCT	WOM-1	RB-1	(E)	(E)	(E)	(E)

AREA NOT IN SCOPE

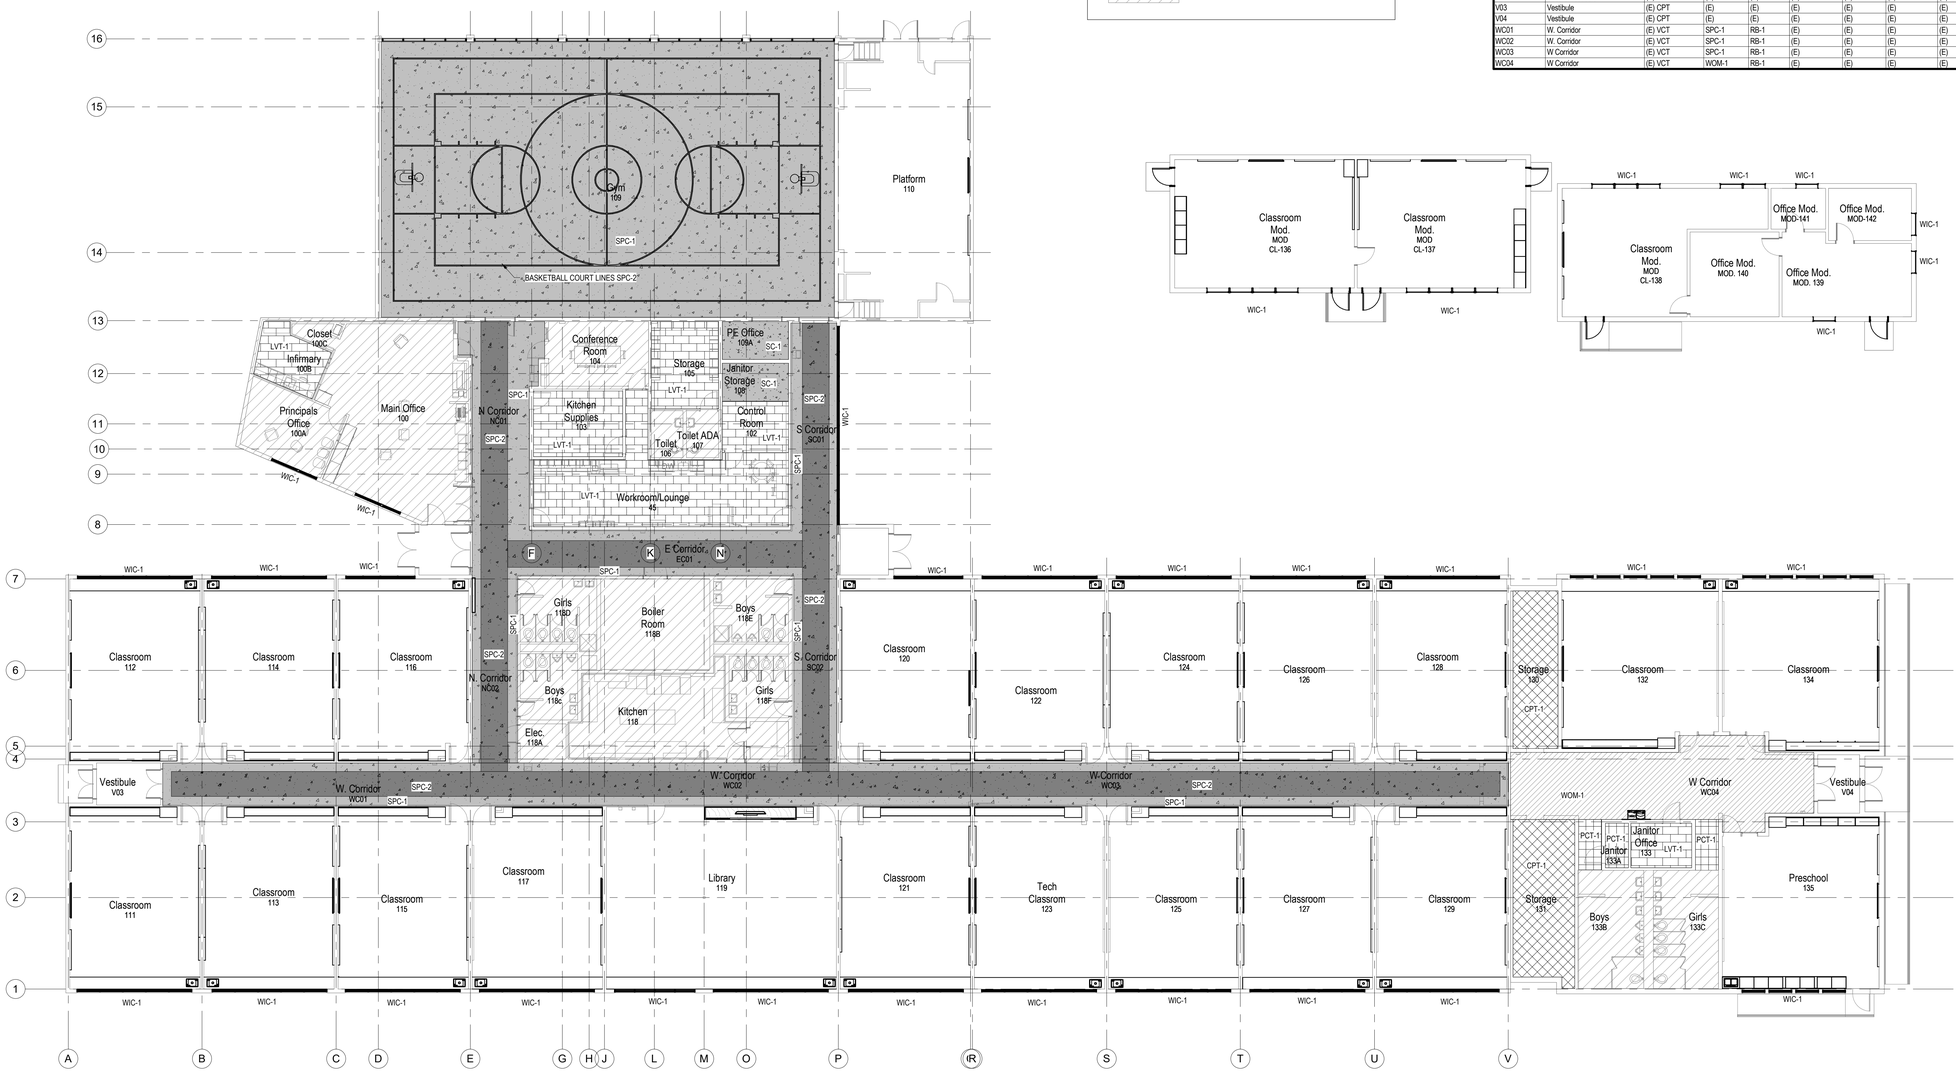

1 Finish Plan
SCALE: 3/32" = 1'-0"

DAO ARCHITECTURE
7230 Meade Street
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.danorecchio.info

Westminster Public Schools

2026 Bond Projects Harris Park Elementary
4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2025-033

September 25th, 2026

Finish Plan

A9.0

Autodesk Docs://MPS 2026 Bond Projects - Harris Park Renovations/Harris Park school - 2019 Kitchen (Revit 2025).rvt
9/25/2025 1:04:32 PM

PLUMBING FIXTURE SCHEDULE

PLAN CODE	DESCRIPTION	MANUF.	MODEL	COLOR FINISH	FITTINGS	MANUF.	MODEL	COLOR FINISH	REMARKS
S-1	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	DRKAD252265L	STAINLESS STEEL	FAUCET BUBBLER	CHICAGO ELKAY	895-GN8AE3ABCP LK1141A	CHROME CHROME	NOTES: 1,2,3,5
S-2	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	DRKAD252265R	STAINLESS STEEL	FAUCET BUBBLER	CHICAGO ELKAY	895-GN8AE3ABCP LK1141A	CHROME CHROME	NOTES: 1,2,3,4
S-3	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	LRAD2918-6"	STAINLESS	FAUCET	CHICAGO	895-GN8AE3ABCP	CHROME	NOTES: 1,2,3
EWC-1	ELECTRIC WATER COOLER (ACCESSIBLE) (HIGH/LOW W/ BOTTLE FILL STATION)	ELKAY	EZSTL8WSVRSK	STAINLESS STEEL	CANE APRON	ELKAY	LKAPREZL	-	NOTE: 6 1/5 HP, 120/60/1

NOTES:

1. 17 GA. P-TRAP, ANGLE SUPPLIES WITH 1/4 TURN L.K. STOPS.
2. GRID STRAINER, INSULATION KIT ON SUPPLIES AND DRAIN.
3. 1.5 GPM FLOW RESTRICTOR.
4. BUBBLER TO BE ON RIGHT SIDE OF SINK, FAUCET CENTERED ON SINK.
5. BUBBLER TO BE ON LEFT SIDE OF SINK, FAUCET CENTERED ON SINK.
6. WITH CARRIER, COORDINATE WALL THICKNESS.

PLUMBING FIXTURE CONNECTION SCHEDULE

PLAN CODE	FIXTURE	PIPE SIZE (INCHES, MINIMUM)							REMARKS
		WASTE		VENT	COLD WATER		HOT WATER		
		TRAP & ARM	VERT. DRAIN	(MIN.)	SUPPLY (MIN.)	CONNECTION (ACTUAL)	SUPPLY (MIN.)	CONNECTION (ACTUAL)	
S	SINK	1-1/2"	2"	1-1/2"	1/2"	1/2"	1/2"	1/2"	
EWC	ELEC. WATER COOLER	1-1/2"	2"	1-1/2"	1/2"	3/8"	-	-	

GENERAL LEGEND

ABBV.	SYMBOL	DESCRIPTION
G.C.		GENERAL CONTRACTOR
P.C.		PLUMBING CONTRACTOR
A.F.F.		ABOVE FINISHED FLOOR
B.F.F.		BELOW FINISHED FLOOR
(N)		NEW
(E)		EXISTING
		EXISTING (DEMOLITION OR REMOVED)
		POINT OF CONNECTION - NEW TO EXISTING
		PIPE CAP
		BALL VALVE
		PIPE ELBOW DOWN
		PIPE ELBOW UP
		TEE OFF BOTTOM OF PIPE
		TEE OFF TOP OF PIPE
	X / XXX	X = SECTION/DETAIL NUMBER XXX = SHEET NUMBER WHERE SECTION/DETAIL IS DRAWN

PLUMBING LEGEND

ABBV.	SYMBOL	DESCRIPTION
WC		WATER CLOSET
UR		URINAL
L		LAVATORY
S		SINK
EWC		ELECTRIC WATER COOLER
DF		DRINKING FOUNTAIN
PP		PLUMBING CIRC. PUMP
PET		PLUMBING EXPANSION TANK
GWH		GAS WATER HEATER
GPM		GALLON PER MINUTE
CW		DOMESTIC COLD WATER
HW		DOMESTIC HOT WATER
HWC		DOMESTIC HOT WATER CIRCULATING
W		SANITARY WASTE BELOW FLOOR
V		SANITARY VENT
WCO	OR	WALL CLEANOUT

SHEET INDEX

SHEET NUMBER	PLUMBING SHEET TITLE	SHEET SCALE
P0.0	Plumbing Cover Sheet - General Notes, Schedules & Legend	None
PD1.0	First Floor - Demolition Plumbing Plan	3/32" = 1'-0"
P1.0	First Floor - Plumbing Plan	3/32" = 1'-0"

PLUMBING DEMOLITION GENERAL NOTES

1. COORDINATE DEMOLITION REQUIREMENTS WITH THE GENERAL CONTRACTOR.
2. COORDINATE EXTENT OF DEMOLITION WITH THE NEW CONSTRUCTION AS SHOWN IN THESE DOCUMENTS.
3. EXISTING PLUMBING PIPING, EQUIPMENT ETC IS SHOWN LIGHT.
4. ALL PLUMBING ITEMS INDICATED TO BE DEMOLISHED SHALL BE INSPECTED FOR SALVAGE BY THE OWNER. ALL NON-SALVAGEABLE ITEMS SHALL THEN BE IMMEDIATELY REMOVED FROM THE SITE BY THE PLUMBING CONTRACTOR.
5. ALL UNUSED HANGERS AND SUPPORTS SHALL BE REMOVED.
6. THE REMOVAL OR INSTALLATION OF FIXTURES, PIPES AND EQUIPMENT MAY REQUIRE THE REMOVAL OF EXISTING WALLS AND CEILINGS. THE PLUMBING CONTRACTOR AND GENERAL CONTRACTOR SHALL COORDINATE AND BE RESPONSIBLE FOR REPAIRING AND PAINTING THESE WALLS AND/OR CEILINGS SO THEY MATCH THE EXISTING WHERE NOT REPLACED UNDER THE ARCHITECTURAL DOCUMENTS. THE CONTRACTOR SHALL REVIEW THE PLUMBING DRAWINGS TO IDENTIFY THESE LOCATIONS PRIOR TO BID PRICING.
7. THE GENERAL CONTRACTOR SHALL PATCH AND SEAL UNUSED ROOF PENETRATIONS AT DEMOLISHED PLUMBING TO MATCH EXISTING CONDITIONS.
8. THE GENERAL CONTRACTOR SHALL MAKE REPAIRS TO ALL EXISTING BUILDING COMPONENTS THAT HAVE BEEN AFFECTED BY THE DEMOLITION OF PLUMBING SYSTEMS.

PLUMBING GENERAL NOTES

1. FIELD VERIFY EXACT LOCATION OF ALL CONNECTIONS PRIOR TO CONSTRUCTION.
2. ROUGH-IN AND FINAL CONNECT ALL FIXTURES, EQUIPMENT, ETC.
3. CONTRACTOR SHALL INSPECT SITE TO THOROUGHLY FAMILIARIZE HIMSELF WITH THE AREA OF WORK. ANY DISCREPANCIES BETWEEN THESE DOCUMENTS AND ACTUAL CONDITIONS SHALL BE REPORTED TO THE ARCHITECT/ENGINEER FOR RESOLUTION PRIOR TO BID PRICING. NO EXTRAS WILL BE ALLOWED DUE TO LACK OF KNOWLEDGE OF EXISTING CONDITIONS.
4. COMPLY WITH ALL BUILDING AND HEALTH DEPARTMENT REGULATIONS FOR PLUMBING INSTALLATION. VERIFY ALL REQUIREMENTS PRIOR TO SUBMITTING BID OR COMMENCING WORK.
5. CONTRACTOR SHALL INSTALL PIPING IN ADHERENCE TO 2021 COLORADO PLUMBING CODE, 2021 COLORADO FUEL GAS CODE, 2021 COLORADO ENERGY CODE, AND LOCAL HEALTH CODES. TABLE C404.5.1, FROM THE IECC, IS INCLUDED ON THIS SHEET BELOW FOR EASE OF REFERENCE.
6. PROVIDE BALL VALVES ON ALL BRANCH LINES FOR BUILDING ISOLATION WHETHER SHOWN OR NOT.
7. REFERENCE ARCHITECTURAL DRAWINGS FOR LOCATIONS OF ALL FIRE RATED WALLS. ALL PIPE PENETRATIONS THROUGH FIRE RATED WALLS SHALL BE SEALED IN ACCORDANCE WITH THE BUILDING CODE.
8. OFFSET ALL PIPING AS REQUIRED TO AVOID STRUCTURAL MEMBERS, CANTS, FLASHING, MECHANICAL, OR ELECTRICAL EQUIPMENT.
9. PROTECT ALL EXISTING EQUIPMENT INDICATED AS REMAINING IN PLACE OR BEING RELOCATED. REPLACE DAMAGED EQUIPMENT IMMEDIATELY WITH EXACT DUPLICATE AT NO ADDITIONAL COST TO THE OWNER.
10. PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR PROPERLY LOCATING AND PROTECTING ALL EXISTING PIPING AND UTILITIES FOR THE DURATION OF THE WORK. ANY DAMAGE CAUSED TO EXISTING PIPING OR UTILITIES SHALL BE REPAIRED IMMEDIATELY AT NO ADDITIONAL COST TO THE OWNER.
11. SUBMIT TO THE ARCHITECT/ENGINEER ELECTRONIC PDF FILES OF MECHANICAL SUBMITTALS FOR REVIEW OF ALL MAJOR EQUIPMENT AS LISTED ON DRAWING EQUIPMENT SCHEDULES, AS WELL AS PRODUCTS SHOWN IN SPECIFICATIONS. ENGINEER ASSUMED NO RESPONSIBILITY FOR EQUIPMENT OR INSTALLATION COORDINATION THAT HAS NOT BEEN SUBMITTED FOR REVIEW.
12. CONTRACTOR SHALL WARRANTY WORK, EQUIPMENT, FIXTURES, MATERIALS, AND PROPER OPERATION FOR A PERIOD OF ONE YEAR FROM THE DATE OF ACCEPTANCE OF BUILDING BY OWNER. THIS GUARANTEE SHALL NOT INCLUDE NORMAL MAINTENANCE REQUIRED BY THE OWNER AS DESCRIBED IN THE OPERATION AND MAINTENANCE MANUALS.
13. PROVIDE TWO SETS OF OPERATION AND MAINTENANCE (O&M) MANUALS FOR OWNER AT COMPLETION OF PROJECT TO THE ARCHITECT/ENGINEER FOR REVIEW. MANUALS TO INCLUDE INSTALLATION INSTRUCTIONS, REPLACEMENT PART LISTS, AND MAINTENANCE INFORMATION ON ALL MECHANICAL EQUIPMENT, FIXTURES, ETC. SUBMITTED.
14. CONTRACTOR SHALL MAINTAIN A COMPLETE AND ACCURATE SET OF RECORD DRAWINGS SHOWING ACTUAL INSTALLED LOCATIONS OF WORK. SUBMIT THESE DRAWINGS AS PART OF THE OPERATION AND MAINTENANCE MANUALS AT COMPLETION OF PROJECT.
15. NEW WATER PIPING SHALL DISINFECTED AS OUTLINED IN THE CURRENT ADOPTED PLUMBING CODE.

SPECIFICATION (PLUMBING)

PIPING:
A. WASTE & VENT PIPING ABOVE FINISHED FLOOR SHALL BE SERVICE WEIGHT CAST-IRON WITH NO-HUB FITTINGS.

B. WASTE & VENT PIPING BELOW FINISHED FLOOR/GRADE SHALL BE SCHEDULE 40 PVC "SOLID CORE" WITH SOLVENT WELDED FITTINGS.

C. FOUNDATION DRAIN PIPING BELOW GRADE SHALL BE PERFORATED PVC (SDR 35) WITH SOLVENT WELDED FITTINGS, ASTM D-3034.

D. WATER PIPING SHALL BE TYPE "L" COPPER, SOLDERED FITTINGS WITH LEAD FREE SOLDER AND FLUX.


INSULATION:
A. COLD WATER, HOT WATER AND HOT WATER RECIRCULATION INSULATION SHALL BE 1" THICK FIBERGLASS TYPE WITH ALL SERVICE JACKET WITH SELF SEAL LAP (ASJ-SSL).

B. PROVIDE PVC FITTING COVERS FOR ALL OF THE ABOVE MENTIONED SYSTEMS.

EQUIPMENT:
A. WALL CLEANOUT (WCO): CAST IRON BODY ADAPTABLE TO PIPE W/ CAST BRONZE OR CAST BRASS CLEANOUT PLUG. STAINLESS STEEL COVER INCLUDING SCREWS. JOSAM OR EQUAL.

VALVES:
A. BALL VALVES SHALL BE NSF 61 RATED AND EQUAL TO APOLLO #77CLF-100/200.

MISCELLANEOUS:
A. SAN-TEES, STOPS, SUPPLIES TO MATCH EXISTING.

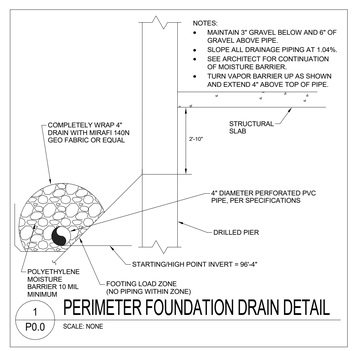

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

Harris Park Elementary Kitchen Renovations

4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2022-022

September 25th, 2026

Plumbing Cover Sheet - General Notes, Schedules & Legend

P0.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/25094 Harris Park 2026 Bond Projects_PLBG_R26.rvt
9/24/2026 4:04:00 PM

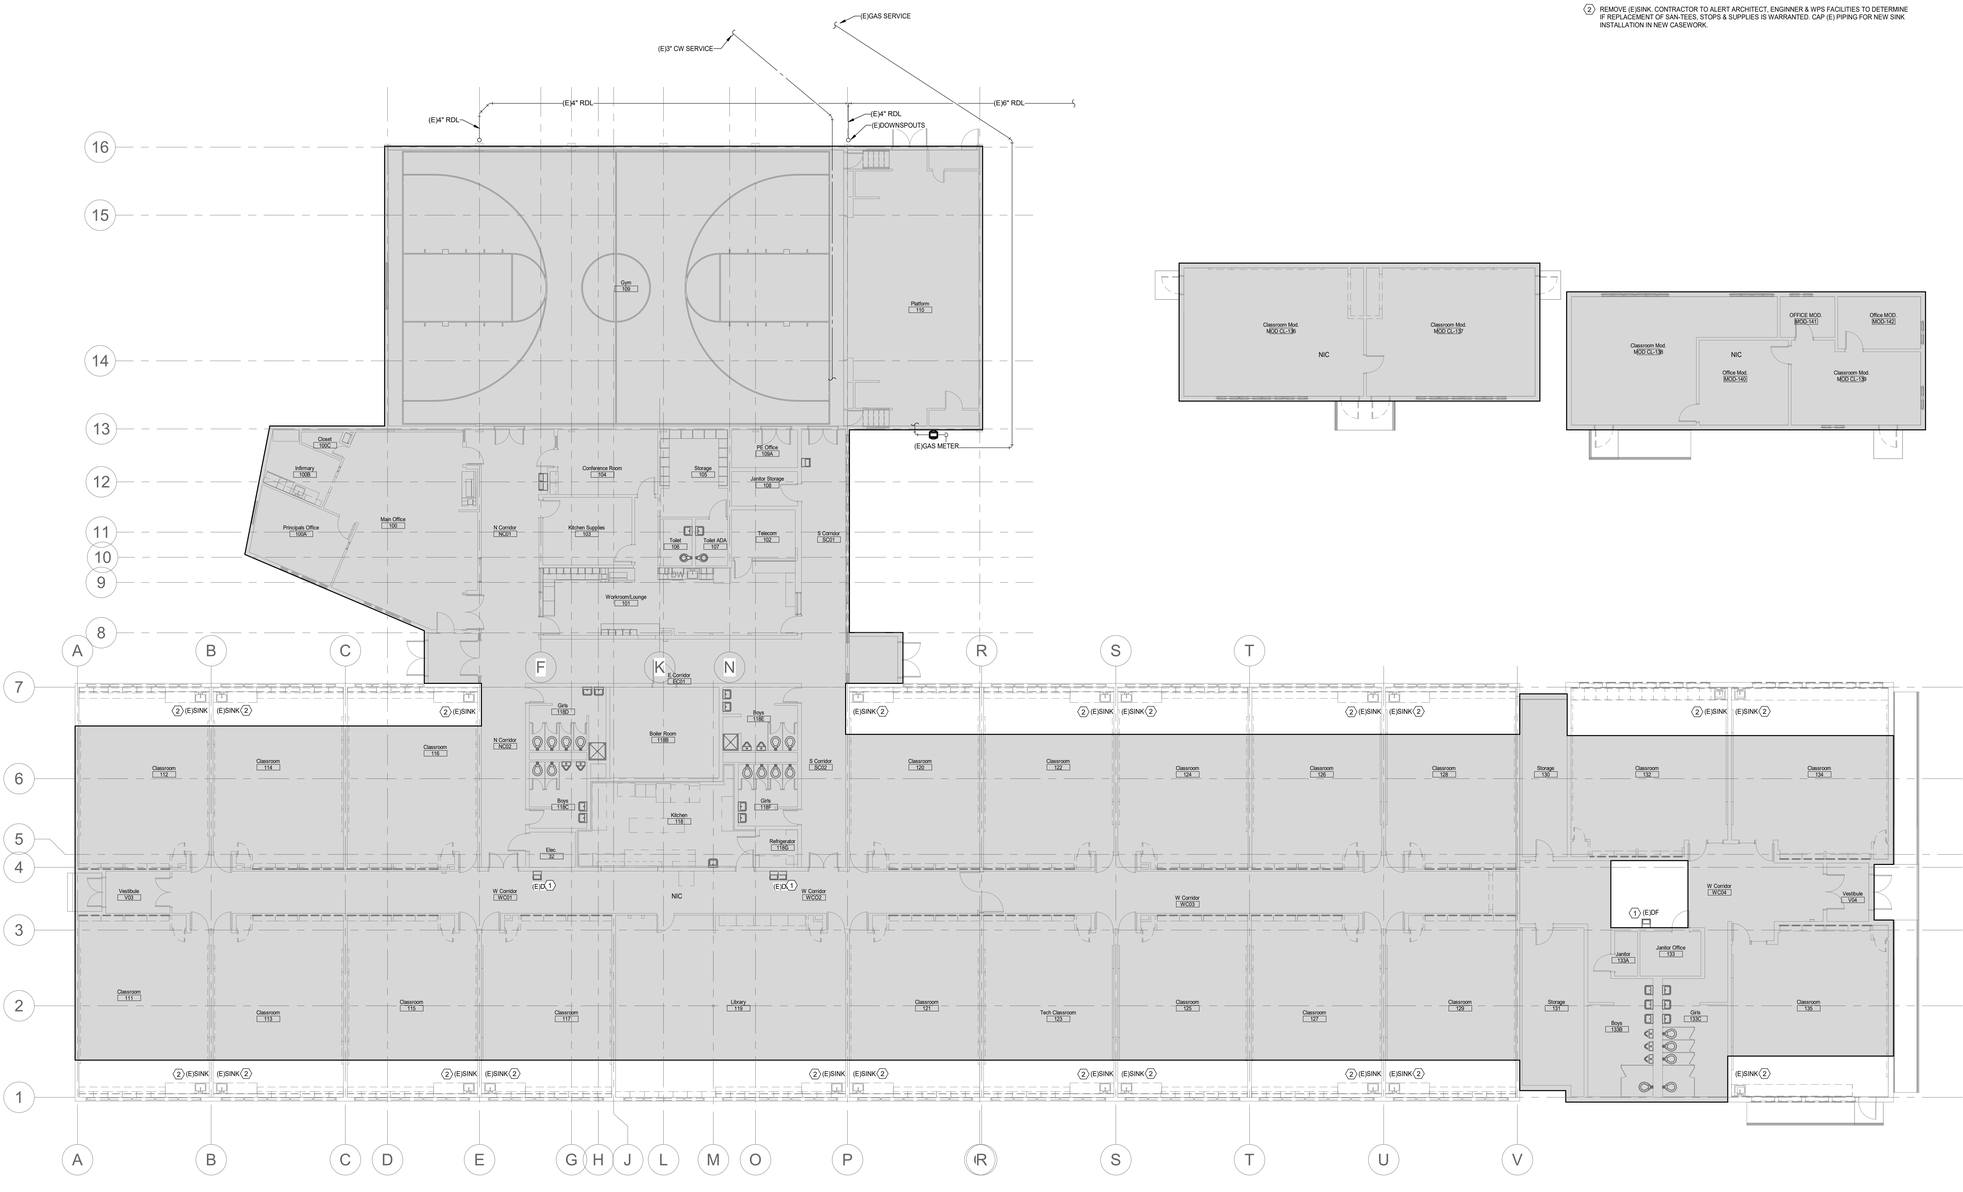

First Floor - Demolition Plumbing Plan

SCALE: 3/32" = 1'-0"

PLUMBING DEMOLITION KEYNOTES:

1. REMOVE (E) DRINKING FOUNTAIN. CAP PIPING FOR (N) FIXTURE.
2. REMOVE (E)SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINNER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEES, STOPS & SUPPLIES IS WARRANTED. CAP (E) PIPING FOR NEW SINK INSTALLATION IN NEW CASEWORK.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

Harris Park Elementary Kitchen Renovations

4300 W. 75th Avenue
Westminster, CO
80030


DAO No.:2022-022

September 25th, 2026

First Floor - Demolition Plumbing Plan

PD1.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/25094-Harris Park 2026 Bond Projects-PLBG-R26.rvt
9/24/2026 4:04:03 PM

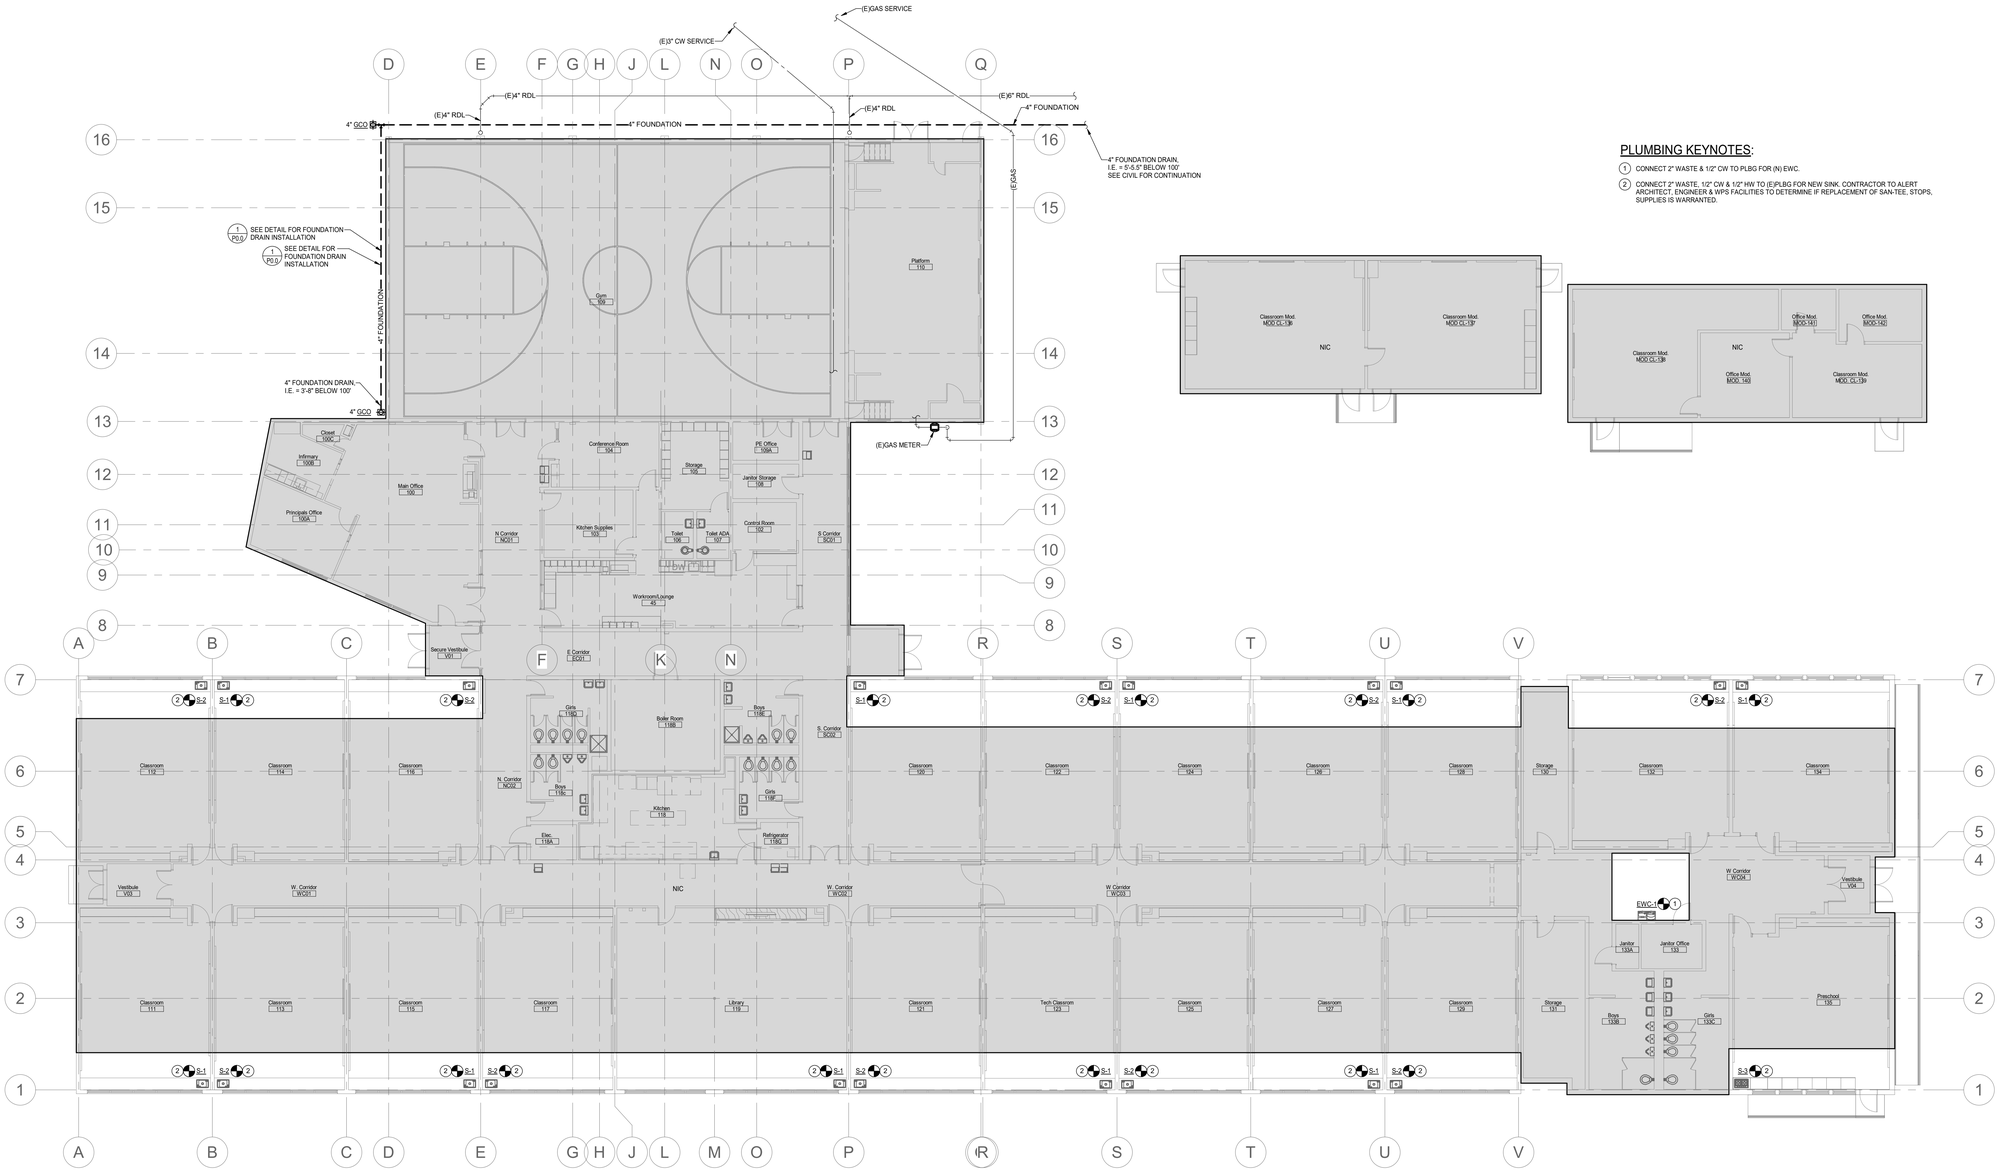

PLUMBING KEYNOTES:

1. CONNECT 2" WASTE & 1/2" CW TO PLBG FOR (N) EWC.
2. CONNECT 2" WASTE, 1/2" CW & 1/2" HW TO (E)PLBG FOR NEW SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEE, STOPS, SUPPLIES IS WARRANTED.

First Floor - Plumbing Plan

SCALE: 3/32" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

Harris Park Elementary Kitchen Renovations

4300 W. 75th Avenue
Westminster, CO
80030

DAO No.:2022-022

September 25th, 2026

First Floor - Plumbing Plan

P1.0

Autodesk Docs://WPS 2026 Bond Projects - Harris Park Renovations/25094 Harris Park 2026 Bond Projects-PLBG-R26.rvt
9/24/2026 4:04:05 PM

POWER LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	SINGLE RECEPTACLE		ELECTRICAL PANELBOARD, CONTROL PANEL, OR OTHER CABINET AS NOTED
	DUPLEX RECEPTACLE: WALL, CEILING, FLOOR MOUNTED	PM	PLUG MOLD (MULTI-OUTLET ASSEMBLY)
	DOUBLE DUPLEX RECEPTACLE; WALL, CEILING, FLOOR MOUNTED	WM	WIREMOLD (SURFACE RACEWAY)
	SPECIAL RECEPTACLE; WALL, CEILING, FLOOR MOUNTED		CONDUIT CONCEALED
	JUNCTION BOX; WALL, CEILING, FLOOR MOUNTED	UG	CONDUIT; UNDERGROUND OR CONCEALED IN FLOOR AS ALLOWED PER SPECIFICATIONS
	DUPLEX RECEPTACLE, HALF CONTROLLED		CONDUIT TURNING DOWN
	DUPLEX RECEPTACLE, FULL CONTROLLED		CONDUIT TURNING UP
	DOUBLE DUPLEX RECEPTACLE, HALF CONTROLLED		CONDUIT CAPPED
	DOUBLE DUPLEX RECEPTACLE, FULL CONTROLLED		GROUND BAR
A-1	SHADING INDICATES EMERGENCY SYSTEM TEXT INDICATES PANEL AND CIRCUIT DESIGNATION		MAIN SWITCHBOARD/DISTRIBUTION CENTER
	DISCONNECT SWITCH (NON-FUSED)	T	TRANSFORMER
	DISCONNECT SWITCH (FUSED)	CT	CURRENT TRANSFORMER
	VARIABLE SPEED DRIVE WITH DISCONNECT		THERMOSTAT
	ENCLOSED CIRCUIT BREAKER	GMN	GENERATOR ANNUNCIATOR PANEL
S	TOGGLE SWITCH		UTILITY METER
			POWER POLE

TECHNOLOGY LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION		SYMBOL	DESCRIPTION	
	WALL FIELD		# XXX	CEILING MOUNTED OUTLET (# = QTY OF CABLES; XXX= SEE BELOW)	
	TELECOM GROUND BAR			AV = AUDIO VISUAL	SEC = SECURITY
	WIRE BASKET TRAY			WAP=WIRELESS ACCESS POINT	PRJ = PROJECTOR
	CABLE TRAY				
	J-HOOK PATHWAY		T XXX	DATA POWER POLE (XXX = SEE BELOW)	
#	FLOOR SPACE BOX DATA OUTLET(# = QTY OF CABLES)			SEC = SECURITY	SR = SURFACE RACEWAY
#	POKE-THRU (# = QTY OF CABLES)		ZZ	TELEVISION COAXIAL CABLE (ZZ = ELEVATION)	
# XXX ZZ	DATA OUTLET (# = QTY OF CABLES; XXX = SEE BELOW ZZ = ELEVATION)			CEILING MOUNTED TELEVISION COAXIAL OUTLET	
	AV = AUDIO VISUAL	POS = POINT OF SALE	J	FLOOR JBOX	
	DAS = BUILDING AUTOMATION SYSTEM	PRT = PRINTER	XXX	POKE THRU; (XXX = SEE BELOW)	
	CLK = CLOCK	RAD = RADIOLOGY NETWORK		FF = FURNITURE FEED	AV = AUDIO VISUAL
	CP = CONTROL PANEL	RED = RED PHONE	XXX ZZ	WALL MOUNTED JBOX (XXX = SEE BELOW; ZZ = ELEVATION)	
	D = MEDICAL/SUPPLY DISPENSER	SCH = SCHEDULER		FF = FURNITURE FEED	AV = AUDIO VISUAL
	DIS = DISPLAY	SEC = SECURITY	XXX	CEILING MOUNTED JBOX (XXX = SEE BELOW)	
	DS = DIGITAL SIGNAGE	SR = SURFACE RUNWAY	PB YY	AV = AUDIO VISUAL	
	EEG = EEG NETWORK	T = TRANSLATION PHONE		PULLBOX (YY = SIZE)	
	EP = EMERGENCY PHONE	TC = TIME CLOCK	XXX	CLOCK OUTLET (XXX = SEE BELOW)	
	F = FACP	W = WALL PHONE		DS = DOUBLE SIDED	DIGITAL (PROVIDE 1 CAT 6 CONNECTION)
	INT = INTERCOM	WP = WEATHER PROOF		A = ANALOG	
	MM = MULLION MOUNT		XXX	COMBINATION CLOCK/SPEAKER OUTLET (XXX = SEE BELOW)	
	MFP = MULTI-FUNCTIONAL PRINTER			A = ANALOG	D = DIGITAL
			C	CEILING MOUNTED CLOCK	
			DAS	DISTRIBUTED ANTENNA SYSTEM	
			WAP	WIRELESS ACCESS POINT ENCLOSURE	
				EQUIPMENT RACK	
				WIRE MANAGER	
				CABINET	
				HAND HOLE	

AUDIO VISUAL LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	
##	CEILING MOUNTED SPEAKER (## = TYPE #)	J XXX	FLOOR POKE THRU (XXX = SEE BELOW)	
	WALL MOUNTED SPEAKER		CTRL = CONTROL UNIT	I/O = INPUT/OUTPUT PLATE
DIS (XX) "	DISPLAY (XX = SIZE OF SCREEN " = ELEVATION)	SSS	SOUND SHOWER SPEAKER	
SCH "	SCHEDULER ; (" = ELEVATION)	PS ZZ	PARTITION SENSOR (ZZ = ELEVATION)	
CTRL "	CONTROL UNIT ; (" = ELEVATION)	ZZ	TELEVISION COAXIAL CABLE (ZZ = ELEVATION)	
I/O "	INPUT/OUTPUT PLATE ; (" = ELEVATION)		CEILING MOUNTED TELEVISION COAXIAL OUTLET	
M "	MICROPHONE OUTLET ; (" = ELEVATION)	VC	VOLUME CONTROL	
"	PROJECTOR	HDMI	HIGH DEFINITION MULTIMEDIA INTERFACE	
VL	VOICELIFT SYSTEM UNIT	##	CEILING MOUNTED MICROPHONE (## = TYPE #)	

REFERENCE SYMBOLS LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
X	KEY NOTE REFERENCE	1	KITCHEN/OWNER/MEDICAL/GENERAL EQUIPMENT REFERENCE
LPA-#	TYPICAL CIRCUIT NUMBER	A	EXISTING TO BE REMOVED
TG#	TYPICAL LUMINAIRE TYPE	A	EXISTING TO BE RELOCATED
A 101	TYPICAL ROOM REFERENCE (TOP = RM #, BOTTOM = FLR)	A	EXISTING TO REMAIN - REPLACE DEVICE
A 101	MECHANICAL EQUIPMENT REFERENCE	E01	ELECTRICAL ACCESSORIES REFERENCE
LC1	LIGHTING CONTROL / MATRIX REFERENCE		

ABBREVIATIONS LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
A	AMPERES	MCP	MOTOR CIRCUIT PROTECTOR
AC	ABOVE COUNTER, +6" ABOVE COUNTER OR BACK SPLASH	MEC	SEE MECHANICAL EQUIPMENT SCHEDULE
AFF	ABOVE FINISHED FLOOR	MIN	MINIMUM
AFG	ABOVE FINISHED GRADE	MLO	MAIN LUGS ONLY
ANN	ANNUNCIATOR	MTS	MANUAL TRANSFER SWITCH
ARF	ABOVE RAISED FLOOR	NC	NORMALLY CLOSED
ASSD	AIR SAMPLING SMOKE DETECTION	NIC	NOT IN CONTRACT
ATS	AUTOMATIC TRANSFER SWITCH	NL	NIGHT LIGHT
BFG	BELOW FINISHED GRADE	NO	NORMALLY OPEN
C	CONDUIT	NTS	NOT TO SCALE
CATV	CABLE TELEVISION	OC	ON CENTER
CB	CIRCUIT BREAKER	OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
CCTV	CLOSED CIRCUIT TELEVISION	OFOI	OWNER FURNISHED, OWNER INSTALLED
(E)	EXISTING	OSWF	ON SITE WORK FORCE
EM	EMERGENCY	PB	PULL BOX
EMDC	EMERGENCY MAIN DISTRIBUTION CENTER	SB	STAND-BY
EP	EXPLOSION PROOF	SDC	SUB-DISTRIBUTION CENTER
EPO	EMERGENCY POWER OFF	TP	TAMPER PROOF
EVO	EMERGENCY VENTILATION ON/OFF	TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSER
EWC	ELECTRIC WATER COOLER	TYP	TYPICAL
FA	FIRE ALARM	UF	UNDER FLOOR
G	GROUND	UG	UNDER GROUND
GCP	GENERATOR CONTROL PANEL	UON	UNLESS OTHERWISE NOTED
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	UPS	UNINTERRUPTIBLE POWER SUPPLY
HOA	HAND OFF AUTOMATIC	V	VOLTS
IG	ISOLATED GROUND	VFD	VARIABLE FREQUENCY DRIVE
MAX	MAXIMUM	W/	WITH
MCB	MAIN CIRCUIT BREAKER	W/O	WITHOUT
MCC	MOTOR CONTROL CENTER	WP	WEATHER PROOF
MDC	MAIN DISTRIBUTION CENTER	XFMR	TRANSFORMER

ONE-LINE DIAGRAM LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	DISCONNECT SWITCH	A	PANELBOARD "A"
	DISCONNECT SWITCH, FUSED	PM	EM=ENERGY METER, PM=POWER METER, CM=CIRCUIT MONITOR
	CIRCUIT BREAKER	VS	VOLTMETER TEST SWITCH
	FUSE	AS	AMMETER TEST SWITCH
	GROUND	V	VOLTMETER
T ##	STEP DOWN TRANSFORMER, ## INDICATES KVA	A	AMMETER
T ##	K-RATED STEP DOWN TRANSFORMER ## INDICATES KVA, # INDICATES K RATING	XXX	SEE FEEDER/MEC/TRANSFORMER SCHEDULES FOR FEEDER SIZE
	CURRENT TRANSFORMER	G	ENGINE GENERATOR
	POTENTIAL TRANSFORMER		CONTACTOR/RELAY/CAPACITOR (AS NOTED)
MTR OR	SERVICE ENTRANCE TRANSFORMER		TRANSFER SWITCH - ATS=AUTOMATIC, MTS=MANUAL
	METER	GFI	GROUND FAULT INTERRUPTER
	EQUIPMENT ENCLOSURE	SPD	SURGE PROTECTIVE DEVICE
	SERVICE WEATHERHEAD	ST	SHUNT TRIP
SCA	SHORT CIRCUIT CURRENT AVAILABLE		TERMINATIONS LB=LOAD BREAK, NLB=NO LOAD BREAK
X	KIRK KEY INTERLOCK, SUBSCRIPT INDICATES INTERLOCKED GROUP		DRAW-OUT DEVICE
X	ELECTRICAL INTERLOCK, SUBSCRIPT INDICATES INTERLOCKED GROUP		PLUG-IN DEVICE
X	MECHANICAL INTERLOCK	EO	ELECTRICALLY OPERATED
		ERMS	ENERGY REDUCING MAINTENANCE SWITCH

GENERAL EQUIPMENT SCHEDULE

COMMON NOTES:

A. PRIOR TO WORK, VERIFY ELECTRICAL REQUIREMENTS (VOLTAGE, AMPERAGE, RECOMMENDED OCPD, CONDUCTORS, AND DISCONNECT) FOR EACH PIECE OF EQUIPMENT.
B. PRIOR TO WORK, VERIFY EXACT LOCATION FOR EACH PIECE OF EQUIPMENT WITH ARCHITECT AND/OR OWNER.

SPECIFIC REMARKS:

KEY	ITEM	HP	FLA	LOAD	EQ LOAD (VA)	VOLTAGE	FEEDERS			PROTECTION			REMARKS
							WIRE	GROUND	CONDUIT	BREAKER	DISCONNECT	FUSE	
EWC	ELECTRIC WATER COOLER	0	0 A	240 VA	240 VA	120 V/ 1ph	2#12	#12G	3/4"	20 A			

POWER PLAN NOTES:

1. MAKE ALL FINAL ELECTRICAL CONNECTIONS TO EQUIPMENT REQUIRING ELECTRICAL CONNECTION. THIS SHALL INCLUDE BUT NOT BE LIMITED TO ALL MECHANICAL AND OTHER EQUIPMENT INCLUDED IN THIS PROJECT.
2. COORDINATE AND VERIFY EXACT MOUNTING LOCATIONS OF WALL AND FLOOR DEVICES WITH ARCHITECTURAL ELEVATIONS, AND ANY FURNITURE OR SPECIALTY EQUIPMENT SUPPLIER DRAWINGS PRIOR TO ROUGH-IN.
3. PROVIDE A DEDICATED NEUTRAL CONDUCTOR FOR EACH 120V CIRCUIT.
4. CIRCUITS MAY BE COMBINED INTO HOMERUNS OF UP TO SIX (6) CURRENT CARRYING CONDUCTORS, INCLUDING NEUTRALS, UNLESS OTHERWISE INDICATED. WHERE CIRCUITS ARE COMBINED WITHIN A SINGLE CONDUIT, PROVIDE STRIPING FOR FULL LENGTH OF NEUTRAL CONDUCTOR INSULATION TO MATCH THE COLOR CODE OF THE ASSOCIATED PHASE CONDUCTOR. SEE SPECIFICATION FOR COLOR CODES.
5. RECEPTACLES INDICATED TO BE MOUNTED ABOVE COUNTER ARE TO BE MOUNTED HORIZONTALLY 6" ABOVE COUNTER UNLESS OTHERWISE NOTED.

ONE-LINE DIAGRAM NOTES:

1. PANELBOARDS INDICATED ON ONE LINE DIAGRAMS DO NOT SHOW ALL BRANCH CIRCUITS. REFER TO PANELBOARD SCHEDULE(S).
2. EXISTING ONE-LINE DIAGRAM TAKEN FROM OWNER FURNISHED DRAWINGS. EXISTING INFORMATION SHOWN OTHER THAN LOCATIONS IMPACTED BY NEW WORK HAS NOT BEEN VERIFIED.

TECHNOLOGY PLAN NOTES:

1. PROVIDE J-HOOK TYPE CABLE SUPPORTS EVERY 4'-0" TO 5'-0" IN OPEN OR ACCESSIBLE CEILING SPACE AS REQUIRED TO SUPPORT CABLES IN ROUTE TO CABLE TRAY OR CONDUIT PATHWAY TO TELECOMMUNICATIONS ROOM. ROUTE CABLE SUPPORTS SUCH THAT CABLE VISIBILITY WILL BE MINIMIZED IN ANY OPEN CEILING AREAS.

ROUGH-IN AND PATHWAY NOTES:

1. PROVIDE 4-11/16" x 4-11/16" x 2-7/8" OUTLET BOX AND SINGLE GANG MUD RING FOR ALL TELE/DATA OUTLETS. ROUTE 1" CONDUIT FROM EACH OUTLET TO ABOVE ACCESSIBLE CEILING UNLESS OTHERWISE NOTED. PROVIDE INSULATED THROAT CONNECTOR ON CONDUIT END. KEEP ALL EXPOSED CONDUITS TIGHT TO STRUCTURE.
2. PROVIDE 4-11/16" x 4-11/16" x 2-7/8" OUTLET BOX AND TWO-GANG MUD RING FOR ALL AV DEVICE AND DISPLAY BACKBOX LOCATIONS UNLESS OTHERWISE NOTED. ROUTE 1-1/4" CONDUIT TO ABOVE ACCESSIBLE CEILING UNLESS OTHERWISE NOTED. PROVIDE INSULATED THROAT CONNECTOR ON CONDUIT END. KEEP ALL EXPOSED CONDUITS TIGHT TO STRUCTURE.
3. COORDINATE AND VERIFY EXACT MOUNTING LOCATIONS OF WALL, CEILING, AND FLOOR DEVICES WITH ARCHITECTURAL ELEVATIONS AND ANY FURNITURE OR SPECIALTY EQUIPMENT SUPPLIER DRAWINGS PRIOR TO ROUGH-IN.
4. CONDUIT DEDICATED FOR TECHNOLOGY SYSTEMS SHALL BE INSTALLED IN EMT UNLESS OTHERWISE NOTED. FLEX CONDUIT SHALL NOT BE USED WITHOUT PRIOR APPROVAL FROM THE ENGINEER OR OWNER.
5. CONDUIT DEDICATED FOR TECHNOLOGY SYSTEMS SHALL NOT EXCEED 100' OR CONTAIN MORE THAN 180 DEGREES OF TOTAL BENDS WITHOUT UTILIZING APPROPRIATELY SIZED PULL BOXES.
6. MINIMUM BEND RADII FOR 2" CONDUIT OR SMALLER SHALL BE 6 TIMES THE OUTSIDE DIAMETER OF THE CONDUIT. BEND RADII FOR CONDUIT LARGER THAN 2" SHALL BE 10 TIMES THE OUTSIDE DIAMETER OF THE CONDUIT. L-BENDS SHALL NOT BE USED.
7. ALL BACKBONE PATHWAYS SHALL BE EQUIPPED WITH A PULL CORD THAT HAS A MINIMUM TEST RATING OF 200lbs.
8. ALLOW FOR A MINIMUM OF 3' VERTICAL CLEAR SPACE ABOVE CONDUITS AND 12"VERTICAL CLEAR SPACE ABOVE CABLE TRAY.

GENERAL NOTES:

1. FOR REMODELING, WORK INCLUDED IS DENOTED IN BOLD. EXISTING CONDITIONS TO REMAIN ARE DENOTED LIGHTLY.
2. PROTECT STRUCTURE AND OWNER EQUIPMENT FROM DAMAGE. IMMEDIATELY REPLACE OR REPAIR, TO ORIGINAL CONDITION, DAMAGE CAUSED BY THE CONTRACTOR WHETHER EQUIPMENT APPEARS TO BE CURRENTLY IN USE OR NOT, UNLESS WRITTEN AUTHORIZATION FROM THE OWNER INDICATED OTHERWISE. PREPARE LISTING OF ALL EXISTING DAMAGED ITEMS AND SUBMIT TO OWNER PRIOR TO BEGINNING WORK.
3. INSTALL CONDUIT CONCEALED IN FINISHED AREAS UNLESS OTHERWISE NOTED. PAINT EXPOSED CONDUIT TO MATCH EXISTING FINISHES WITHIN THE SURROUNDING AREA.
4. FIRE SEAL ALL FIRE RATED WALL AND FLOOR PENETRATIONS. REFER TO ARCHITECTURAL DRAWINGS FOR FIRE RATED WALLS.
5. A DETAILED WRITTEN METHOD OF PROCEDURE IS REQUIRED WHEN A CONSTRUCTION ACTIVITY OR AN OUTAGE AFFECTS THE SAFETY OF OCCUPANTS, TELEPHONE/DATA/FIRE ALARM EQUIPMENT OR COMPONENTS OF ANY SYSTEM WHICH SUPPORTS THIS EQUIPMENT OR ESSENTIALLY AFFECTS THE BUILDING MANAGEMENT, OPERATIONS OR SECURITY. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.
6. EXISTING INFORMATION SHOWN ON THE DRAWINGS HAS BEEN TAKEN FROM OWNER FURNISHED DRAWINGS AND/OR LIMITED FIELD OBSERVATIONS. CATOR, RUMA & ASSOCIATES IS NOT RESPONSIBLE FOR THE ACCURACY OF ANY INFORMATION OR THE ADEQUACY, SAFETY AND CONFORMANCE TO CURRENT PREVAILING CODES OF ANY WORK SHOWN AS EXISTING ON THESE DRAWINGS.
7. PROVIDE SEPARATE INSULATED GROUNDING CONDUCTOR IN ALL FEEDER, HOMERUN AND BRANCH CIRCUITS.

DEMOLITION NOTES:

1. UNLESS NOTED OTHERWISE, BOLD ITEMS INDICATE EQUIPMENT, DEVICES, ETC. TO BE REMOVED. SEE SPECIFICATION SECTION 260500 FOR REMODEL/DEMOLITION DETAILED REQUIREMENTS.
2. DEMOLITION DRAWINGS MAY NOT SHOW EVERY ITEM TO BE DEMOLISHED. CONTRACTOR SHALL VISIT SITE TO DETERMINE AND COORDINATE THE EXACT EXTENT OF DEMOLITION TO FACILITATE ALL WORK INDICATED BY THE CONTRACT DOCUMENTS PRIOR TO QUOTATION. NO EXTRAS WILL BE ALLOWED FOR WORK REQUIRED TO ACHIEVE THE END RESULT AS INDICATED BY THE CONTRACT DOCUMENTS. REWORK EXISTING TERMINATIONS, CONNECTIONS, CONDUIT, WIRING, ETC. TO ACCEPT NEW WORK. MAINTAIN CIRCUIT CONTINUITY TO EXISTING CIRCUITS AND DEVICES TO REMAIN OR REMODEL/DEMOLITION DETAILED REQUIREMENTS TO BE RELOCATED. PRIOR TO COMMENCEMENT OF ANY DEMO WORK, CONFIRM EXISTING CONDITIONS AND NOTIFY ENGINEER OF ANY DISCREPANCIES FOR RESOLUTION.
3. ALL ITEMS IDENTIFIED TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY INCLUDING ALL WIRING AND EXPOSED CONDUIT AND CONDUIT SUPPORTS BACK TO POINT OF ORIGIN OR NEXT DEVICE TO REMAIN. REMOVED ITEMS SHALL BE TURNED OVER TO THE OWNER, UNLESS NOTED OTHERWISE, AND STORED IN THE AREA DESIGNATED BY THE OWNER. REMOVE FROM SITE AND LEGALLY DISPOSE OF ALL ITEMS THE OWNER CHOOSES NOT TO ACCEPT.
4. WHERE EXISTING CONDUITS ARE SHOWN TO BE REMOVED AND HAVE BEEN ROUTED IN CONCRETE FLOOR SLABS, CONCRETE WALLS OR CONCRETE CEILINGS, THEY SHALL BE CUT BACK FLUSH WITH CONCRETE, FILL WITH GROUT TO ACHIEVE A SMOOTH AND EVEN FINISH FLUSH WITH CONCRETE SURFACE AFTER CONDUCTORS HAVE BEEN REMOVED.
5. REUSE EXISTING CONDUIT WHERE CURRENT NEC AND LOCAL CODE REQUIREMENTS ARE MAINTAINED. PROVIDE NEW CONDUIT AND WIRE FOR NEW INSTALLATIONS AND EXTENSION OF EXISTING INSTALLATIONS. REUSE EXISTING CONDUIT IN PLACE. DO NOT REINSTALL EXISTING CONDUIT. PROVIDE LABELING PER SPECIFICATIONS FOR REUSED CONDUIT.
6. RELOCATED EQUIPMENT AND DEVICES ARE TO BE CLEANED OF ALL FOREIGN MATERIAL. REPLACE EQUIPMENT OR DEVICES WHICH ARE DEFECTIVE OR DAMAGED DURING RELOCATION.
7. WHERE EXISTING DEVICES, SWITCHES, MOTOR CONNECTIONS, ETC. ARE TO BE REMOVED FROM WALLS WHICH ARE REMAINING, WALLS SHALL BE PATCHED TO MATCH ORIGINAL FINISH. BLANK COVERPLATES OVER EXISTING BOXES ARE NOT ACCEPTABLE, UNLESS NOTED OTHERWISE.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026


ELECTRICAL LEGENDS, SCHEDULES & NOTES

E0.01

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement
9/24/2026 8:57:14 AM


FEEDER SCHEDULE		
NOTE: CONDUCTORS WITH "AL" DESIGNATION ARE ALUMINUM TYPE XHHW-2 COMPACT 600V.		
KEY	CONDUCTORS	C"
150.4G	4 # 1/0 , 1 # 6 G	2

KEYNOTES	
E7	INTERCEPT EXISTING PANEL C BRANCH CIRCUITS AND EXTEND TO NEW PANEL C. EXTEND CONDUCTORS AND RACEWAYS AS REQUIRED.
E9	REPURPOSE EXISTING PANEL ENCLOSURE AS PULL BOX.
E10	REMOVE EXISTING FEEDERS. MAINTAIN EXISTING CONDUIT FOR REUSE.
E15	CONNECT TO EXISTING SPARE 2"C AND UTILIZE FOR NEW FEEDER.

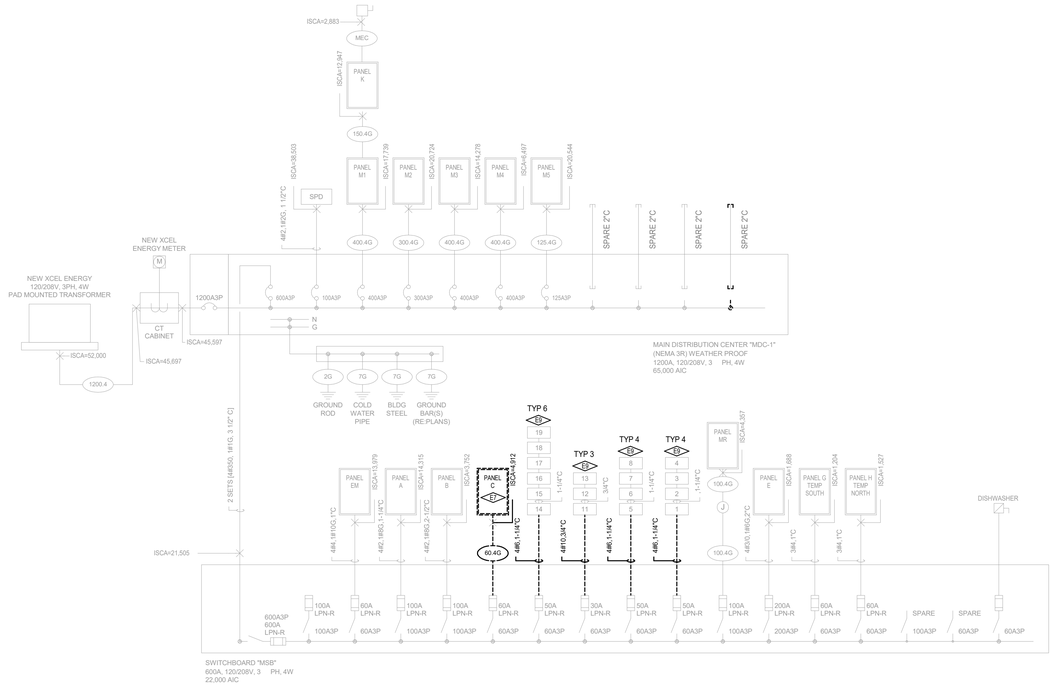

ELECTRICAL ONE-LINE DIAGRAM - DEMO

SCALE: NONE

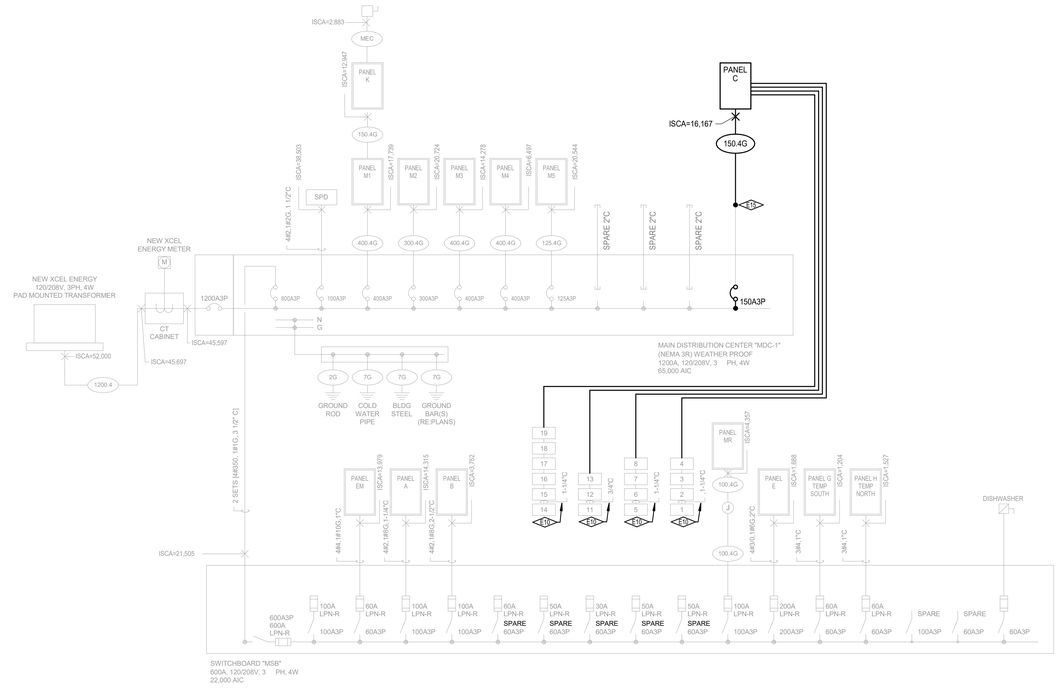

ELECTRICAL ONE-LINE DIAGRAM - NEW

SCALE: NONE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026


ELECTRICAL ONE-LINE DIAGRAM

E0.11

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement\
9/24/2026 8:57:14 AM

KEYNOTES

E1	REMOVE EXISTING ABOVE-COUNTER RECEPTACLE WHERE REQUIRED TO ACCOMMODATE NEW CASEWORK. MAINTAIN EXISTING CIRCUIT FOR RECONNECTION.
E11	REMOVE EXISTING BREAKERS FROM PANELETTE SERVING LIGHTING AND RECEPTACLES IN THE CLASSROOM, AND REMOVE WIRING BACK TO SOURCE. INTERCEPT EXISTING BRANCH CIRCUITS FOR EXTENSION TO INDIVIDUAL BREAKERS IN NEW PANEL.
E18	DISCONNECT AND REMOVE EXISTING PLUGMOLD AND ASSOCIATED DEVICES. PRESERVE EXISTING BRANCH CIRCUIT FOR RECONNECTION TO NEW RECEPTACLES. FIELD VERIFY EXISTING CIRCUIT AND PROVIDE CIRCUIT TRACING AS REQUIRED.

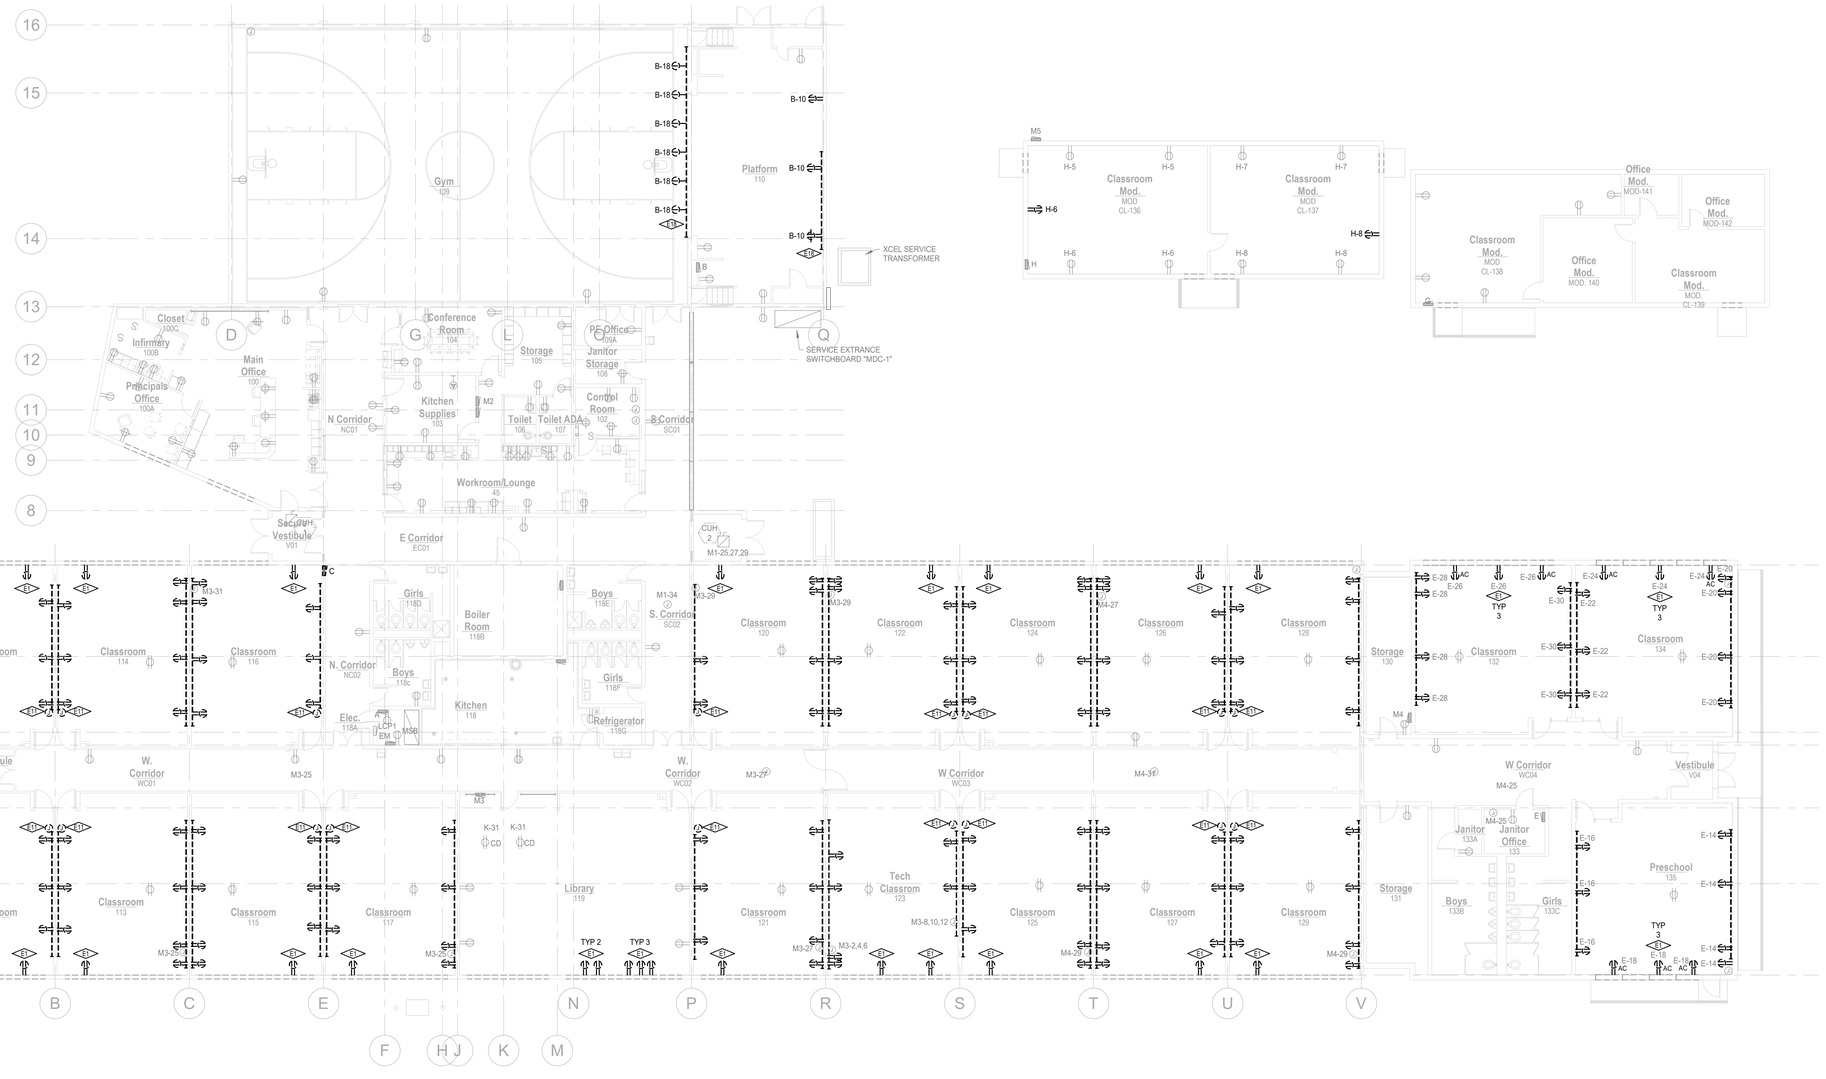


WORKING NORTH

TRUE NORTH

FIRST FLOOR POWER DEMO PLAN

SCALE: 3/32" = 1'-0"

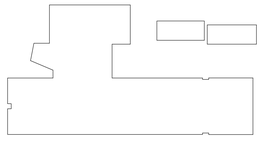

KEYPLAN

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026


FIRST FLOOR POWER DEMO PLAN

ED1.11

P:\WPS\2026-187 Harris Park Elementary School Micro Panel Replacement
9/24/2026 8:57:15 AM

KEYNOTES

T1	TEMPORARILY REMOVE EXISTING TECHNOLOGY DEVICES AS REQUIRED FOR ARCHITECTURAL WORK. RETAIN FOR REINSTALLATION.

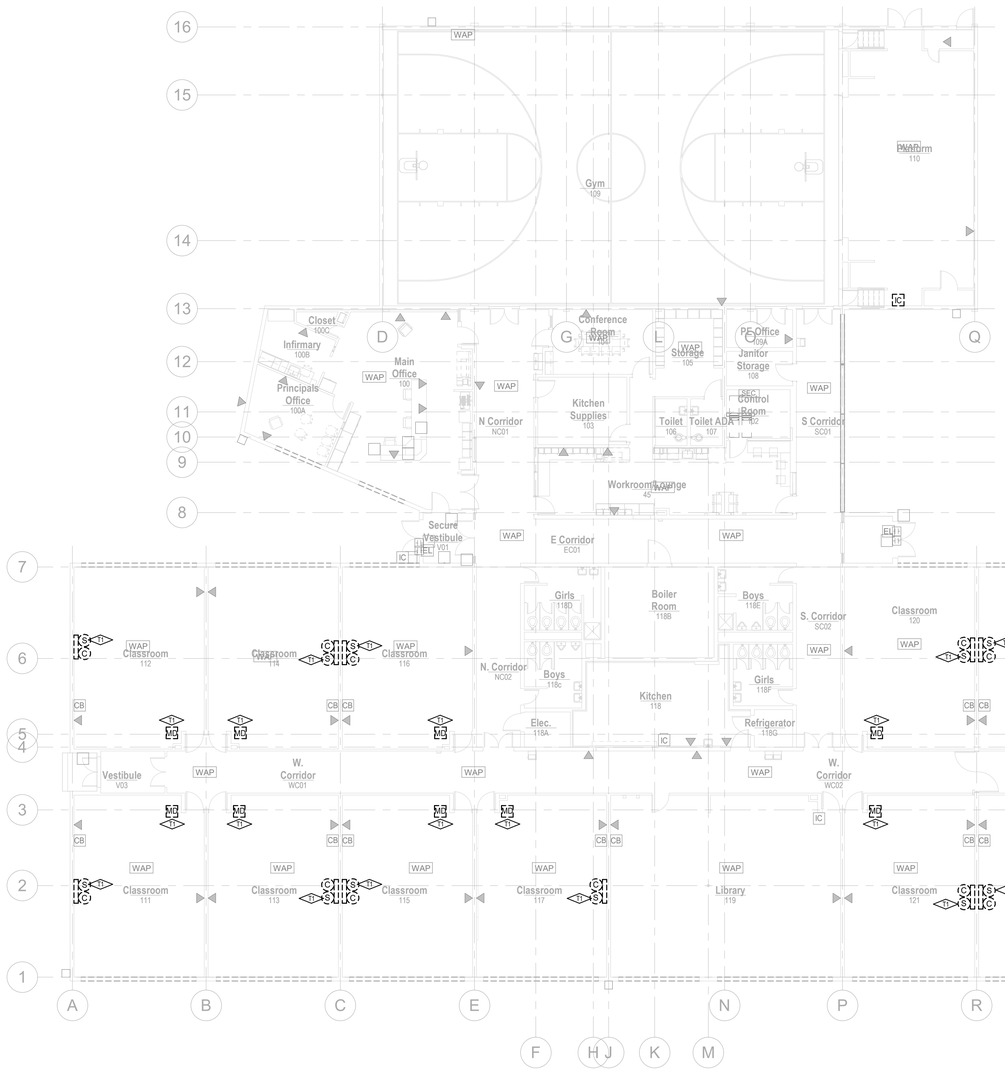




WORKING NORTH

TRUE NORTH

FIRST FLOOR TECHNOLOGY DEMO PLAN

SCALE: 3/32" = 1'-0"

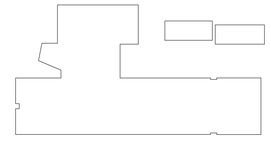

KEYPLAN

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026


FIRST FLOOR TECHNOLOGY DEMO PLAN

ED1.12

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement
9/24/2026 8:57:17 AM

KEYNOTES

E2	PROVIDE NEW RECEPTACLE IN CABINET FILLER PANEL. CONNECT TO EXISTING CIRCUIT SERVING REMOVED RECEPTACLE. COORDINATE FINAL MOUNTING LOCATION WITH CASEWORK.
E3	PROVIDE STI STOPPER STATION TURN-TO-RESET PUSH BUTTON, MODEL SS2, COLOR BLUE, WITH SHIELD AND CUSTOM TEXT. CUSTOM LABEL TO READ "DOOR HOLD RELEASE." FOR MASTER CONTROL OF DOOR HOLD OPENS. STATION SHALL SIMULTANEOUSLY RELEASE ALL MAGNETIC HOLD OPENS.
E4	PROVIDE SURFACE-MOUNTED BOX AND SERIES I-500 WIREMOLD FOR CAMDEN CM-7000/7100 SERIES MOMENTARY SWITCH. MOUNT SWITCH WITH OPERABLE PART AT 46 INCHES MAXIMUM AFF FOR CONTROL OF DOOR HOLD.
E5	PROVIDE LOW PROFILE SURFACE MOUNTED WIREMOLD BOXES AND I-500 SERIES WIREMOLD RACEWAY FOR DOOR HOLD OPEN HARDWARE. SELECT BOXES AND RACEWAY TO ACHIEVE THE LOWEST PROFILE INSTALLATION POSSIBLE. PROVIDE CONDUIT PATHWAYS TO BOXES AND TRANSITION TO WIREMOLD WITH APPROPRIATE FROM-TO ADAPTERS. PROVIDE 120V CONNECTION TO DOOR HOLD OPEN MAGNET. MAGNET SHALL HAVE ADJUSTABLE HOLD STRENGTH. FIELD COORDINATE EXACT LOCATION.
E12	EXTEND BRANCH CIRCUITS AS INDICATED, EACH WITH 2#12, 1#12G, MIN. 3/4"C (2#10, 1#10G FOR RUNS OVER 100'). UTILIZE EXISTING CONDUIT PATHWAYS, AND/OR PROVIDE NEW AS REQUIRED. RECONNECT LIGHTING FIXTURES AND RECEPTACLES WITHIN ROOM TO SEPARATE BRANCH CIRCUITS AS INDICATED. PANELETTE BECOMES JUNCTION BOX: PROVIDE BLANK BOX COVER.
E13	REUSE EXISTING CEILING RECEPTACLE CIRCUIT SERVING FORMER PROJECTOR. EXTEND CIRCUIT TO JUNCTION BOX ABOVE CEILING FOR HARDWIRED CONNECTION TO NEW VOICELIFT UNIT.
E14	REFEEDING 9 TOTAL 2X2 LED TROFFERS, 35VA EACH.
E16	PROVIDE NEW JUNCTION BOX ABOVE ACT CEILING FOR HARDWIRED CONNECTION TO NEW VOICE LIFT UNIT. CONNECT TO UNSWITCHED LEG OF EXISTING CLASSROOM LIGHTING CIRCUIT.
E17	PROVIDE NEW RELAY PANEL FOR AUTOMATIC PLUG LOAD CONTROL OF CONTROLLED RECEPTACLES IN CLASSROOMS. COORDINATE PROGRAMMING WITH OWNER.
E19	PROVIDE NEW RECEPTACLES. REUSE EXISTING BRANCH CIRCUIT PRESERVED DURING DEMOLITION. EXTEND EXISTING CIRCUIT AS REQUIRED TO SERVE NEW RECEPTACLES.

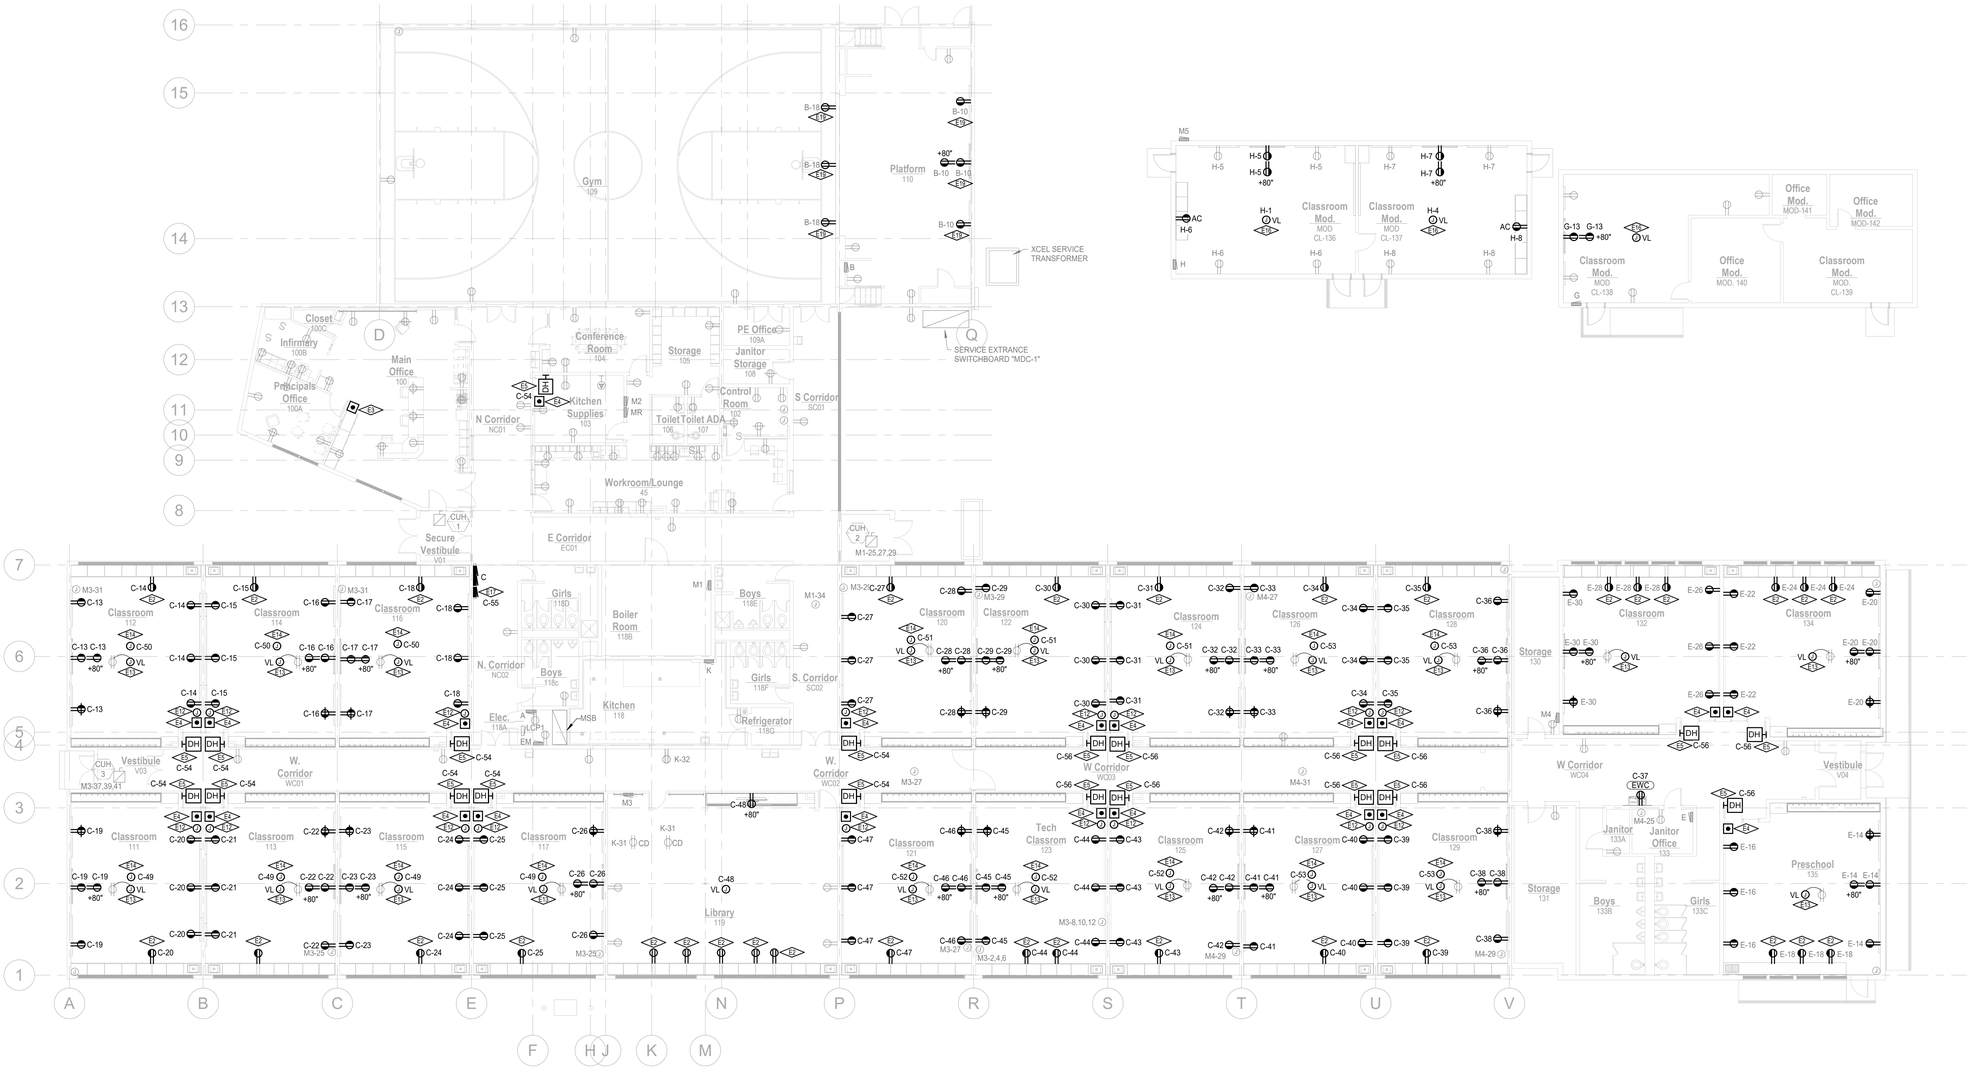


WORKING NORTH

TRUE NORTH

FIRST FLOOR POWER PLAN

SCALE: 3/32" = 1'-0"

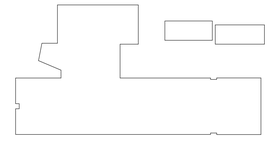

KEYPLAN

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026


FIRST FLOOR POWER PLAN

E1.11

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement
9/24/2025 8:57:17 AM

KEYNOTES

T2	REINSTALL EXISTING TECHNOLOGY DEVICES FOLLOWING COMPLETION OF ARCHITECTURAL WORK. RECONNECT TO EXISTING SYSTEMS.

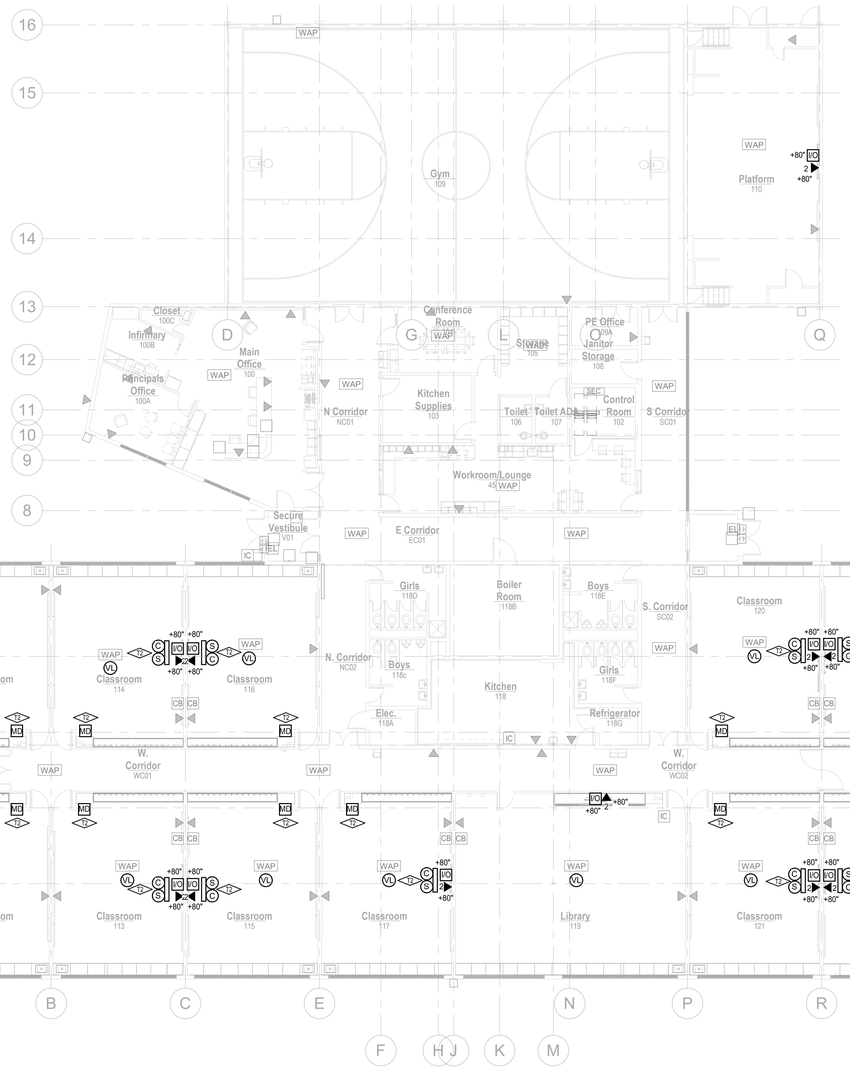


WORKING NORTH

TRUE NORTH

FIRST FLOOR TECHNOLOGY PLAN

SCALE: 3/32" = 1'-0"

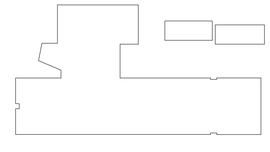

KEYPLAN

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030


DAO No.: 2025-033

September 25th, 2026

FIRST FLOOR TECHNOLOGY PLAN

E1.12

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement
9/24/2026 8:57:18 AM

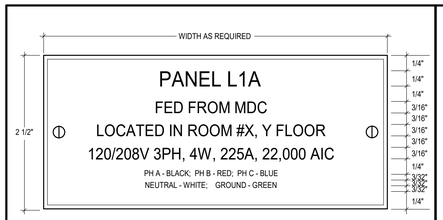


SUB-DISTRIBUTION CENTER AND BRANCH PANELBOARD NAMEPLATE DETAIL

SCALE: FULL

NOTES:

1. SEE SPECIFICATIONS FOR ADDITIONAL NAMEPLATE INFORMATION.
2. REWORD NAMEPLATE FOR FIELD CONDITIONS.
3. AMP RATING SHALL INDICATE BUS RATING.
4. CONFIRM ROOM NUMBER (X) AND FLOOR (Y) WITH OWNER AND ARCHITECT PRIOR TO PRINTING LABEL.
5. REFER TO SPECIFICATIONS FOR 277/480V PHASE CONDUCTOR COLOR REQUIREMENTS.

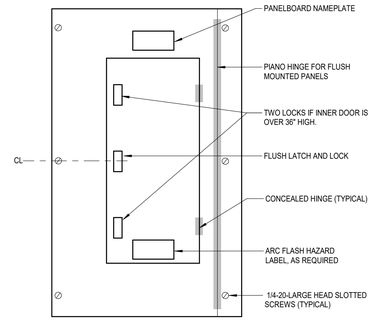


HINGED TRIM TO BOX PANEL FRONT

NO SCALE

NOTES:

1. ALL BOLTS SHALL HAVE LARGE (3/8") ROUND HEAD. NO WASHERS ALLOWED.
2. TYPICAL FOR ALL 120/208V BRANCH PANELBOARDS.

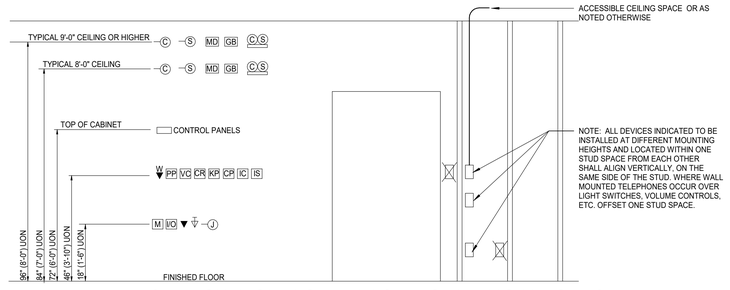


TYPICAL LOW VOLTAGE DEVICE MOUNTING HEIGHTS

NO SCALE

NOTES:

1. HEIGHTS SHOWN ARE TYPICAL TO CENTERLINE OF BOX UNLESS OTHERWISE NOTED.
2. WHERE EVER DEVICES ARE INDICATED TO BE ABOVE DOORS, DEVICE SHALL BE CENTERED BETWEEN TOP OF DOOR TRIM AND CEILING LINE.
3. MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS SHALL GOVERN OVER THOSE SHOWN ABOVE. VERIFY MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS. DEVICES AND COVER PLATES SHALL NOT COVER/OVERLAP EDGES OF WAINSCOTING, TILE OR OTHER SPECIALTY WALL FINISHES.
4. DEVICE MOUNTING HEIGHTS SHALL BE PER MOST CURRENT VERSION OF GOVERNING CODE AND STANDARDS NEC, IBC, NFPA, ADA, ETC. WHERE DISCREPANCIES BECOME EVIDENT, CONSULT THE ARCHITECT AND ENGINEER OF RECORD.
5. WHERE DEVICES ARE INSTALLED ABOVE COUNTER, THE DEVICES SHALL BE INSTALLED AT 46" MAXIMUM (COUNTERS/SHELVES 0-20 INCHES WIDE) AND 44" MAXIMUM (COUNTER/SHELVES 20-25 INCHES WIDE) ABOVE FINISHED FLOOR TO DEVICE CENTER.
6. LOW VOLTAGE DEVICES SHALL NOT BE INSTALLED BELOW 15" AFF PER ADA STANDARDS.

TTM-003

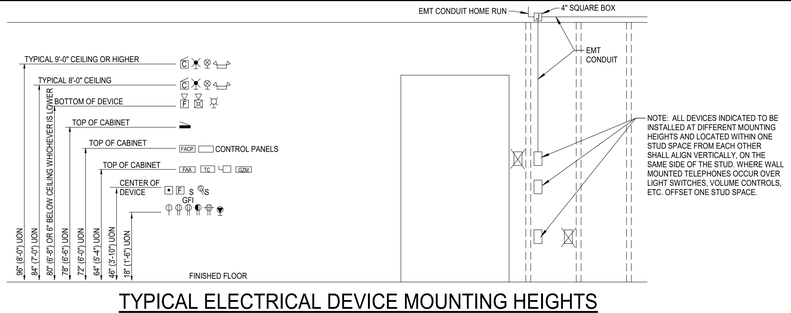

TYPICAL ELECTRICAL DEVICE MOUNTING HEIGHTS

NO SCALE

NOTES:

1. HEIGHTS SHOWN ARE TYPICAL TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE.
2. WHERE EVER DEVICES ARE INDICATED TO BE ABOVE DOORS, DEVICE SHALL BE CENTERED BETWEEN TOP OF DOOR TRIM AND CEILING LINE.
3. MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS SHALL GOVERN OVER THOSE SHOWN ABOVE. VERIFY MOUNTING HEIGHTS WITH ARCHITECTURAL ELEVATIONS. DEVICES AND COVER PLATES SHALL NOT COVER/OVERLAP EDGES OF WAINSCOTING, TILE OR OTHER SPECIALTY WALL FINISHES.
4. REFER TO TYPICAL TECHNOLOGY DEVICE MOUNTING HEIGHTS DETAIL FOR ADDITIONAL INFORMATION.
5. DEVICE MOUNTING HEIGHTS SHALL BE PER MOST CURRENT VERSION OF GOVERNING CODES AND STANDARDS NEC, IBC, NFPA, ADA, ETC. WHERE DESCREPANCIES BECOME EVIDENT CONSULT THE ARCHITECT AND ENGINEER OF RECORD.
6. WHERE RECEPTACLES, SWITCHES AND OTHER DEVICES ARE INSTALLED ABOVE COUNTERS, THE DEVICES SHALL BE INSTALLED AT 46" MAXIMUM (COUNTERS/SHELVES 0-20 INCHES WIDE) AND 44" MAXIMUM (COUNTERS/SHELVES 20-25 INCHES WIDE) ABOVE FINISHED FLOOR TO DEVICE CENTER.
7. RECEPTACLES AND LOW VOLTAGE DEVICES SHALL NOT BE INSTALLED BELOW 15" AFF PER ADA STANDARDS.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026

ELECTRICAL DETAILS

E2.01

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement\
9/24/2026 8:57:19 AM

SWITCHBOARD MDC-1 — EXISTING

LOCATION: | **VOLTS:** 120/208 Wye | **A.I.C. RATING:** 65,000
SUPPLY FROM: | **PHASES:** 3 | **MAINS TYPE:** MCB
MOUNTING: SURFACE | **WIRES:** 4 | **BUS RATING:** 1200 A
ENCLOSURE: NEMA 1 | **MCB RATING:** 1200 A

NOTES:
1. EXISTING LOAD ACCOUNTED FOR WITH UTILITY PEAK DEMAND.
2. EXISTING LOAD TO ACCOUNT FOR PEAK DEMAND RECORDED 07/2026 85.76kW AT 125%.
3. PROVIDE CIRCUIT BREAKER IN SPACE TO MATCH EXISTING.

LOAD	A	B	C	NOTE
SPD	0	0	0	
MSB	0	0	0	1
PANEL M1	0	0	0	1
PANEL M2	0	0	0	1
PANEL M3	0	0	0	1
PANEL M4	0	0	0	1
PANEL M5	0	0	0	1
SPARE	0	0	0	
SPARE	0	0	0	
SPARE	0	0	0	
PANEL C	**15415**	**14225**	**14024**	**3**
UTILITY PEAK DEMAND	28587	28587	28587	2
	44002 VA	42812 VA	42611 VA	**TOTAL LOAD**
REFER TO ONE-LINE DIAGRAM FOR SPACE, SPARE, AND CIRCUIT BREAKER QUANTITIES.	367 A	357 A	355 A	**TOTAL AMPS**
	3	1	3	**PHASE BALANCE**
	% A-B	% B-C	% C-A	

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	TOTALS	
L	LIGHTING	11094 VA	125.00%	13868 VA		
R	RECEPTACLE	31500 VA	65.87%	20750 VA		
M	MOTOR	0 VA	0.00%	0 VA	**TOTAL CONNECTED LOAD:**	129424 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	359 A
G	GENERAL	1070 VA	100.00%	1070 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	142888 VA
E	EXISTING	85760 VA	125.00%	107200 VA	**TOTAL DEMAND CURRENT:**	397 A
O	OTHER	0 VA	0.00%	0 VA		

SWITCHBOARD MSB — EXISTING

LOCATION: Elec. 118A | **VOLTS:** 120/208 Wye | **A.I.C. RATING:** 22,000
SUPPLY FROM: | **PHASES:** 3 | **MAINS TYPE:** MCB
MOUNTING: SURFACE | **WIRES:** 4 | **BUS RATING:** 600 A
ENCLOSURE: NEMA 1 | **MCB RATING:** 600 A

NOTES:
1. EXISTING LOAD REMOVED.

LOAD	A	B	C	NOTE
PANEL EM	1133	1133	1133	
PANEL A	4233	4233	4233	
PANEL B	1767	1767	1767	
SPARE	**0**	**0**	**0**	**1**
SPARE	**0**	**0**	**0**	**1**
SPARE	**0**	**0**	**0**	**1**
SPARE	**0**	**0**	**0**	**1**
SPARE	**0**	**0**	**0**	**1**
PANEL MR	6367	6367	6367	
PANEL E	8000	8725	4195	
PANEL G TEMP SOUTH	4280	1540	1505	
PANEL H TEMP SOUTH	1773	435	1260	
SPARE	0	0	0	
SPARE	0	0	0	
DISHWASHER	5760	5760	5760	
	33313 VA	29960 VA	26220 VA	**TOTAL LOAD**
REFER TO ONE-LINE DIAGRAM FOR SPACE, SPARE, AND CIRCUIT BREAKER QUANTITIES.	282 A	254 A	219 A	**TOTAL AMPS**
	11	16	29	**PHASE BALANCE**
	% A-B	% B-C	% C-A	

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	TOTALS	
L	LIGHTING	3133 VA	125.00%	3916 VA		
R	RECEPTACLE	16020 VA	81.21%	13010 VA		
M	MOTOR	60 VA	125.00%	75 VA	**TOTAL CONNECTED LOAD:**	89493 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	248 A
G	GENERAL	70280 VA	100.00%	70280 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	87281 VA
E	EXISTING	0 VA	0.00%	0 VA	**TOTAL DEMAND CURRENT:**	242 A
O	OTHER	0 VA	0.00%	0 VA		

PANEL C — NEW

LOCATION: N. Corridor NC02 | **VOLTAGE:** 120/208 Wye | **A.I.C. RATING:** 22,000
SUPPLY FROM: MDC-1 | **PHASE:** 3 | **MAINS TYPE:** MLO
MOUNTING: RECESSED | **WIRE:** 4 | **BUS RATING:** 150 A
ENCLOSURE: Type 1

NOTES:
1. BRANCH CIRCUITS RELOCATED FROM EXISTING PANEL C. COORDINATE CIRCUIT NAME AND LOADS.

NOTE	CKT	LOAD	TYPE	AMP	P	A		B		C		P	AMP	TYPE	LOAD	CKT	NOTE
	1	L-MAIN HALL	L	20	1	415	1260					1	20	R	R-HALLWAY	2	1
	3	L-CLASSRM HALL	L	20	1			530	1260			1	20	R	R-HALLWAY	4	1
	5	L-RESTROOMS	L	20	1					504	1500	1	20	L	L-EXT. POLES	6	1
	7	L-CLASSRM HALL	L	20	1	365	1500					1	20	L	L-EXT. POLES	8	1
	9	L-MAIN HALL	L	20	1			305	520			1	20	L	L-WALL PACKS, TC	10	1
	11	L-ENTRY	L	20	1					100	1260	1	20	R	R-HALLWAY	12	1
	13	R-CLASS 112 TEACHWALL	R	20	1	900	720					1	20	R	R-CLASS 112	14	
	15	R-CLASS 114	R	20	1			720	900			1	20	R	R-CLASS 114 TEACHWALL	16	
	17	R-CLASS 116 TEACHWALL	R	20	1					900	720	1	20	R	R-CLASS 116	18	
	19	R-CLASS 111 TEACHWALL	R	20	1	900	720					1	20	R	R-CLASS 111	20	
	21	R-CLASS 113	R	20	1			720	900			1	20	R	R-CLASS 113 TEACHWALL	22	
	23	R-CLASS 115 TEACHWALL	R	20	1					900	720	1	20	R	R-CLASS 115	24	
	25	R-CLASS 117	R	20	1	720	900					1	20	R	R-CLASS 117 TEACHWALL	26	
	27	R-CLASS 120	R	20	1			720	900			1	20	R	R-CLASS 120 TEACHWALL	28	
	29	R-CLASS 122 TEACHWALL	R	20	1					900	720	1	20	R	R-CLASS 122	30	
	31	R-CLASS 124	R	20	1	720	900					1	20	R	R-CLASS 124 TEACHWALL	32	
	33	R-CLASS 126 TEACHWALL	R	20	1			900	720			1	20	R	R-CLASS 126	34	
	35	R-CLASS 128	R	20	1					720	900	1	20	R	R-CLASS 128 TEACHWALL	36	
	37	ELEC WATER COOLER	G	20	1	240	900					1	20	R	R-CLASS 129 TEACHWALL	38	
	39	R-CLASS 129	R	20	1			720	720			1	20	R	R-CLASS 127	40	
	41	R-CLASS 127 TEACHWALL	R	20	1					900	900	1	20	R	R-CLASS 125 TEACHWALL	42	
	43	R-CLASS 125	R	20	1	720	720					1	20	R	R-CLASS 123	44	
	45	R-CLASS 123 TEACHWALL	R	20	1			900	900			1	20	R	R-CLASS 121 TEACHWALL	46	
	47	R-CLASS 121	R	20	1					720	300	1	20	R; G	R-LIBRARY 119/VL	48	
	49	L-CLASS 111, 113, 115, 117	L	20	1	1260	945					1	20	L	L-CLASS 112, 114 ,116	50	
	51	L-CLASS 120, 122 ,124	L	20	1			945	945			1	20	L	L-CLASS 121, 123 ,125	52	
	53	L-CLASS 126, 128 ,127, 129	L	20	1					1260	100	1	20	G	MAG DOOR HOLD WEST	54	
	55	RELAY PANEL	G	20	1	500	110					1	20	G	MAG DOOR HOLD EAST	56	
	57	SPARE	--	20	1			0	0			1	20	--	SPARE	58	
	59	SPARE	--	20	1					0	0	1	20	--	SPARE	60	
	61	SPARE	--	20	1	0	0					1	20	--	SPARE	62	
	63	SPARE	--	20	1			0	0			1	20	--	SPARE	64	
	65	SPARE	--	20	1					0	0	1	20	--	SPARE	66	
	67	SPARE	--	20	1	0	--					1	--	--	SPACE	68	
	69	SPARE	--	20	1			0	--			1	--	--	SPACE	70	
	71	SPARE	--	20	1					0	--	1	--	--	SPACE	72	
	73	SPARE	--	20	1	0	--					1	--	--	SPACE	74	
	75	SPARE	--	20	1			0	--			1	--	--	SPACE	76	
	77	SPARE	--	20	1					0	--	1	--	--	SPACE	78	
	79	SPARE	--	20	1	0	--					1	--	--	SPACE	80	
	81	SPARE	--	20	1			0	--			1	--	--	SPACE	82	
	83	SPARE	--	20	1					0	--	1	--	--	SPACE	84	
					TOTAL LOAD:	15415 VA		14225 VA		14024 VA							
					TOTAL AMPS:	129 A		119 A		117 A							
					PHASE BALANCE:	8 % A-B		2 % B-C		10 % C-A							

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	PANEL TOTALS	
L	LIGHTING	11094 VA	125.00%	13868 VA		
R	RECEPTACLE	31500 VA	65.87%	20750 VA		
M	MOTOR	0 VA	0.00%	0 VA	**TOTAL CONNECTED LOAD:**	43664 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	121 A
G	GENERAL	1070 VA	100.00%	1070 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	35688 VA
E	EXISTING	0 VA	0.00%	0 VA	**TOTAL DEMAND CURRENT:**	99 A
O	OTHER	0 VA	0.00%	0 VA		

PANEL E — EXISTING

LOCATION: Janitor Office 133 | **VOLTAGE:** 120/208 Wye | **A.I.C. RATING:** 10,000
SUPPLY FROM: MSB | **PHASE:** 3 | **MAINS TYPE:** MLO
MOUNTING: SURFACE | **WIRE:** 4 | **BUS RATING:** 225 A
ENCLOSURE: Type 1 | **MCB RATING:** 225 A

NOTES:
1. NEW LOAD ON EXISTING CIRCUIT BREAKER, 180VA.

NOTE	CKT	LOAD	TYPE	AMP	P	A		B		C		P	AMP	TYPE	LOAD	CKT	NOTE
	1	HOT WATER HEATER	G	60	2	4500	315					1	20	L	L-CLASS 135	2	
	3							4500	315			1	20	L	L-CLASS 134	4	
	5									0	315	1	20	L	L-CLASS 132	6	
	7	SPARE	--	40	3	0	305					1	20	L	L-STORAGE/JAN	8	
	9							0	210			1	20	L	L-RESTROOMS	10	
	11	CUH-1	M	20	1					60	180	1	20	L	L-W. CORRIDOR	12	
	13	SPARE	--	20	1	0	900					1	20	R	R-CLASS 135 TEACHWALL	14	1
	15	SPARE	--	20	1			0	540			1	20	R	R-CLASS 135	16	
	17	CRAWL SP PWR/LTS	R; L	20	1					300	540	1	20	R	R-CLASS 135 AC	18	
	19	SPARE	--	20	1	0	900					1	20	R	R-CLASS 134 TEACHWALL	20	1
	21	SPARE	--	20	1			0	540			1	20	R	R-CLASS 134	22	
	23	SPARE	--	20	1					0	540	1	20	R	R-CLASS 134 AC	24	
	25	SPARE	--	20	1	0	540					1	20	R	R-CLASS 132	26	
	27	SPARE	--	20	1			0	540			1	20	R	R-CLASS 132 AC	28	
	29	SPARE	--	20	1					0	900	1	20	R	R-CLASS 121 TEACHWALL	30	1
	31	SPARE	--	20	1	0	540					1	20	R	R-RECPTS	32	
	33	SPARE	--	20	1			0	1080			1	20	R	R-RECPTS	34	
	35	SPARE	--	20	1					0	360	1	20	R	R-RECPTS	36	
	37	SPARE	--	20	1	0	0					1	20	--	SPARE	38	
	39	SPARE	--	20	1			0	1000			1	20	G	ELEC HAND DRYER	40	
	41	SPARE	--	20	1					0	1000	1	20	G	ELEC HAND DRYER	42	
					TOTAL LOAD:	8000 VA		8725 VA		4195 VA							
					TOTAL AMPS:	72 A		78 A		35 A							
					PHASE BALANCE:	8 % A-B		122 % B-C		105 % C-A							

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	PANEL TOTALS	
L	LIGHTING	1760 VA	125.00%	2200 VA		
R	RECEPTACLE	8100 VA	100.00%	8100 VA		
M	MOTOR	60 VA	125.00%	75 VA	**TOTAL CONNECTED LOAD:**	20920 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	58 A
G	GENERAL	11000 VA	100.00%	11000 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	21375 VA
E	EXISTING	0 VA	0.00%	0 VA	**TOTAL DEMAND CURRENT:**	59 A
O	OTHER	0 VA	0.00%	0 VA		

PANEL H — EXISTING

LOCATION: Classroom Mod. MOD CL-136 | **VOLTAGE:** 120/208 Wye | **A.I.C. RATING:** 10,000
SUPPLY FROM: MSB | **PHASE:** 3 | **MAINS TYPE:** MCB
MOUNTING: RECESSED | **WIRE:** 4 | **BUS RATING:** 100 A
ENCLOSURE: Type 1 | **MCB RATING:** 100 A

NOTES:
1. NEW LOAD ON EXISTING CIRCUIT BREAKER.

NOTE	CKT	LOAD	TYPE	AMP	P	A		B		C		P	AMP	TYPE	LOAD	CKT	NOTE
	1	L-NORTH/VL	G; L	20	1	435	78					1	20	L	L-EXTERIOR	2	
	3	SPARE	--	20	1			0	435			1	20	G; L	L-SOUTH/VL	4	1
	5	R-NORTH PLUGS	R	20	1					720	540	1	20	R	R-NORTH PLUGS	6	
	7	R-SOUTH PLUGS	R	20	1	720	540					1	20	R	R-SOUTH PLUGS	8	
	9	SPARE	--	30	2			0	0			1	20	--	SPARE	10	
	11									0	0	2	30	--	SPARE	12	
	13	SPACE	--	--	1	--	0									14	
	15	SPACE	--	--	1			--	--			1	--	--	SPACE	16	
	17	SPACE	--	--	1					--	--	1	--	--	SPACE	18	
	19	SPACE	--	--	1	--	--					1	--	--	SPACE	20	
					TOTAL LOAD:	1773 VA		435 VA		1260 VA							
					TOTAL AMPS:	16 A		4 A		12 A							
					PHASE BALANCE:	337 % A-B		219 % B-C		37 % C-A							

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	PANEL TOTALS	
L	LIGHTING	708 VA	125.00%	885 VA		
R	RECEPTACLE	2520 VA	100.00%	2520 VA		
M	MOTOR	0 VA	0.00%	0 VA	**TOTAL CONNECTED LOAD:**	3468 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	10 A
G	GENERAL	240 VA	100.00%	240 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	3645 VA
E	EXISTING	0 VA	0.00%	0 VA	**TOTAL DEMAND CURRENT:**	10 A
O	OTHER	0 VA	0.00%	0 VA		

PANEL G — EXISTING

LOCATION: Classroom Mod. MOD CL-138 | **VOLTAGE:** 120/208 Wye | **A.I.C. RATING:** 10,000
SUPPLY FROM: MSB | **PHASE:** 3 | **MAINS TYPE:** MCB
MOUNTING: RECESSED | **WIRE:** 4 | **BUS RATING:** 100 A
ENCLOSURE: Type 1 | **MCB RATING:** 100 A

NOTES:
1. PROVIDE CIRCUIT BREAKER IN SPACE TO MATCH EXISTING.

NOTE	CKT	LOAD	TYPE	AMP	P	A		B		C		P	AMP	TYPE	LOAD	CKT	NOTE
	1	R-PLUGS	R	20	1	1260	140					1	20	L	L-MIDDLE RM	2	
	3	R-PLUGS	R	20	1			1260	280			1	20	L	L-PC RM	4	
	5	L-SPEECH RM	L	20	1					245	1260	1	20	R	R-PLUGS	6	
	7	R-PLUGS	R	20	1	1260	1260					1	20	G	EXISTING LOAD	8	
	9	SPARE	--	40	2			0	0			2	40	--	SPARE	10	
	11									0	0					12	
1	13	R-DISPLAY WALL	R	20	1	360	--					1	--	--	SPACE	14	
	15	SPACE	--	--	1			--	--			1	--	--	SPACE	16	
					TOTAL LOAD:	4280 VA		1540 VA		1505 VA							
					TOTAL AMPS:	36 A		13 A		13 A							
					PHASE BALANCE:	177 % A-B		3 % B-C		185 % C-A							

LOAD TYPE		CONNECTED LOAD	DEMAND FACTOR	DEMAND LOAD	PANEL TOTALS	
L	LIGHTING	665 VA	125.00%	831 VA		
R	RECEPTACLE	5400 VA	100.00%	5400 VA		
M	MOTOR	0 VA	0.00%	0 VA	**TOTAL CONNECTED LOAD:**	7325 VA
C	CONTINUOUS	0 VA	0.00%	0 VA	**TOTAL CONNECTED CURRENT:**	20 A
G	GENERAL	1260 VA	100.00%	1260 VA		
K	KITCHEN	0 VA	0.00%	0 VA	**TOTAL DEMAND LOAD:**	7491 VA
E	EXISTING	0 VA	0.00%	0 VA	**TOTAL DEMAND CURRENT:**	21 A
O	OTHER	0 VA	0.00%	0 VA		

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2026 Bond Projects
Harris Park Elementary

4300 W. 75th Avenue
Westminster, CO 80030

DAO No.: 2025-033

September 25th, 2026

ELECTRICAL PANEL SCHEDULES

E3.01

P:\WPS\2025-187 Harris Park Elementary School Micro Panel Replacement
9/24/2026 8:47:19 AM