Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations
7826 Fairview Ave. Denver, CO 80221
DAO No.: 2025 - 033
Construction Documents
September 25, 2026

FAIRVIEW ELEMENTARY

EXTERIOR PERSPECTIVE

DRAWING INDEX

GENERAL

Cover	Cover Sheet
G0.0	Standard Symbols, Abbreviations, General Notes & Building Code Data
G0.1	Building Code Data

ARCHITECTURE

AD1.0	First Floor Demolition Plan
AD2.0	Exterior Elevations Demolition
AD2.1	Exterior Elevations Demolition
A1.0	First Floor Plan
A1.1	Equipment Plan
A2.0	Exterior Elevations
A2.1	Exterior Elevations
A4.0	Wall Section
A6.0	Casework Sections/Window Schedule/Window Details
A6.1	Details/Door Schedule/Door & Window Details
A6.2	Interior Elevations
A6.3	Interior Elevations
A6.4	Interior Elevations
A6.5	Exterior Frame Types
A9.0	Finish Plan

PLUMBING

P0.0	Plimbing Cover Sheet - General Notes, Schedules & Legend
PD1.0	First Floor - Demolition Plumbing Plans
P1.0	First Floor - Plumbing Plans

ELECTRICAL

E0.01	Electrical Legend, Notes & Details
E0.02	One-Line Diagram
ED1.0	First Floor Electrical Demolition Plan
E1.0	First Floor Electrical Plan
E2.0	First Floor Technology Plan
E3.0	Electrical Panel Schedules

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

OWNER:
WESTMINSTER PUBLIC SCHOOLS
7002 RALEIGH STREET
WESTMINSTER, CO 80030
CONTACT: DON CIANCIO
PHONE : 720.542.5100

ARCHITECT:
DAO ARCHITECTURE
7230 MEADE ST
WESTMINSTER, CO 80030
CONTACT: DAN ORECCHIO
PHONE : 720.273.0431

MECHANICAL AND PLUMBING ENGINEERS:
THE BALLARD GROUP, INC.
2525 S WADSWORTH BLVD. SUITE 200
LAKEWOOD, CO 80227
CONTACT: ERIC BAALMAN; NATE RUST
PHONE: 303.988.4514

ELECTRICAL AND TECHNOLOGY ENGINEERS:
CATOR RUMA & ASSOCIATES, CO.
896 TABOR STREET
LAKEWOOD, CO 80401
CONTACT: KEVIN MILLER
PHONE: 303.232.6200

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

CONSTRUCTION DOCUMENTS

Cover

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:02 AM

MATERIALS SYMBOLS

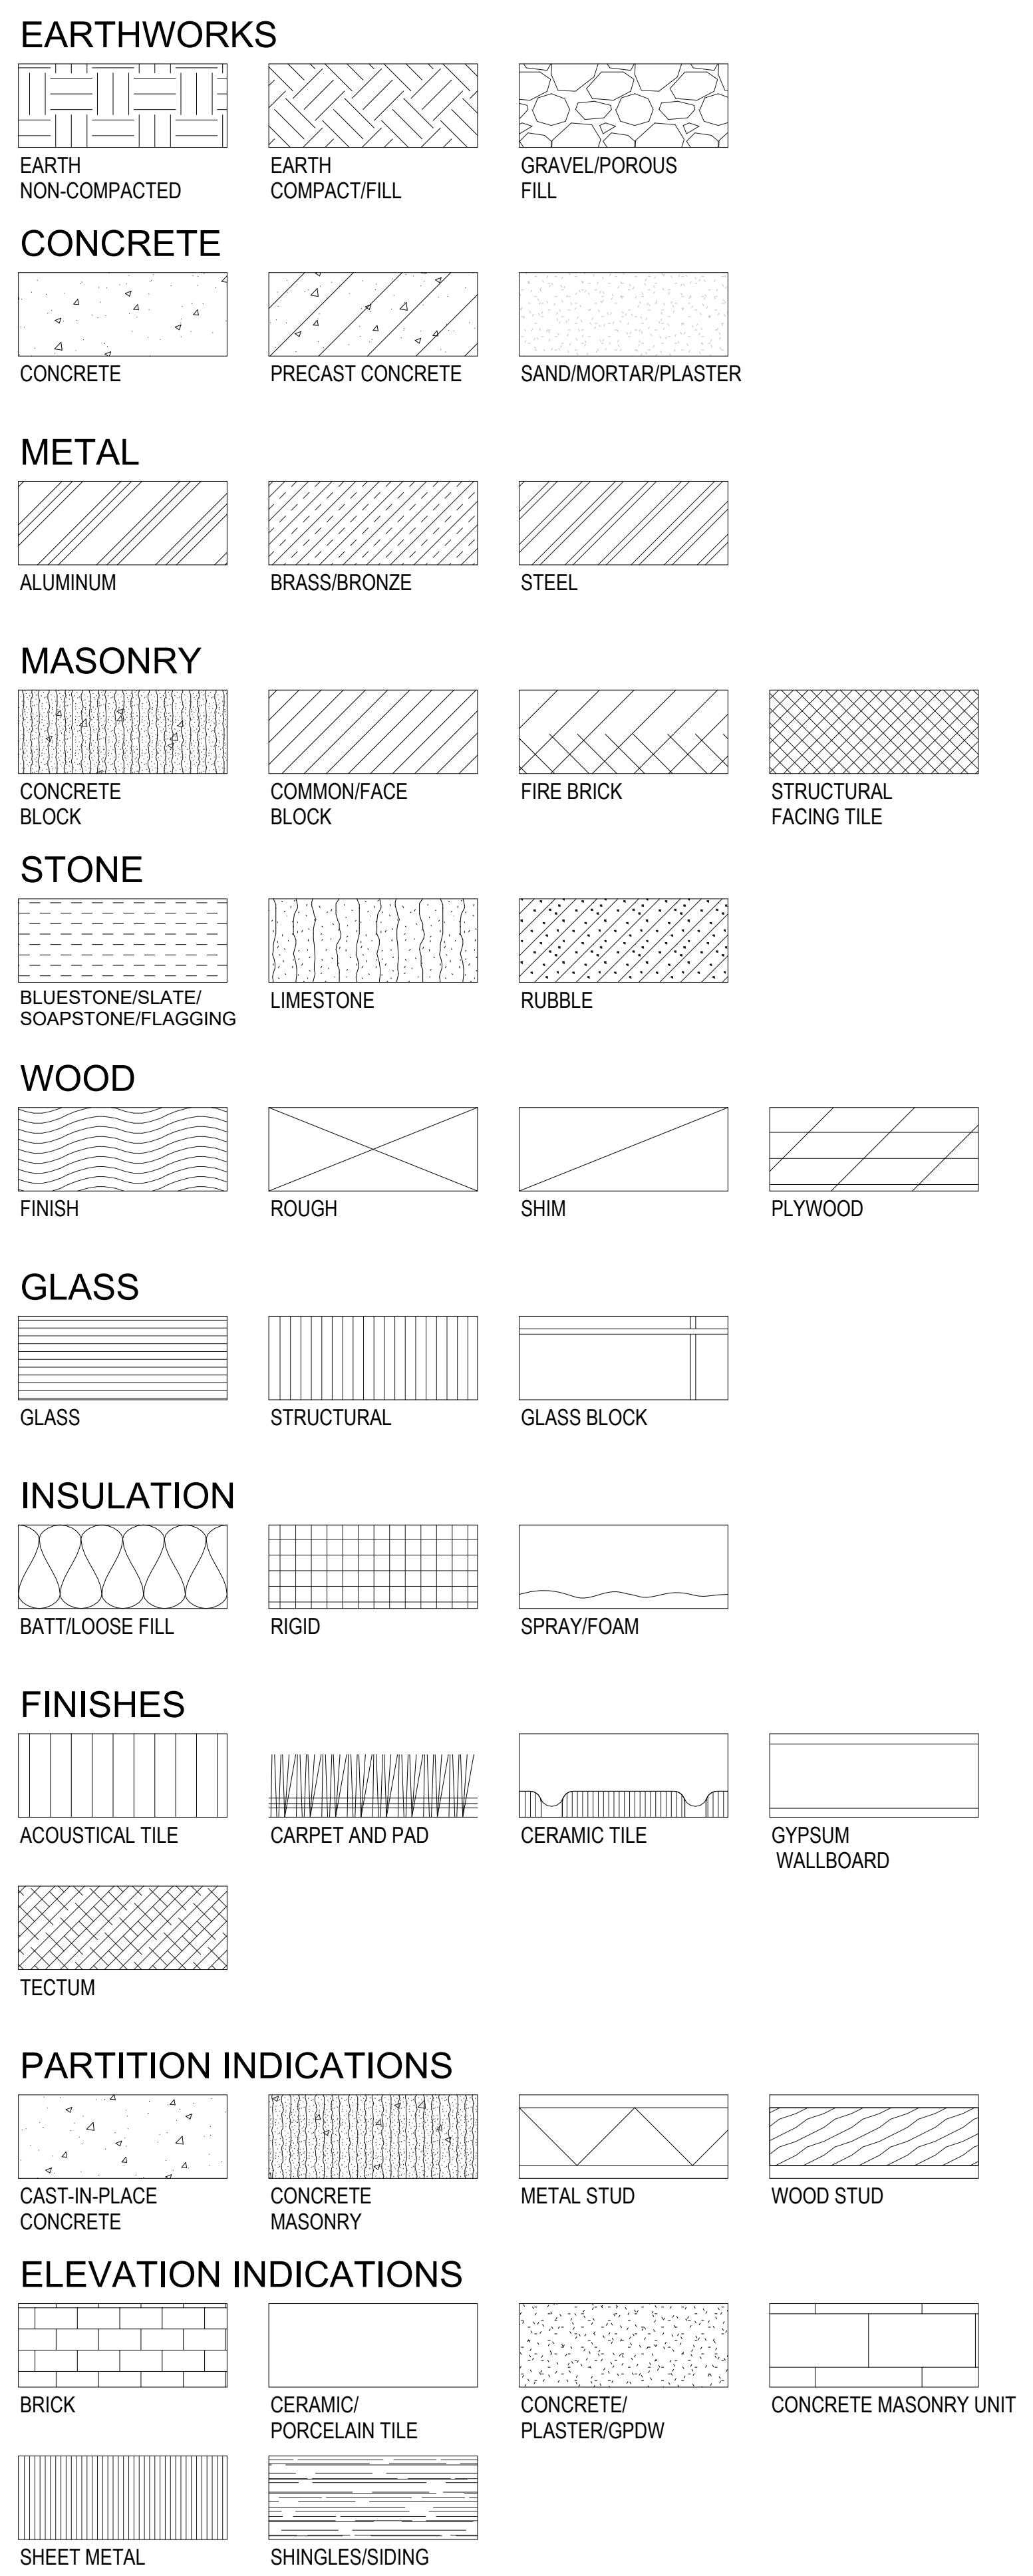

REFERENCE SYMBOLS

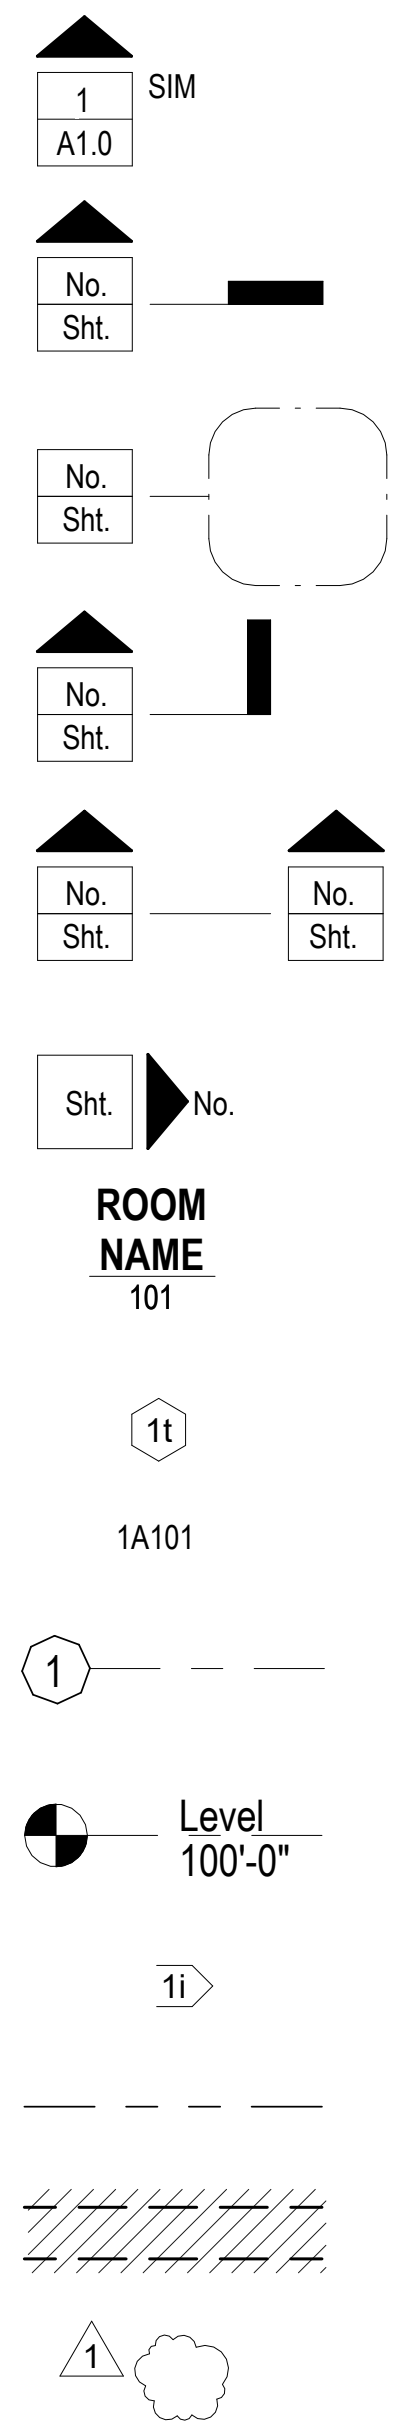

1 / A1.0 SIM	DETAIL OR SECTION NUMBER SHEET ON WHICH IT IS FOUND
No. / Sht.	SECTION REFERENCE
No. / Sht.	DETAIL REFERENCE
No. / Sht.	WALL SECTION REFERENCE
No. / Sht. — No. / Sht.	BUILDING SECTION REFERENCE
Sht. No.	ELEVATION REFERENCE
ROOM NAME 101	ROOM IDENTIFIER
1t	WINDOW/OPENING IDENTIFIER
1A101	DOOR/OPENING IDENTIFIER
1	EXISTING GRID LINE
Level 100'-0"	ELEVATION REFERENCE
1i	WALL TYPE REFERENCE
	MATCH LINE
	DEMOLITION INDICATOR
1	REVISION INDICATOR

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON PLANS PRIOR TO COMMENCEMENT OF THE WORK . IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALLBE COORDINATED WITH THE ARCHITECT AND OWNER IN ORDER TO MODIFY PLANS ACCORDINGLY .

2. ALL DISCIPLINES SHALL BE RESPONSIBLE FOR THEIR SCOPE OF WORK . THIS WORK IS TO BE SCHEDULED AND COMPLETED WITH THE GENERAL CONTRACTOR'S FULL KNOWLEDGE.

3. ALL HOT WORK ACTIVITIES (I.E. USING HEAT GUNS, SOLDERING, BRAZING, WELDING, GRINDING, METAL CUTTING, ETC.) OR OTHER ACTIVITIES INVOLVING FLAMES OR SPARKS SHALL BE PRECEDED BY OBTAINING AN APPROVED HOT WORK PERMIT. (IF HOT WORK PERMIT IS REQUIRED)

4. THE PROJECT STAGING AREA / CONSTRUCTION ACTIVITIES SHALL NOT CAUSE THE OBSTRUCTION OF PATHS OF EGRESS INSIDE THE BUILDING, BLOCK EXIT DISCHARGE FROM THE BUILDING, OR IMPEDE EMERGENCY VEHICLE ACCESS TO THE BUILDING. CORRIDORS MAY NOT BE USED AS STAGING AREAS OR AS AREAS FOR DEBRIS COLLECTION.

5. ALL NECESSARY MEASURES SHALL BE TAKEN TO PREVENT THE NUISANCE ACTUATION OF ANY NEARBY SMOKE OR DUCT DETECTORS BY CONSTRUCTION ACTIVITIES THAT CREATE DUST OR FUMES INSIDE THE BUILDING.

6. THE CONTRACTOR SHALL NOT HANDLE OR DISABLE ANY FIRE SYSTEMS DEVICES. ONLY BUILDING FIRE SYSTEMS PERSONNEL MAY HANDLE OR DISABLE EXISTING FIRE SYSTEMS. ANY OUTAGES REQUIRED FOR THE EXISTING FIRE SYSTEMS SHALL BE PERFORMED ACCORDING TO WPS PROCEDURES.

7. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.

8. CONTRACTOR TO PROVIDE FINAL CLEANING SERVICES IN ALL CLASSROOMS PRIOR TO PROJECT COMPLETION, AND NO LATER THAN THE DATE THAT THE OWNER OCCUPIES THE CLASSROOMS, AHEAD OF STAFF AND STUDENTS RETURNING TO THE SCHOOL

STANDARD ABBREVIATIONS

A/E	ARCHITECT/ENGINEER
AB	ANCHOR BOLT
ABBR	ABBREVIATE
ABV	ABOVE
AC	AIR CONDITIONING
ACID RES	ACID RESISTANT
ACOUS	ACOUSTICAL
ACOUS INSUL	ACOUSTICAL INSULATION
ACOUS PNL	ACOUSTICAL PANEL
ACOUS PLAS	ACOUSTICAL PLASTER
ACOUS TILE	ACOUSTICAL TILE
ACT	ACTUAL
AD	AREA DRAIN
ADC	AUTOMATIC DOOR CLOSER
ADDL	ADDITIONAL
ADDM	ADDENDUM
ADJ	ADJUSTABLE
ADJC	ADJACENT
AF	ACCESS FLOOR
AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
AFS	ABOVE FINISHED SLAB
AGGR	AGGREGATE
AHR	ANCHOR
AHU	AIR HANDLING UNIT
ALD	ALUMINUM DOOR
ALM	ALARM
ALT	ALTERNATE
ALUM	ALUMINUM
AMB	AMBIENT
AMPL	AMPLIFIER
AMT	AMOUNT
ANN	ANNUNCIATOR
ANOD	ANODIZED
ANT	ANTENNA
AP	ACCESS PANEL
APPX	APPENDIX
ARCH	ARCHITECT(URAL)
ASB	ASBESTOS
ASC	ABOVE SUSPENDED CEILING
ASPH	ASPHALT
ASYM	ASYMMETRICAL
AV	AUDIO VISUAL
AVE	AVENUE
AWC	ACOUSTICAL WALL COVERING
AWP	ACOUSTICAL WALL PANEL
B&B	BALLED AND BURLAPPED
BAF	BAFFLE
BAL	BALANCE
BB	BULLETIN BOARD
BC	BOTTOM OF CURB
BD	BOARD
BEV	BEVEL
BF	BOTH FACES
BFF	BELOW FINISH FLOOR
BFP	BACKFLOW PREVENTER
BITUM	BITUMINOUS
BJT	BED JOINT
BL	BASE LINE
BLDG	BUILDING
BLK	BLOCK
BLKG	BLOCKING
BLKHD	BULKHEAD
BLST	BALLAST
BM	BEAM
BO	BOTTOM OF
BOC	BACK OF CURB
BOW	BOTTOM OF WALL
BP	BASE PLATE
BRCG	BRACING
BRDG JST	BRIDGING JOIST
BRG	BEARING
BRG PL	BEARING PLATE
BRK	BRICK
BRKT	BRACKET
BRS	BRASS
BRZ	BRONZE
BS	BOTH SIDES
BSMT	BASEMENT
BTM	BOTTOM
BUR	BUILT-UP ROOF
BW	BOTH WAYS
BOW	BOTTOM OF WALL
C/C	CENTER TO CENTER
C&G	CURB AND GUTTER
CAB	CABINET
CARP	CARPET
CAV	CAVITY
CB	CATCH BASIN
CCTV	CLOSED CIRCUIT TELEVISION
CEM	CEMENT
CEM PLAS	CEMENT PLASTER
CER	CERAMIC
CER TILE	CERAMIC TILE
C FLG	COUNTER FLASHING
CH BD	CHALKBOARD
CG	CORNER GUARD
CHAN	CHANNEL
CHFR	CHAMFER
CHK	CHECK
CI	CAST IRON
CIP	CAST IN PLACE
CIR	CIRCLE
CJ	CONTROL JOINT
CL	CENTER LINE
CLG	CEILING
CLG DIFF	CEILING DIFFUSER
CLG HT	CEILING HEIGHT
CLL	CONTRACT LIMIT LINE
CLOS	CLOSET
CLR	CLEAR
CLSR	CLOSURE
CMPST	COMPOSITE
CMU	CONCRETE MASONRY UNIT
CNR	CORNER
CNTR	COUNTER
CO	CLEANOUT
COL	COLUMN
COMM	COMMERCIAL
COMPL	COMPLETE
CONC	CONCRETE
CONC FL	CONCRETE FLOOR
CONF	CONFERENCE
CONN	CONNECTION
CONSTR	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
COORD	COORDINATE
CORR	CORRIDOR
COV PL	COVER PLATE
CPRS	COMPRESSIBLE
CPT	CARPET
CRCMF	CIRCUMFERENCE
CRS	COLD ROLLED STEEL
CSG	CASING
CSK	COUNTERSUNK
CSMT	CASEMENT
CSWK	CASEWORK
CT	CERAMIC TILE
C TV	CABLE TELEVISION
CUB	CUBICLE
CUR	CURRENT
CW	COLD WATER
DBL GLZ	DOUBLE GLAZING
DEPT	DEPARTMENT
DET	DETAIL
DF	DRINKING FOUNTAIN
DF	DRAPERY FABRIC
DFR	DOOR FRAME
DH	DOUBLE HUNG
DIA	DIAMETER
DIM	DIMENSION
DIST	DISTANCE
DIV	DIVIDER
DIW	DEIONIZED WATER
DJ	DOUBLE JOIST
DL	DRAPERY LINER
DMPF	DAMPPROOFING
DN	DOWN
DO	DITTO
DR	DOOR
DR CLSR	DOOR CLOSURE
DS	DOWNSPOUT
DST	DOOR STOP
DT	DRAIN TILE
DUPL	DUPLICATE
DVTL	DOVETAIL
DW	DISHWASHER
DWG	DRAWING
DWL	DOWEL
DWR	DRAWER
DWTR	DUMBWAITER
E	EAST
EA	EACH
EF	EACH FACE
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATOR
EMER	EMERGENCY
EMER SHR	EMERGENCY SHOWER
ENAM	ENAMEL
ENCL	ENCLOSURE
ENGR	ENGINEER
ENTR	ENTRANCE
EO	ELECTRICAL OUTLET
EP	ELECTRICAL PANEL
EPS	EXPANDED POLYSTYRENE
EPX	EPOXY FLOOR
EQL SP	EQUALLY SPACED
EQ	EQUAL
EQUIP	EQUIPMENT
EQUIV	EQUIVALENT
ERECT	ERECTION
ESCAL	ESCALATOR
ESMT	EASEMENT
EST	ESTIMATE
EW	EACH WAY
EXC	EXCAVATE
EXG	EXISTING
EXH HD	EXHAUST HOOD
EXH FN	EXHAUST FAN
EXP	EXPANSION
EXSP	EXPOSED
EXST	EXISTING
EXST GR	EXISTING GRADE
EXT	EXTERIOR
EXTN	EXTENSION
EIFS	EXTERIOR INSULATION & FINISH SYSTEM
F BRK	FIRE BRICK
F/F	FACE TO FACE
FBD	FIBERBOARD
FC	FIRE COATED
FD	FLOOR DRAIN
FDN	FOUNDATION
FEC	FIRE EXTINGUISHER CABINET
FF	FACTORY FINISH
FFE	FINISH FLOOR ELEVATION
FGL	FIBERGLASS
FIN GR	FINISH GRADE
FIN FL	FINISH FLOOR
FIN	FINISH
FL	FLOWLINE
FLDG	FOLDING
FLG	FLANGE
FLR	FLOOR
FLR SK	FLOOR SINK
FLR PL	FLOOR PLATE
FLR FIN	FLOOR FINISH
FLT GL	FLOAT GLASS
FLOUR	FLUORESCENT
FOC	FACE OF CONCRETE
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FPL	FIREPLACE
FPRF	FIREPROOFING
FRM	FRAME
FRNT	FRONT
FS	FULL SIZE
FSP	FIRE STANDPIPE
FSTNR	FASTENER
FTG	FOOTING
FURR	FURRING
FUT	FUTURE
FXTR	FIXTURE
GA	GYPSUM ASSOCIATION
GALV	GALVANIZED
GB	GRAB BAR
GDRL	GUARD RAIL
GENL	GENERAL
GENL CONTR	GENERAL CONTRACTOR
GFI	GROUND FAULT INTERRUPTER
GL	GLASS
GL BLK	GLASS BLOCK
GLU LAM	GLUE LAMINATED
GLZ	GLAZING
GLZ CMU	GLAZED CONCRETE MASONRY UNIT
GND	GROUND
GPDW	GYPSUM DRY WALL
GR BM	GRADE BEAM
GR	GRADE
GRTG	GRATING
GUT	GUTTER
GYP	GYPSUM
GYP PLAS	GYPSUM PLASTER
H	HIGH
H&CW	HOT & COLD WATER
HB	HOSE BIBB
HC	HOLLOW CORE
HC	HANDICAP
HCMU	HOLLOW CONCRETE MASONRY UNIT
HD	HEAVY DUTY
HDJT	HEAD JOINT
HDBD	HARDBOARD
HDR	HEADER
HDWD	HARDWOOD
HGT	HEIGHT
HLB	HORIZONTAL LOUVER BLINDS
HM	HOLLOW METAL
HMD	HOLLOW METAL DOOR
HMF	HOLLOW METAL FRAME
HNDRL	HAND RAIL
HO	HOLD-OPEN
HORIZ	HORIZONTAL
HR	HOUR
HS	HIGH STRENGTH
HSB	HIGH STRENGTH BOLT
HTG	HEATING
HVAC	HEATING, VENTILATION, AIR CONDITIONING
HW	HOT WATER
HYD	HYDRANT
ID	INSIDE DIAMETER
IF	INSIDE FACE
INCAND	INCANDESCENT
INL	INLET
INSTL	INSTALLATION
INSUL	INSULATION
INTR	INTERIOR
INV	INVERT
INV EL	INVERT ELEVATION
JAN	JANITOR
JC	JANITOR'S CLOSET
JST	JOIST
JT	JOINT
KB	KNEE BRACE
KO	KNOCKOUT
KOP	KNOCKOUT PANEL
KPL	KICK PLATE
KWY	KEYWAY
L	LEFT
LAB	LABORATORY
LAT	LAY-IN ACOUSTICAL TILE
LAV	LAVATORY
LB	POUND
LBR	LUMBER
LCMU	LIGHTWEIGHT CONCRETE MASONRY UNIT
LD BRG	LOAD BEARING
LDG	LANDING
LF	LINEAR FOOT
LG	LENGTH
LH	LEFT HAND
LHR	LEFT HAND REVERSE
LIN	LINOLEUM
LIQ	LIQUID
LKR	LOCKER
LKR RM	LOCKER ROOM
LL	LIVE LOAD
LNTL	LINTEL
LOC	LOCATION
LONG	LONGITUDINAL
LRG	LARGE
LS	LUMP SUM
LT	LIGHT
LT WT	LIGHTWEIGHT
LTG	LIGHTING
LVL	LEVEL
LVR	LOUVER
LW PLAS	LIGHTWEIGHT PLASTER
LWC	LIGHTWEIGHT CONCRETE
M	METER
MAINT	MAINTENANCE
MARB	MARBLE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MB	MARKERBOARD
MBR	MEMBER
MC	METAL CLAD
MDF	MEDIUM DENSITY FIBERBOARD
MDO	MEDIUM DENSITY OVERLOAD
ME	MATCH EXISTING
ME	MISCELLANEOUS EQUIPMENT
MECH	MECHANICAL
MED	MEDIUM
MEMB	MEMBRANE
MEZZ	MEZZANINE
MFG	MANUFACTURING
MFR	MANUFACTURER
MH	MANHOLE
MIL	MILLIMETER
MIN	MINIMUM
MIR	MIRROR
MISC	MISCELLANEOUS
MK	MARK
MKRBD	MARKERBOARD
ML	MATCH LINE
MLC	METAL LABORATORY CASEWORK
MLDG	MOLDING
MLWK	MILLWORK
MO	MASONRY OPENING
MOD	MODULE
MTD	MOUNTED
MTG	MEETING
MTL	METAL
MTR	MORTAR
MULL	MULLION
MULT	MULTIPLE
MVBL	MOVABLE
N	NORTH
N/A	NOT APPLICABLE
NEG	NEGATIVE
NF	NEAR FACE
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NS	NEAR SIDE
NTS	NOT TO SCALE
O/O	OUT TO OUT
OA	OVERALL
OC	ON CENTER
OD	OUTSIDE DIAMETER
OD	OVERFLOW DRAIN
OF	OUTSIDE FACE
OFCI	OWNER FURNISHED CONTRACTOR INSTALL
OFF	OFFICE
OFOI	OWNER FURNISHED OWNER INSTALLED
OH	OVERHEAD
OHD	OVERHEAD DOOR
OPER	OPERABLE
OPNG	OPENING
OPP	OPPOSITE
OPT	OPTIONAL
ORIG	ORIGINAL
OVHD	OVERHEAD
OXY	OXYGEN
OZ	OUNCE
P/C	PRECAST
PAR	PARALLEL
PARG	PARGING
PB	PANIC BAR
PBD	PARTICLE BOARD
PC	PORTLAND CEMENT
PCPLAS	PORTLAND CEMENT PLASTER
PED	PEDESTAL
PERF	PERFORATED
PERIM	PERIMETER
PERM	PERMANENT
PERP	PERPENDICULAR
PF	PANEL FABRIC
PFP	PRE-FINISHED PANELS
PGBD	PEGBOARD
PH	PHASE
PL	PLASTIC LAMINATE
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PLAT	PLATFORM
PLBG	PLUMBING
PLYWD	PLYWOOD
POL	POLISHED
POLY	POLYSTYRENE
POLYISO	POLYISOCYANURATE
POS	POSITIVE
PR	PAIR
PREFAB	PREFABRICATED
PRELIM	PRELIMINARY
PRKG	PARKING
PROJ	PROJECT
PS	PROJECTION SCREEN
PT	PAINT
PT	PORCELAIN TILE
PTN	PARTITION
PVC	POLYVINYL CHLORIDE
PVG	PAVING
PVMT	PAVEMENT
PWR	POWER
QT	QUARRY TILE
QTY	QUANTITY
QUAL	QUALITY
R	RISER
RAD	RADIUS
RB	RUBBER BASE
RBR	RUBBER
RC	REINFORCED CONCRETE
RCP	REINFORCED CONCRETE PIPE
RD	ROOF DRAIN
REC	RECESSED
RECD	RECEIVED
RECPT	RECEPTACLE
RECT	RECTANGULAR
REF	REFERENCE
REINF	REINFORCEMENT
REM	REMOVABLE
REQD	REQUIRED
RESIL	RESILIENT
RFM	RECESSED FLOOR MAT
RFG	ROOFING
RH	RIGHT HAND
RHR	RIGHT HAND REVERSE
RND	ROUND
RO	ROUGH OPENING
RST	RUBBER STAIR TREAD
RT	RUBBER TILE
RV	ROOF VENT
RVS	REVERSE
S	SOUTH
S	SEATING
SALV	SALVAGE
SB	SPLASH BLOCK
SC	SOLID CORE
SCH	SCHEDULE
SCMU	SOLID CONCRETE MASONRY UNIT
SCRN	SCREEN
SD	STORM DRAIN
SECT	SECTION
SF	SYSTEMS FURNITURE
SGL	SINGLE
SHR	SHOWER
SHTHG	SHEATHING
SHVL	SHELVES
SIM	SIMILAR
SJ	SLIP JOINT
SK	SINK
SLA	SLATE
SLP	SLOPE
SLS	SUB-FLOOR LEVELING SYSTEM
SLV	SLEEVE
SM	SHEET METAL
SMLS	SEAMLESS
SP	SPACING
SPCL	SPECIAL
SPEC	SPECIFICATION
SPKLR	SPRINKLER
SPKR	SPEAKER
SPRT	SUPPORT
SQFT	SQUARE FOOT
SQ	SQUARE
SQIN	SQUARE INCH
SQYD	SQUARE YARD
SSK	SERVICE SINK
SS	STAINLESS STEEL
SSM	SOLID SURFACING MATERIAL
ST	STAIN
ST	STREET
STAG	STAGGERED
STC	SOUND TRANSMISSION CLASS
STD	STANDARD
STIR	STIRRUP
STL JST	STEEL JOIST
STL PL	STEEL PLATE
STL	STEEL
STN	STONE
STOR	STORAGE
STRUCT	STRUCTURAL
STRUCT STL	STRUCTURAL STEEL
SUPPL	SUPPLEMENT
SURF	SURFACE
SUSP	SUSPENDED
SUSP CLG	SUSPENDED CEILING
SVB	SHEET VINYL BASE
SVF	SHEET VINYL FLOOR
SYM	SYMBOL
SYMM	SYMMETRICAL
SYST	SYSTEM
T&B	TOP & BOTTOM
T&G	TONGUE & GROOVE
T	TABLE
TB	TACKBOARD
TB-xx	TEST BORING-xx (E.G. TB-1)
TC	TOP OF CURB
TD	TRENCH DRAIN
TE	TRANSITION EDGE
TECH	TECHNICAL
TEMP	TEMPORARY
TER	TERRAZZO
THK	THICK
THRES	THRESHOLD
THRU	THROUGH
TKBD	TACKBOARD
TLT	TOILET
TMPD	TEMPERED
TMPD GL	TEMPERED GLASS
TNL	TUNNEL
TO	TOP OF
TOF	TOP OF FLANGE
TOFF	TOP OF FINISH FLOOR
TOJ	TOP OF JOIST
TOL	TOLERANCE
TOS	TOP OF STEEL
TOT	TOTAL
TOW	TOP OF WALL
TRNBKL	TURNBUCKLE
TS	TUBE STEEL
TV	TELEVISION
TYP	TYPICAL
UF	UPHOLSTERY FABRIC
UFD	UNDER FLOOR DUCT
UG	UNDERGROUND
UL	UNDERWRITERS LABORATORY
ULT	ULTIMATE
UNEX	UNEXCAVATED
UNFIN	UNFINISHED
UNO	UNLESS NOTED OTHERWISE
UPS	UNITERRUPTIBLE POWER SUPPLY
UR	URINAL
UTIL	UTILITY
V	VOLT
VAC	VACUUM
VAV	VARIABLE AIR VOLUME
VB	VAPOR BARRIER
VB	VINYL BASE
VCT	VINYL COMPOSITION TILE
VDB	VISUAL DISPLAY BOARD
VERT	VERTICAL
VEST	VESTIBULE
VIB	VIBRATION
VNR	VENEER
VOL	VOLUME
VR	VAPOR RETARDER
VT	VINYL TILE
VWC	VINYL WALL COVERING
W/	WITH
W/W	WALL TO WALL
W/O	WITHOUT
W	WEST
WC	WATER CLOSET
WC	WALL COVERING
WCPT	WALL CARPET
WD	WOOD
WDD	WOOD DOOR
WDW	WINDOW
WF	WOOD FLOORING
WF	WIDE FLANGE
WGL	WIRE GLASS
WH	WALL HUNG
WHSE	WAREHOUSE
WL	WIND LOAD
WLD	WELDED
WR	WATER RESISTANT
WS	WEATHERSTRIPPING
WSCT	WAINSCOT
WT	WEIGHT
WTR	WATER
WTRPRF	WATERPROOFING
WWM	WELDED WIRE MESH
X SECT	CROSS SECTION

VICINITY MAP

NTS

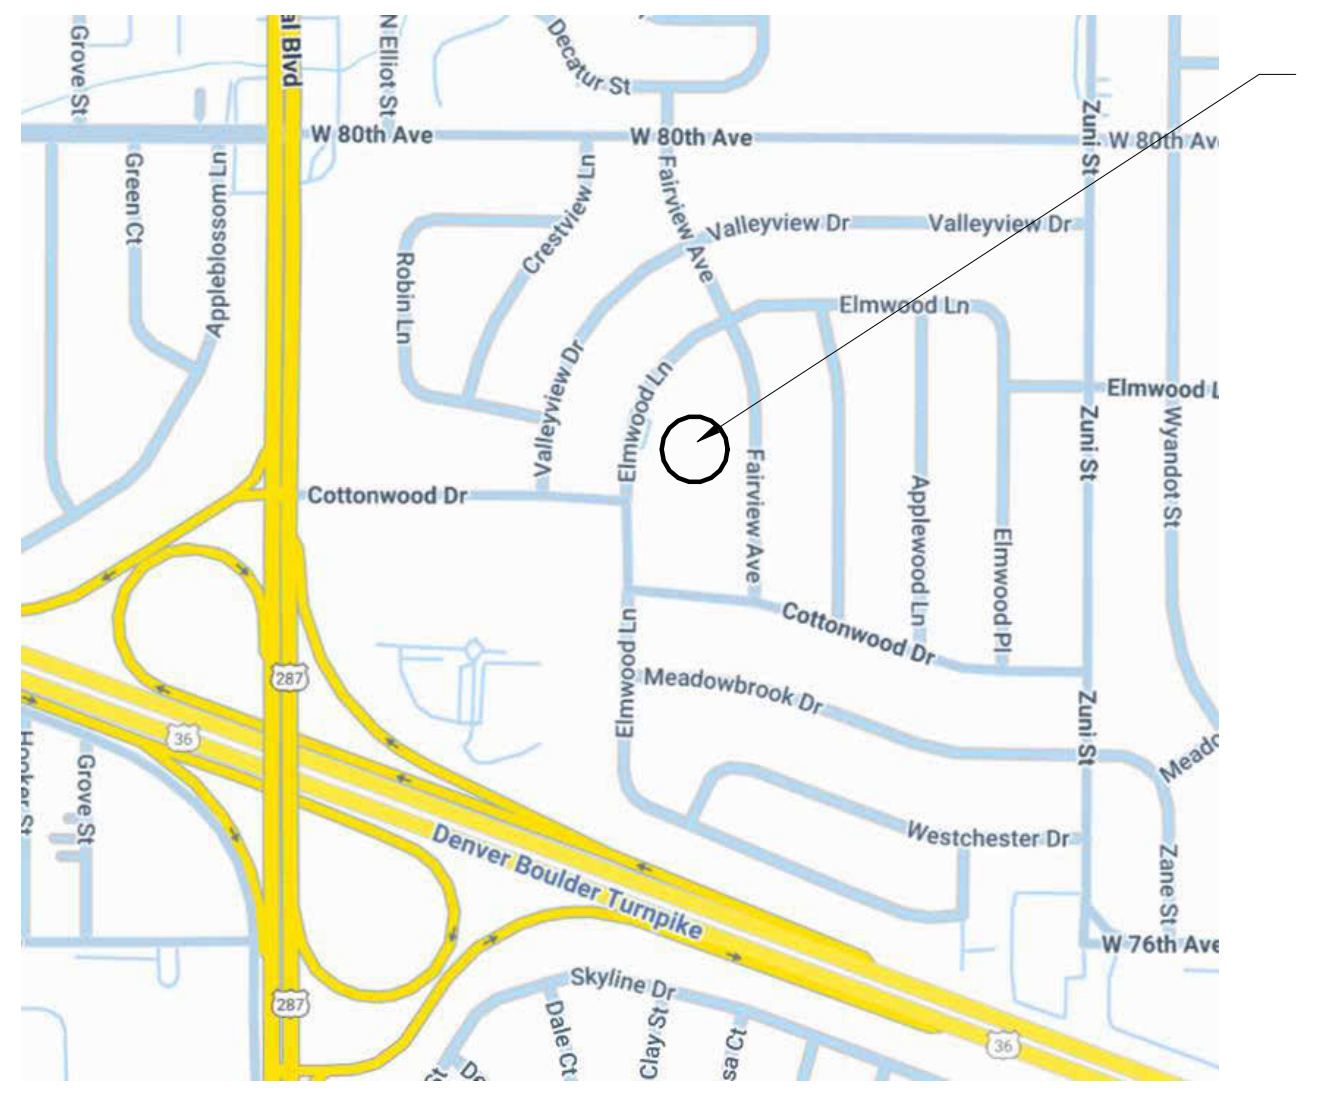

PROJECT DESCRIPTION

THIS PROJECT ENTAILS THE RENOVATION OF AN EXISTING SCHOOL BUILDING, AND ITS ASSOCIATED OUTBUILDINGS IN ADAMS COUNTY, COLORADO.

ARCHITECTURALLY, THIS PROJECT ENTAILS THE REPLACEMENT OF CASEWORK, FLOORING AND WINDOWS THROUGHOUT A MAJORITY OF THE EXISTING STRUCTURE.

PLUMBING IN THE EXISTING BUILDING WILL INCLUDE REPLACING CLASSROOM SINKS AND ONE DRINKING FOUNTAIN.

ELECTRICALLY, POWER AND DATE CONNECTIONS WILL BE UPGRADED AS REQUIRED TO SUPPORT NEW TEACHING WALLS.

NO CIVIL, LANDSCAPE, MECHANICAL, STRUCTURAL OR FIRE ALARM SCOPE ARE ANTICIPATED AS PART OF THIS PROJECT.

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:05 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Rev. #	Description	Rev. Date

Revision Schedule

Westminster Public Schools

2026 Bond Projects
Fairview PK-8
Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-033

September 25, 2026

Standard Symbols,
Abbreviations, General
Notes & Building Code Data

G0.0

APPLICABLE BUILDING CODES

All new work shall comply with the requirements of the codes and standards adopted by the State of Colorado.
The primary Applicable Codes and Standards are:

The 2021 International Code Series:
- The 2021 International Existing Building Code (IEBC)
- The 2021 International Building Code (IBC)
- The 2021 International Fire Code (IFC)
- The 2021 International Mechanical Code (IMC)
- The 2021 International Energy Conservation Code (IECC)

The 2024 Colorado Plumbing Code (CPC)
The 2024 Colorado Fuel Gas Code (CFGC)
The 2023 National Electrical Code
The 2017 ICC A117.1, Accessible and Usable Buildings and Facilities

CODE REVIEW

This project entails a renovation at the existing Fairview Elementary School (Original Building, Outbuilding, and Modular) in Denver, CO (unincorporated Adams County).
This building is an existing E Occupancy building and will remain an E occupancy.

2021 IEBC

Chapter 3 – Provisions for All Compliance Methods
302 - General Provisions
- 302.3 Existing materials - Materials already in use in a building in compliance with requirements or approvals in effect at the time of their erection or installation shall be permitted to remain in use unless determined by the code official to be unsafe.
- 302.4 New and replacement materials - Except as otherwise required or permitted by this code, materials permitted by the applicable code for new construction shall be used.

306 - Accessibility For Existing Buildings
- 306.6 Additions - Provisions for new construction shall apply to *additions*. An *addition* that affects the accessibility to, or contains an area of, a *primary function* shall comply with the requirements in Section 306.7.1.
- 306.7 Alterations - A facility that is altered shall comply with the applicable provisions in Chapter 11 of the International Building Code, ICC A117.1 and the provisions of Sections 06.7.1 through 306.7.16, unless technically infeasible. Where compliance with this section is technically infeasible, the alteration shall provide access to the maximum extent technically feasible.
  - 306.7.1 Alterations affecting an area of primary function - Where an *alteration* affects the accessibility to, or contains an area of *primary function*, the route to the *primary function* area shall be accessible. The accessible route to the *primary function* area shall include toilet *facilities* and drinking fountains serving the area of *primary function*.
  - 306.7.2 - Accessible means of egress. Accessible means of egress required by Chapter 10 of the International Building Code are not required to be added in existing facilities.

Chapter 5 - Prescriptive Compliance Method
503 - Alterations
- 503.1 General - *Alterations* to any building or structure shall comply with the requirements of the *International Building Code* for new construction. *Alterations* shall be such that the *existing building* or structure is not less complying with the provisions of the *International Building Code* than the *existing building* or structure was prior to the *alteration*.
- 503.17 Locking arrangements in educational occupancies - In Group E occupancies...egress doors with locking arrangements designed to keep intruders from entering the room shall comply with Section 1010.2.8 of the *International Building Code*.

505 - Windows and Emergency Escape Openings
- 505.1 Replacement Windows - The installation or replacement of windows shall be as required for new installations.

2021 IBC

Chapter 3 – Use and Occupancy Classification
305 - Educational: Group E - Educational Group E occupancy includes, among others, the use of a building or structure, or a portion thereof, by six or more persons at any one time for educational purposes through the 12th grade.

Chapter 5 – General Building Heights and Areas
Building height and area are existing conditions that will not be altered by this project's scope

Chapter 6 - Types of Construction
602 - Construction Classification
- 602.3 - Type IIIB and Type VB- The existing original building is assumed to be type IIIB, as the exterior walls are of noncombustible materials, and the interior building elements are of any material permitted by the IBC.

Chapter 9 - Fire Protection Systems
903 - Automatic Fire Sprinklers
- 903.2 - Where Required - Automatic sprinklers will no be required as the building is an existing structure. [The existing building is un-sprinklered]

Chapter 10 – Means of Egress
1001 - Administration
- 1001.2 Minimum Requirements - It shall be unlawful to alter a building or structure in a manner that will reduce the number of exits or the capacity of the means of egress to less that required by this code.

1004 - Occupant Load - See Occupant Load Table
1005 - Means of Egress Sizing - See Occupant Load Table
1006 - Number of Exists and Exist Access Doorways
- 1006.2.1 - 49 occupants and 75' travel distance (E Occupancy, non sprinklered)

1010 - Doors Gates and Turnstiles
- 1010.1.1 Size of Doors - The required capacity of each door opening shall be sufficient for the *occupant load* thereof and shall provide a minimum clear opening width of 32 inches (813 mm).
- 1010.2.8 Locking Arrangement in Educational Occupancies - In Group E occupancies, Group B educational occupancies and Group I-4 occupancies, egress doors from classrooms, offices and other occupied rooms with locking arrangements designed to keep intruders from entering the room shall comply with all of the following conditions:
  1. The door shall be capable of being unlocked from outside the room with a key or other *approved* means.
  2. The door shall be openable from within the room in accordance with Section 1010.2.
  3. Modifications shall not be made to listed *panic hardware*, *fire door* hardware or door closers.
  4. Modifications to *fire door assemblies* shall be in accordance with NFPA 80.

  Remote locking or unlocking of doors from an approved location shall be permitted in addition to the unlocking operation in Item1.
- 1010.2.9 Panic and Fire Exit Hardware - Swinging doors serving rooms or spaces with an *occupant load* of 50 or more in a Group A or E occupancy shall not be provided with a latch or lock other than *panic hardware* or *fire exit hardware*.

Chapter 11 – Accessibility
1110 - Other Features and Facilities
- 1110.0 Sinks - Where sinks are provided, at least 5 percent but not less than one provided in accessible spaces shall be accessible.
- 1110.10 Storage - Where fixed or built-in storage elements such as cabinets, coat hooks, shelves, medicine cabinets, lockers, closets and drawers are provided in required accessible spaces, at least 5 percent, but not less than one of each type shall be accessible.

Chapter 13 – Energy Efficiency
Energy efficiency features are existing and are not being altered by the scope of this project.

Chapter 29 - Plumbing Systems
See table 2902.1.

Colorado Model Electric Ready and Solar Ready Code
CMERSRC is not applicable to the scope of this project as it is not a major renovation, addition, or first tenant finish to the building.

LIFE SAFETY SYMBOLS

(e)FEC	FIRE EXTINGUISHER CABINET (EXISTING)
FEC	FIRE EXTINGUISHER CABINET
—◆—◆—◆—◆—◆—	1 HOUR FIRE (EXISTING)
- - - (XX) - - ->	PATH OF TRAVEL (FOR CUMULATIVE DISTANCES REFER TO SCHEDULE)
▲	EXIT DISCHARGE
P: XX" R: XX"	WIDTH PROVIDED WIDTH REQUIRED

Occupant Load Table

tg	Name	Occupancy Classification	Area	Area Function	SF Per Occupant	Occupant Load	Required Exiting Width
Core Building							
000	Vestibule	(none)	91 SF	(none)		0	0
1	Library	(none)	951 SF	IBC_Educational: Classroom area	20 SF	48	9.5
2	Classroom	(IBC) E	744 SF	IBC_Educational: Classroom area	20 SF	38	7.4
3	Classroom	(IBC) E	745 SF	IBC_Educational: Classroom area	20 SF	38	7.4
4	Classroom	(IBC) E	868 SF	IBC_Educational: Classroom area	20 SF	44	8.7
5	Classroom	(IBC) E	869 SF	IBC_Educational: Classroom area	20 SF	44	8.7
6	Classroom	(IBC) E	745 SF	IBC_Educational: Classroom area	20 SF	38	7.4
7	Classroom	(IBC) E	743 SF	IBC_Educational: Classroom area	20 SF	38	7.4
8	Classroom	(IBC) E	742 SF	IBC_Educational: Classroom area	20 SF	38	7.4
10	Platform	(IBC) E	798 SF	IBC_Educational: Classroom area	20 SF	40	8
11	Classroom	(IBC) E	744 SF	IBC_Educational: Classroom area	20 SF	38	7.4
12	Classroom	(IBC) E	743 SF	IBC_Educational: Classroom area	20 SF	38	7.4
13	Classroom	(IBC) E	757 SF	IBC_Educational: Classroom area	20 SF	38	7.6
14	Classroom	(IBC) E	752 SF	IBC_Educational: Classroom area	20 SF	38	7.5
15	Classroom	(IBC) E	736 SF	IBC_Educational: Classroom area	20 SF	37	7.4
16	Classroom	(IBC) E	735 SF	IBC_Educational: Classroom area	20 SF	37	7.3
26	Vestibule	(none)	89 SF	(none)		0	0
27	Corridor	(none)	357 SF	IBC_Educational: Classroom area	20 SF	18	3.6
28	Storage	(IBC) S-1	259 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
29	Storage	(IBC) S-1	259 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0.2
30	Corridor	(none)	285 SF	(none)		0	0
32	Kitchen	(IBC) B	91 SF	IBC_Kitchens, commercial	200 SF	1	0.1
33	Kitchen	(IBC) B	361 SF	IBC_Kitchens, commercial	200 SF	2	0.4
34	Boys	(none)	178 SF	(none)		0	0
35	Jan.	(none)	34 SF	(none)		0	0
36	Girls	(none)	155 SF	(none)		0	0
37	Elec.	(none)	33 SF	(none)		0	0
38	Corridor	(none)	2182 SF	(none)		0	0
40	Custodial	(none)	615 SF	(none)		0	0
41	Office	(IBC) B	248 SF	IBC_Business areas	100 SF	3	0.5
42	Classroom	(IBC) E	713 SF	IBC_Educational: Classroom area	20 SF	36	7.1
43	Boys	(none)	181 SF	(none)		0	0
44	Girls	(none)	163 SF	(none)		0	0
45	Office	(IBC) B	117 SF	IBC_Business areas	100 SF	2	0.2
46	Vestibule	(none)	107 SF	(none)		0	0
100a	Reception / Waiting	(IBC) B	332 SF	IBC_Business areas	100 SF	4	0.7
100b	Registration	(IBC) B	53 SF	IBC_Business areas	100 SF	1	0.1
100c	Workarea	(IBC) B	87 SF	IBC_Business areas	100 SF	1	0.2
100d	Infirmary	(IBC) B	92 SF	IBC_Business areas	100 SF	1	0.2
100e	Sec.	(IBC) B	127 SF	IBC_Business areas	100 SF	2	0.3
100f	Principal	(IBC) B	194 SF	IBC_Business areas	100 SF	2	0.4
101	Toilet	(none)	61 SF	(none)		0	0
102a	Lounge / Workroom	(IBC) B	389 SF	IBC_Business areas	100 SF	4	0.8
102b	Storage	(IBC) S-1	20 SF	IBC_Accessory storage areas, mechanical equipment room	300 SF	1	0
103	MDF	(none)	102 SF	(none)		0	0
104	Flex	(IBC) B	109 SF	IBC_Business areas	100 SF	2	0.2
			19753 SF			674	131.7
Core Building - Gym							
39	Gymnasium	(IBC) E	3929 SF	IBC_Assembly: without fixed seats - Concentrated (chairs only - not fixed)	7 SF	562	112.3
			3929 SF			562	112.3
Modular							
24	Classroom	(IBC) E	770 SF	IBC_Educational: Classroom area	20 SF	39	7.7
25	Classroom	(IBC) E	982 SF	IBC_Educational: Classroom area	20 SF	50	9.8
55	Toilet	(none)	57 SF	(none)		0	0
56	Toilet	(none)	56 SF	(none)		0	0
57	Passage	(none)	98 SF	IBC_Educational: Classroom area	20 SF	5	1
58	Multi-Purpose	(IBC) E	0 SF	IBC_Educational: Classroom area	20 SF	0	0
			1963 SF			94	18.5
Outbuilding							
17	Classroom	(IBC) E	833 SF	IBC_Educational: Classroom area	20 SF	42	8.3
18	Classroom	(IBC) E	835 SF	IBC_Educational: Classroom area	20 SF	42	8.3
19	Classroom	(IBC) E	859 SF	IBC_Educational: Classroom area	20 SF	43	8.6
20	Classroom	(IBC) E	763 SF	IBC_Educational: Classroom area	20 SF	39	7.6
21	Classroom	(IBC) E	860 SF	IBC_Educational: Classroom area	20 SF	44	8.6
47	Restroom	(none)	110 SF	(none)		0	0
48	Restroom	(none)	90 SF	(none)		0	0
49	Corridor	(none)	619 SF	(none)		0	0
50	Office	(IBC) B	127 SF	IBC_Business areas	100 SF	2	0.3
51	Restroom	(none)	28 SF	(none)		0	0
52	Elec.	(none)	98 SF	(none)		0	0
53	Office	(IBC) B	153 SF	(none)		0	0
54	Mech.	(none)	111 SF	(none)		0	0
			5487 SF			212	41.8
			31131 SF			1542	304.2

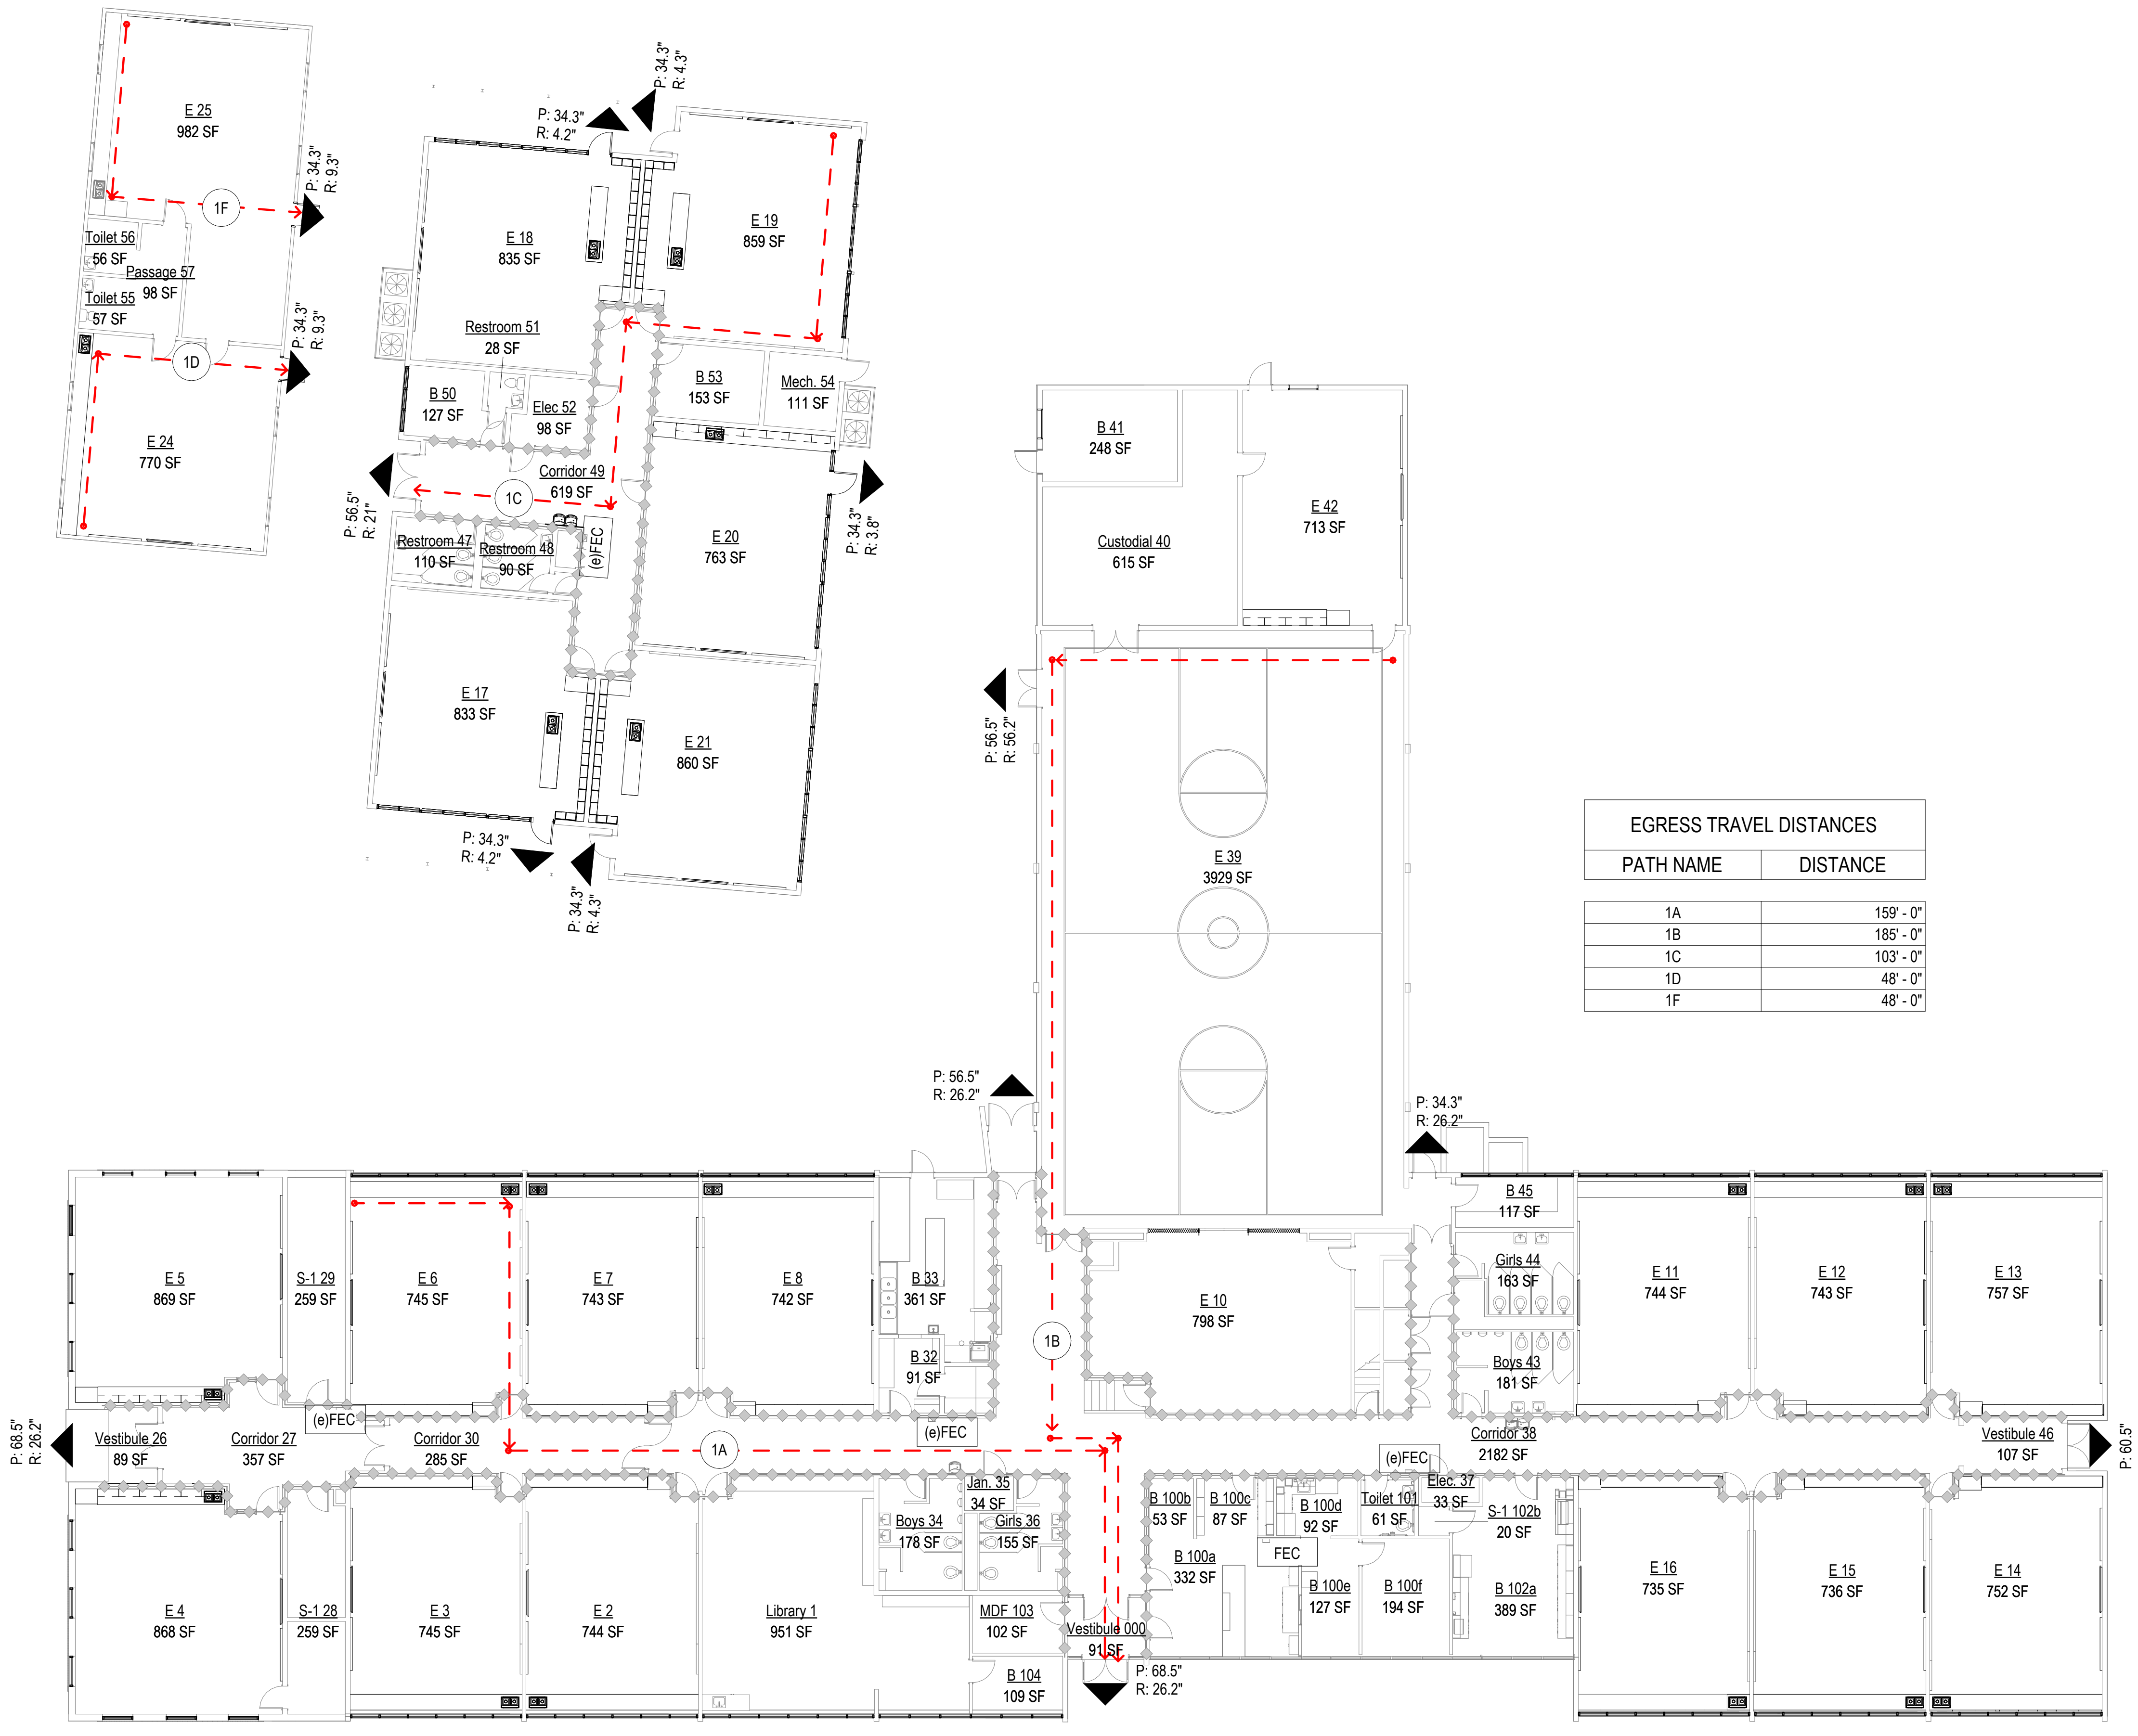

EGRESS TRAVEL DISTANCES	
PATH NAME	DISTANCE
1A	159' - 0"
1B	185' - 0"
1C	103' - 0"
1D	48' - 0"
1F	48' - 0"

Life Safety Plan
SCALE: 1/16" = 1'-0"

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Building Code Data

G0.1

C:\Users\Arron\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:12 AM

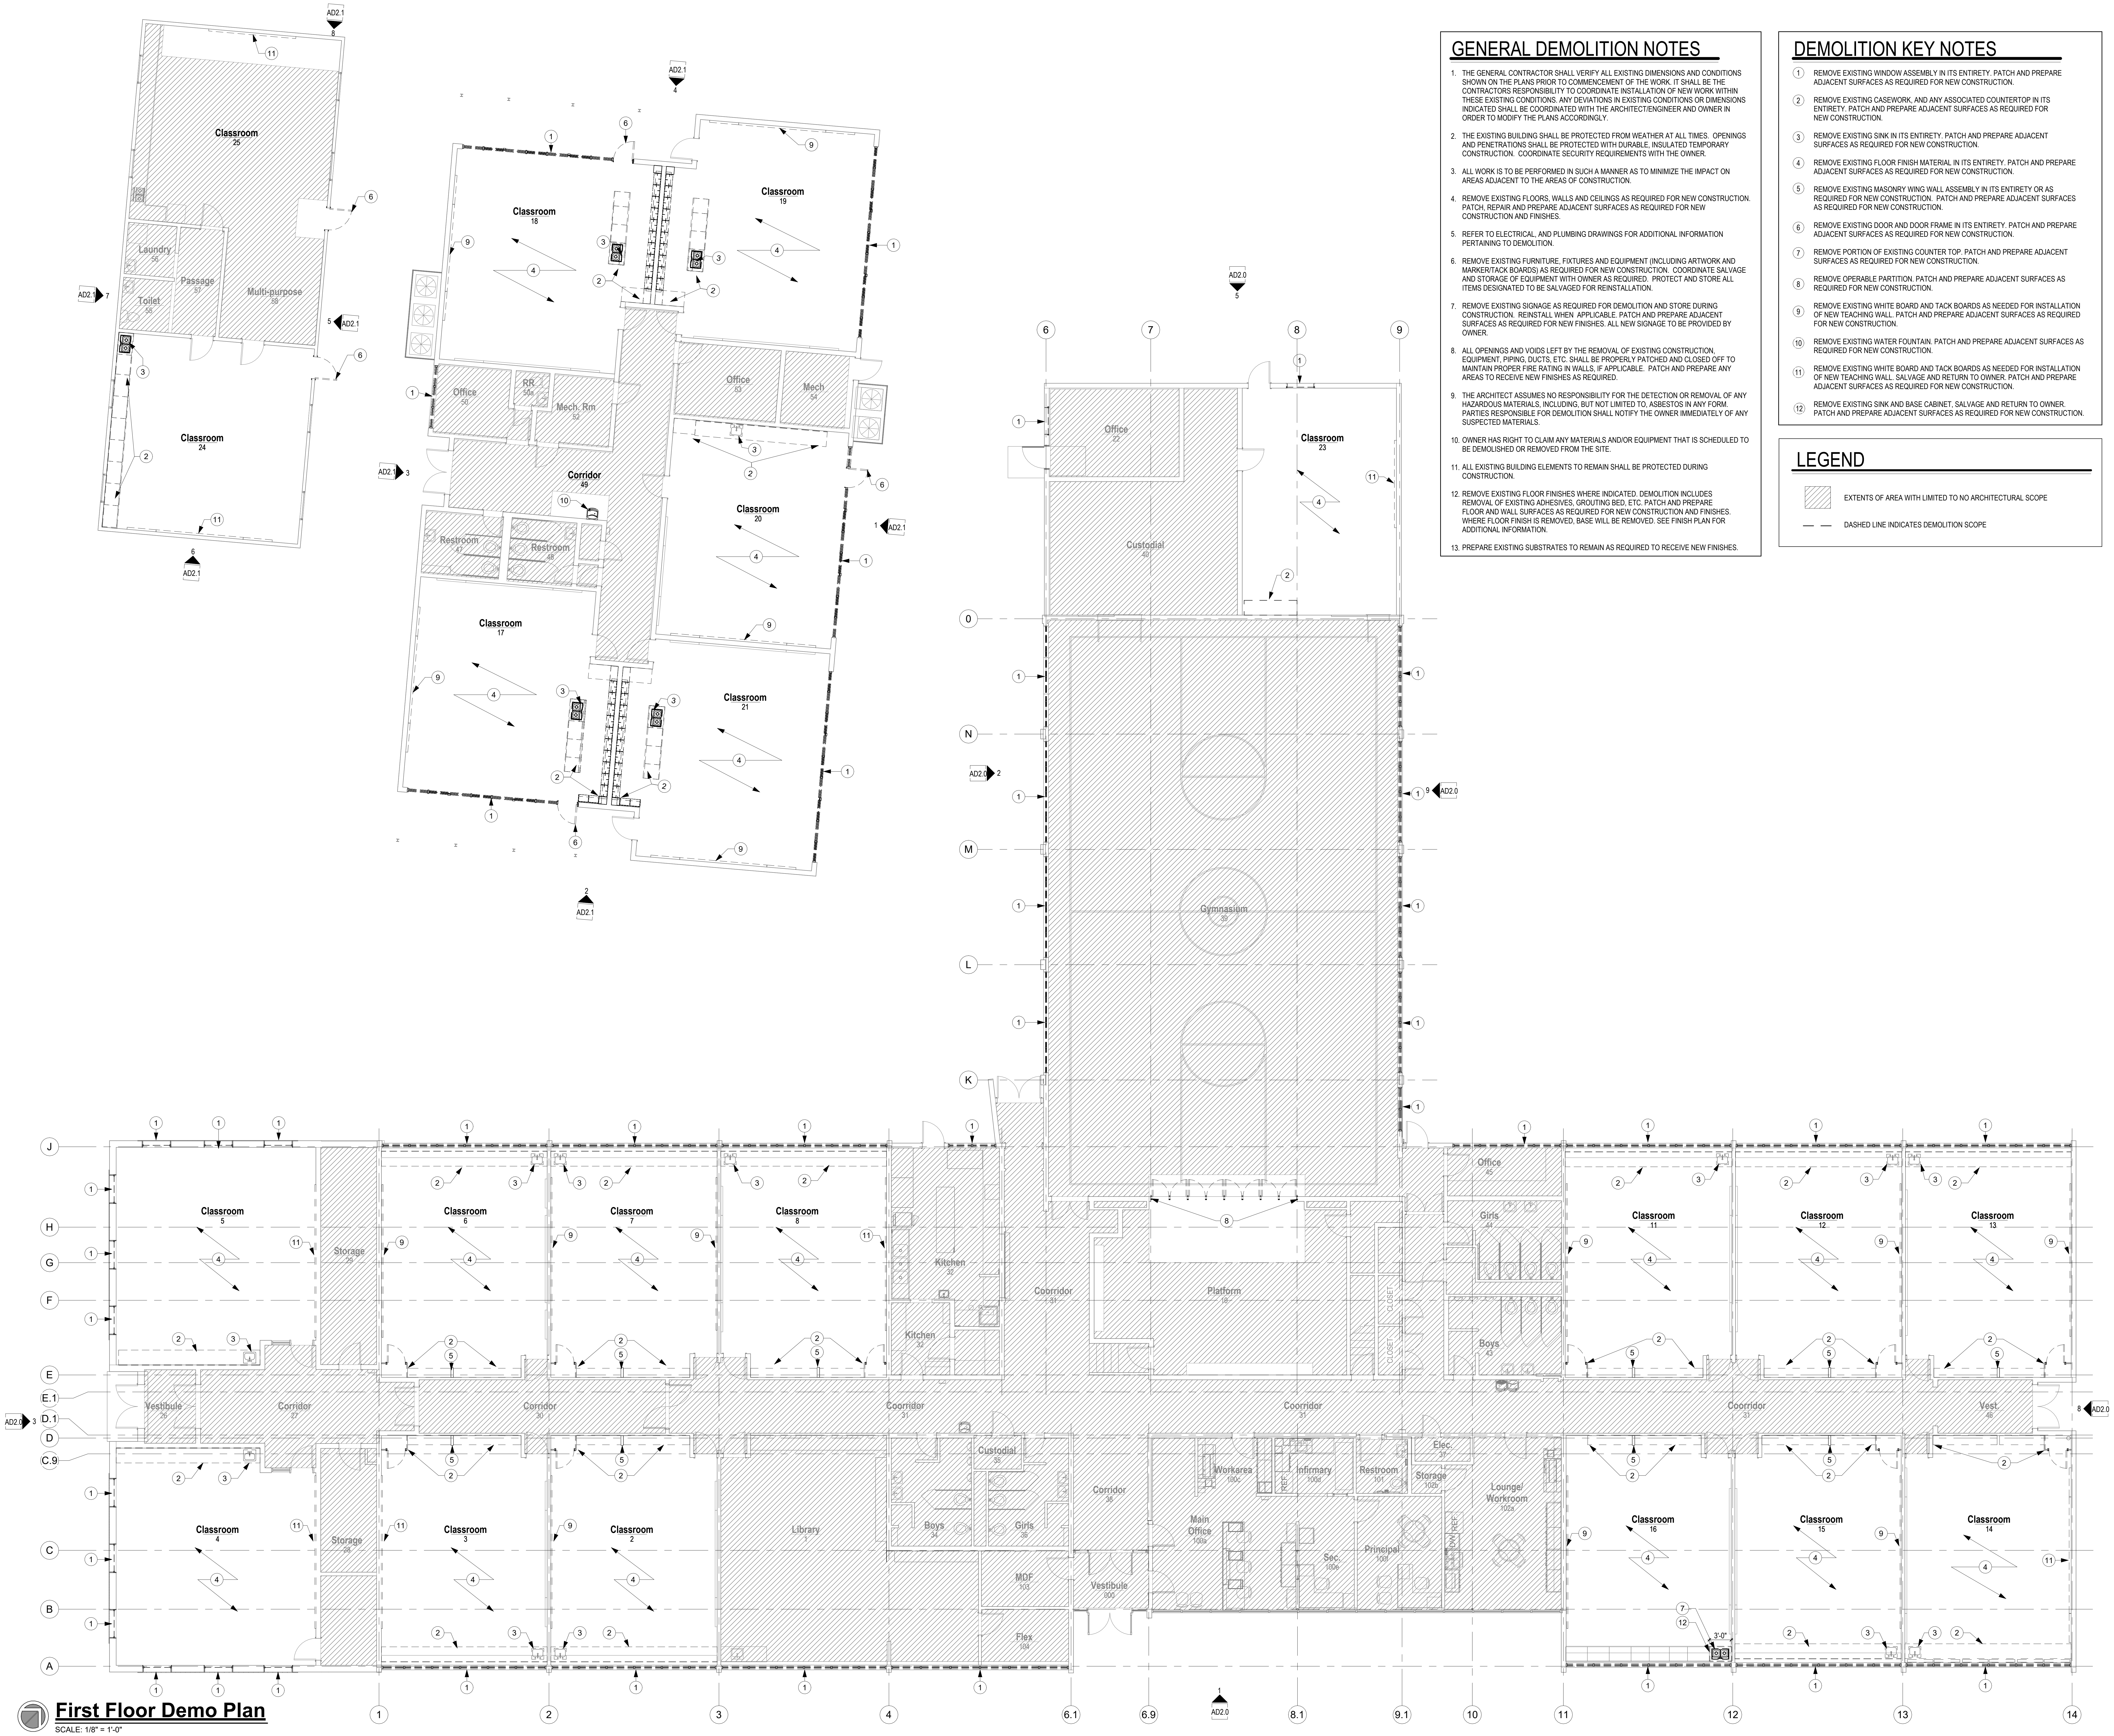
Classroom 25
Laundry 56
Passage 57
Toilet 55
Multi-purpose 58
Classroom 24
Classroom 18
Classroom 19
Office 50
RR 50a
Mech. Rm 52
Office 53
Mech 54
Corridor 49
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
Office 22
Custodial 40
Classroom 23
Gymnasium 39
Platform 18
Classroom 5
Classroom 6
Classroom 7
Classroom 8
Storage 29
Kitchen
Kitchen 32
Corridor 41
Office 45
Girls 44
Boys 43
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Corridor 31
Vest. 46
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Custodial 35
Boys 34
Girls 36
MDF 108
Flex 104
Corridor 38
Vestibule 105
Workarea 100c
Infirmary 100d
Restroom 101
Storage 100b
Elec. 37
Main Office 100a
Sec. 100e
Principal 100f
Lounge/ Workroom 102a
Classroom 16
Classroom 15
Classroom 14
3'-0"
AD2.0
AD2.1
A
B
C
C.9
D
D.1
E
E.1
F
G
H
J
K
L
M
N
O
1
2
3
4
6.1
6.9
8.1
9.1
10
11
12
13
14
6
7
8
9

First Floor Demo Plan

SCALE: 1/8" = 1'-0"

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:21 AM

GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS) AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. OWNER HAS RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT IS SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. REMOVE EXISTING FLOOR FINISHES WHERE INDICATED. DEMOLITION INCLUDES REMOVAL OF EXISTING ADHESIVES, GROUTING BED, ETC. PATCH AND PREPARE FLOOR AND WALL SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES. WHERE FLOOR FINISH IS REMOVED, BASE WILL BE REMOVED. SEE FINISH PLAN FOR ADDITIONAL INFORMATION.
13. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

DEMOLITION KEY NOTES

①	REMOVE EXISTING WINDOW ASSEMBLY IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
②	REMOVE EXISTING CASEWORK, AND ANY ASSOCIATED COUNTERTOP IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
③	REMOVE EXISTING SINK IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
④	REMOVE EXISTING FLOOR FINISH MATERIAL IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑤	REMOVE EXISTING MASONRY WING WALL ASSEMBLY IN ITS ENTIRETY OR AS REQUIRED FOR NEW CONSTRUCTION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑥	REMOVE EXISTING DOOR AND DOOR FRAME IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑦	REMOVE PORTION OF EXISTING COUNTER TOP. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑧	REMOVE OPERABLE PARTITION. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑨	REMOVE EXISTING WHITE BOARD AND TACK BOARDS AS NEEDED FOR INSTALLATION OF NEW TEACHING WALL. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑩	REMOVE EXISTING WATER FOUNTAIN. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑪	REMOVE EXISTING WHITE BOARD AND TACK BOARDS AS NEEDED FOR INSTALLATION OF NEW TEACHING WALL. SALVAGE AND RETURN TO OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
⑫	REMOVE EXISTING SINK AND BASE CABINET, SALVAGE AND RETURN TO OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

LEGEND

▨	EXTENTS OF AREA WITH LIMITED TO NO ARCHITECTURAL SCOPE
— —	DASHED LINE INDICATES DEMOLITION SCOPE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

First Floor Demolition Plan

AD1.0

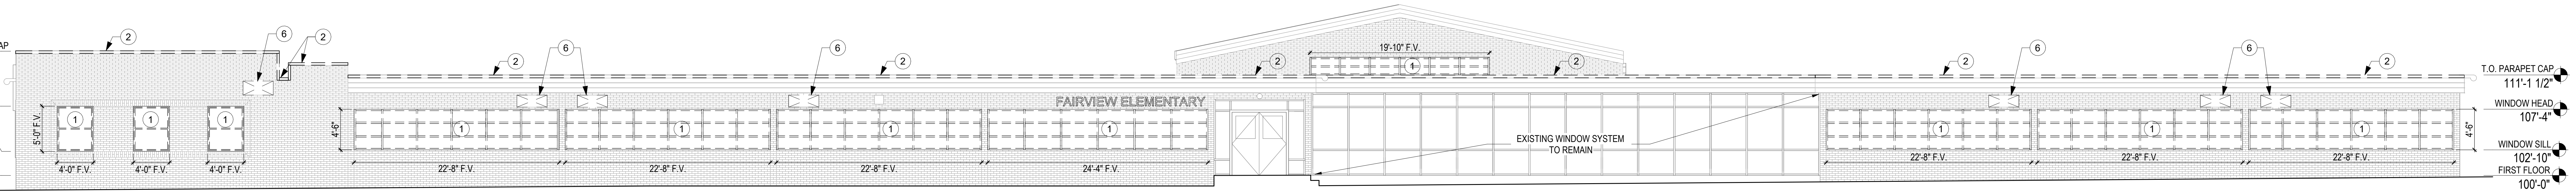
T.O. PARAPET CAP
113'-9"
WINDOW HEAD
107'-8"
WINDOW SILL
102'-8"
FIRST FLOOR
100'-0"
5'-0" F.V.
4'-0" F.V.
4'-6"
22'-8" F.V.
24'-4" F.V.
19'-10" F.V.
FAIRVIEW ELEMENTARY
EXISTING WINDOW SYSTEM
TO REMAIN
T.O. PARAPET CAP
111'-1 1/2"
WINDOW HEAD
107'-4"
WINDOW SILL
102'-10"
FIRST FLOOR
100'-0"

1 Exterior Elevation Demolition -Southeast

SCALE: 1/8" = 1'-0"

1 AD1.0

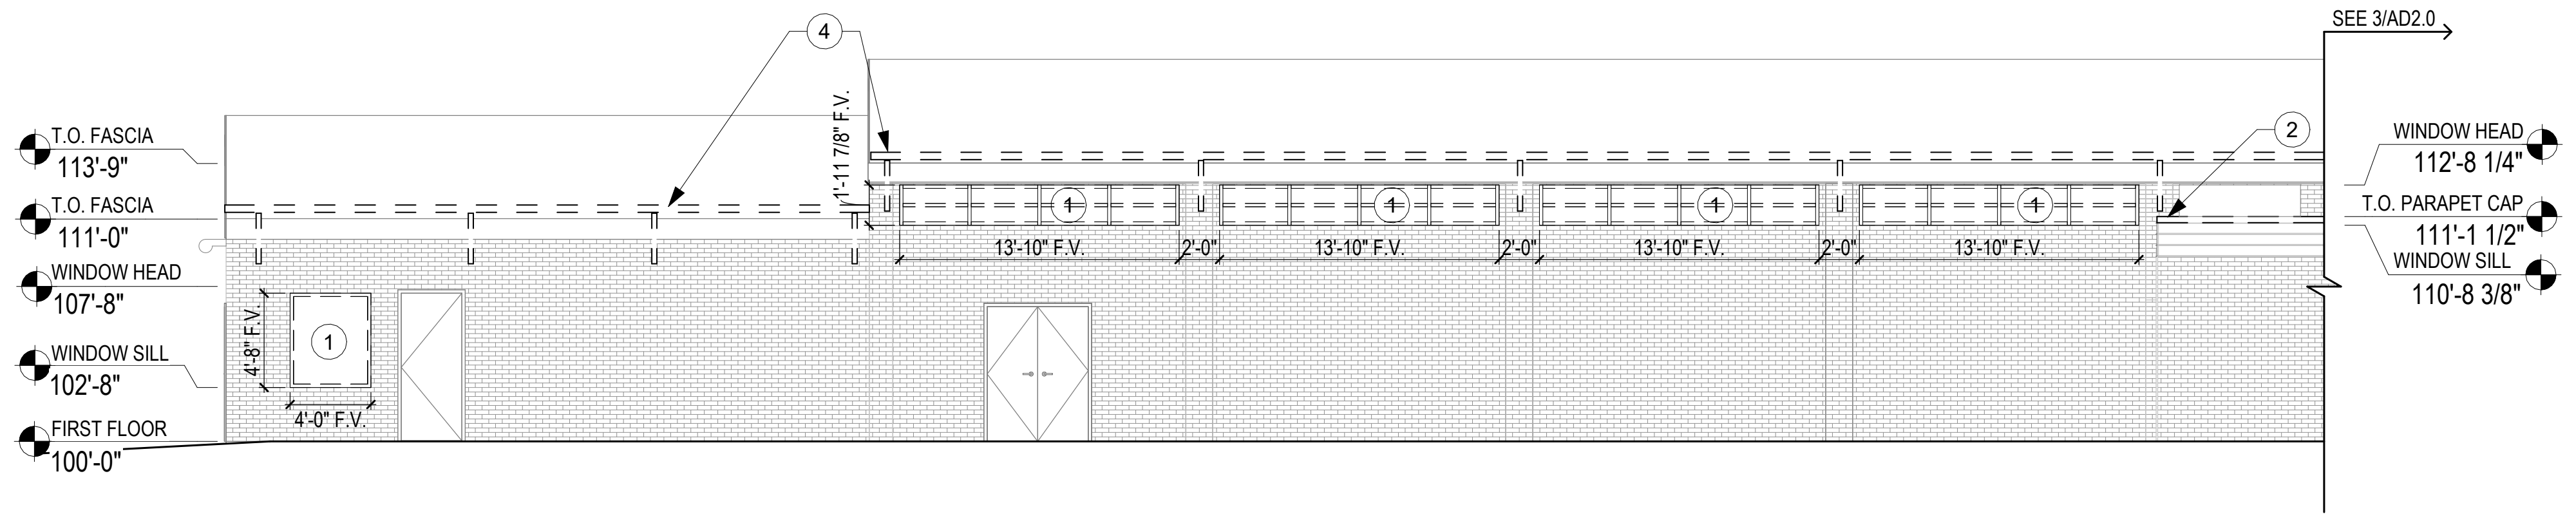
T.O. FASCIA
113'-9"
T.O. FASCIA
111'-0"
WINDOW HEAD
107'-8"
WINDOW SILL
102'-8"
FIRST FLOOR
100'-0"
4'-8" F.V.
4'-0" F.V.
1'-11 7/8" F.V.
13'-10" F.V.
2'-0"
SEE 3/AD2.0
WINDOW HEAD
112'-8 1/4"
T.O. PARAPET CAP
111'-1 1/2"
WINDOW SILL
110'-8 3/8"

2 Exterior Elevation Demolition - Southwest

SCALE: 1/8" = 1'-0"

1 AD1.0

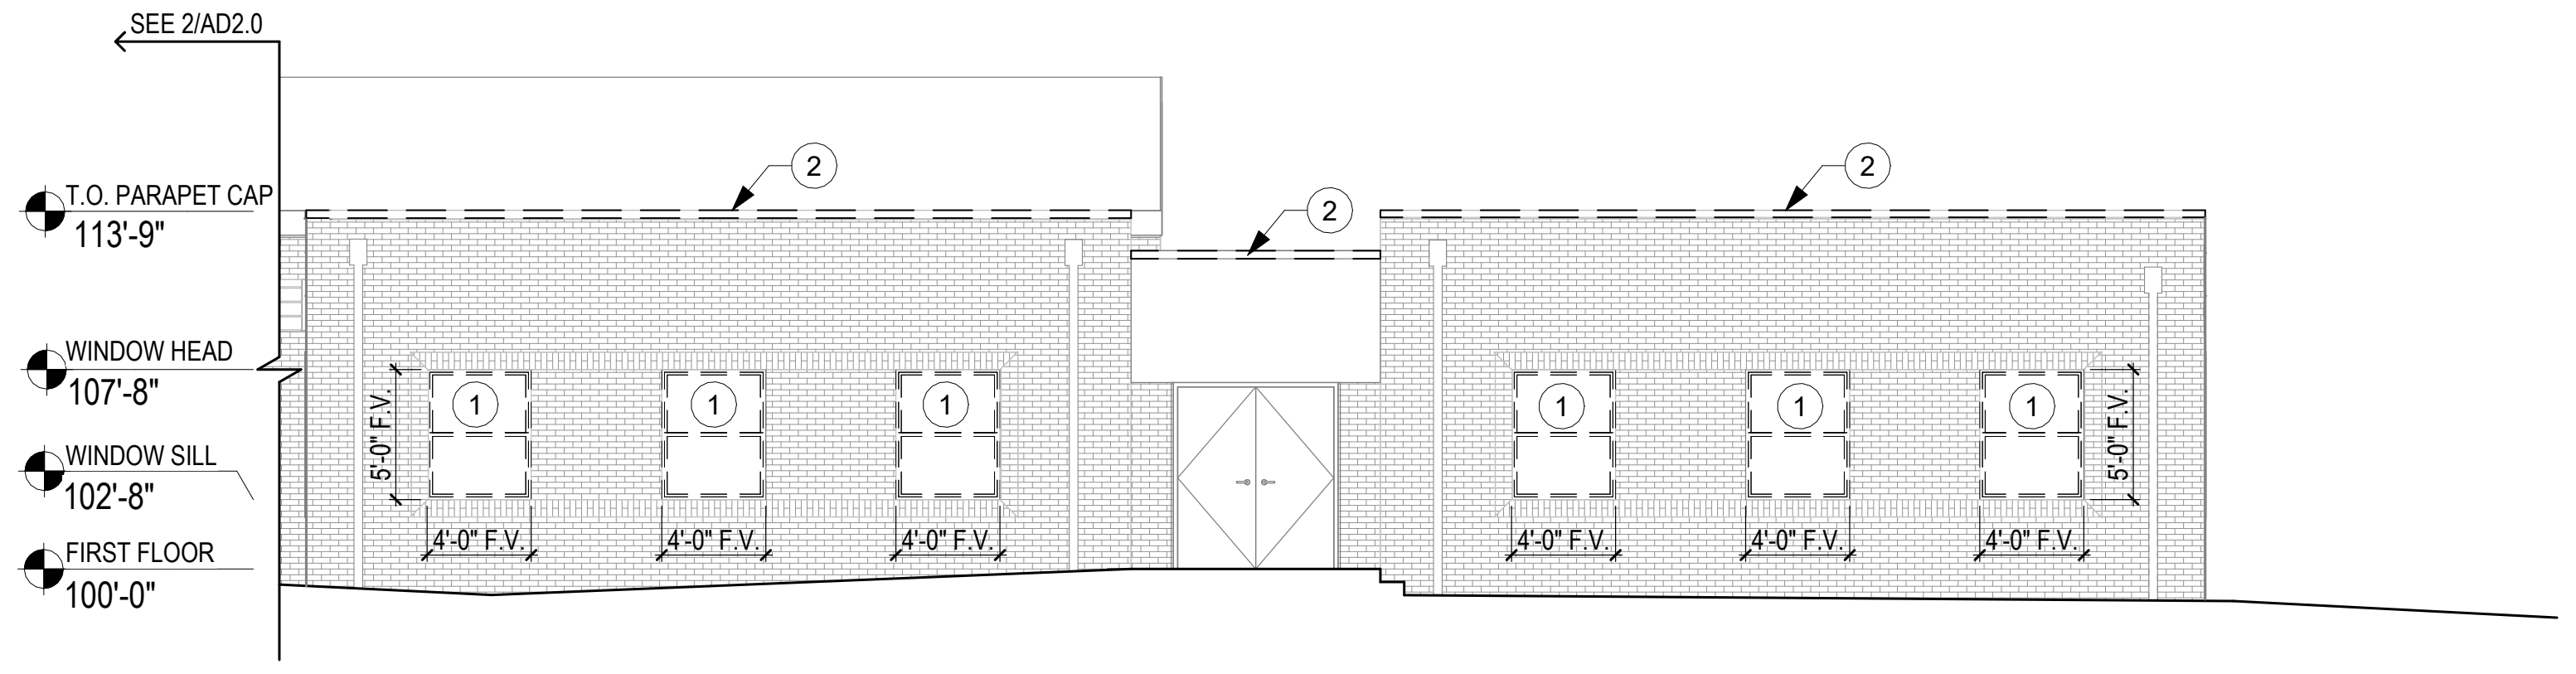
SEE 2/AD2.0
T.O. PARAPET CAP
113'-9"
WINDOW HEAD
107'-8"
WINDOW SILL
102'-8"
FIRST FLOOR
100'-0"
5'-0" F.V.
4'-0" F.V.

3 Exterior Elevation Demolition - Southwest

SCALE: 1/8" = 1'-0"

1 AD1.0

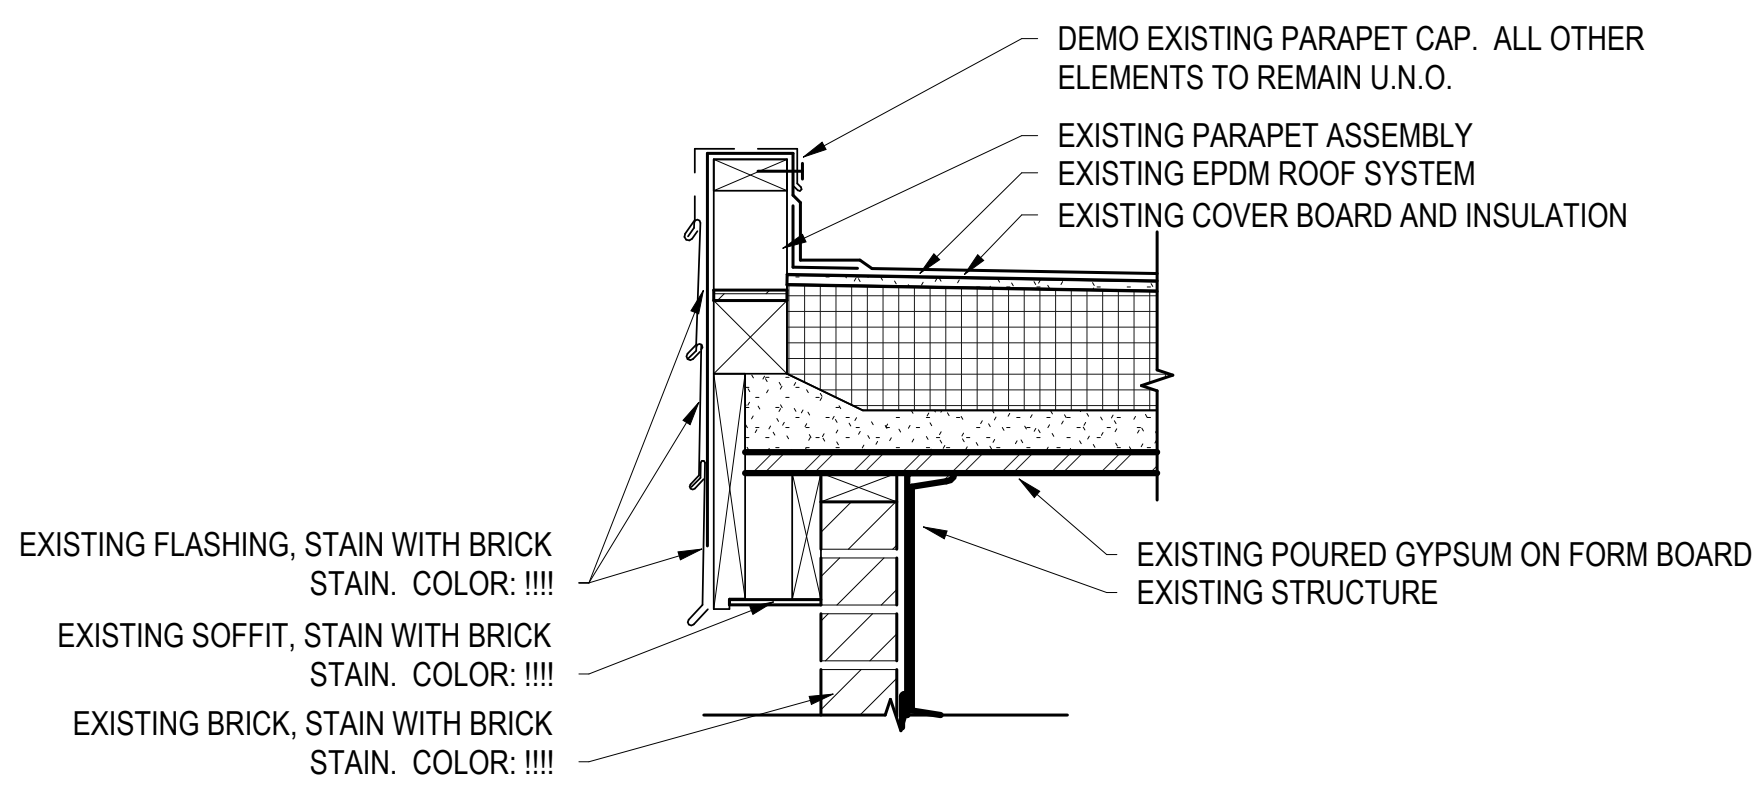
DEMO EXISTING PARAPET CAP. ALL OTHER ELEMENTS TO REMAIN U.N.O.
EXISTING PARAPET ASSEMBLY
EXISTING EPDM ROOF SYSTEM
EXISTING COVER BOARD AND INSULATION
EXISTING FLASHING, STAIN WITH BRICK STAIN. COLOR: !!!!
EXISTING SOFFIT, STAIN WITH BRICK STAIN. COLOR: !!!!
EXISTING BRICK, STAIN WITH BRICK STAIN. COLOR: !!!!
EXISTING POURED GYPSUM ON FORM BOARD
EXISTING STRUCTURE

4 Typ. Flashing Demo

SCALE: 1" = 1'-0"

1 A1.2

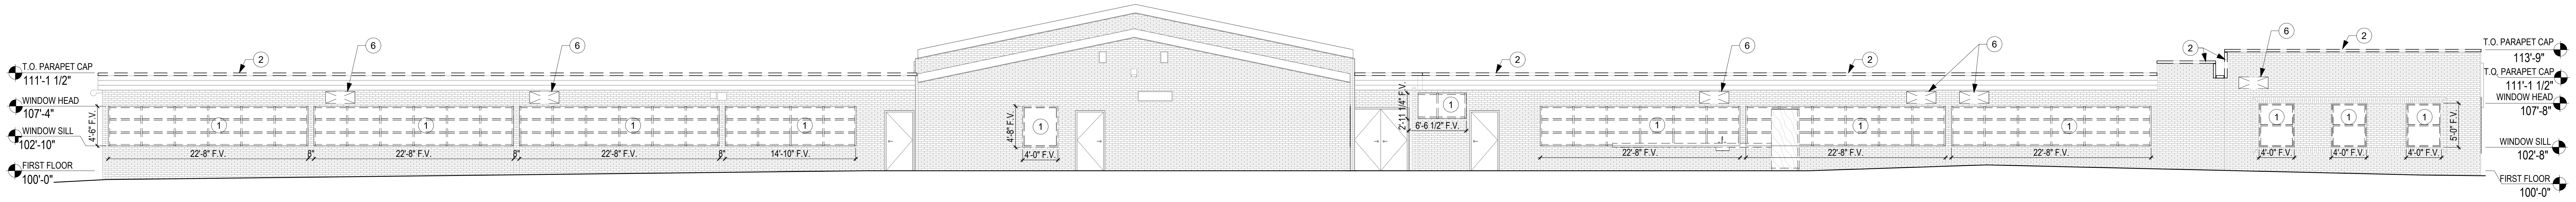
T.O. PARAPET CAP
111'-1 1/2"
WINDOW HEAD
107'-4"
WINDOW SILL
102'-10"
FIRST FLOOR
100'-0"
22'-8" F.V.
14'-10" F.V.
4'-6" F.V.
4'-0" F.V.
6'-6 1/2" F.V.
T.O. PARAPET CAP
113'-9"
T.O. PARAPET CAP
111'-1 1/2"
WINDOW HEAD
107'-8"
WINDOW SILL
102'-8"
FIRST FLOOR
100'-0"

5 Exterior Elevation Demolition - Northwest

SCALE: 1/8" = 1'-0"

1 AD1.0

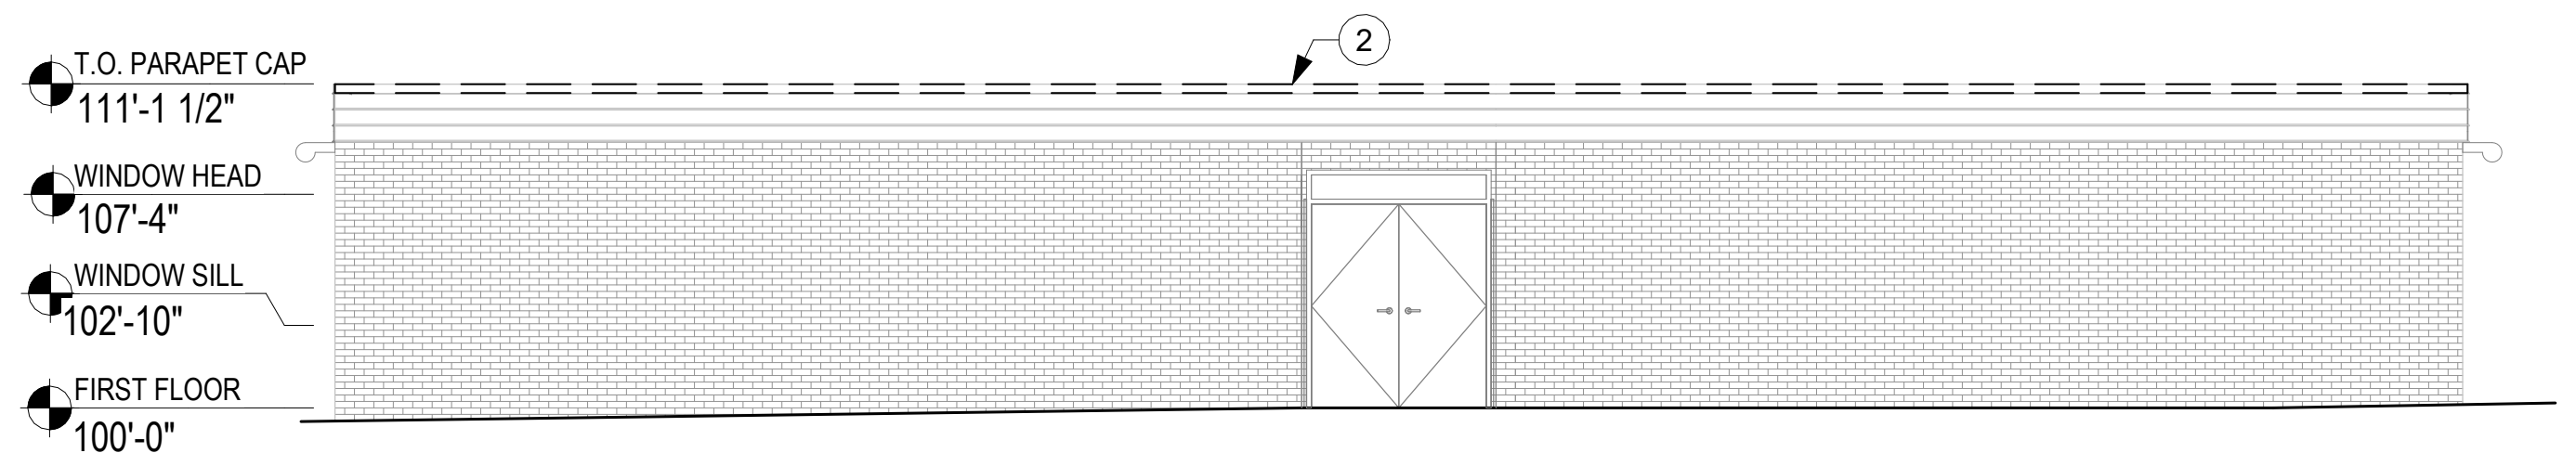
T.O. PARAPET CAP
111'-1 1/2"
WINDOW HEAD
107'-4"
WINDOW SILL
102'-10"
FIRST FLOOR
100'-0"

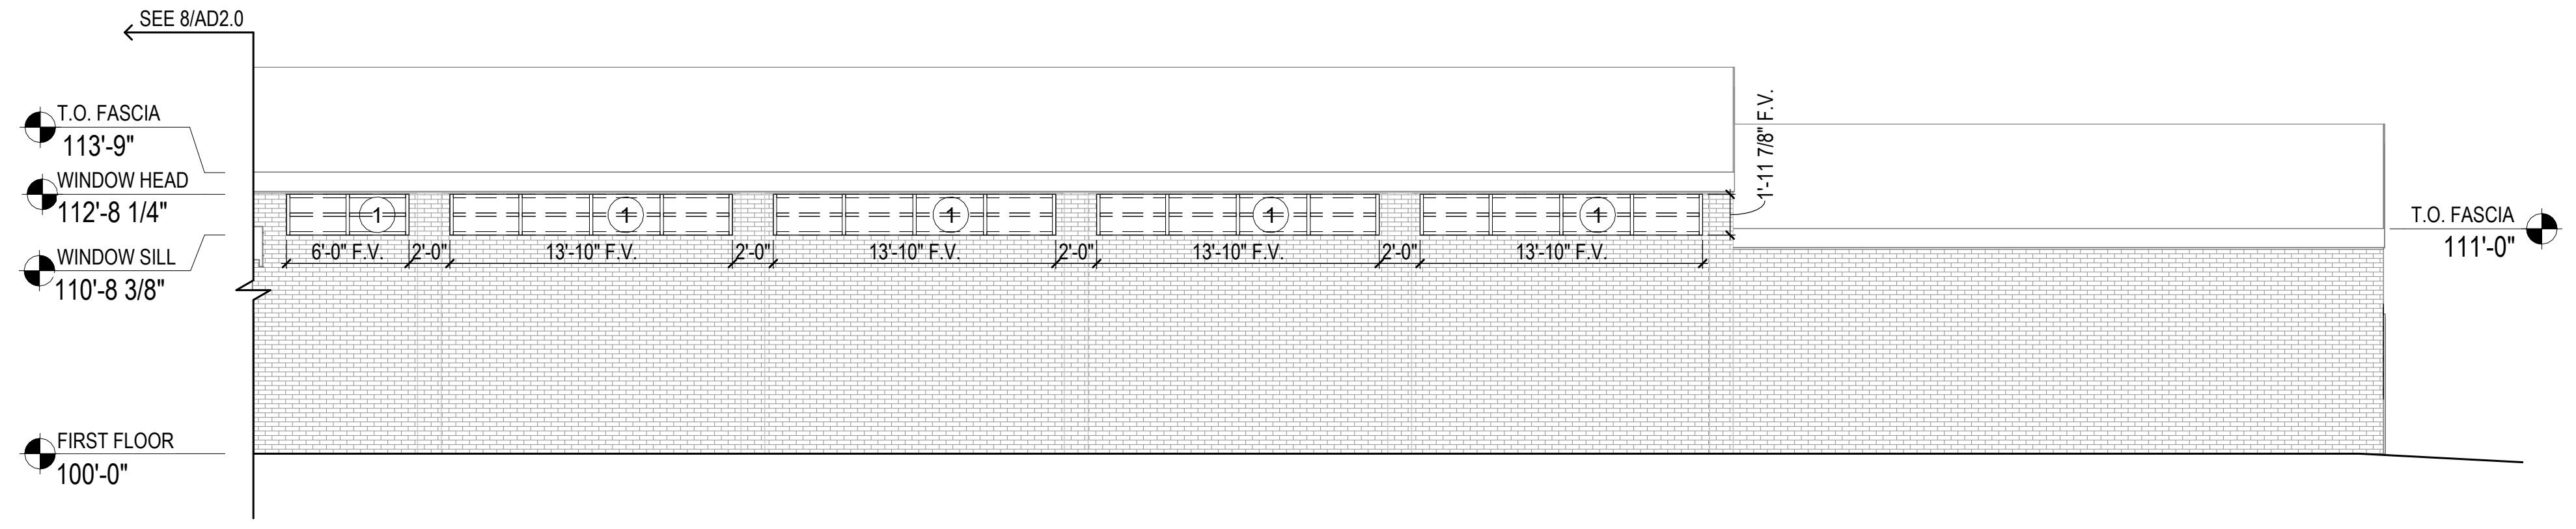
SEE 8/AD2.0
T.O. FASCIA
113'-9"
WINDOW HEAD
112'-8 1/4"
WINDOW SILL
110'-8 3/8"
FIRST FLOOR
100'-0"
6'-0" F.V.
2'-0"
13'-10" F.V.
1'-11 7/8" F.V.
T.O. FASCIA
111'-0"

8 Exterior Elevation Demolition - Northeast

SCALE: 1/8" = 1'-0"

1 AD1.0

9 Exterior Elevation Demolition - Northeast

SCALE: 1/8" = 1'-0"

1 AD1.0

GENERAL ELEVATION DEMO. NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATION IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REFER TO ELECTRICAL, PLUMBING, LOW VOLTAGE, DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
5. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
6. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.
7. REPAIR DAMAGED AND WEATHERED BRICK AND MORTAR AS REQUIRED TO RECEIVE NEW FINISHES.
8. REMOVE EXISTING SIGNAGE IN ITS ENTIRETY. COORDINATE SALVAGE AND REINSTALLATION WITH THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY THE OWNER.

ELEVATION DEMOLITION KEY NOTES

① REMOVE EXISTING WINDOW ASSEMBLY IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

② REMOVE EXISTING PARAPET CAP, ALL OTHER ELEMENTS TO REMAIN. SEE 4/AD2.0 FOR ADDITIONAL INFORMATION

③ REMOVE EXISTING DOOR AND DOOR FRAME IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

④ REMOVE EXISTING SNOW GUARDS AND ANY ASSOCIATED BRACING IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

⑤ REMOVE EXISTING MODULAR SKIRTING IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

⑥ REMOVE EXISTING BREAK METAL COVER AS NEEDED FOR BRICK INFILL. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

Note

ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK AND PAINTING OF SIDING. RE-INSTALL AS REQUIRED

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Exterior Elevations Demolition

AD2.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:28 AM

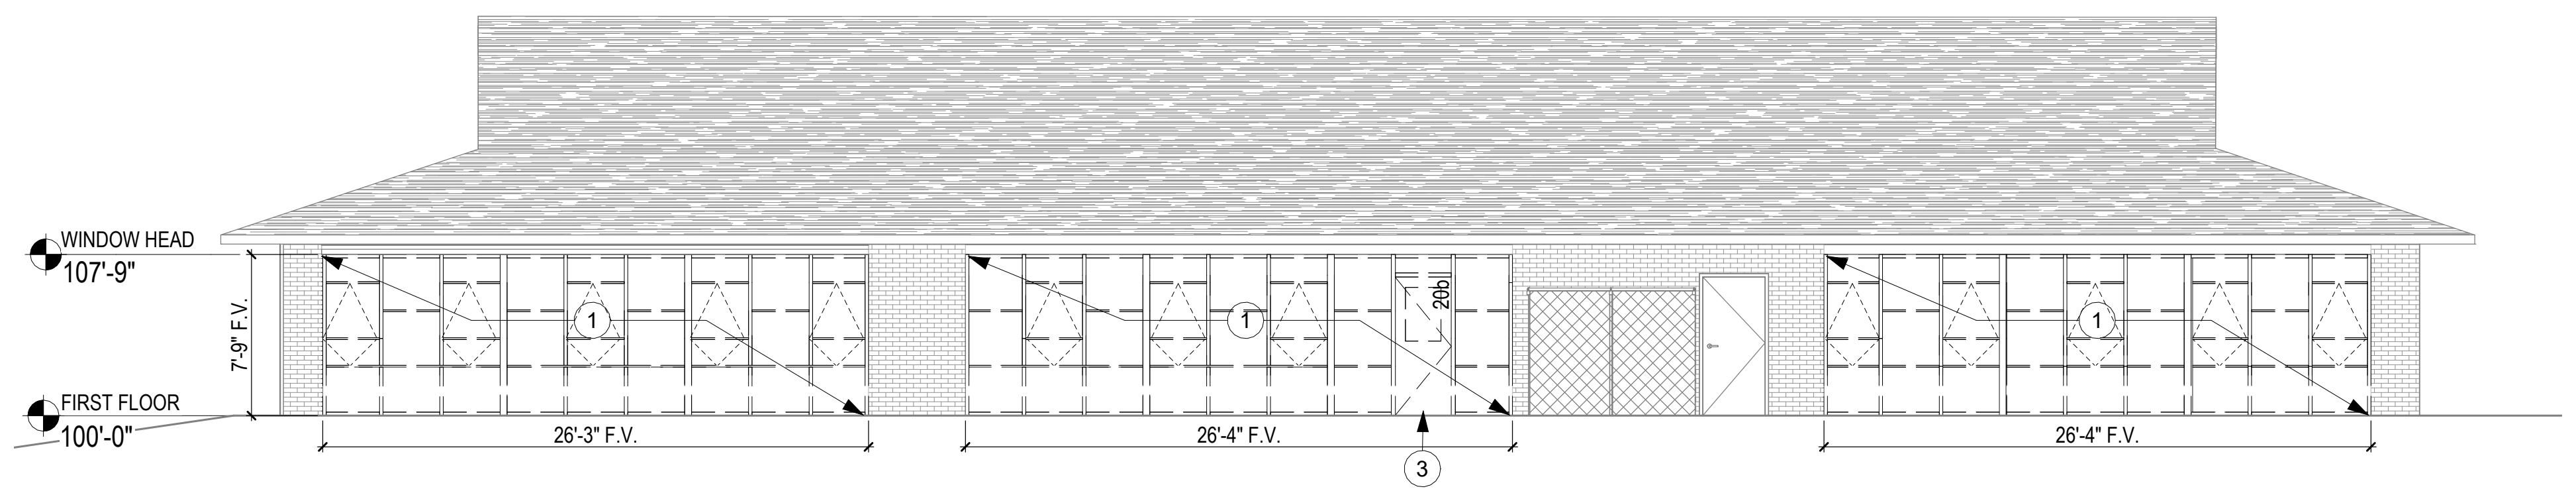

1

Outbuilding Exterior Elevation Demolition - North

SCALE: 1/8" = 1'-0"

1 AD1.0

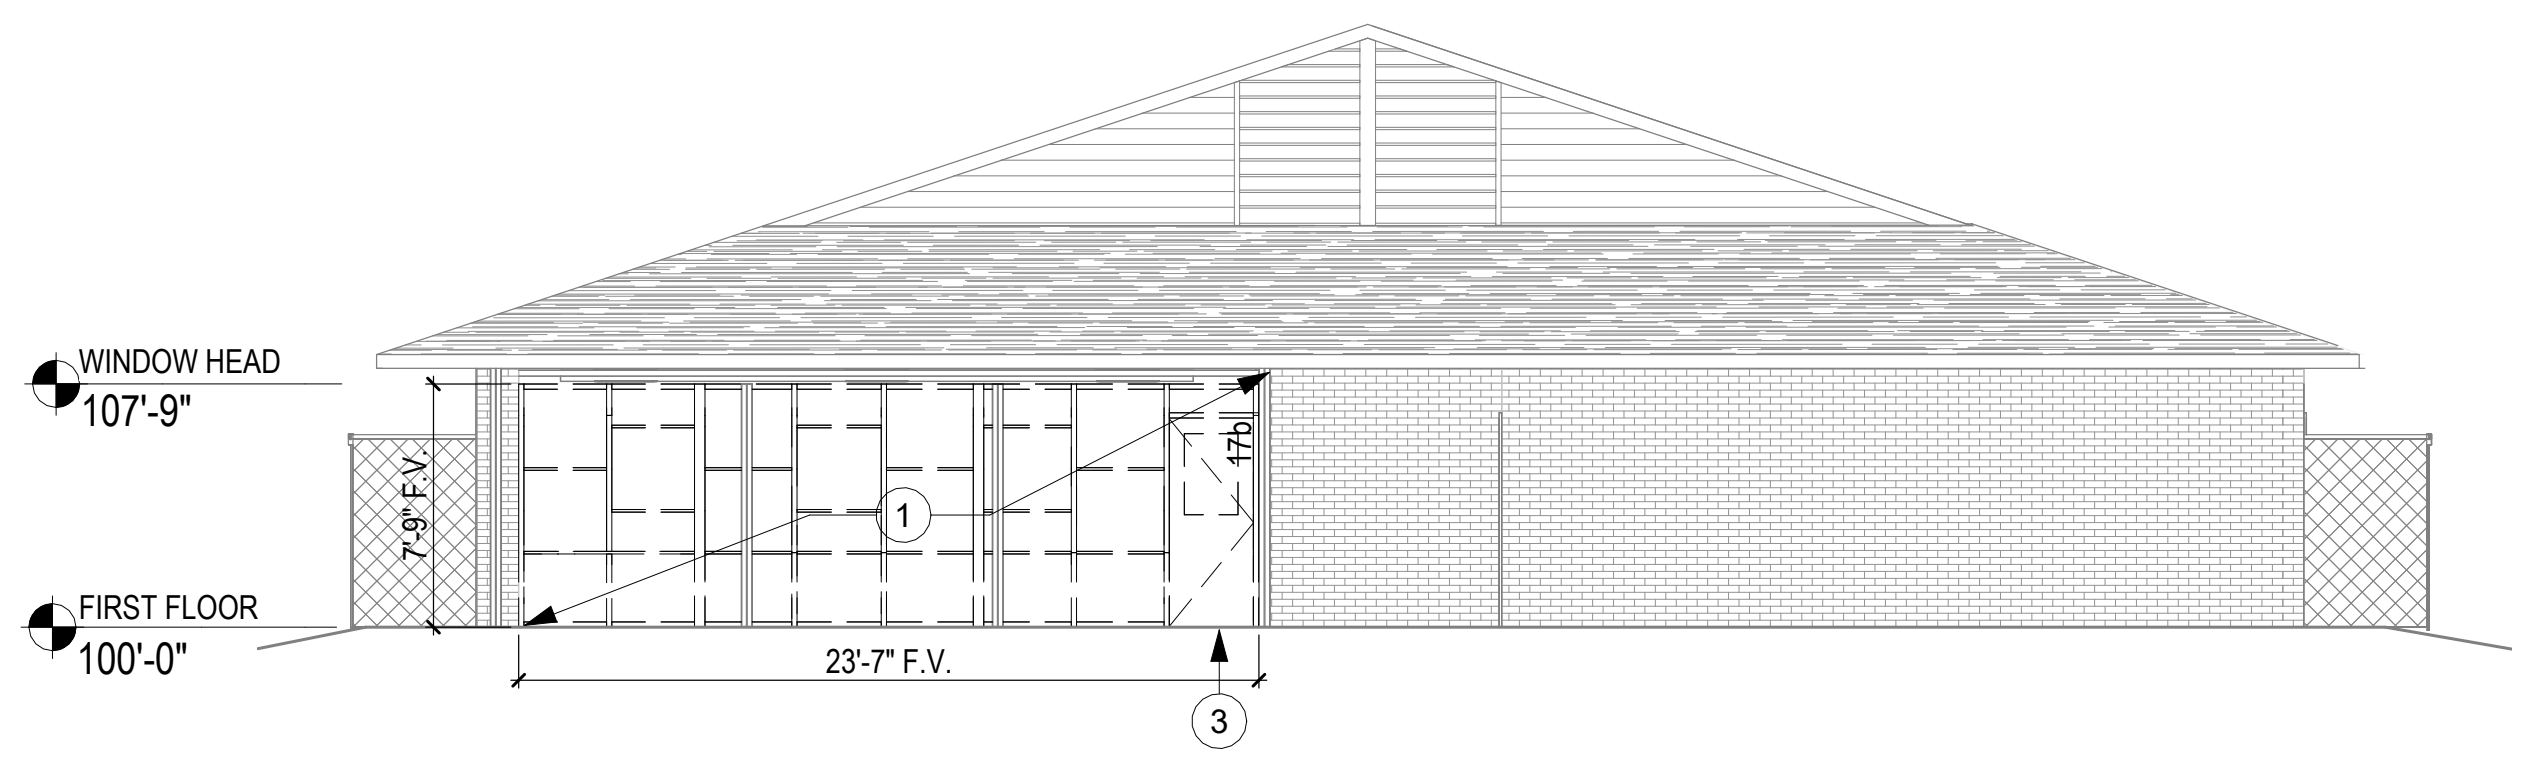

2

Outbuilding Exterior Elevation Demolition - East

SCALE: 1/8" = 1'-0"

1 AD1.0

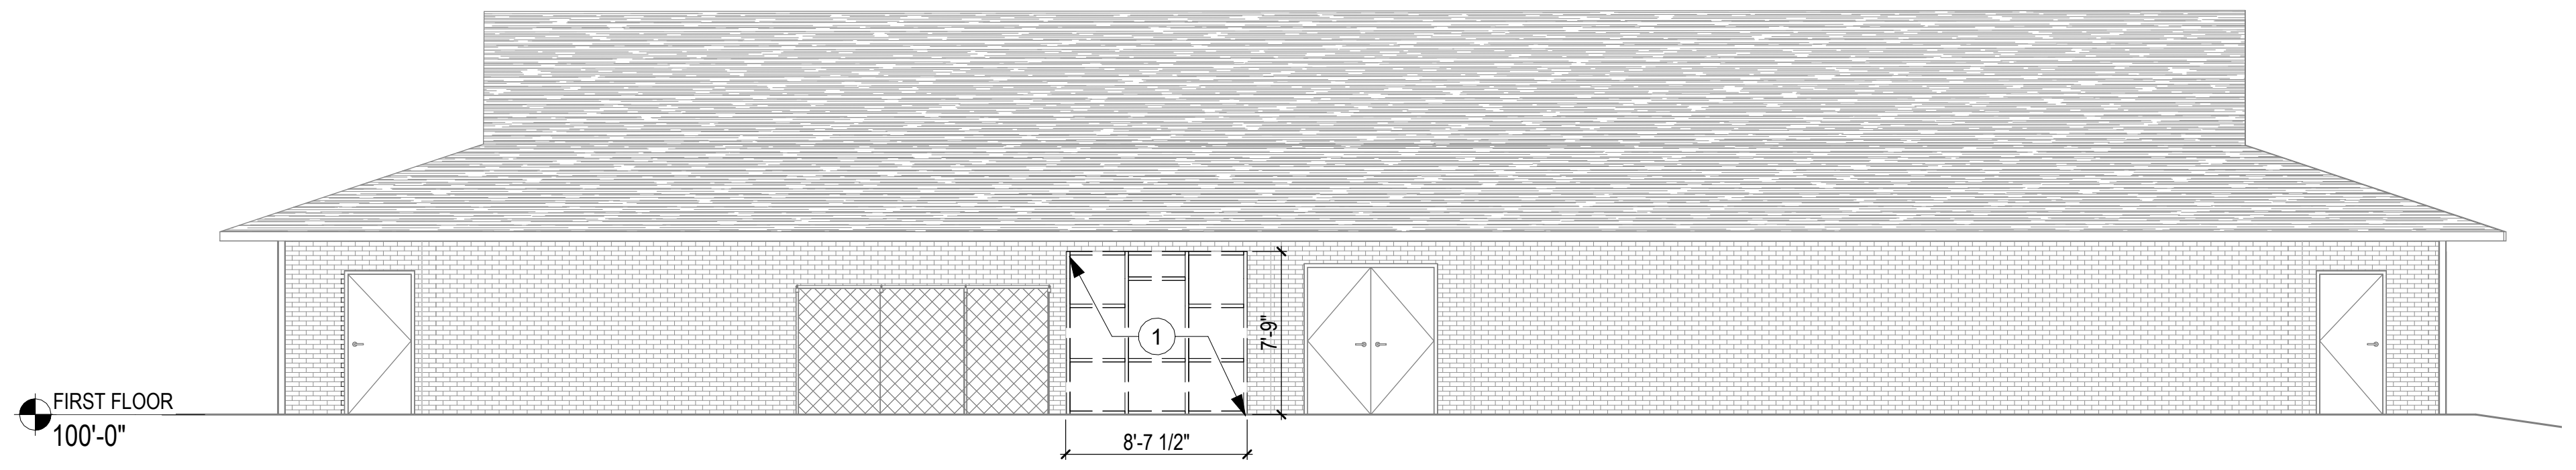

3

Outbuilding Exterior Elevation Demolition - South

SCALE: 1/8" = 1'-0"

1 AD1.0

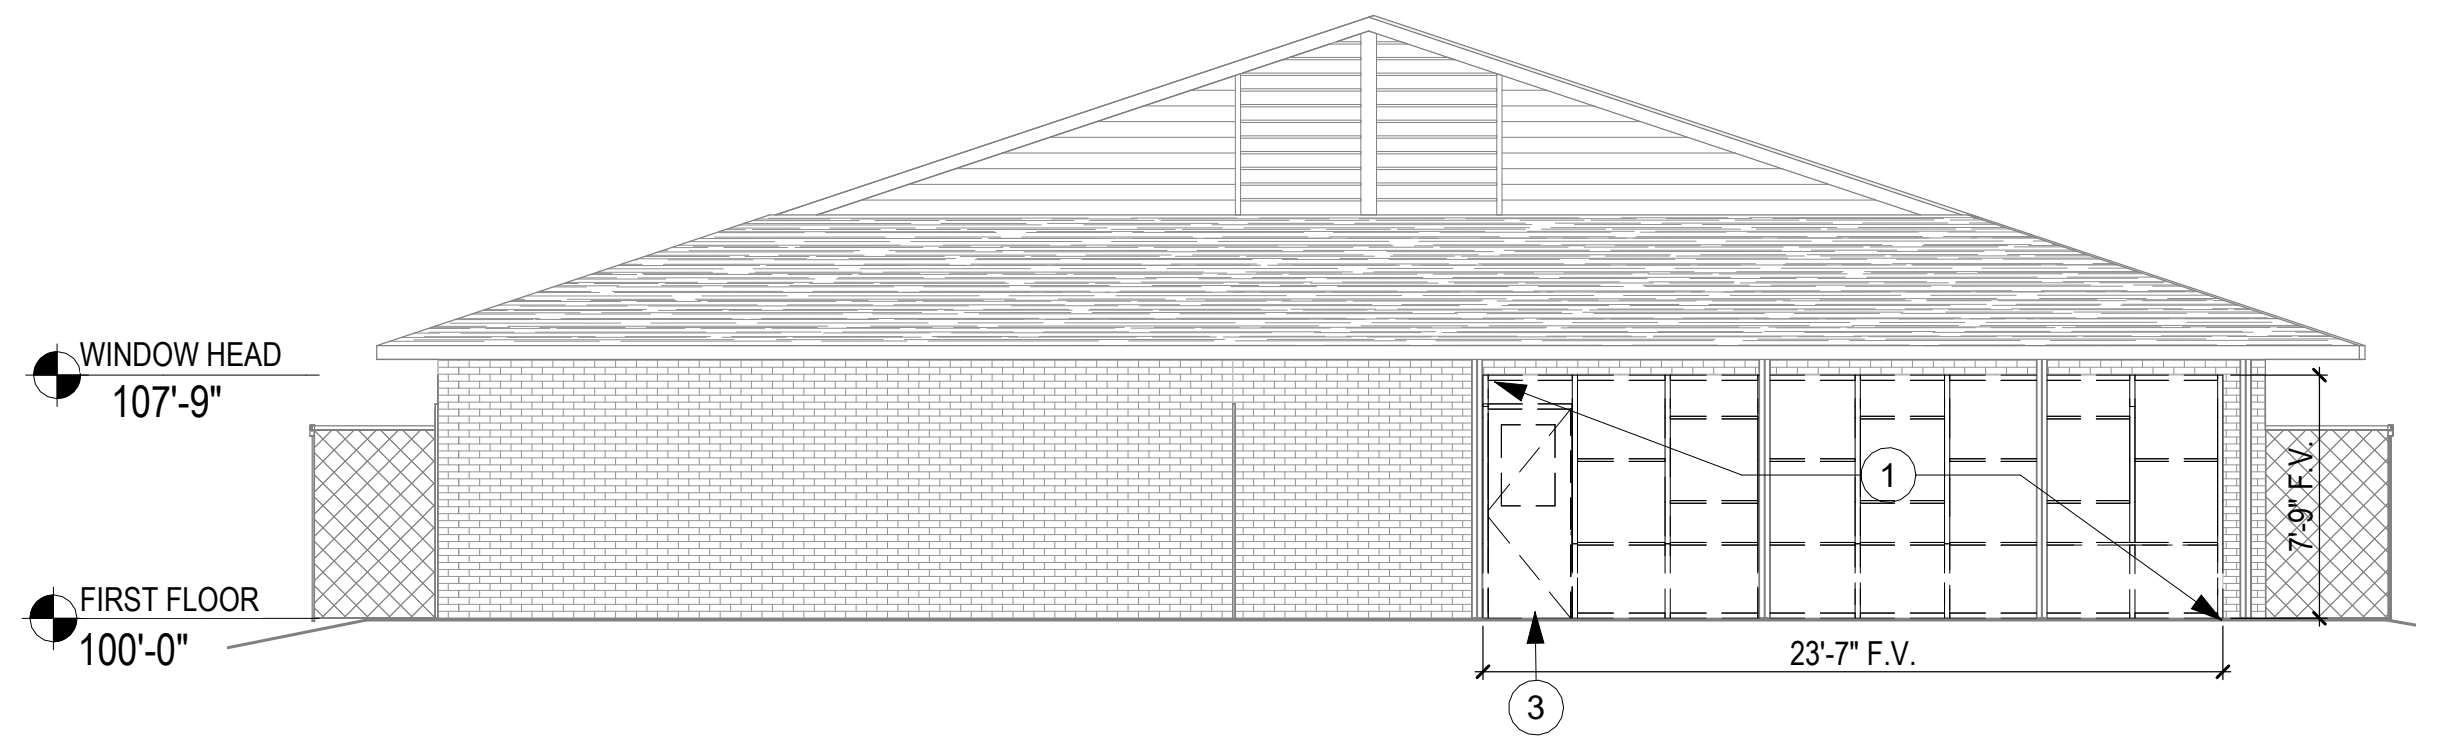

4

Outbuilding Exterior Elevation Demolition - West

SCALE: 1/8" = 1'-0"

1 AD1.0

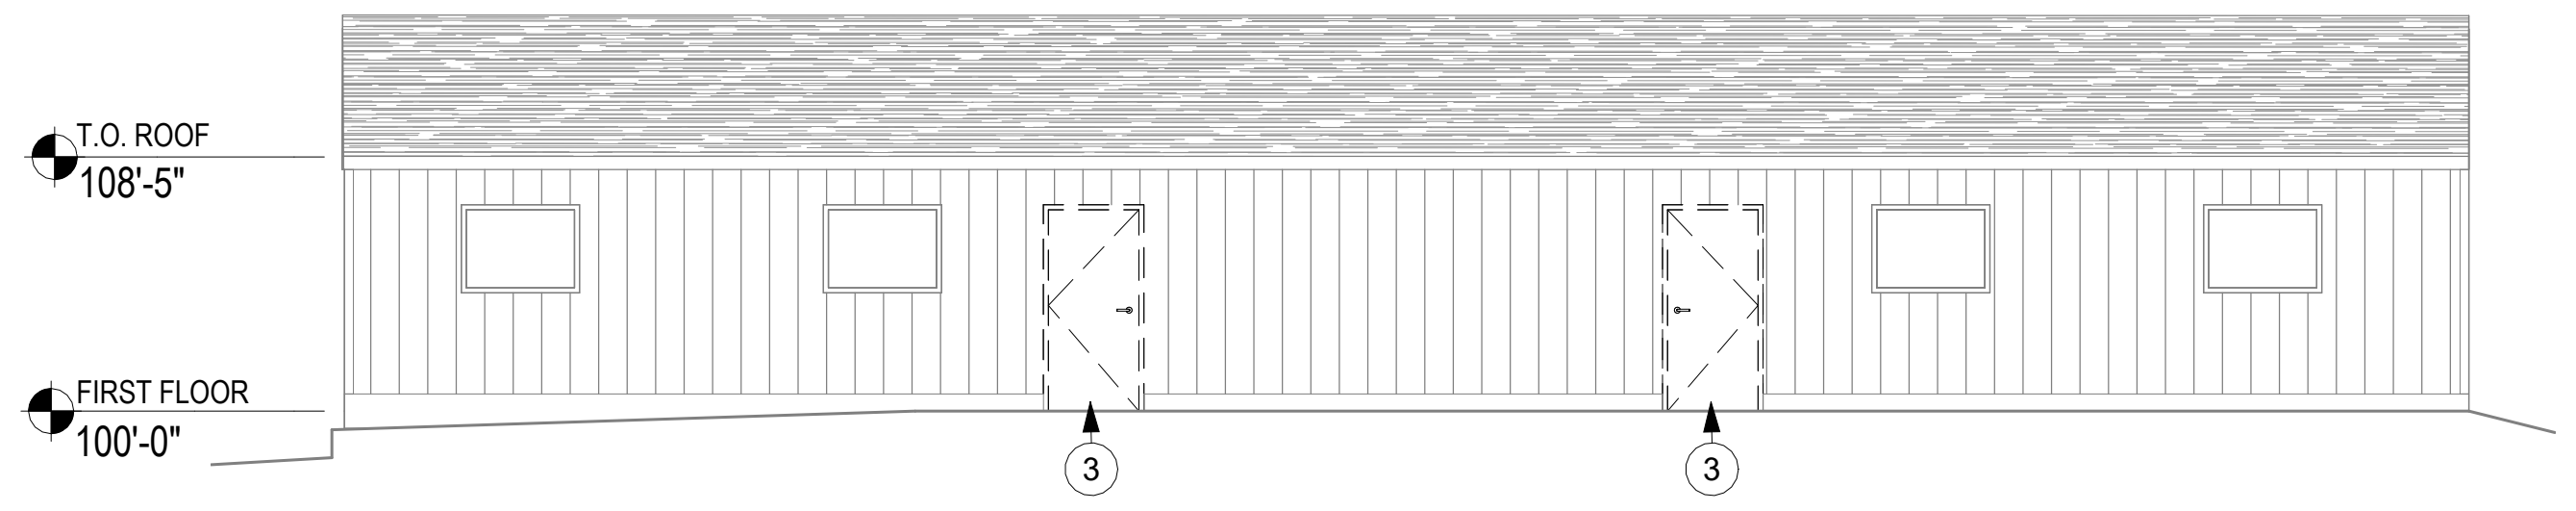

5

Modular Exterior Elevation Demolition - North

SCALE: 1/8" = 1'-0"

1 AD1.0

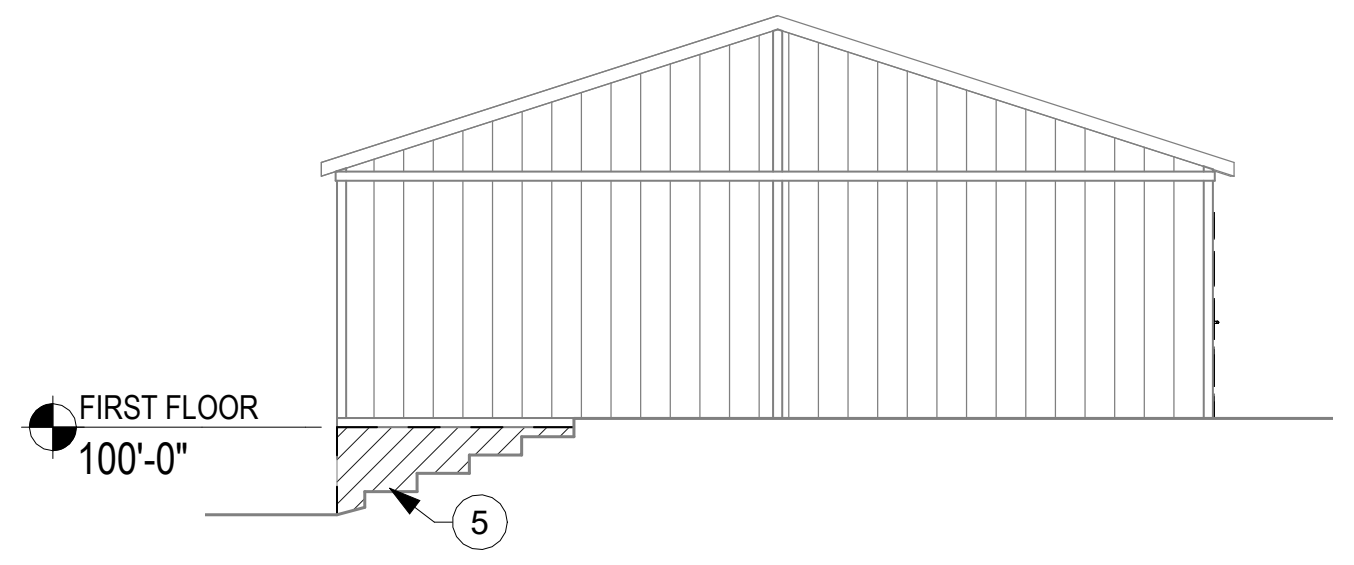

6

Modular Exterior Elevation Demolition - East

SCALE: 1/8" = 1'-0"

1 AD1.0

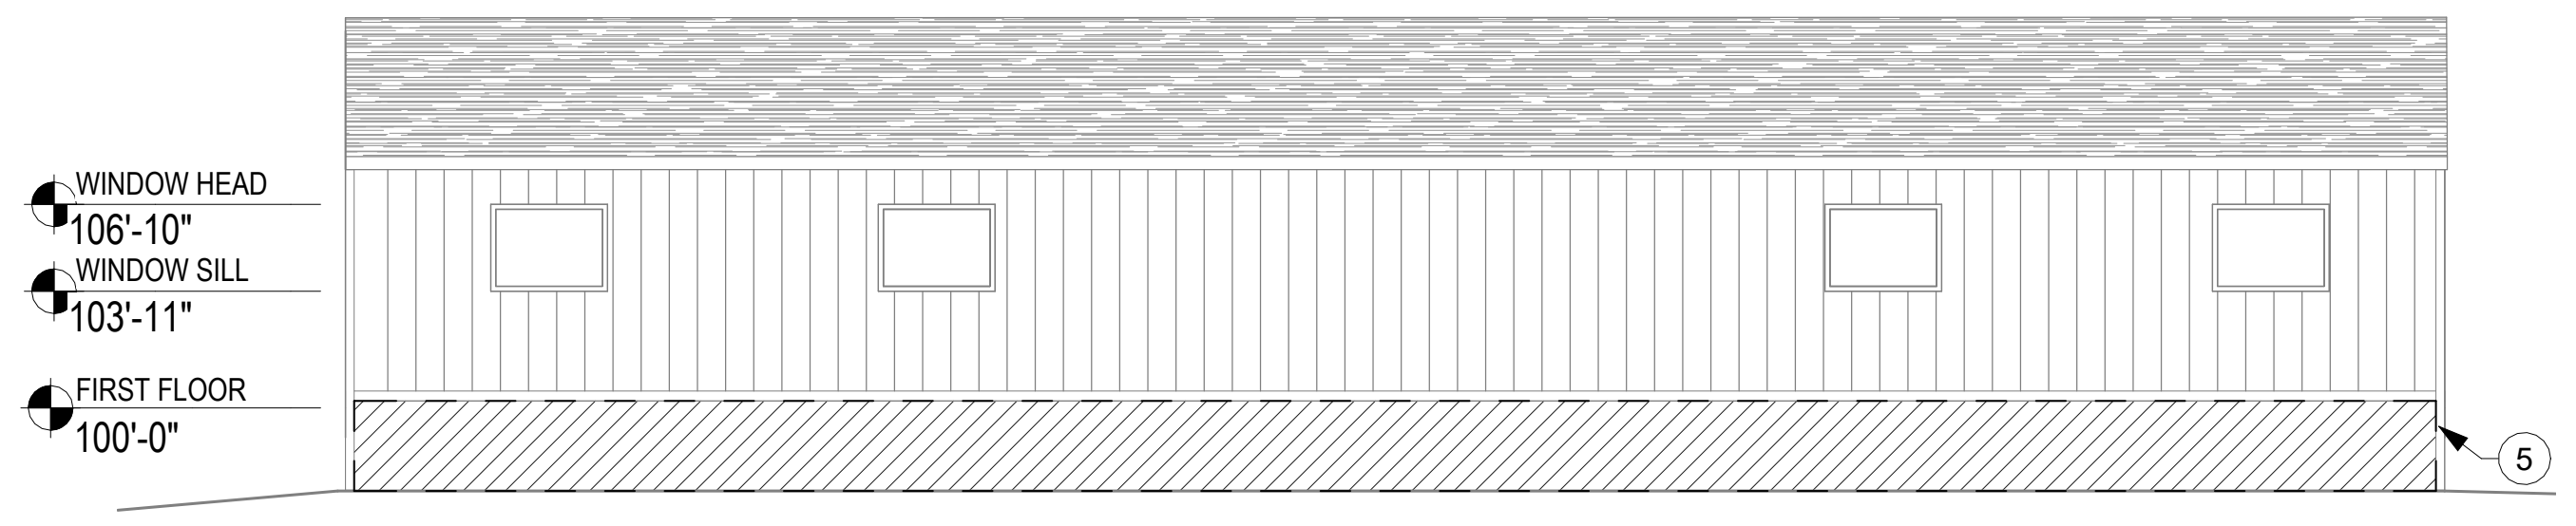

7

Modular Exterior Elevation Demolition - South

SCALE: 1/8" = 1'-0"

1 AD1.0

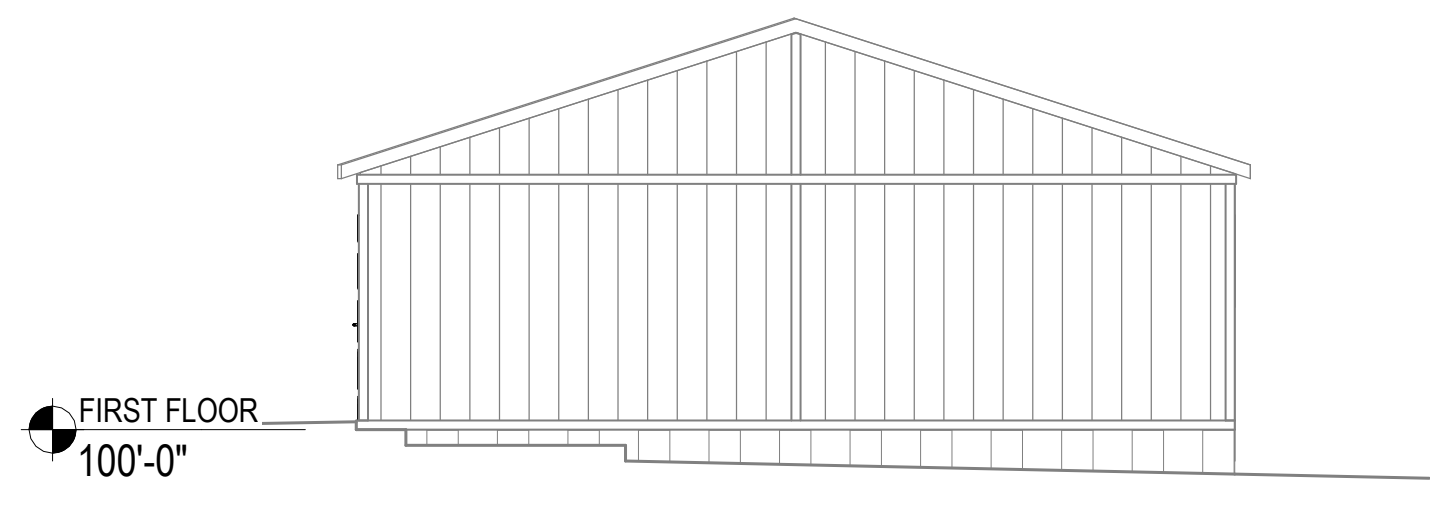

8

Modular Exterior Elevation Demolition - West

SCALE: 1/8" = 1'-0"

1 AD1.0

GENERAL ELEVATION DEMO. NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATION IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REFER TO ELECTRICAL, PLUMBING, LOW VOLTAGE, DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
5. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
6. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.
7. REPAIR DAMAGED AND WEATHERED BRICK AND MORTAR AS REQUIRED TO RECEIVE NEW FINISHES.
8. REMOVE EXISTING SIGNAGE IN ITS ENTIRETY. COORDINATE SALVAGE AND REINSTALLATION WITH THE OWNER. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY THE OWNER.

ELEVATION DEMOLITION KEY NOTES

① REMOVE EXISTING WINDOW ASSEMBLY IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

② REMOVE EXISTING PARAPET CAP, ALL OTHER ELEMENTS TO REMAIN. SEE 4/AD2.0 FOR ADDITIONAL INFORMATION

③ REMOVE EXISTING DOOR AND DOOR FRAME IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

④ REMOVE EXISTING SNOW GUARDS AND ANY ASSOCIATED BRACING IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

⑤ REMOVE EXISTING MODULAR SKIRTING IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

⑥ REMOVE EXISTING BREAK METAL COVER AS NEEDED FOR BRICK INFILL. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.

Note

ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK AND PAINTING OF SIDING. RE-INSTALL AS REQUIRED

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Exterior Elevations Demolition

AD2.1

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:34 AM

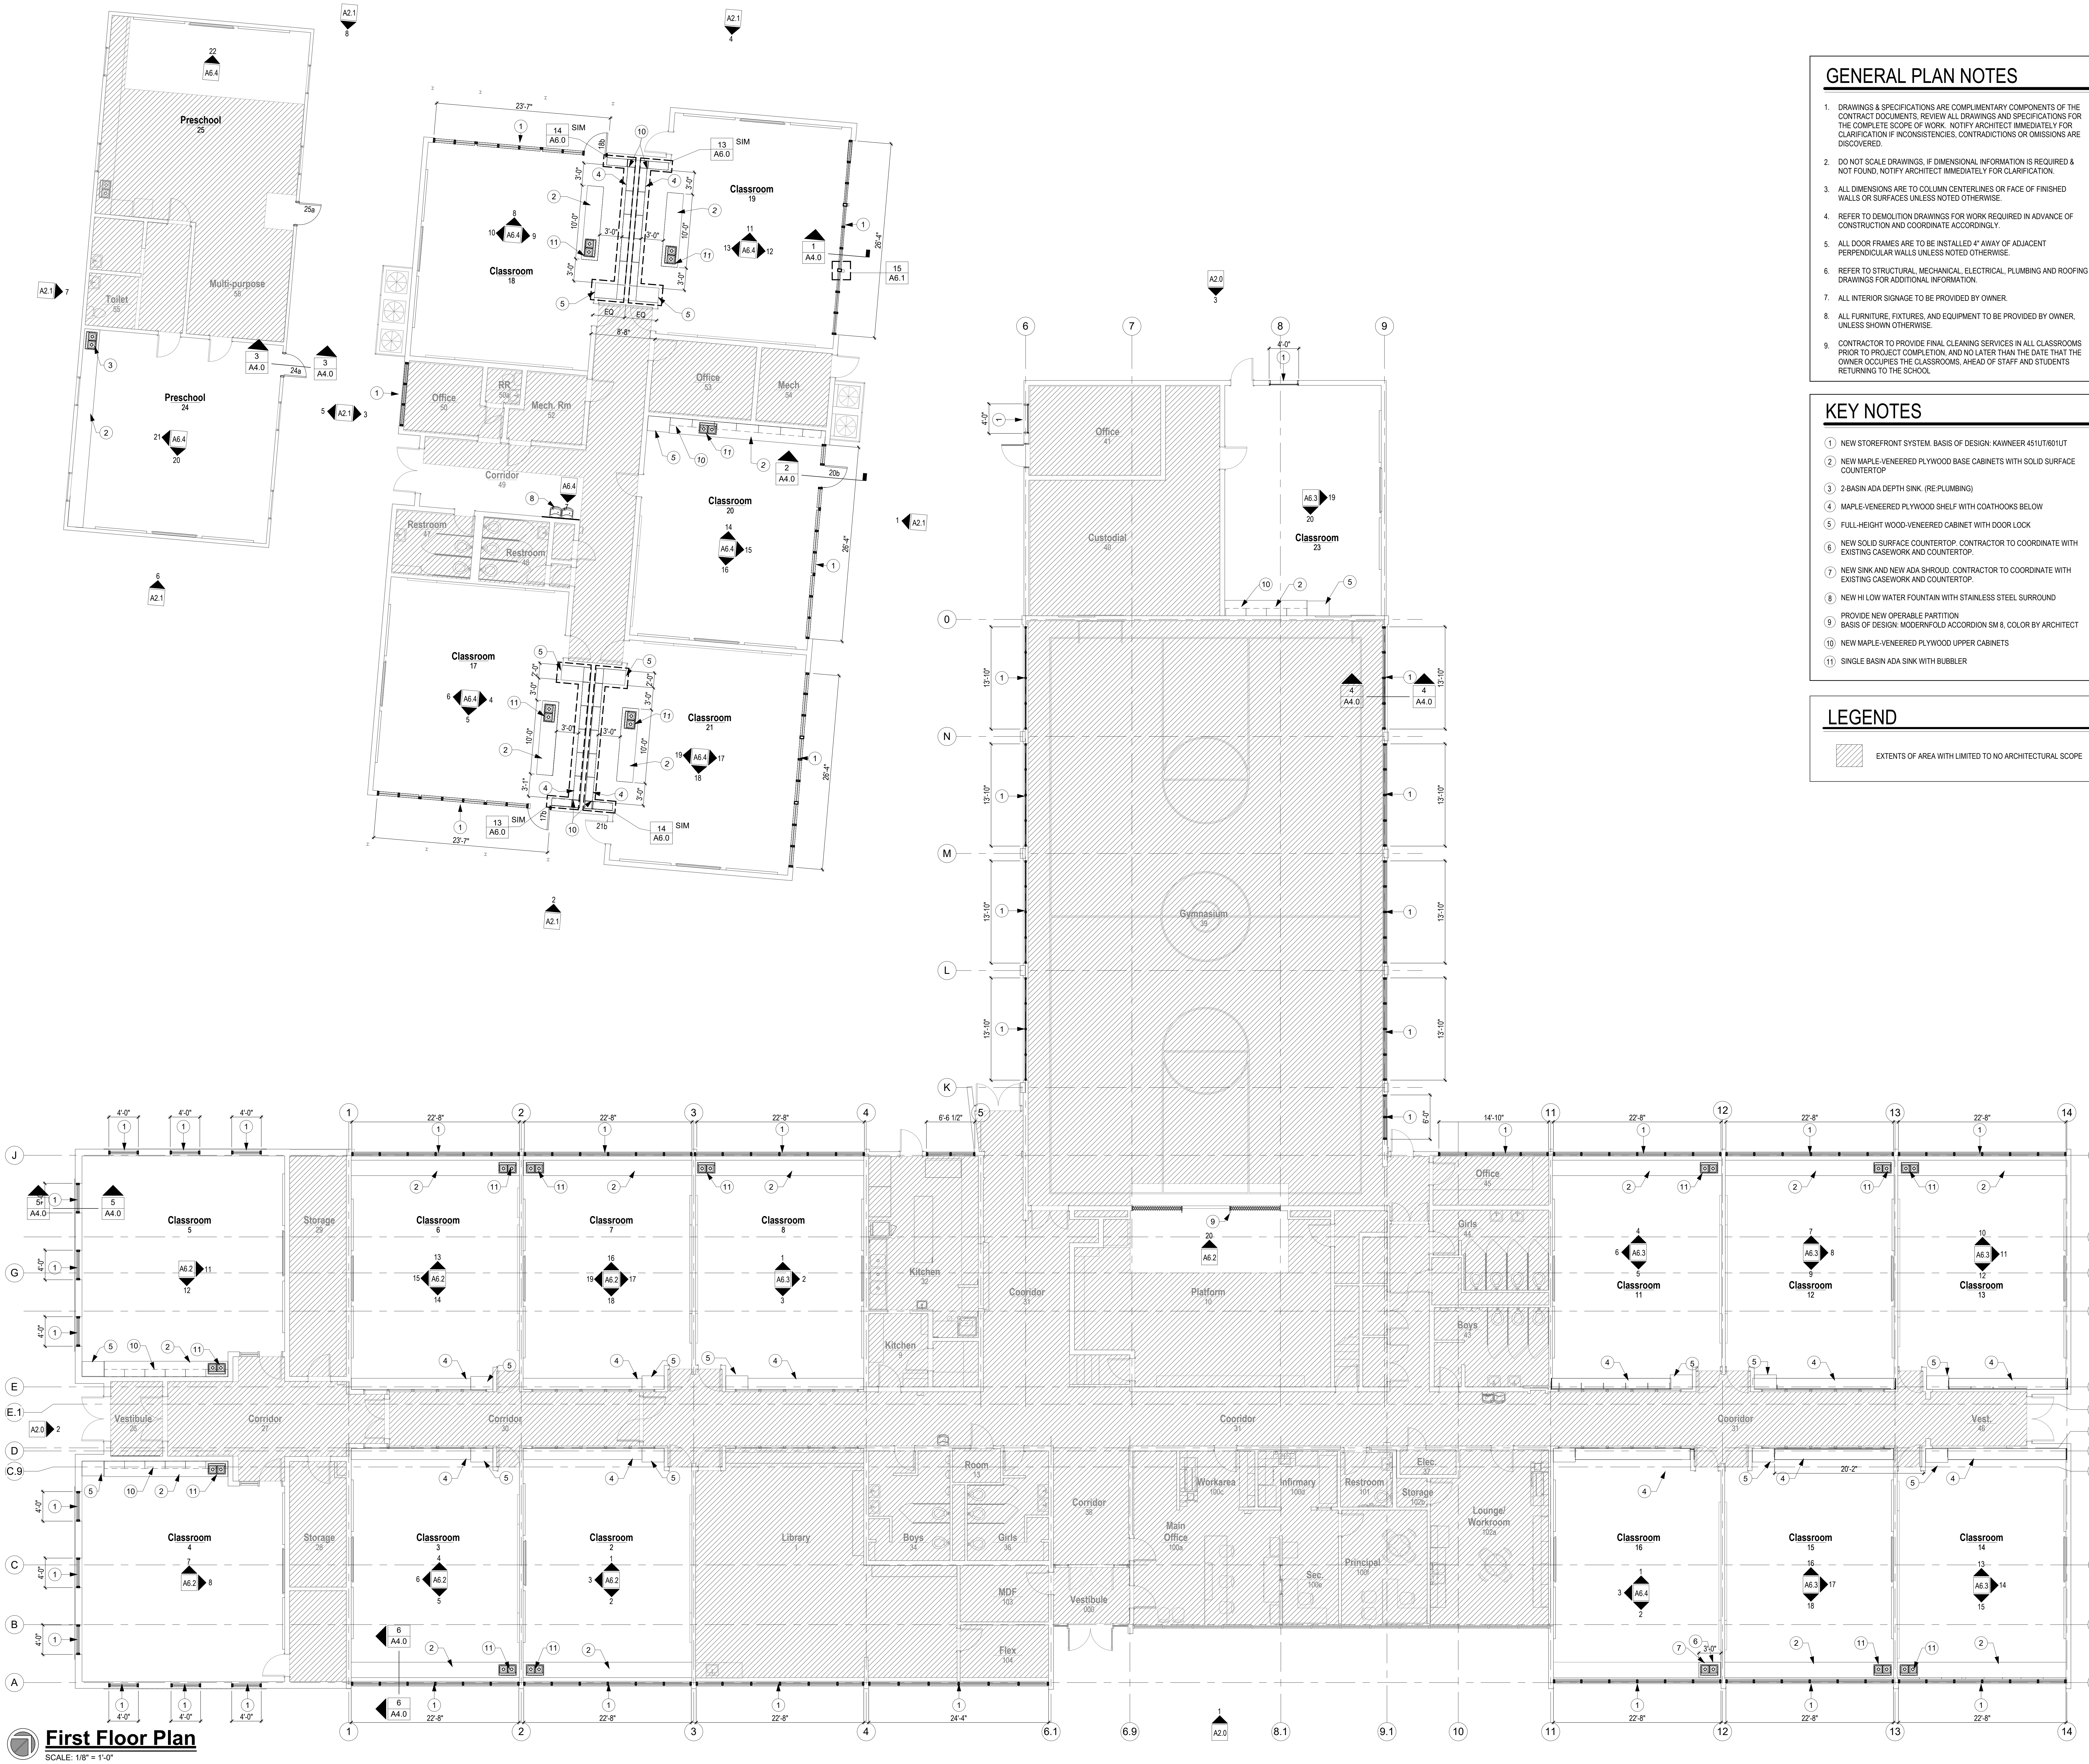
Preschool
25
Multi-purpose
56
Toilet
55
Preschool
24
Classroom
18
Classroom
19
Office
50
RR
50a
Mech. Rm
51
Office
53
Mech
54
Corridor
49
Restroom
47
Restroom
48
Classroom
20
Classroom
17
Classroom
21
Office
41
Custodial
40
Classroom
23
Gymnasium
39
Classroom
5
Storage
29
Classroom
6
Classroom
7
Classroom
8
Kitchen
Kitchen
Corridor
31
Platform
10
Office
45
Girls
44
Boys
43
Classroom
11
Classroom
12
Classroom
13
Vestibule
26
Corridor
27
Corridor
30
Corridor
31
Corridor
31
Vest.
46
Classroom
4
Storage
28
Classroom
3
Classroom
2
Library
Room
13
Boys
34
Girls
35
MDF
103
Flex
104
Corridor
36
Vestibule
000
Main Office
100a
Workarea
100c
Infirmary
100d
Restroom
Storage
102b
Elec.
Lounge/ Workroom
102a
Sec.
100e
Principal
100f
Classroom
16
Classroom
15
Classroom
14
SIM
EQ
EQ
23'-7"
22'-8"
24'-4"
14'-10"
20'-2"
13'-10"
26'-4"
4'-0"
6'-6 1/2"
A2.0
A2.1
A4.0
A6.0
A6.1
A6.2
A6.3
A6.4
J
H
G
F
E
E.1
D.1
D
C.9
C
B
A
K
L
M
N
O
1
2
3
4
5
6
7
8
9
6.1
6.9
8.1
9.1
10
11
12
13
14

First Floor Plan

SCALE: 1/8" = 1'-0"

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:41 AM

GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS, REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. ALL DOOR FRAMES ARE TO BE INSTALLED 4" AWAY OF ADJACENT PERPENDICULAR WALLS UNLESS NOTED OTHERWISE.
6. REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING AND ROOFING DRAWINGS FOR ADDITIONAL INFORMATION.
7. ALL INTERIOR SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL FURNITURE, FIXTURES, AND EQUIPMENT TO BE PROVIDED BY OWNER, UNLESS SHOWN OTHERWISE.
9. CONTRACTOR TO PROVIDE FINAL CLEANING SERVICES IN ALL CLASSROOMS PRIOR TO PROJECT COMPLETION, AND NO LATER THAN THE DATE THAT THE OWNER OCCUPIES THE CLASSROOMS, AHEAD OF STAFF AND STUDENTS RETURNING TO THE SCHOOL

KEY NOTES

① NEW STOREFRONT SYSTEM. BASIS OF DESIGN: KAWNEER 451UT/601UT
② NEW MAPLE-VENEERED PLYWOOD BASE CABINETS WITH SOLID SURFACE COUNTERTOP
③ 2-BASIN ADA DEPTH SINK. (RE:PLUMBING)
④ MAPLE-VENEERED PLYWOOD SHELF WITH COATHOOKS BELOW
⑤ FULL-HEIGHT WOOD-VENEERED CABINET WITH DOOR LOCK
⑥ NEW SOLID SURFACE COUNTERTOP. CONTRACTOR TO COORDINATE WITH EXISTING CASEWORK AND COUNTERTOP.
⑦ NEW SINK AND NEW ADA SHROUD. CONTRACTOR TO COORDINATE WITH EXISTING CASEWORK AND COUNTERTOP.
⑧ NEW HI LOW WATER FOUNTAIN WITH STAINLESS STEEL SURROUND
⑨ PROVIDE NEW OPERABLE PARTITION
BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR BY ARCHITECT
⑩ NEW MAPLE-VENEERED PLYWOOD UPPER CABINETS
⑪ SINGLE BASIN ADA SINK WITH BUBBLER

LEGEND

▨ EXTENTS OF AREA WITH LIMITED TO NO ARCHITECTURAL SCOPE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

First Floor Plan

A1.0

EQUIPMENT SCHEDULE_Area A				
ITEM NO.	ITEM DESCRIPTION (MANUFACTURER & MODEL)	QUANTITY	FURNISHED/INSTALLED BY	COMMENTS
001	4' X 7' MARKER BOARD, CLARIDGE SERIES 4	42	CONTRACTOR/CONTRACTOR	
002	TV-85"	21	OWNER/CONTRACTOR	
003	4' X 12' MARKER BOARD, CLARIDGE SERIES 4	1	CONTRACTOR/CONTRACTOR	
005	4' X 4' TACK BOARD, FORBO BULLETIN BOARD	2	CONTRACTOR/CONTRACTOR	

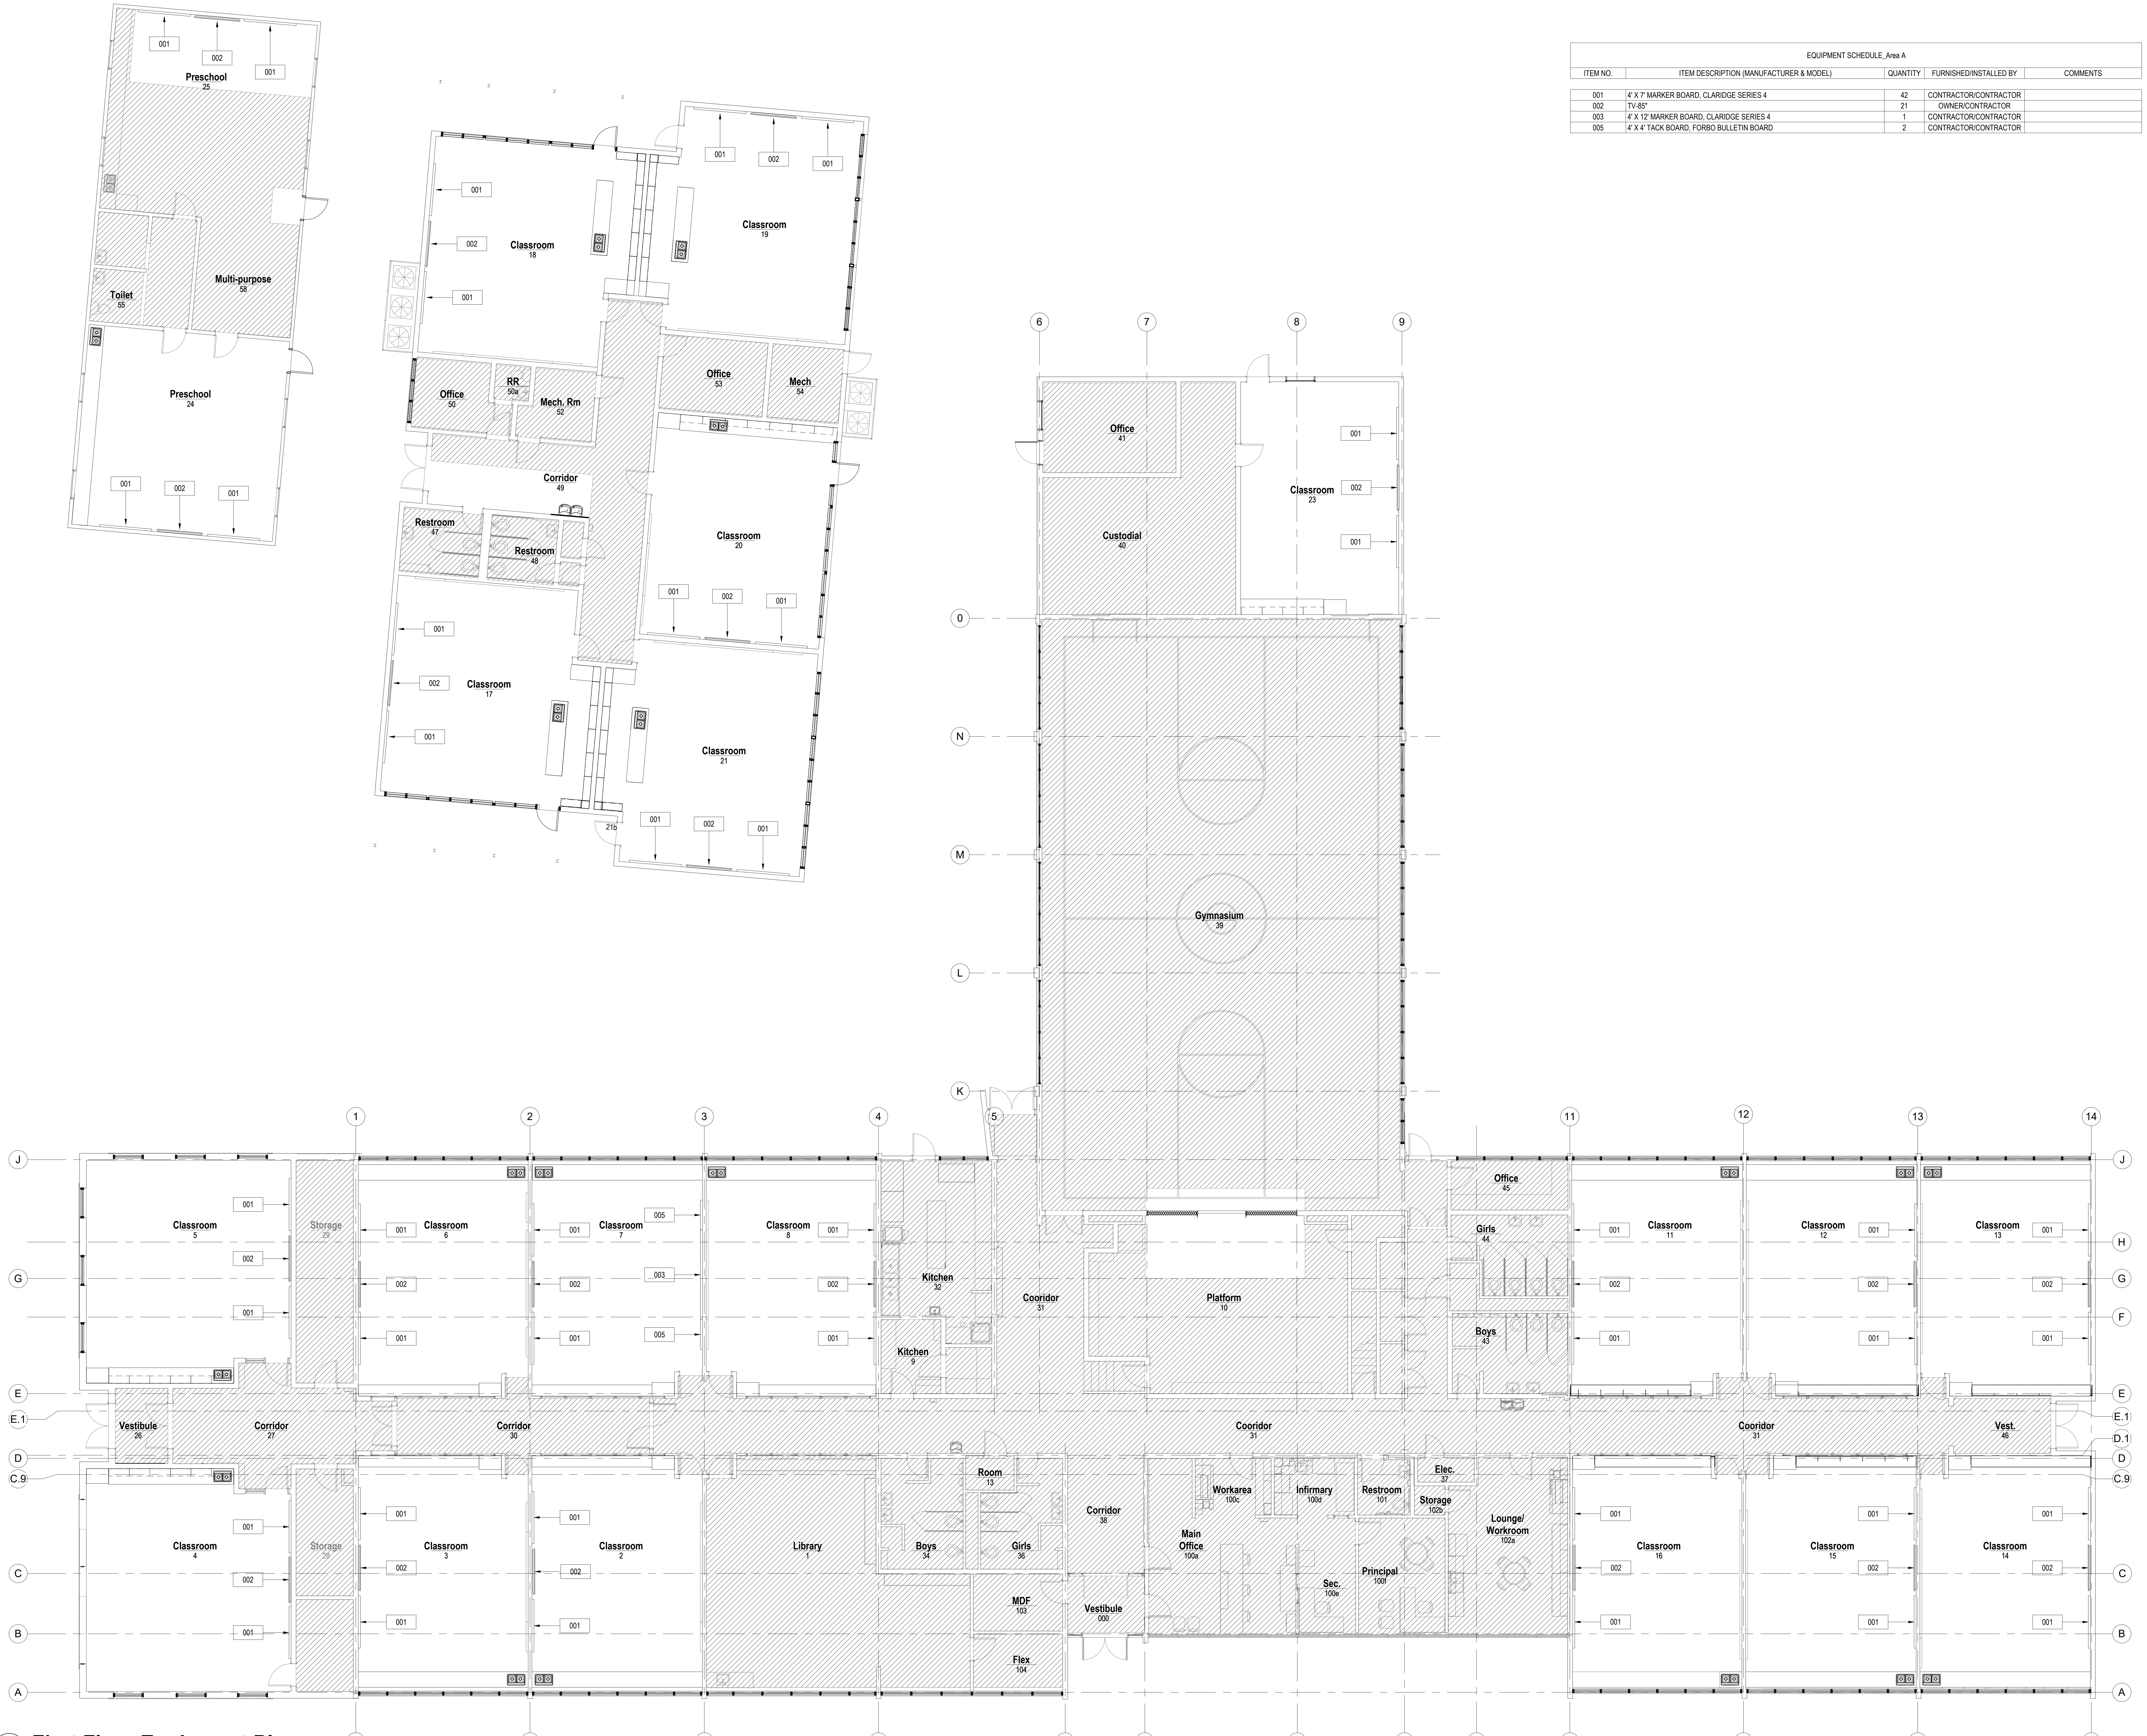
Preschool 25
Multi-purpose 58
Toilet 55
Preschool 24
Classroom 18
Classroom 19
Office 50
RR 50a
Mech. Rm 52
Office 53
Mech 54
Corridor 49
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
21b
Office 41
Custodial 40
Classroom 23
Gymnasium 39
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Kitchen 32
Kitchen 9
Cooridor 31
Platform 10
Office 45
Girls 44
Boys 43
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Cooridor 31
Cooridor 31
Vest. 46
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Boys 34
Room 13
Girls 36
MDF 103
Flex 104
Corridor 38
Vestibule 000
Main Office 100a
Workarea 100c
Infirmary 100d
Sec. 100e
Restroom 101
Principal 100f
Elec. 37
Storage 102b
Lounge/ Workroom 102a
Classroom 16
Classroom 15
Classroom 14
001
002
003
005
J
H
G
F
E
E.1
D
D.1
C.9
C
B
A
0
N
M
L
K
1
2
3
4
5
6
7
8
9
6.1
6.9
8.1
9.1
10
11
12
13
14

First Floor Equipment Plan

SCALE: 1/8" = 1'-0"

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt

9/25/2026 10:43:47 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Equipment Plan

A1.1

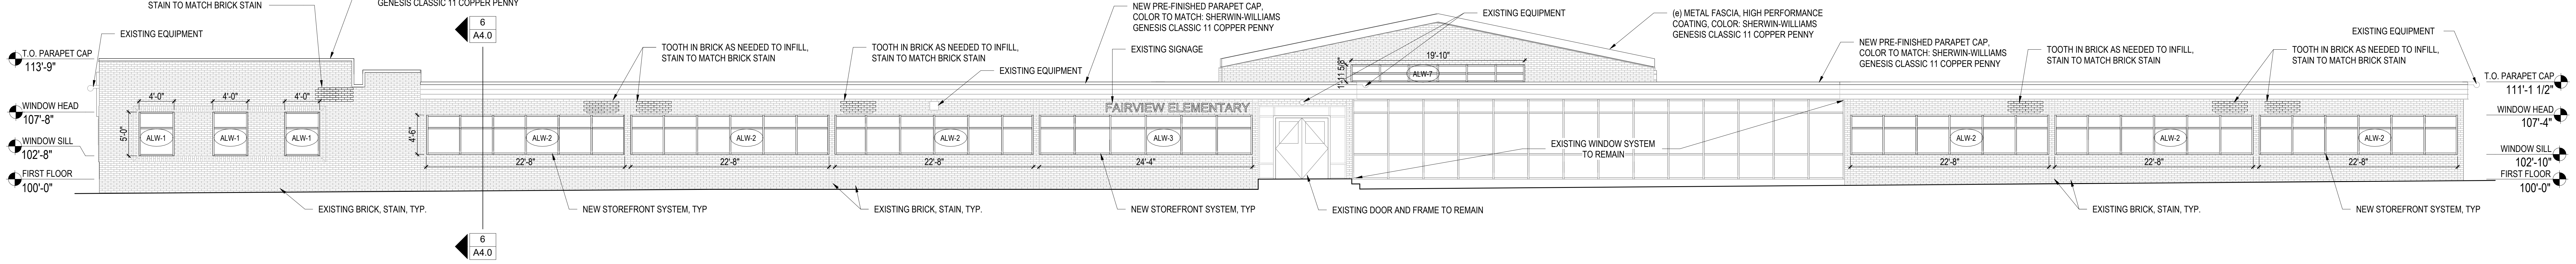
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING EQUIPMENT
6
A4.0
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
EXISTING EQUIPMENT
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING SIGNAGE
FAIRVIEW ELEMENTARY
EXISTING EQUIPMENT
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
EXISTING EQUIPMENT
T.O. PARAPET CAP 113'-9"
WINDOW HEAD 107'-8"
WINDOW SILL 102'-8"
FIRST FLOOR 100'-0"
4'-0"
4'-0"
4'-0"
5'-0"
ALW-1
ALW-1
ALW-1
4'-6"
ALW-2
ALW-2
ALW-2
ALW-3
22'-8"
22'-8"
22'-8"
24'-4"
19'-10"
1'-11 5/8"
ALW-7
EXISTING WINDOW SYSTEM TO REMAIN
ALW-2
ALW-2
ALW-2
22'-8"
22'-8"
22'-8"
T.O. PARAPET CAP 111'-1 1/2"
WINDOW HEAD 107'-4"
WINDOW SILL 102'-10"
FIRST FLOOR 100'-0"
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM, TYP
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM, TYP
EXISTING DOOR AND FRAME TO REMAIN
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM, TYP
6
A4.0

1

Exterior Elevation - Southeast

SCALE: 1/8" = 1'-0"

1 A1.0

BASIS OF DESIGN LEGEND

▨ EXISTING BRICK

▦ NEW BRICK

ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING (COLOR BY ARCHITECT)

PAINT ALL NEW AND EXISTING PARAPET CAP, BASIS OF DESIGN: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY

Note

1. ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

2. ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING (COLOR BY ARCHITECT)

Brick Repair Scope General Notes:

1. CONTRACTOR TO FEILD VERIFY EXTENTS OF ALL CRACKED AND/OR DAMAGED BRICK. CONFIRM WITH OWNER FOR DIRECTION ON REPAIR AND REPLACEMENT.

2. CONTRACTOR TO PROVIDE NOT-TO-EXCEED PRICING FOR BRICK RE-POINTING AND REPAIR IN AREAS INDICATED ON THE DRAWINGS, ESTIMATED AT 2,200 SF, PERIMETER X2'. CONTRACTOR TO PROVIDE UNIT PRICING FOR ADDITIONAL AREAS OF REPAIR, AND/OR TO CREDIT AREAS INDICATED THAT ARE FOUND TO NOT NEED REPAIR.

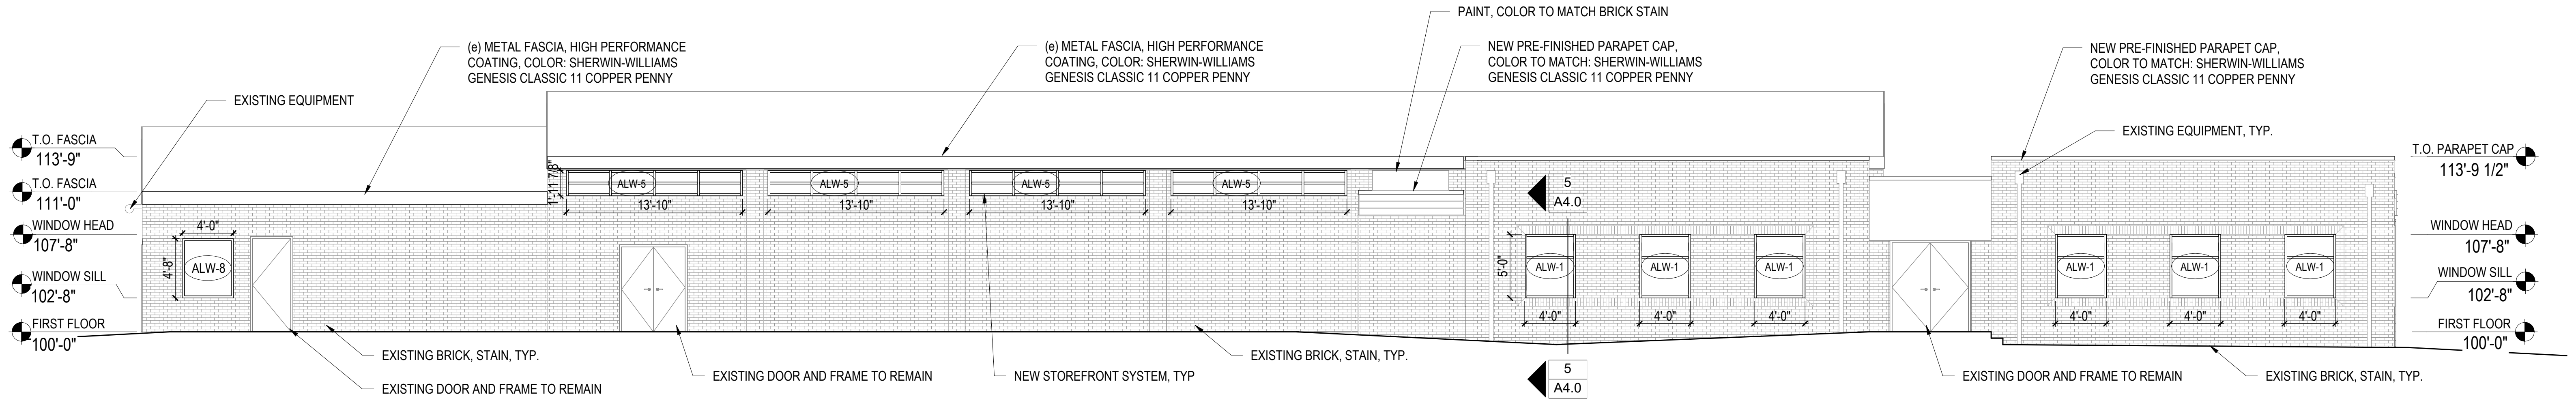
EXISTING EQUIPMENT
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
PAINT, COLOR TO MATCH BRICK STAIN
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING EQUIPMENT, TYP.
T.O. FASCIA 113'-9"
T.O. FASCIA 111'-0"
WINDOW HEAD 107'-8"
WINDOW SILL 102'-8"
FIRST FLOOR 100'-0"
4'-0"
4'-8"
ALW-8
1'-11 7/8"
ALW-5
ALW-5
ALW-5
ALW-5
13'-10"
13'-10"
13'-10"
13'-10"
5
A4.0
5'-0"
ALW-1
ALW-1
ALW-1
4'-0"
4'-0"
4'-0"
ALW-1
ALW-1
ALW-1
4'-0"
4'-0"
4'-0"
T.O. PARAPET CAP 113'-9 1/2"
WINDOW HEAD 107'-8"
WINDOW SILL 102'-8"
FIRST FLOOR 100'-0"
EXISTING BRICK, STAIN, TYP.
EXISTING DOOR AND FRAME TO REMAIN
EXISTING DOOR AND FRAME TO REMAIN
NEW STOREFRONT SYSTEM, TYP
EXISTING BRICK, STAIN, TYP.
5
A4.0
EXISTING DOOR AND FRAME TO REMAIN
EXISTING BRICK, STAIN, TYP.

2

Exterior Elevation - Southwest

SCALE: 1/8" = 1'-0"

1 A1.0

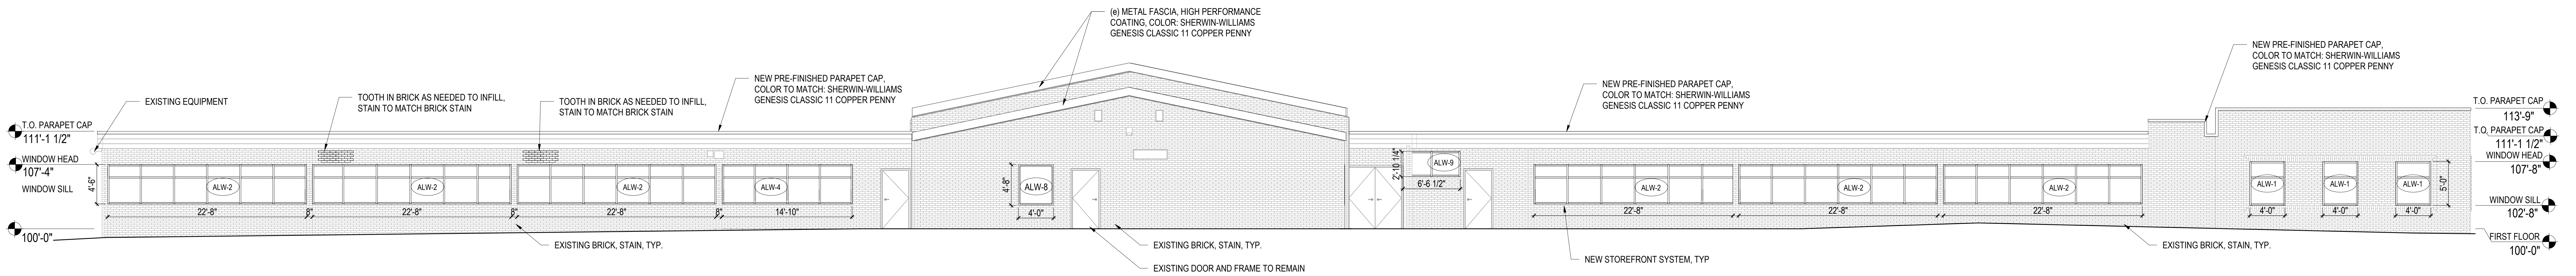
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING EQUIPMENT
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
TOOTH IN BRICK AS NEEDED TO INFILL, STAIN TO MATCH BRICK STAIN
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
T.O. PARAPET CAP 111'-1 1/2"
WINDOW HEAD 107'-4"
WINDOW SILL
100'-0"
4'-6"
ALW-2
ALW-2
ALW-2
ALW-4
22'-8"
8"
22'-8"
8"
22'-8"
8"
14'-10"
4'-8"
ALW-8
4'-0"
2'-10 1/4"
ALW-9
6'-6 1/2"
ALW-2
ALW-2
ALW-2
22'-8"
22'-8"
22'-8"
ALW-1
ALW-1
ALW-1
4'-0"
4'-0"
4'-0"
5'-0"
T.O. PARAPET CAP 113'-9"
T.O. PARAPET CAP 111'-1 1/2"
WINDOW HEAD 107'-8"
WINDOW SILL 102'-8"
FIRST FLOOR 100'-0"
EXISTING BRICK, STAIN, TYP.
EXISTING BRICK, STAIN, TYP.
EXISTING DOOR AND FRAME TO REMAIN
NEW STOREFRONT SYSTEM, TYP
EXISTING BRICK, STAIN, TYP.

3

Exterior Elevation - Northwest

SCALE: 1/8" = 1'-0"

1 A1.0

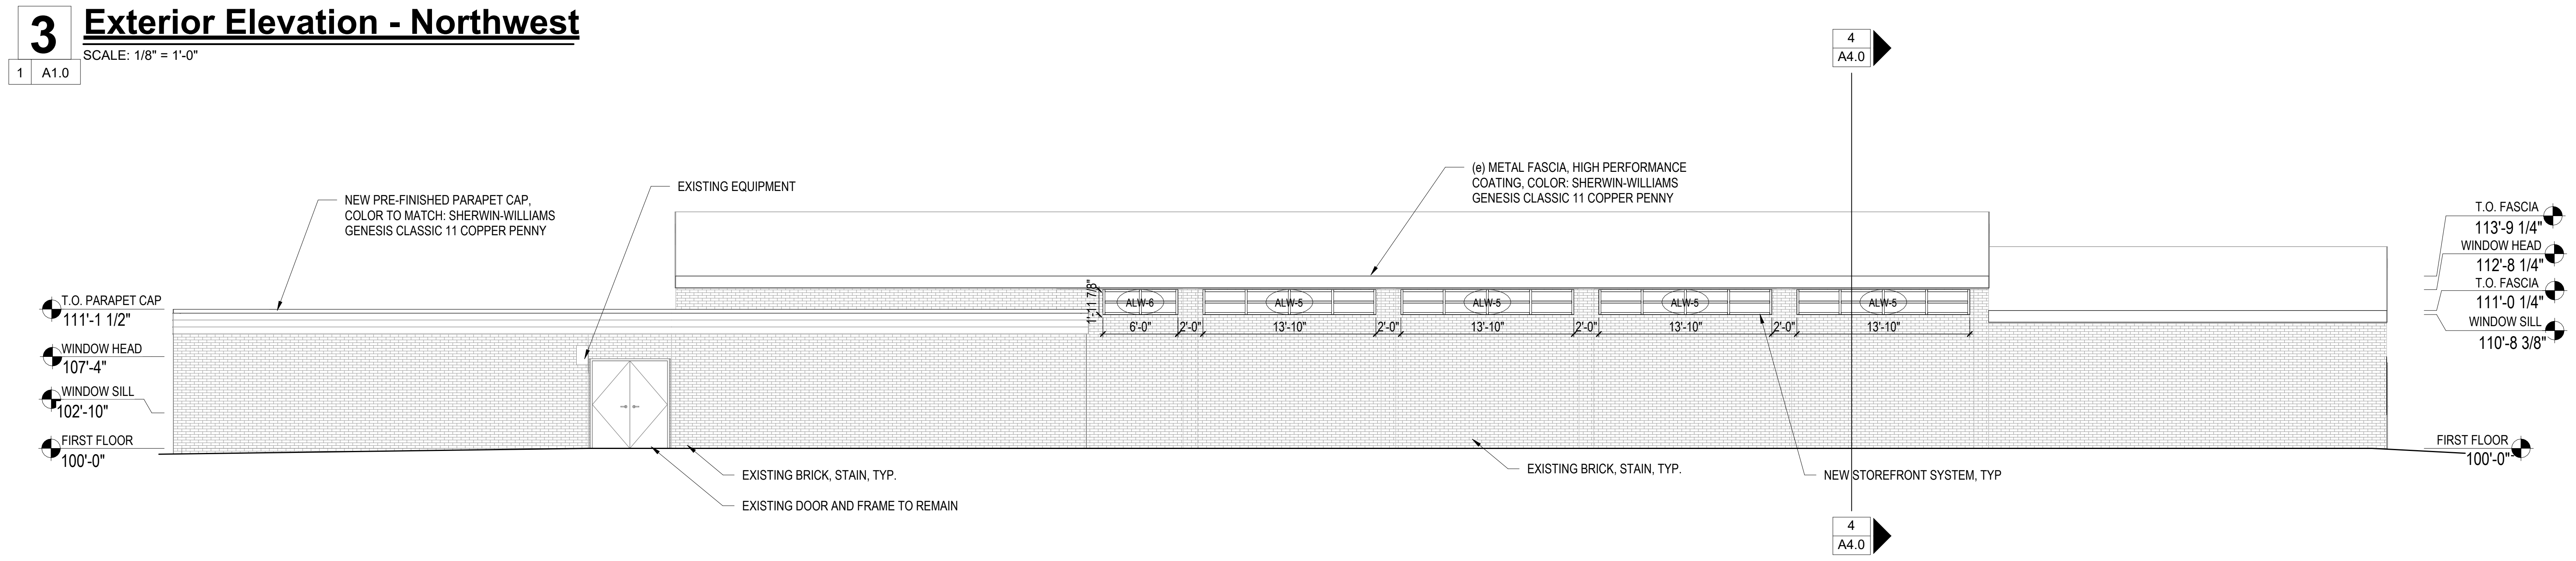
4
A4.0
NEW PRE-FINISHED PARAPET CAP, COLOR TO MATCH: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING EQUIPMENT
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
T.O. PARAPET CAP 111'-1 1/2"
WINDOW HEAD 107'-4"
WINDOW SILL 102'-10"
FIRST FLOOR 100'-0"
1'-11 7/8"
ALW-6
ALW-5
ALW-5
ALW-5
ALW-5
6'-0"
2'-0"
13'-10"
2'-0"
13'-10"
2'-0"
13'-10"
2'-0"
13'-10"
T.O. FASCIA 113'-9 1/4"
WINDOW HEAD 112'-8 1/4"
T.O. FASCIA 111'-0 1/4"
WINDOW SILL 110'-8 3/8"
FIRST FLOOR 100'-0"
EXISTING BRICK, STAIN, TYP.
EXISTING DOOR AND FRAME TO REMAIN
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM, TYP
4
A4.0

4

Exterior Elevation - Northeast

SCALE: 1/8" = 1'-0"

1 A1.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:55 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Exterior Elevations

A2.0

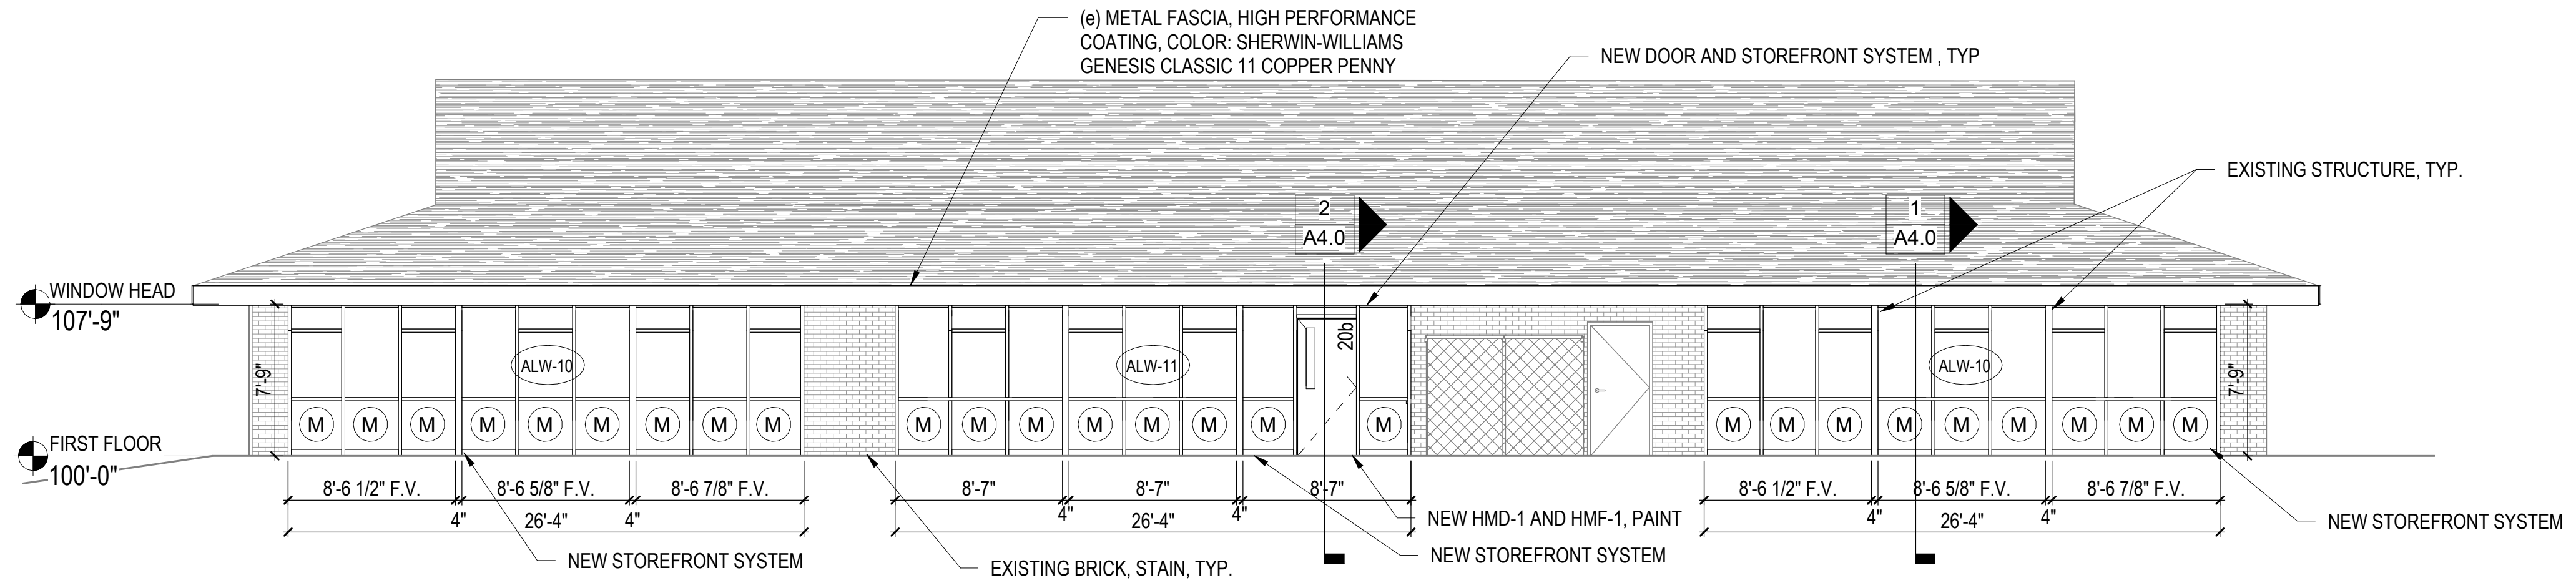
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
NEW DOOR AND STOREFRONT SYSTEM , TYP
EXISTING STRUCTURE, TYP.
2
A4.0
1
A4.0
WINDOW HEAD
107'-9"
FIRST FLOOR
100'-0"
7'-9"
ALW-10
ALW-11
ALW-10
20b
M
8'-6 1/2" F.V.
8'-6 5/8" F.V.
8'-6 7/8" F.V.
4"
26'-4"
8'-7"
NEW HMD-1 AND HMF-1, PAINT
NEW STOREFRONT SYSTEM
EXISTING BRICK, STAIN, TYP.

1 Outbuilding Exterior Elevation - North

SCALE: 1/8" = 1'-0"

1 A1.0

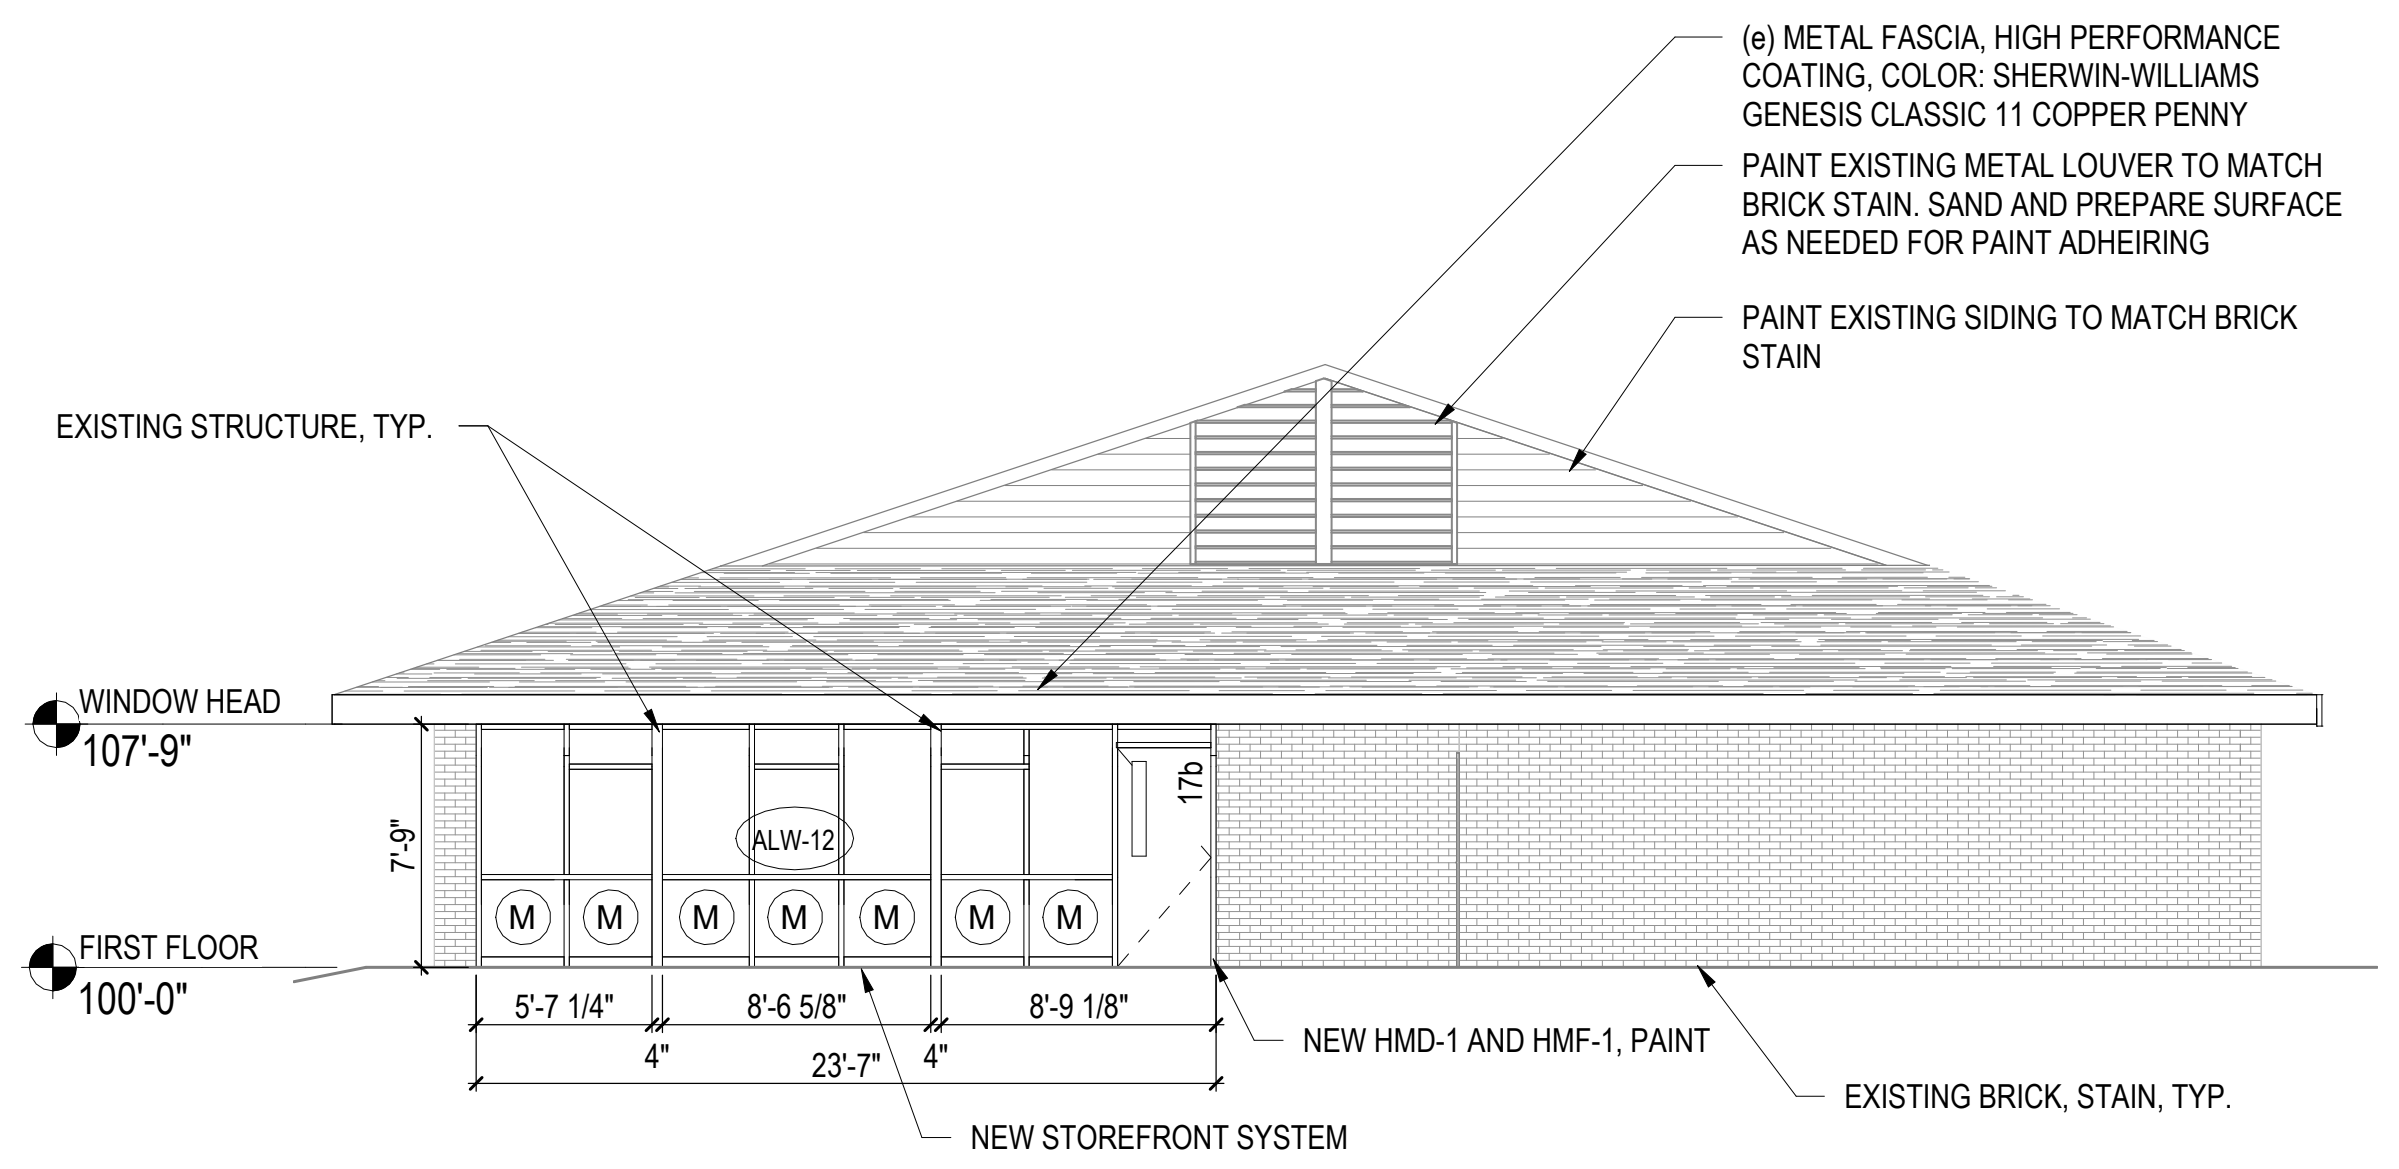
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
PAINT EXISTING METAL LOUVER TO MATCH BRICK STAIN. SAND AND PREPARE SURFACE AS NEEDED FOR PAINT ADHEIRING
PAINT EXISTING SIDING TO MATCH BRICK STAIN
EXISTING STRUCTURE, TYP.
WINDOW HEAD
107'-9"
FIRST FLOOR
100'-0"
7'-9"
ALW-12
17b
M
5'-7 1/4"
8'-6 5/8"
8'-9 1/8"
4"
23'-7"
NEW HMD-1 AND HMF-1, PAINT
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM

2 Outbuilding Exterior Elevation - East

SCALE: 1/8" = 1'-0"

1 A1.0

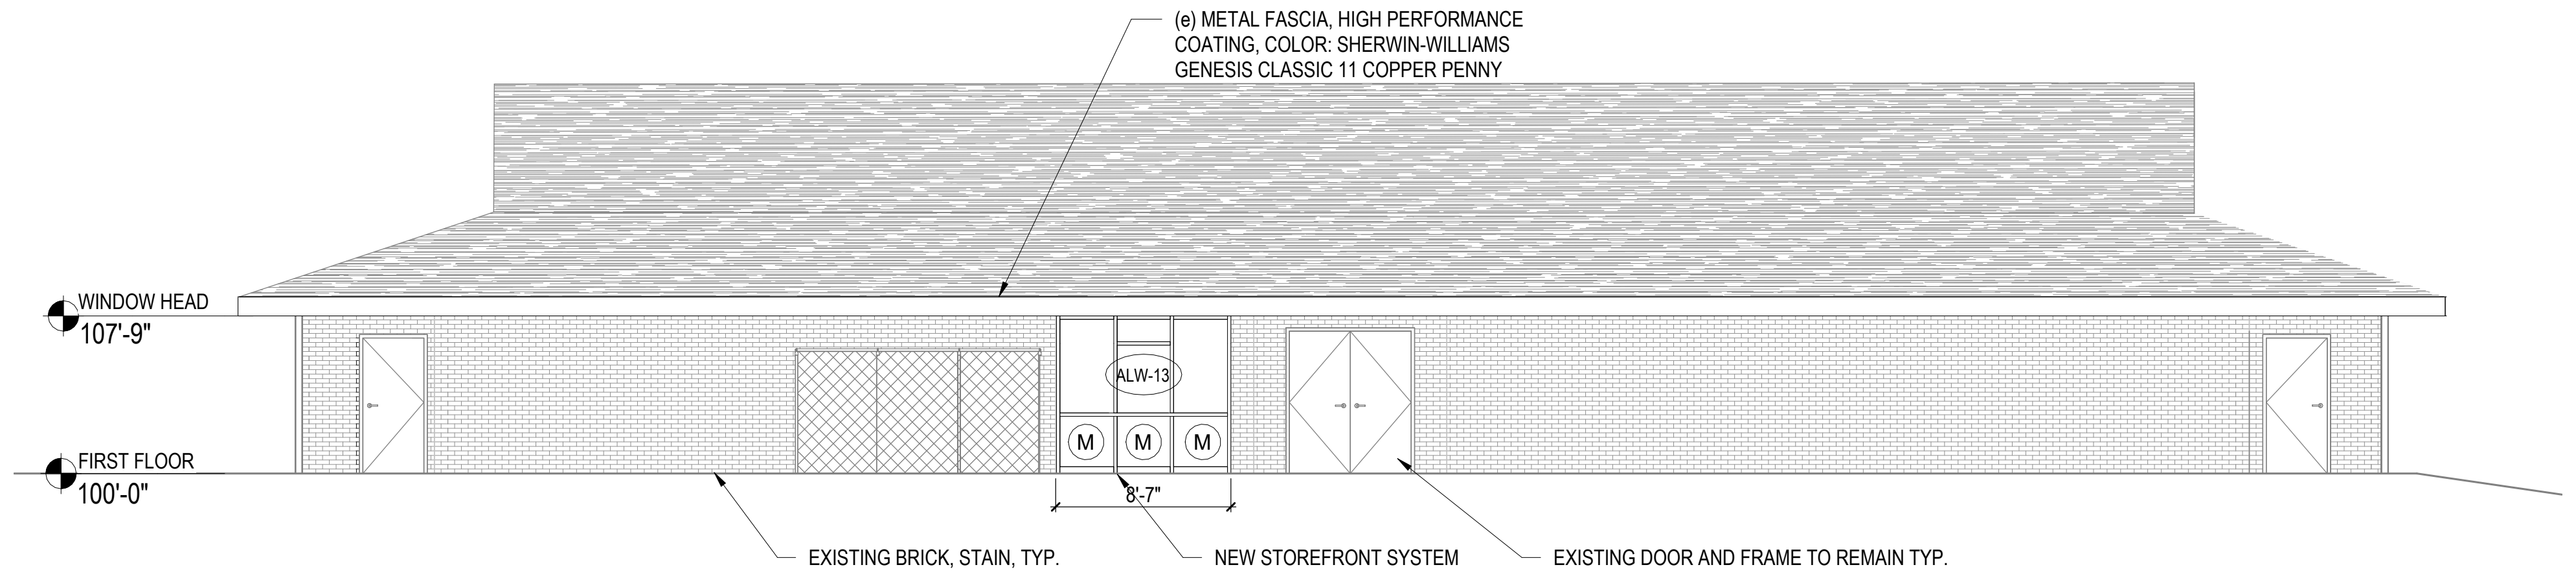
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
WINDOW HEAD
107'-9"
FIRST FLOOR
100'-0"
ALW-13
M
8'-7"
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM
EXISTING DOOR AND FRAME TO REMAIN TYP.

3 Outbuilding Exterior Elevation - South

SCALE: 1/8" = 1'-0"

1 A1.0

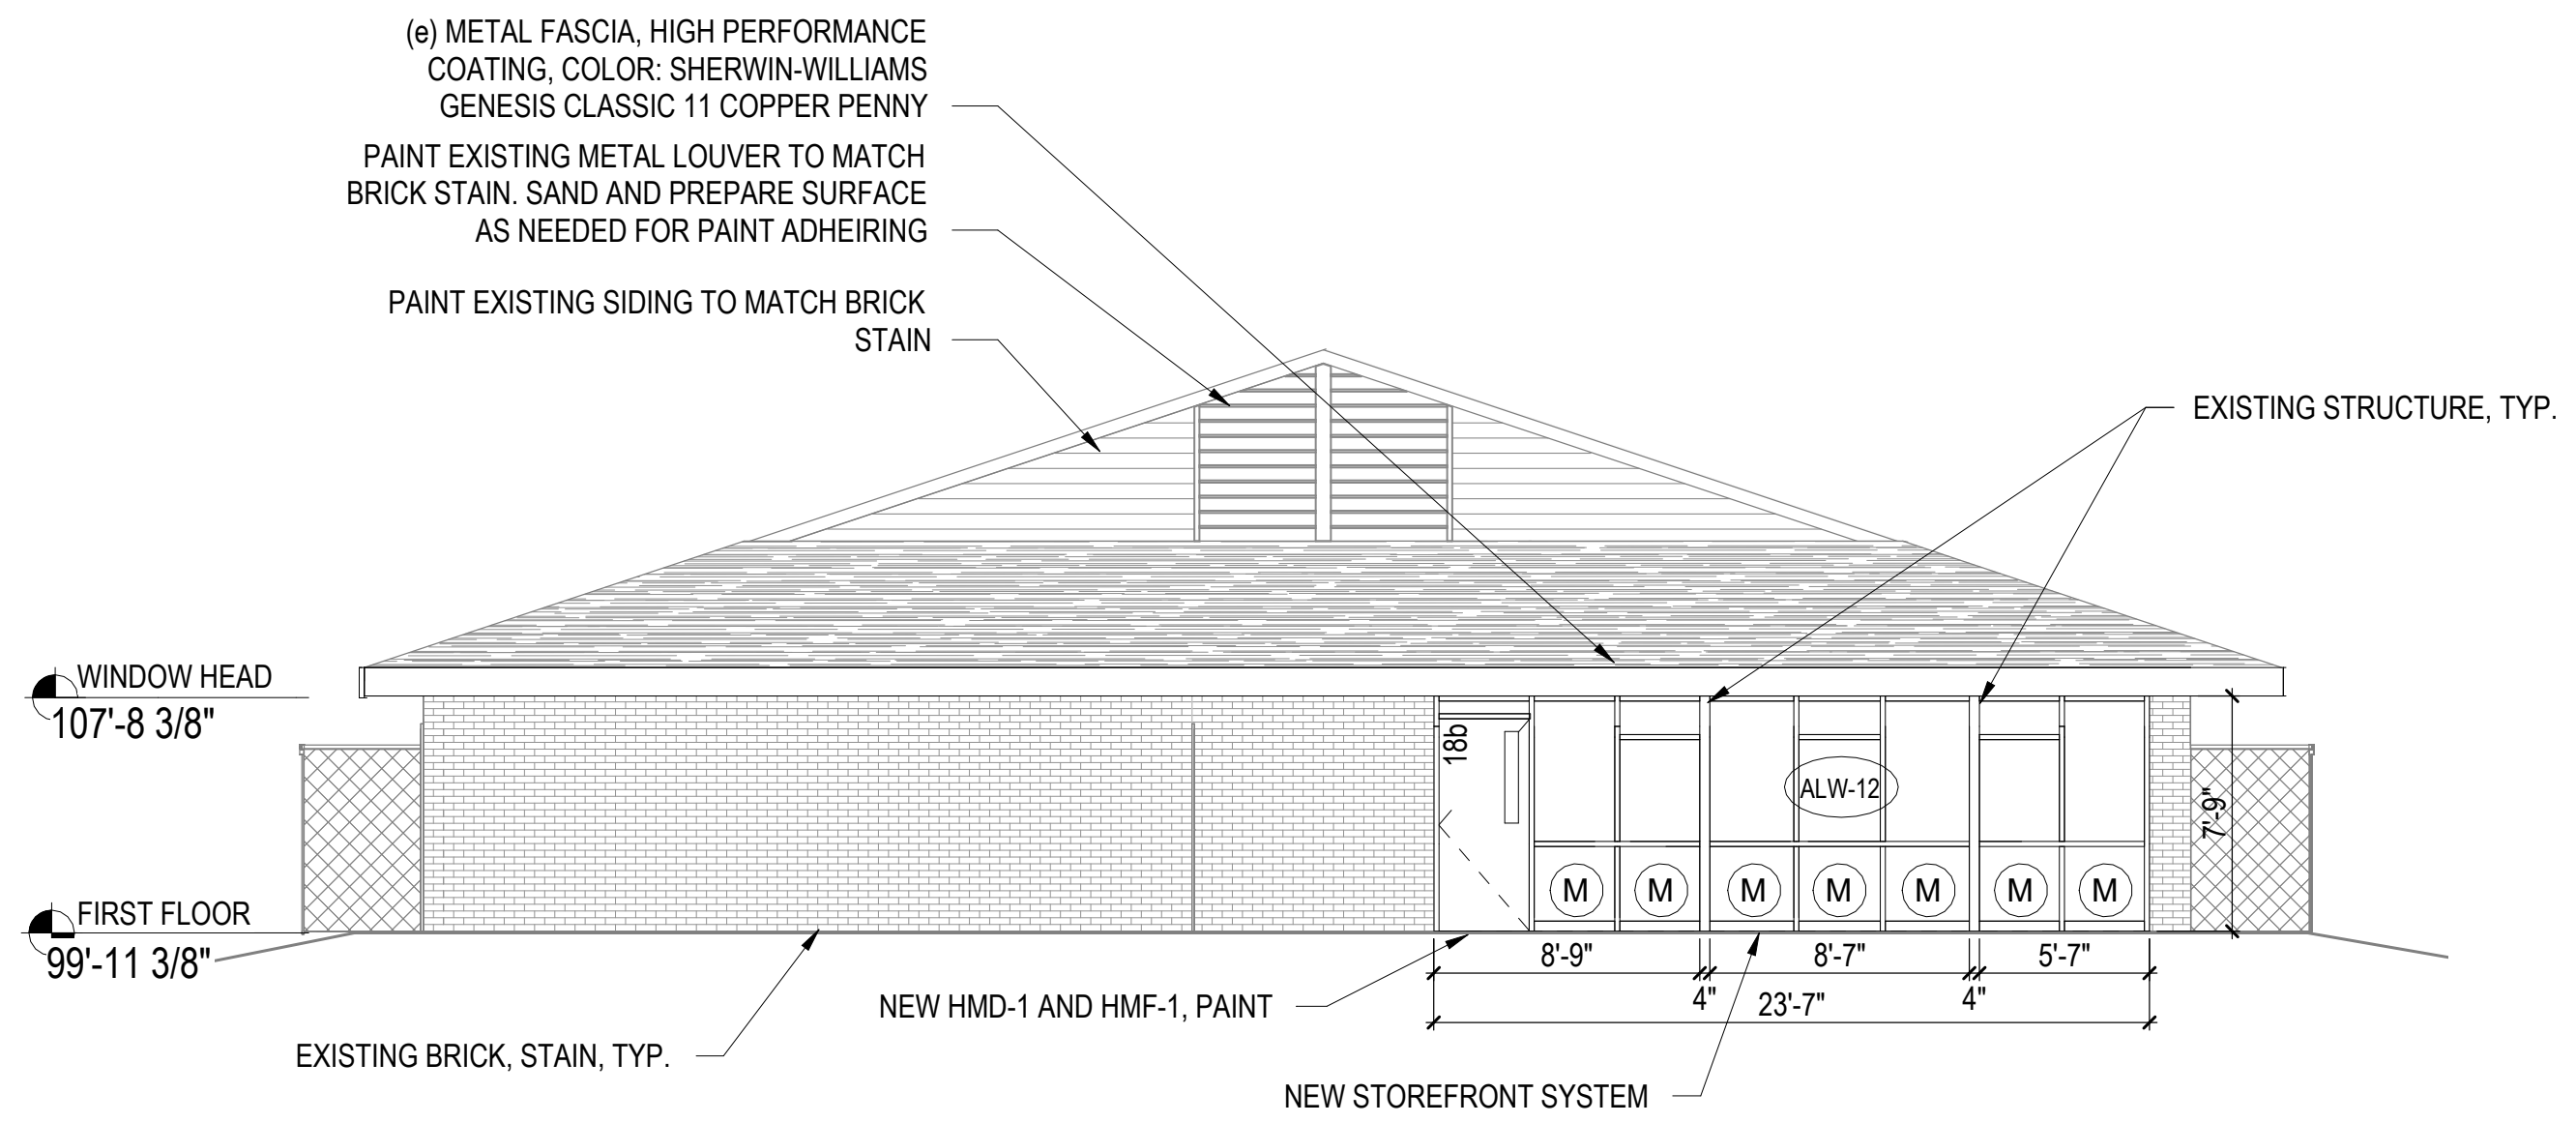
(e) METAL FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
PAINT EXISTING METAL LOUVER TO MATCH BRICK STAIN. SAND AND PREPARE SURFACE AS NEEDED FOR PAINT ADHEIRING
PAINT EXISTING SIDING TO MATCH BRICK STAIN
EXISTING STRUCTURE, TYP.
WINDOW HEAD
107'-8 3/8"
FIRST FLOOR
99'-11 3/8"
18b
ALW-12
7'-9"
M
8'-9"
8'-7"
5'-7"
4"
23'-7"
NEW HMD-1 AND HMF-1, PAINT
EXISTING BRICK, STAIN, TYP.
NEW STOREFRONT SYSTEM

4 Outbuilding Exterior Elevation - West

SCALE: 1/8" = 1'-0"

1 A1.0

Note

1. ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

2. ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING (COLOR BY ARCHITECT)

LEGEND

Ⓜ INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL

Brick Repair Scope General Notes:

1. CONTRACTOR TO FEILD VERIFY EXTENTS OF ALL CRACKED AND/OR DAMAGED BRICK. CONFIRM WITH OWNER FOR DIRECTION ON REPAIR AND REPLACEMENT.

2. CONTRACTOR TO PROVIDE NOT-TO-EXCEED PRICING FOR BRICK RE-POINTING AND REPAIR IN AREAS INDICATED ON THE DRAWINGS, ESTIMATED AT 2,200 SF, PERIMETER X2'. CONTRACTOR TO PROVIDE UNIT PRICING FOR ADDITIONAL AREAS OF REPAIR, AND/OR TO CREDIT AREAS INDICATED THAT ARE FOUND TO NOT NEED REPAIR.

BASIS OF DESIGN LEGEND

▨ EXISTING BRICK

▨ NEW BRICK

ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING (COLOR BY ARCHITECT)

PAINT ALL NEW AND EXISTING PARAPET CAP, BASIS OF DESIGN: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY

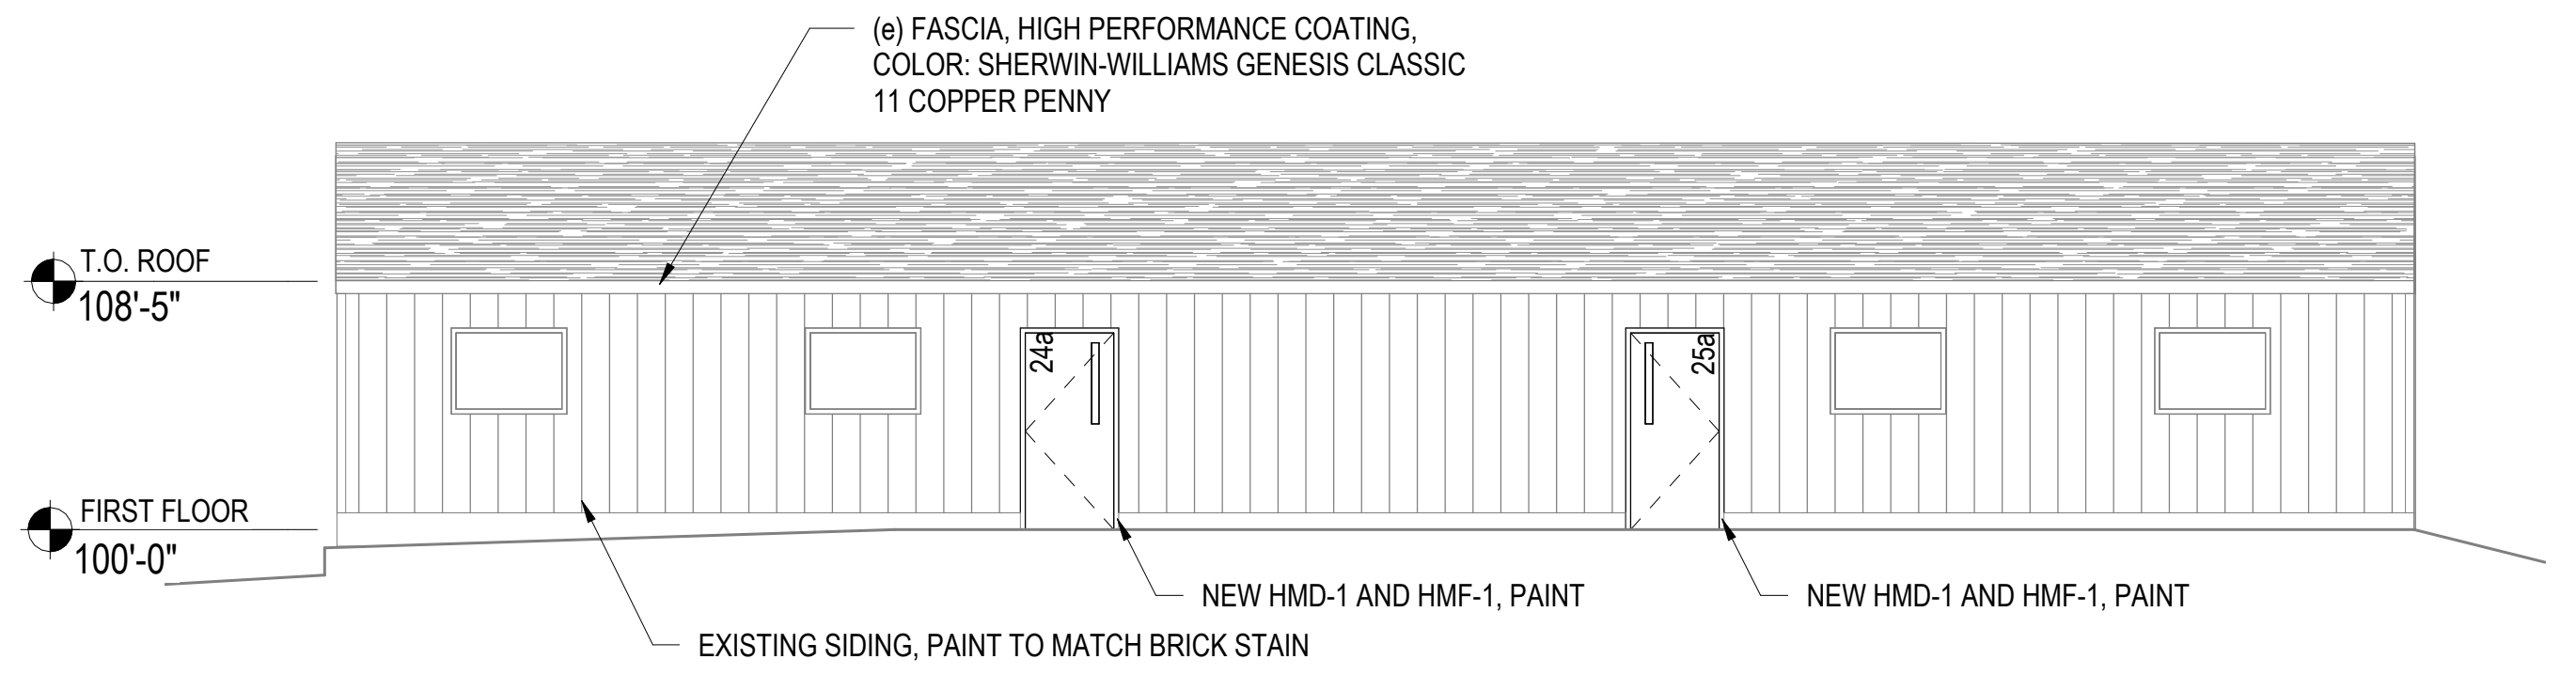
(e) FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
T.O. ROOF
108'-5"
FIRST FLOOR
100'-0"
24a
25a
NEW HMD-1 AND HMF-1, PAINT
NEW HMD-1 AND HMF-1, PAINT
EXISTING SIDING, PAINT TO MATCH BRICK STAIN

5 Modular Exterior Elevation - North

SCALE: 1/8" = 1'-0"

1 A1.0

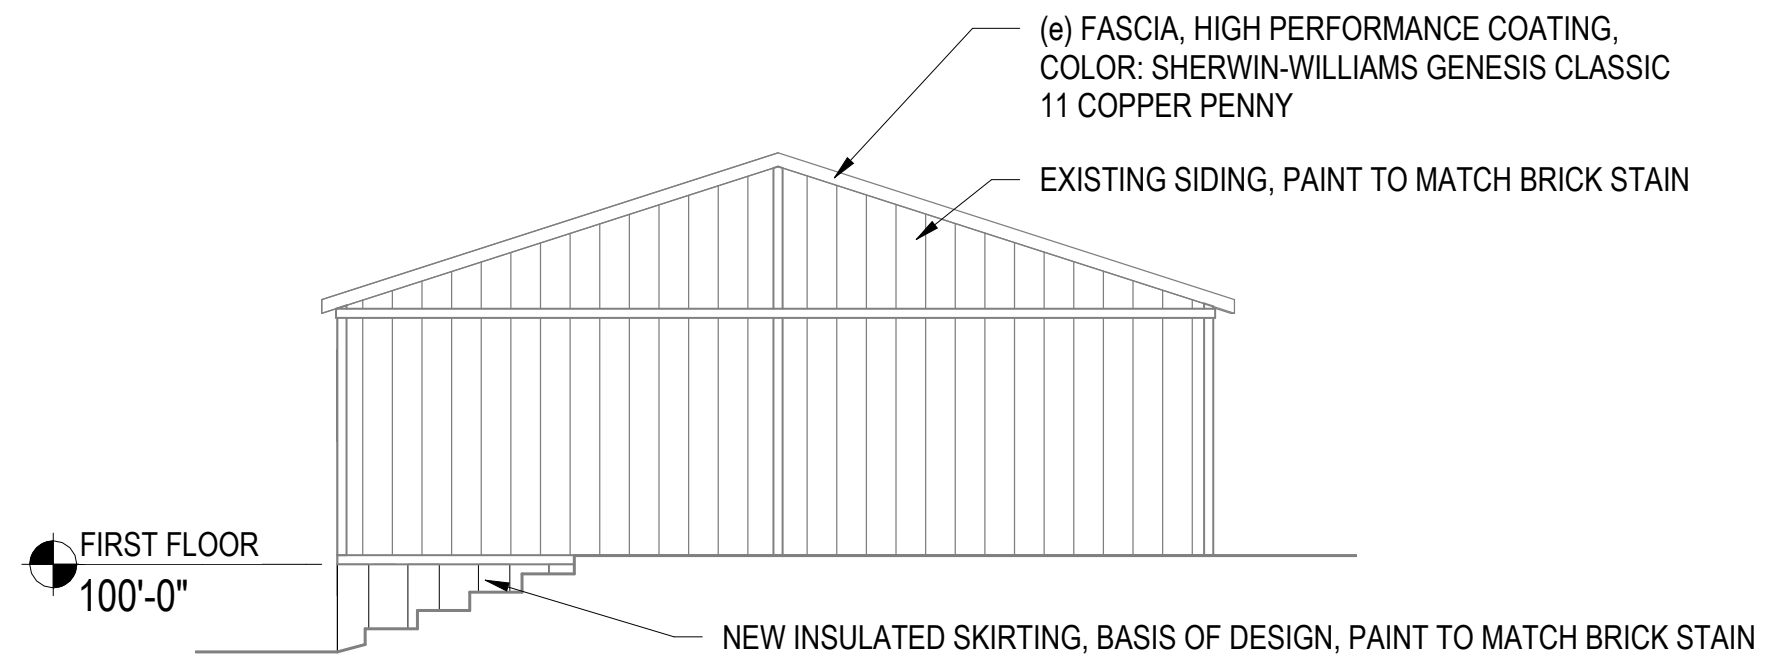
(e) FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING SIDING, PAINT TO MATCH BRICK STAIN
FIRST FLOOR
100'-0"
NEW INSULATED SKIRTING, BASIS OF DESIGN, PAINT TO MATCH BRICK STAIN

6 Modular Exterior Elevation - East

SCALE: 1/8" = 1'-0"

1 A1.0

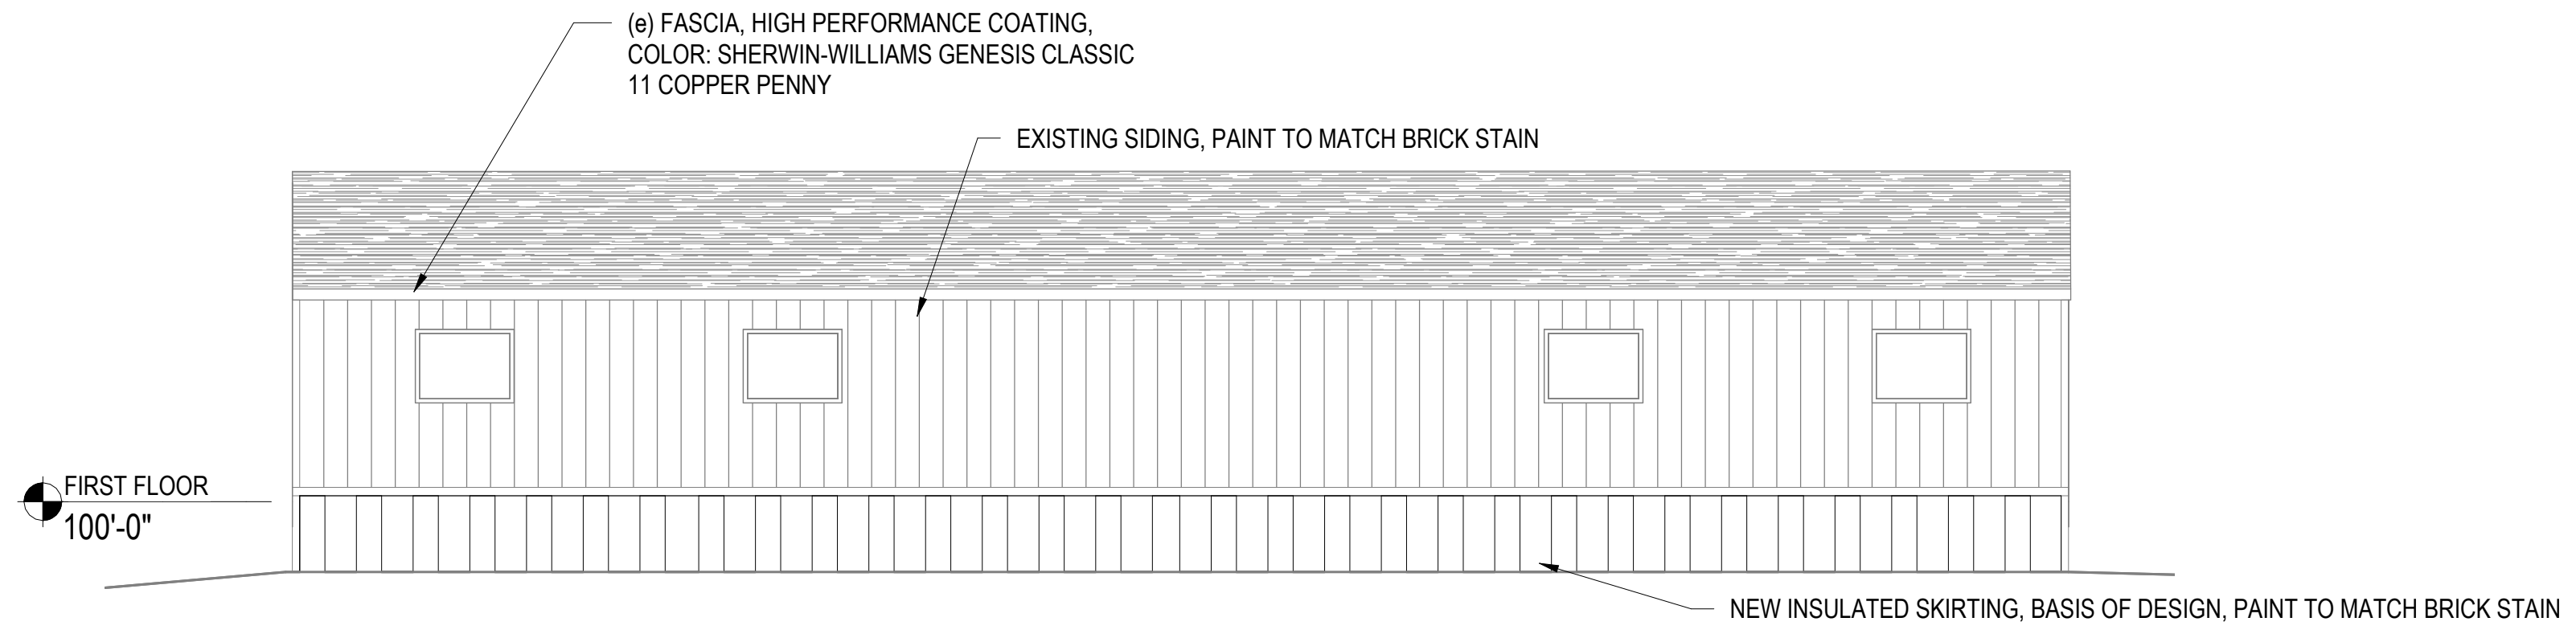
(e) FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
EXISTING SIDING, PAINT TO MATCH BRICK STAIN
FIRST FLOOR
100'-0"
NEW INSULATED SKIRTING, BASIS OF DESIGN, PAINT TO MATCH BRICK STAIN

7 Modular Exterior Elevation - South

SCALE: 1/8" = 1'-0"

1 A1.0

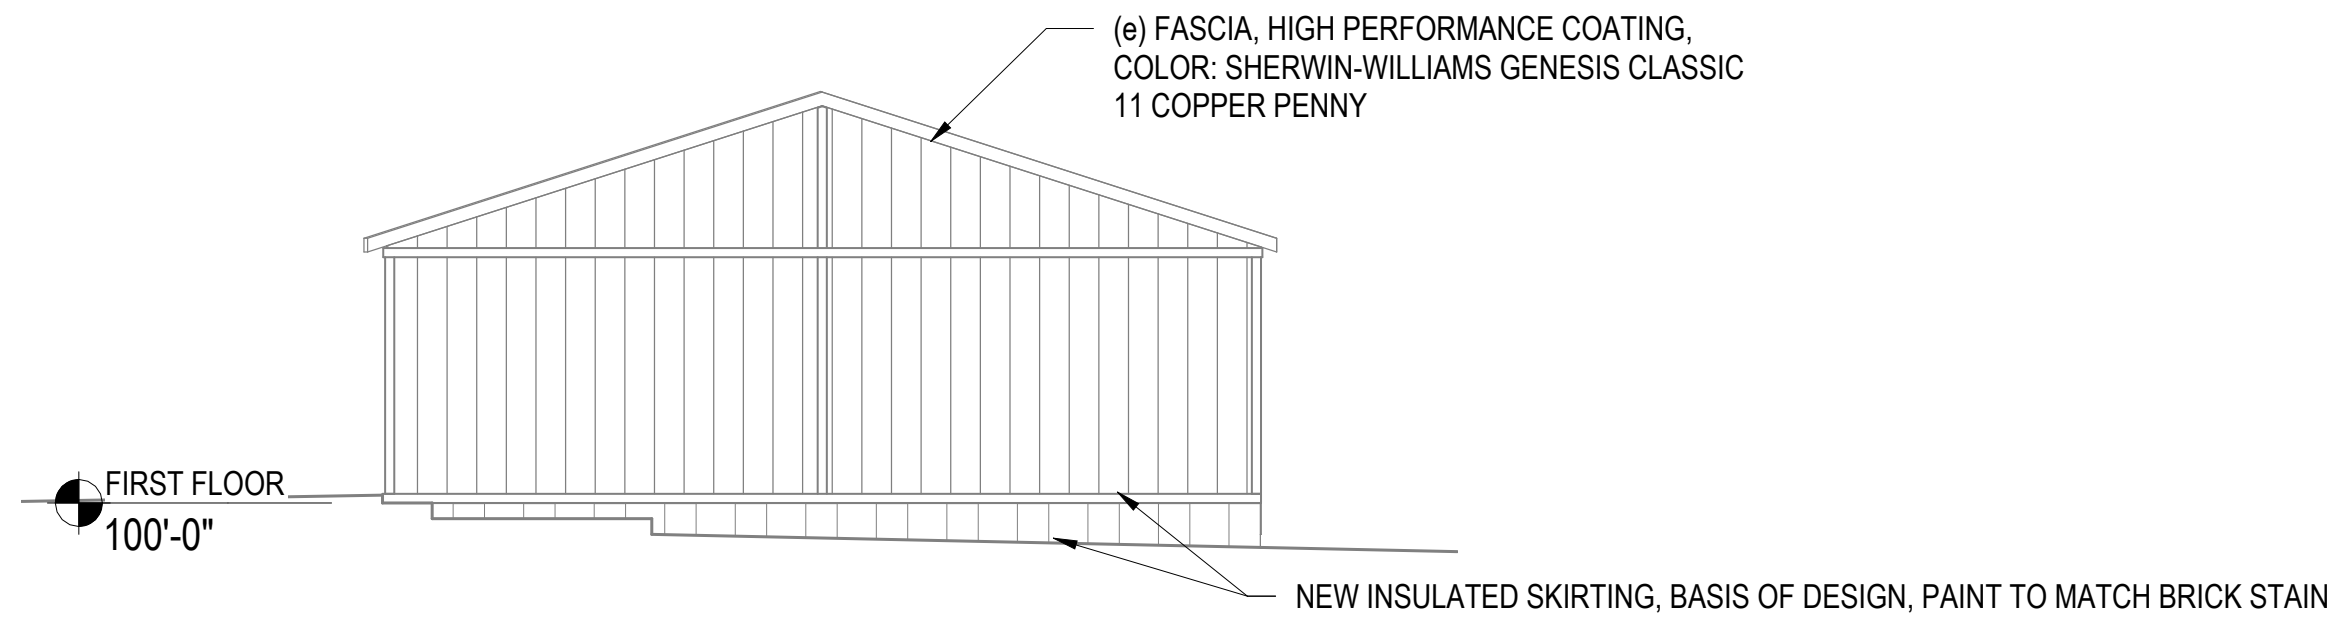
(e) FASCIA, HIGH PERFORMANCE COATING, COLOR: SHERWIN-WILLIAMS GENESIS CLASSIC 11 COPPER PENNY
FIRST FLOOR
100'-0"
NEW INSULATED SKIRTING, BASIS OF DESIGN, PAINT TO MATCH BRICK STAIN

8 Modular Exterior Elevation - West

SCALE: 1/8" = 1'-0"

1 A1.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:43:59 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Exterior Elevations

A2.1

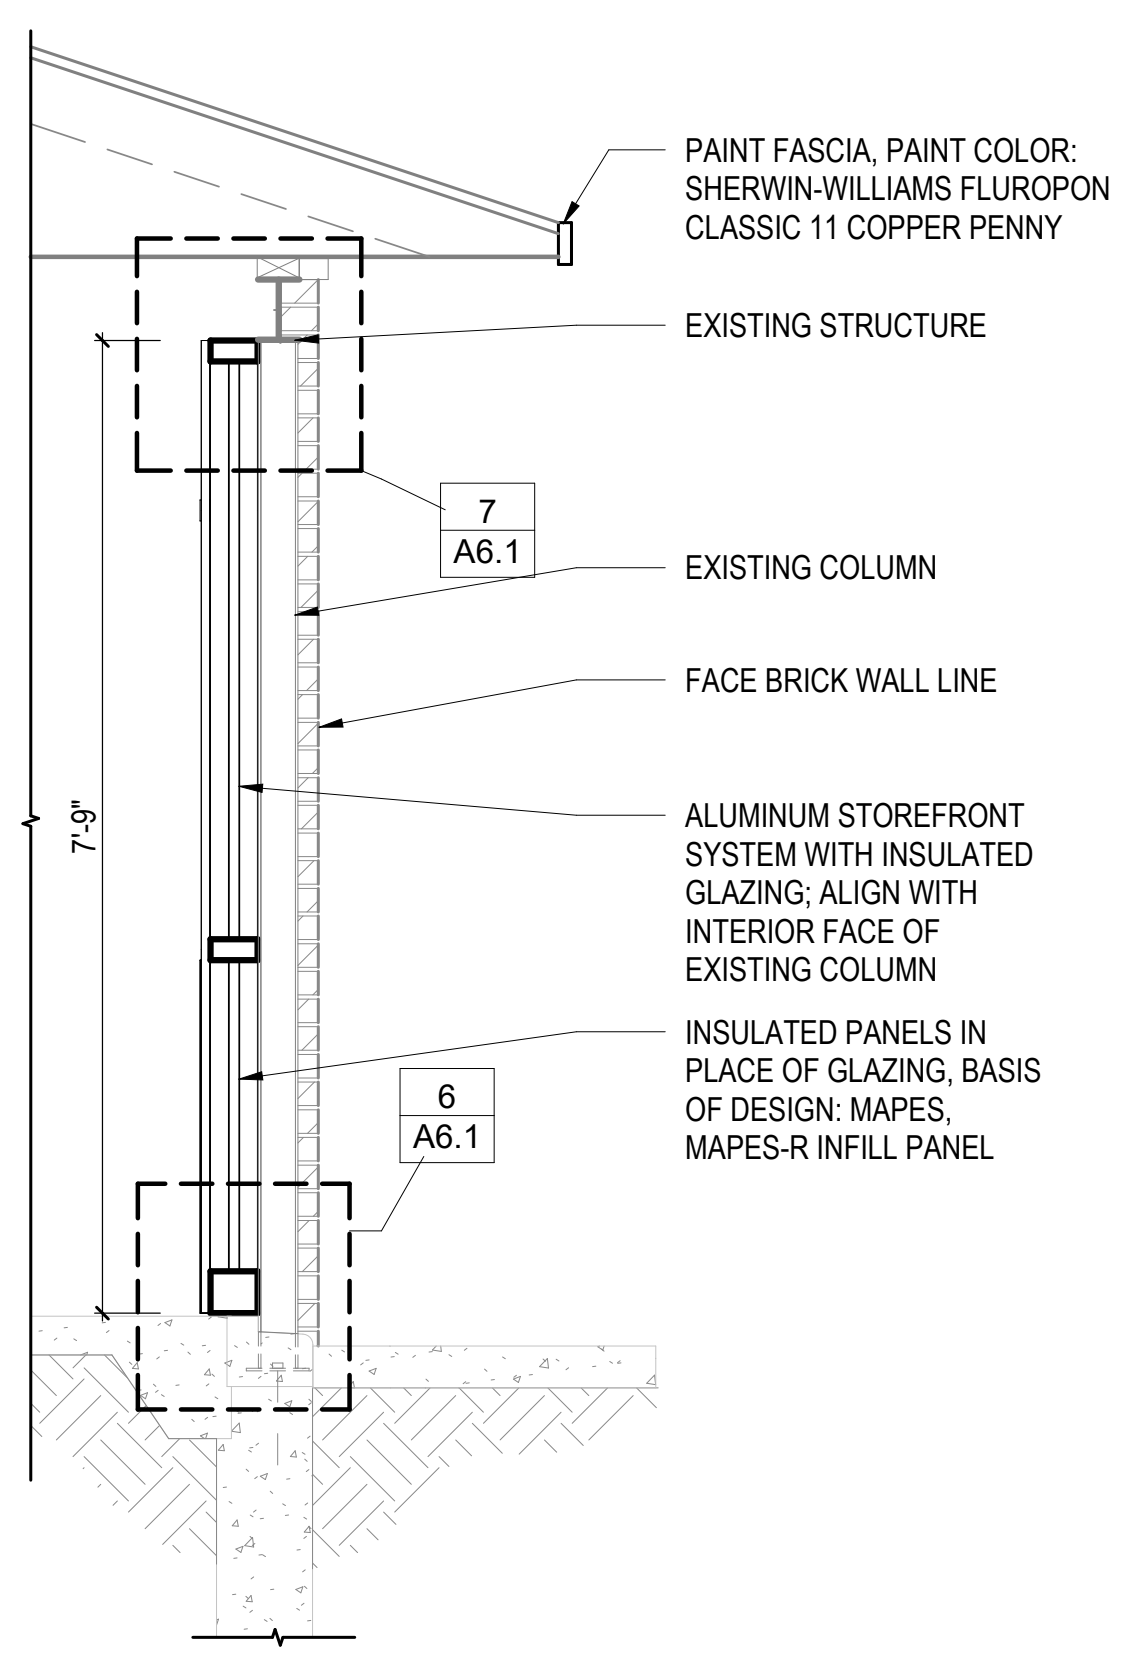
PAINT FASCIA, PAINT COLOR: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY
EXISTING STRUCTURE
7
A6.1
EXISTING COLUMN
FACE BRICK WALL LINE
7'-9"
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING; ALIGN WITH INTERIOR FACE OF EXISTING COLUMN
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL
6
A6.1

1 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

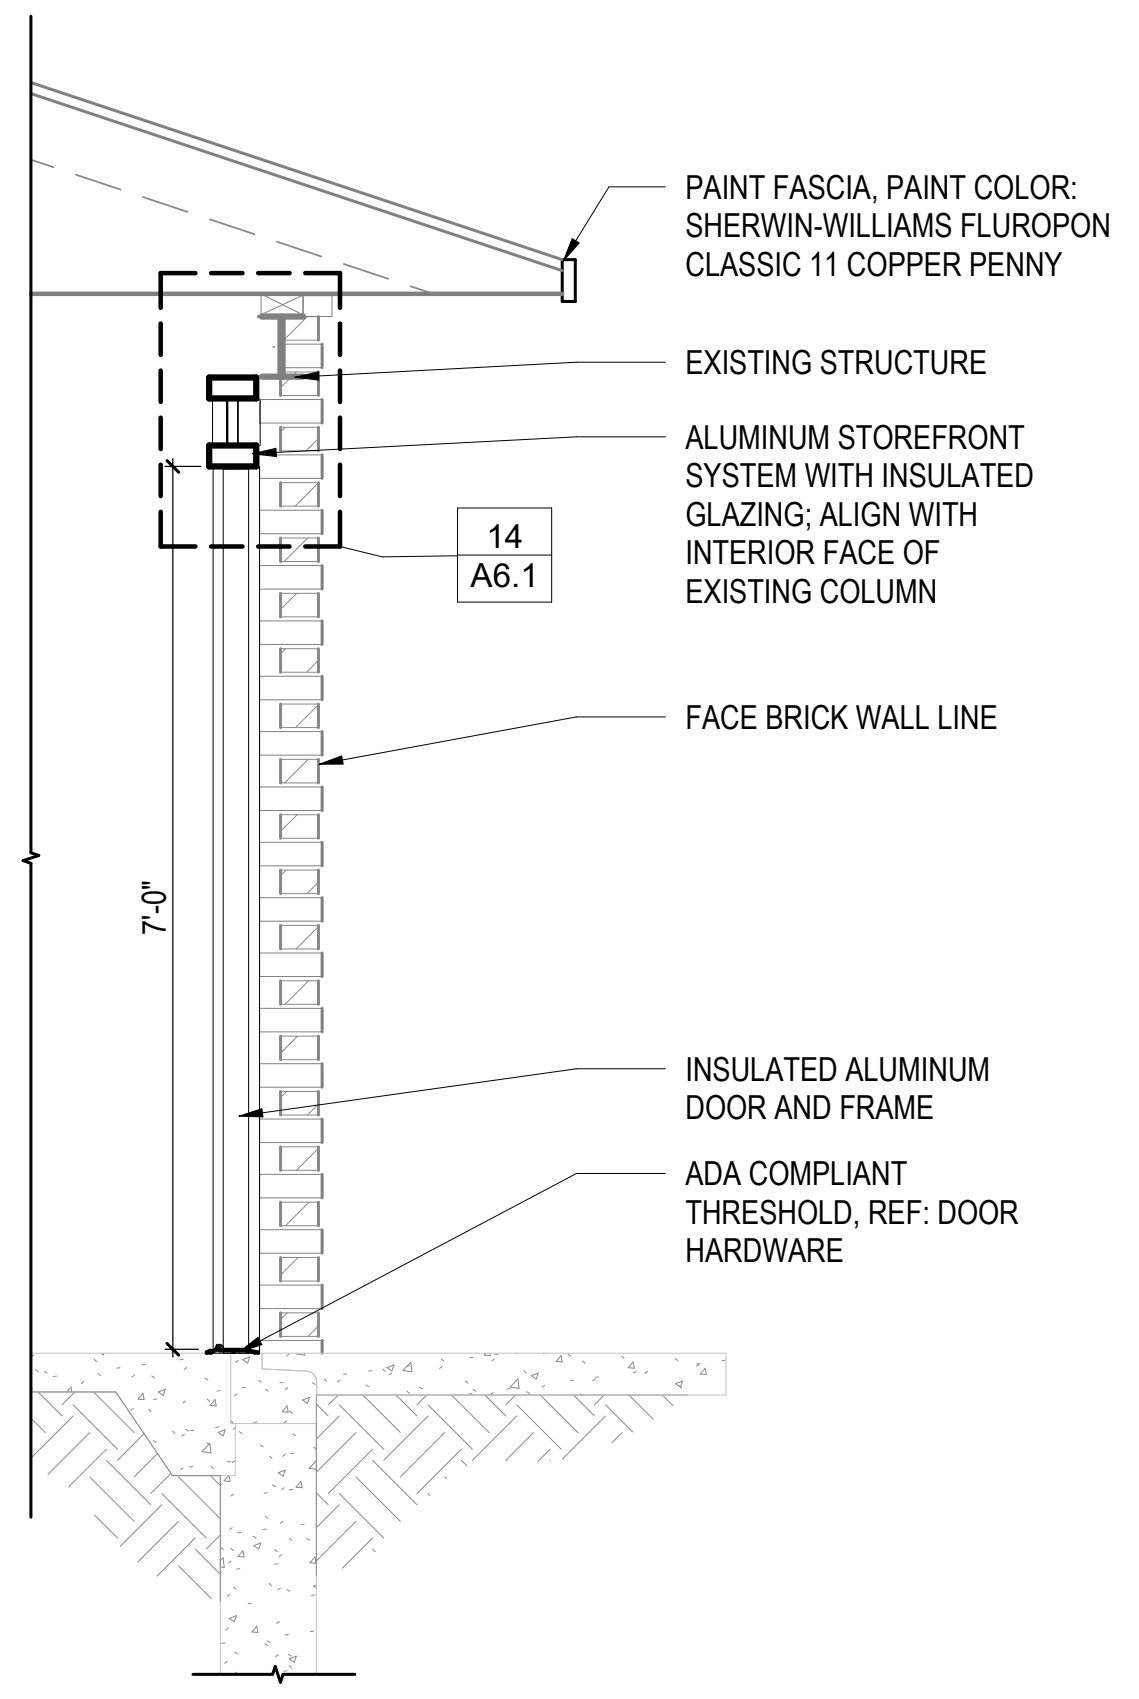
PAINT FASCIA, PAINT COLOR: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY
EXISTING STRUCTURE
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING; ALIGN WITH INTERIOR FACE OF EXISTING COLUMN
14
A6.1
FACE BRICK WALL LINE
7'-0"
INSULATED ALUMINUM DOOR AND FRAME
ADA COMPLIANT THRESHOLD, REF: DOOR HARDWARE

2 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

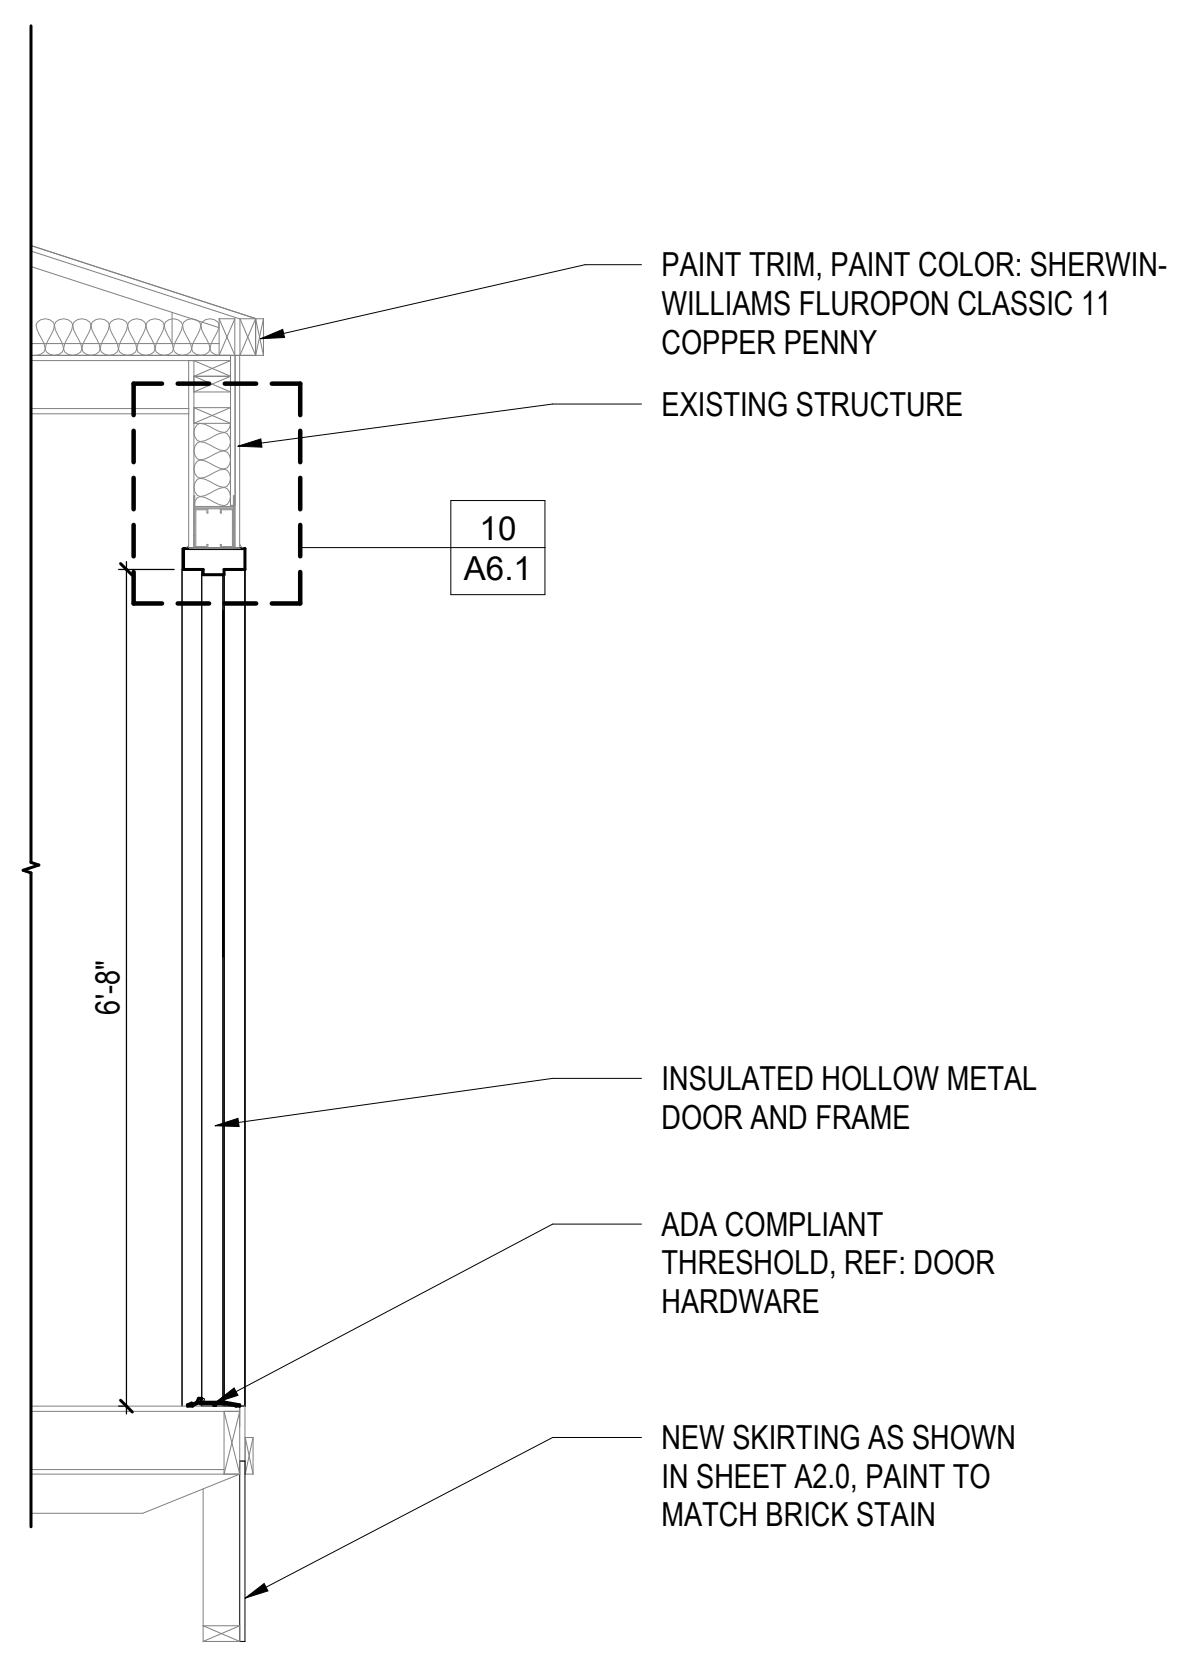
PAINT TRIM, PAINT COLOR: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY
EXISTING STRUCTURE
10
A6.1
6'-8"
INSULATED HOLLOW METAL DOOR AND FRAME
ADA COMPLIANT THRESHOLD, REF: DOOR HARDWARE
NEW SKIRTING AS SHOWN IN SHEET A2.0, PAINT TO MATCH BRICK STAIN

3 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

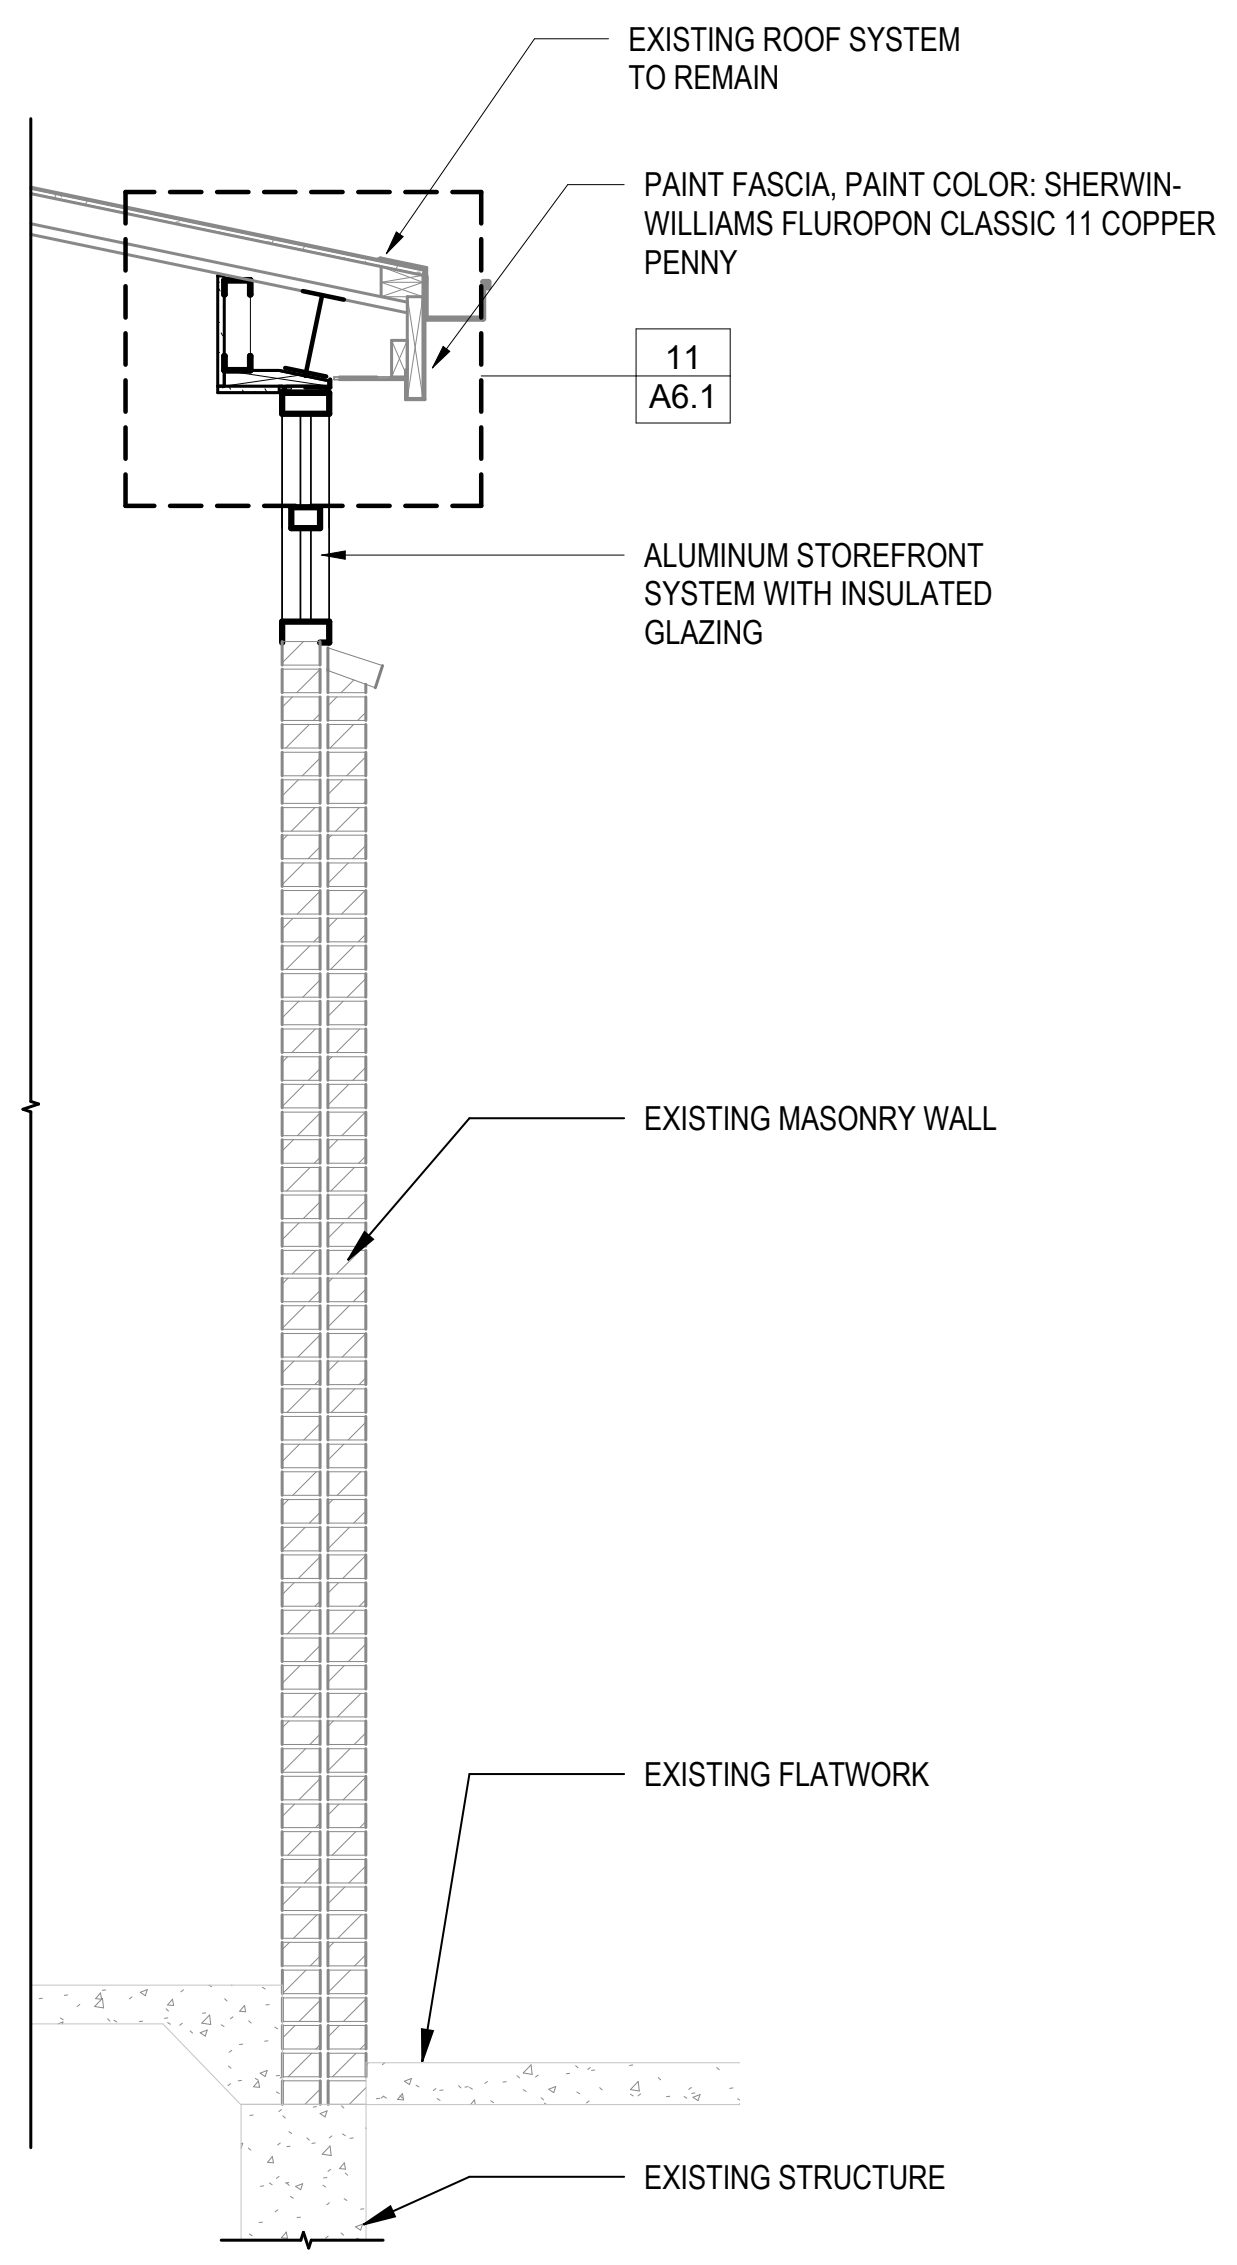
EXISTING ROOF SYSTEM TO REMAIN
PAINT FASCIA, PAINT COLOR: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY
11
A6.1
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING
EXISTING MASONRY WALL
EXISTING FLATWORK
EXISTING STRUCTURE

4 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

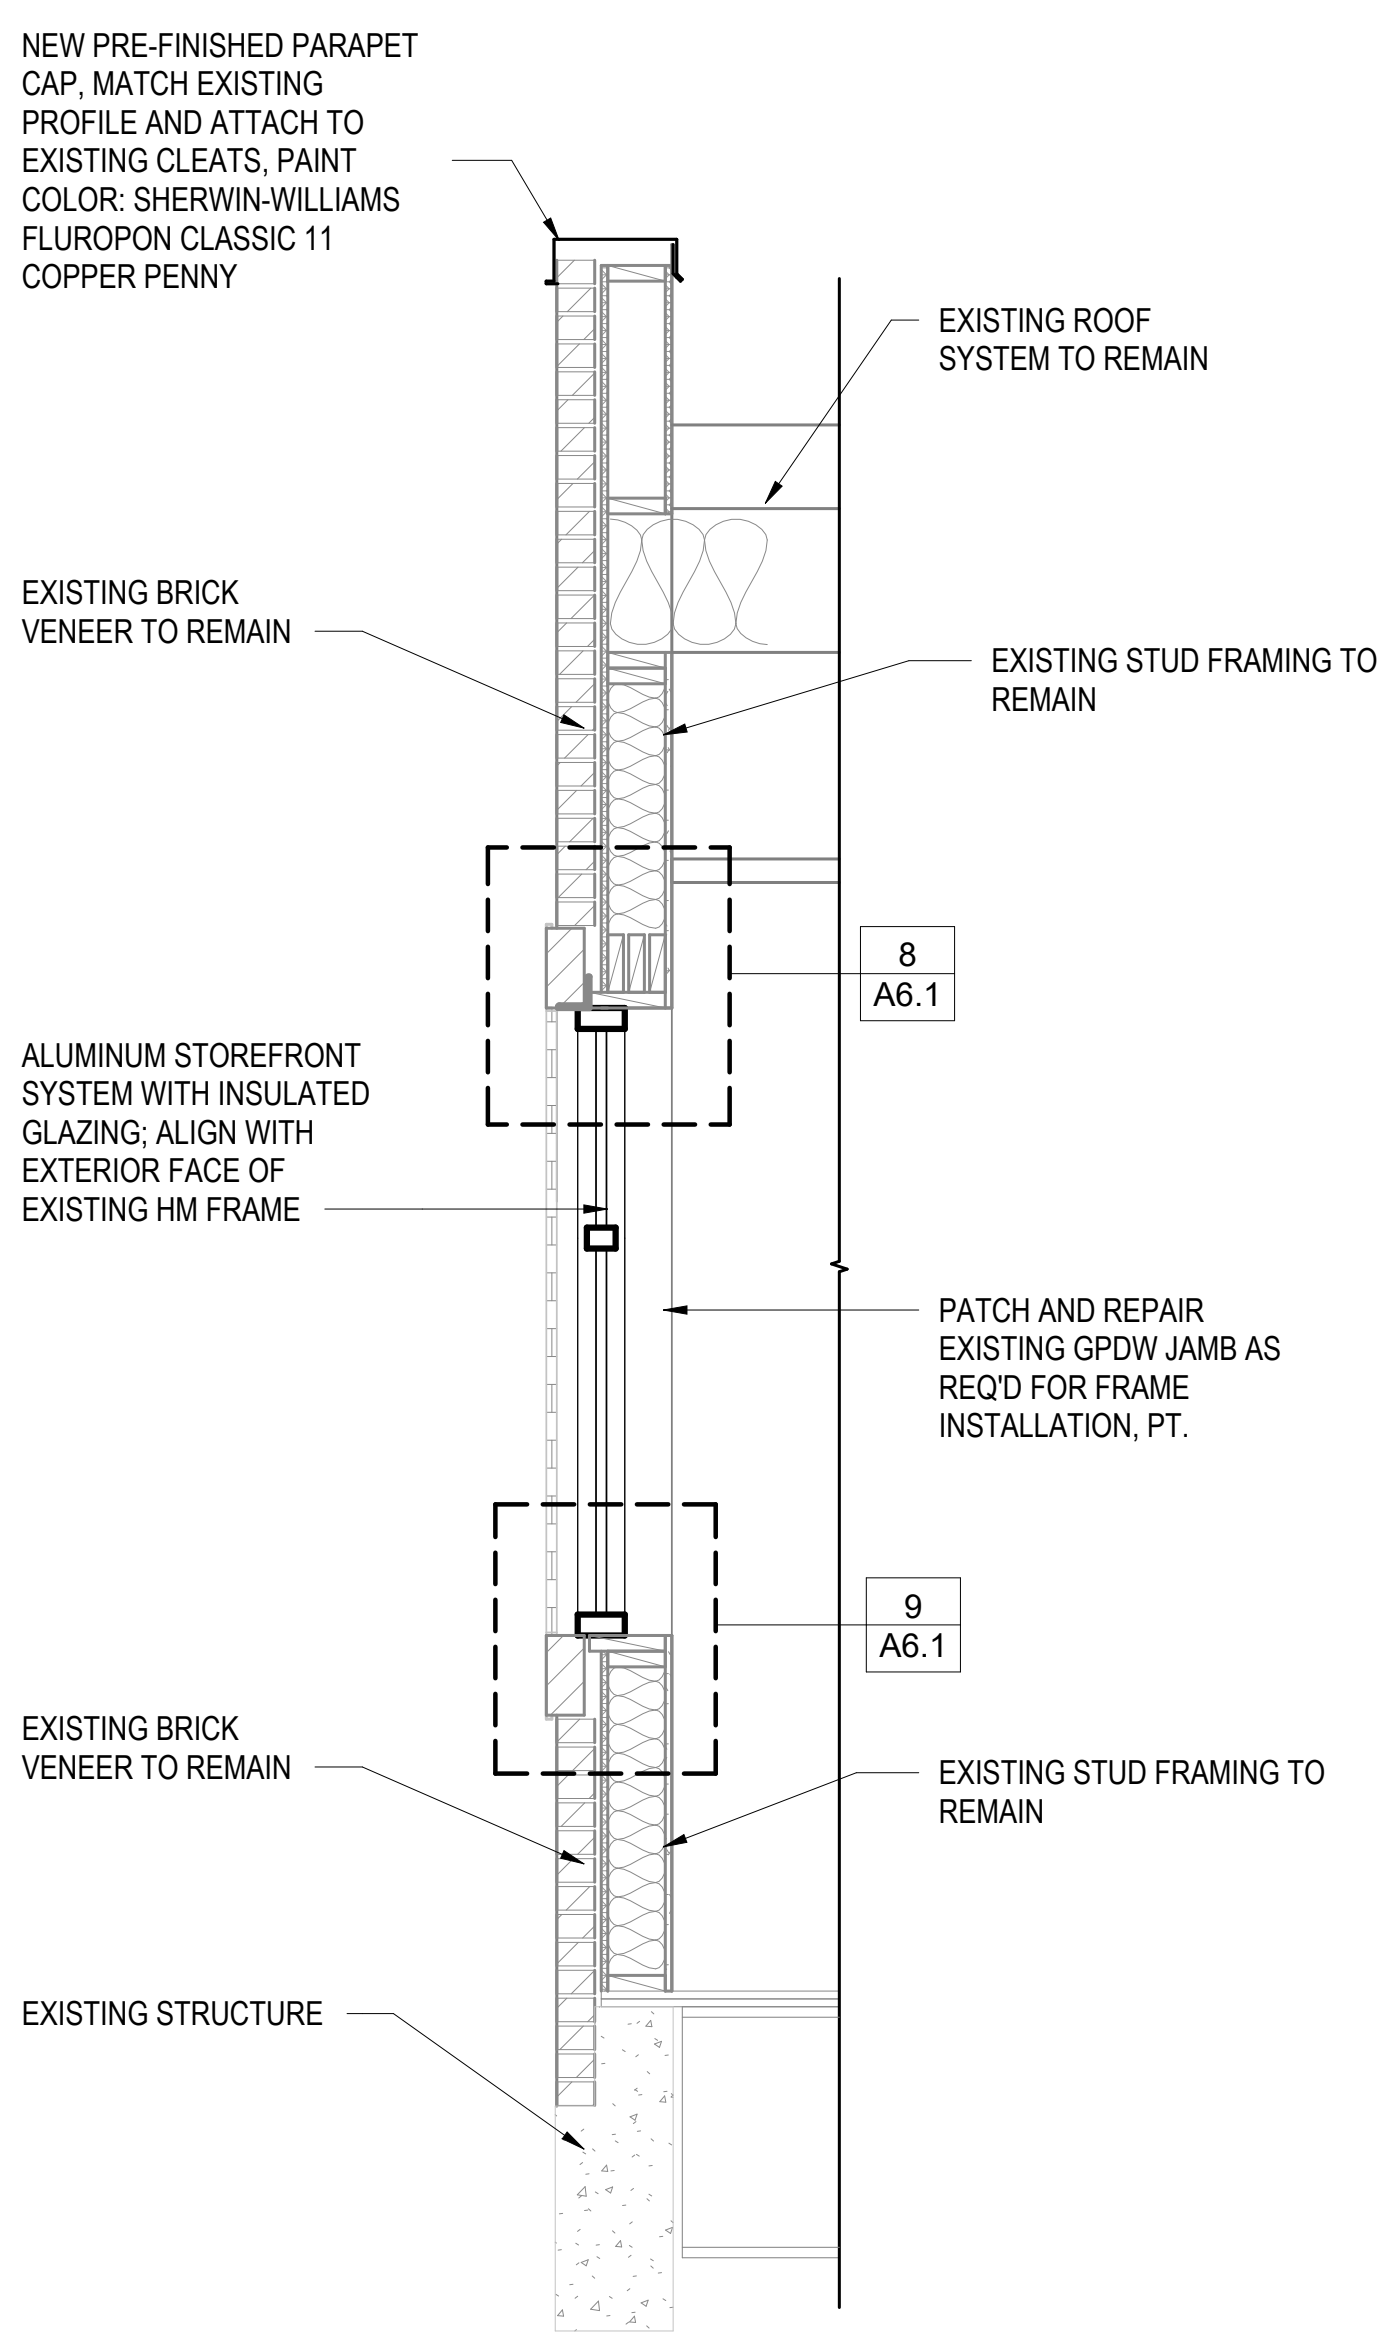
NEW PRE-FINISHED PARAPET CAP, MATCH EXISTING PROFILE AND ATTACH TO EXISTING CLEATS, PAINT COLOR: SHERWIN-WILLIAMS FLUROPON CLASSIC 11 COPPER PENNY
EXISTING ROOF SYSTEM TO REMAIN
EXISTING BRICK VENEER TO REMAIN
EXISTING STUD FRAMING TO REMAIN
8
A6.1
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING; ALIGN WITH EXTERIOR FACE OF EXISTING HM FRAME
PATCH AND REPAIR EXISTING GPDW JAMB AS REQ'D FOR FRAME INSTALLATION, PT.
9
A6.1
EXISTING BRICK VENEER TO REMAIN
EXISTING STUD FRAMING TO REMAIN
EXISTING STRUCTURE

5 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

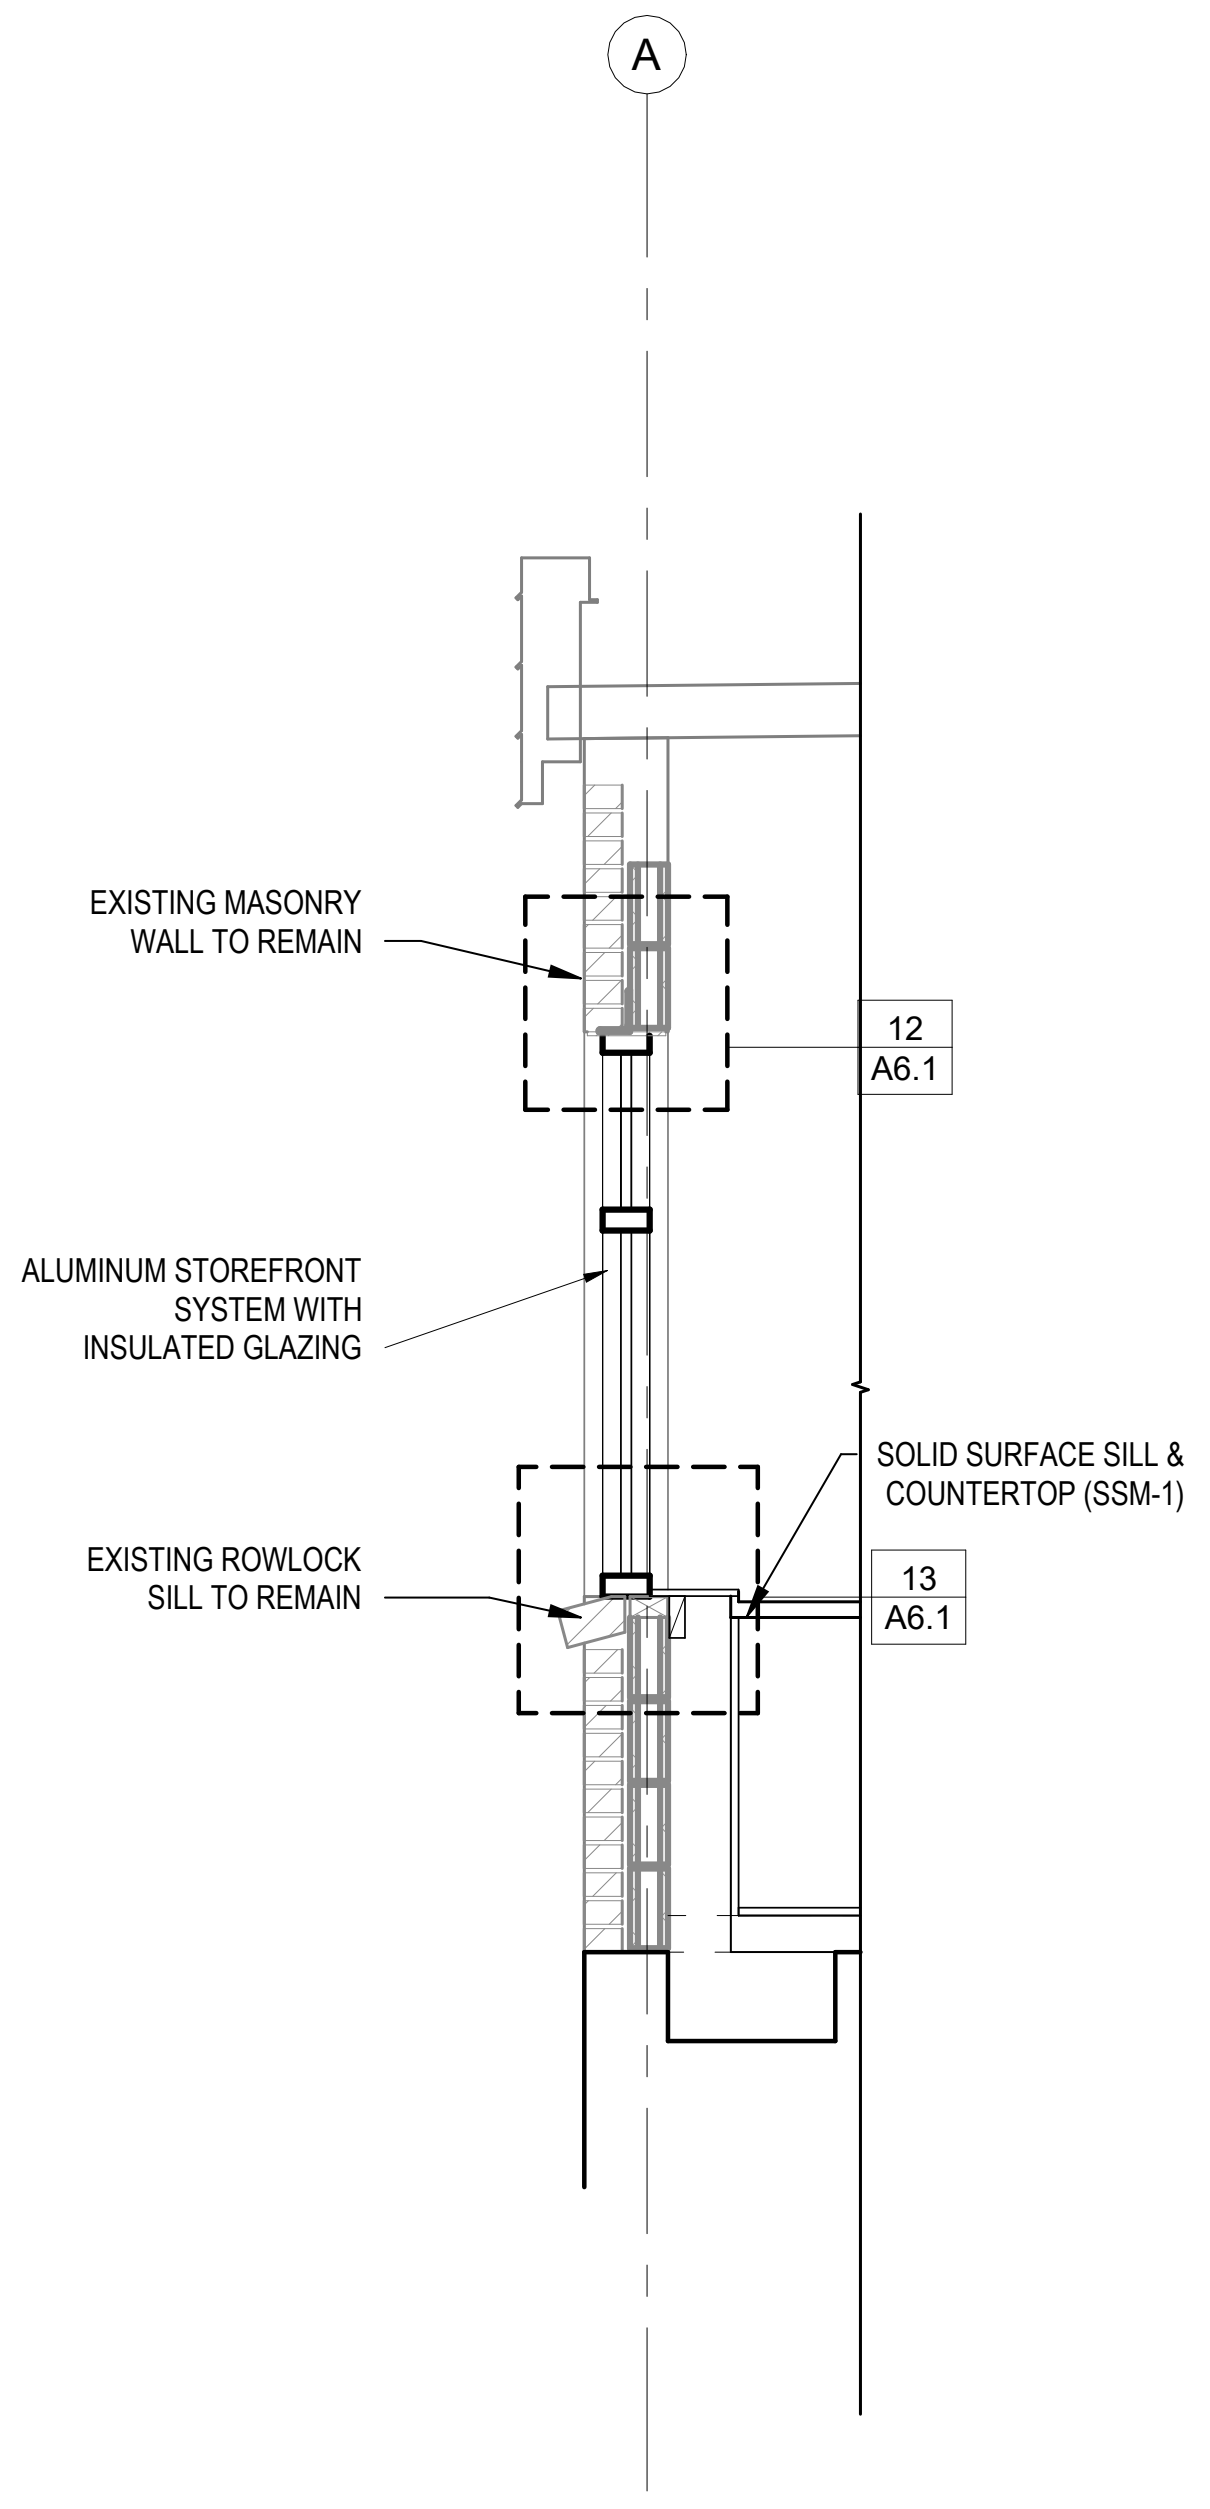
A
EXISTING MASONRY WALL TO REMAIN
12
A6.1
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING
SOLID SURFACE SILL & COUNTERTOP (SSM-1)
EXISTING ROWLOCK SILL TO REMAIN
13
A6.1

6 Wall Section
SCALE: 1/2" = 1'-0"
1 A1.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:44:01 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Wall Section

A4.0

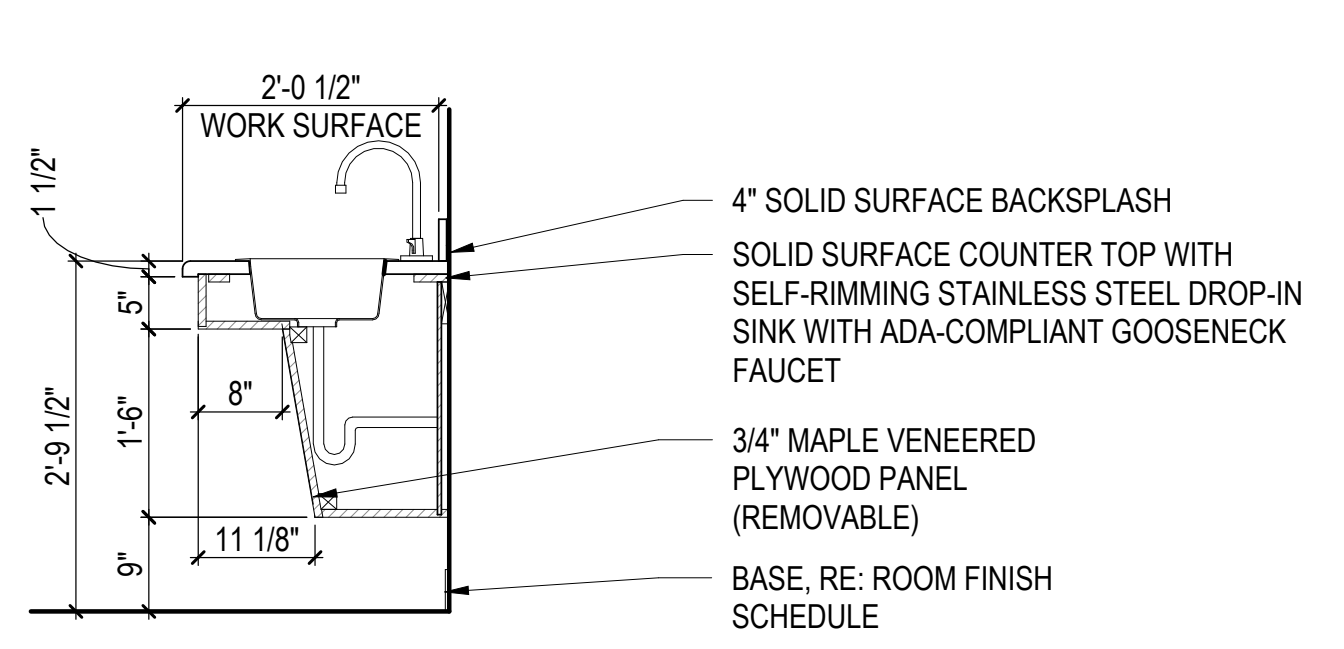
2'-0 1/2"
WORK SURFACE
1 1/2"
5"
8"
1'-6"
2'-9 1/2"
11 1/8"
9"
4" SOLID SURFACE BACKSPLASH
SOLID SURFACE COUNTER TOP WITH SELF-RIMMING STAINLESS STEEL DROP-IN SINK WITH ADA-COMPLIANT GOOSENECK FAUCET
3/4" MAPLE VENEERED PLYWOOD PANEL (REMOVABLE)
BASE, RE: ROOM FINISH SCHEDULE

1 Sink Base Cabinet Only

SCALE: 1/2" = 1'-0"

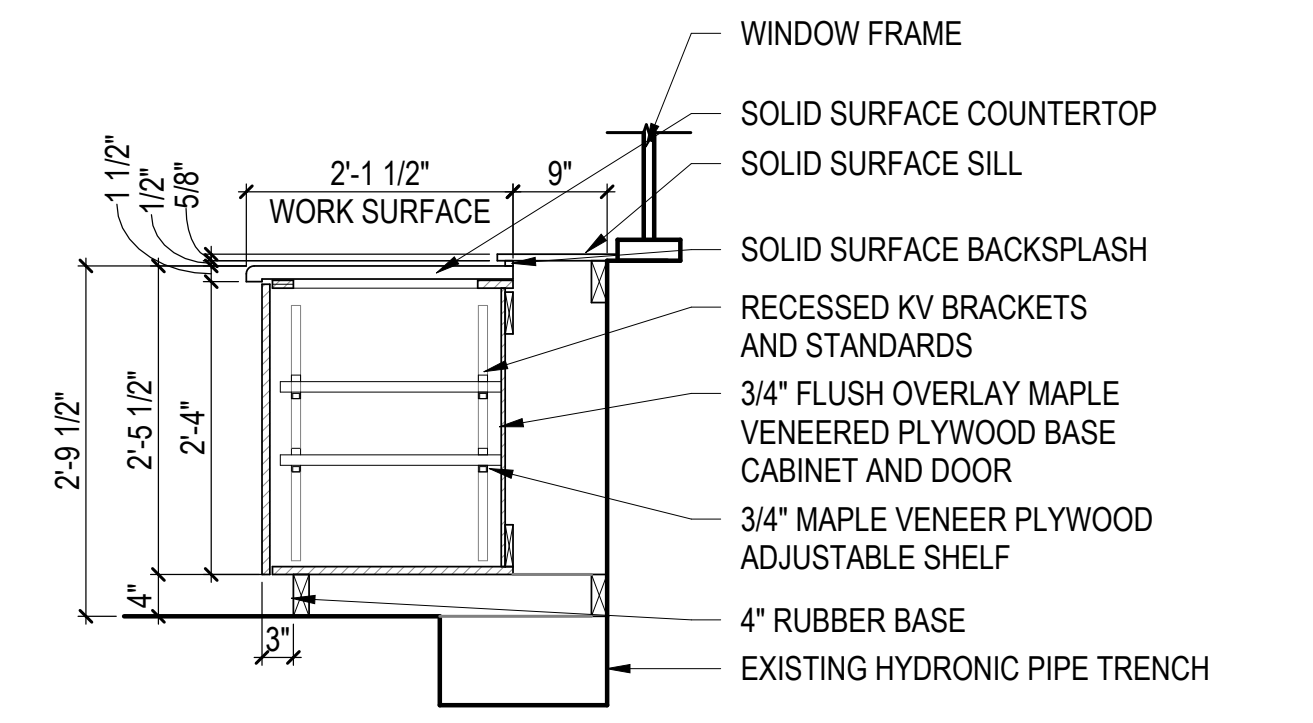
2'-1 1/2"
WORK SURFACE
9"
1 1/2"
1/2"
5/8"
2'-9 1/2"
2'-5 1/2"
2'-4"
4"
3"
WINDOW FRAME
SOLID SURFACE COUNTERTOP
SOLID SURFACE SILL
SOLID SURFACE BACKSPLASH
RECESSED KV BRACKETS AND STANDARDS
3/4" FLUSH OVERLAY MAPLE VENEERED PLYWOOD BASE CABINET AND DOOR
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF
4" RUBBER BASE
EXISTING HYDRONIC PIPE TRENCH

2 Base Cabinet Only - Trench

SCALE: 1/2" = 1'-0"

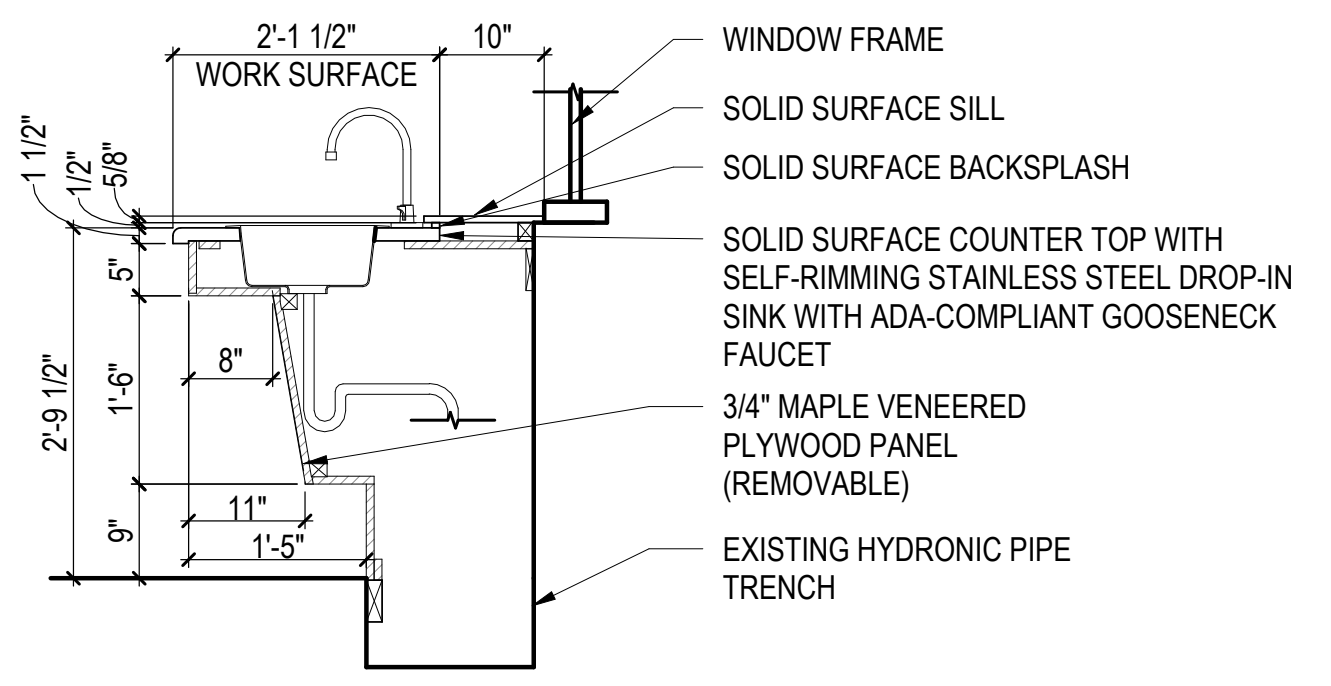
2'-1 1/2"
WORK SURFACE
10"
1 1/2"
5/8"
2'-9 1/2"
1'-6"
8"
11"
1'-5"
9"
WINDOW FRAME
SOLID SURFACE SILL
SOLID SURFACE BACKSPLASH
SOLID SURFACE COUNTER TOP WITH SELF-RIMMING STAINLESS STEEL DROP-IN SINK WITH ADA-COMPLIANT GOOSENECK FAUCET
3/4" MAPLE VENEERED PLYWOOD PANEL (REMOVABLE)
EXISTING HYDRONIC PIPE TRENCH

3 Sink Base Cabinet Only - Trench

SCALE: 1/2" = 1'-0"

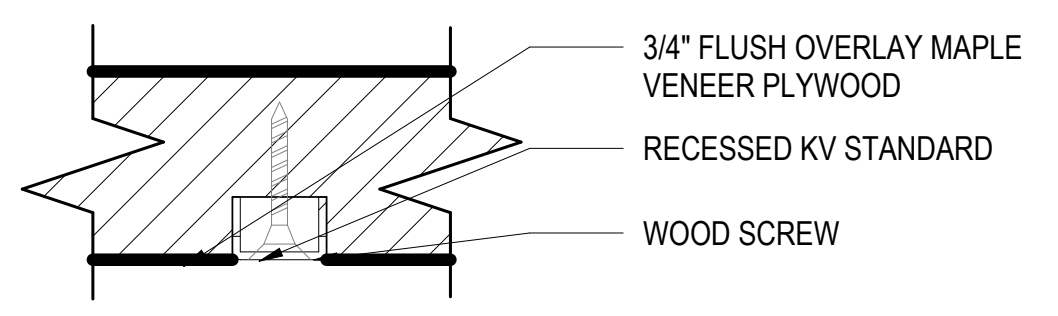
3/4" FLUSH OVERLAY MAPLE VENEER PLYWOOD
RECESSED KV STANDARD
WOOD SCREW

4 Typ. Recessed KV Standard

SCALE: 12" = 1'-0"

CASEWORK GENERAL NOTES

1. ALL CASEWORK SHALL BE CONSTRUCTED TO MEET THE FOLLOWING AWI CONSTRUCTION GRADES:
   WOOD VENEERED PLYWOOD CASEWORK (MAPLE)
   -AWI GRADE = CUSTOM

2. TYPICAL MATERIALS:
   -HEAVY DUTY DRAWER SLIDES
   -FIVE KNUCKLE HINGES
   -WIRE PULLS
   -METAL SHELF CLIPS IN K.V. STANDARDS
   -SOLID SURFACE COUNTERTOPS AND BACKSPLASH

3. ALL CASEWORK SHALL BE FLUSH OVERLAY STYLE, CONSTRUCTED USING WOOD VENEERED PLYWOOD IN THE THICKNESSES INDICATED ON DRAWINGS.

4. SEE SHEET A9.0 FOR FINISH SELECTIONS

5. RECESS ALL KV STANDARDS PER DETAIL 7 ON SHEET A6.2

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

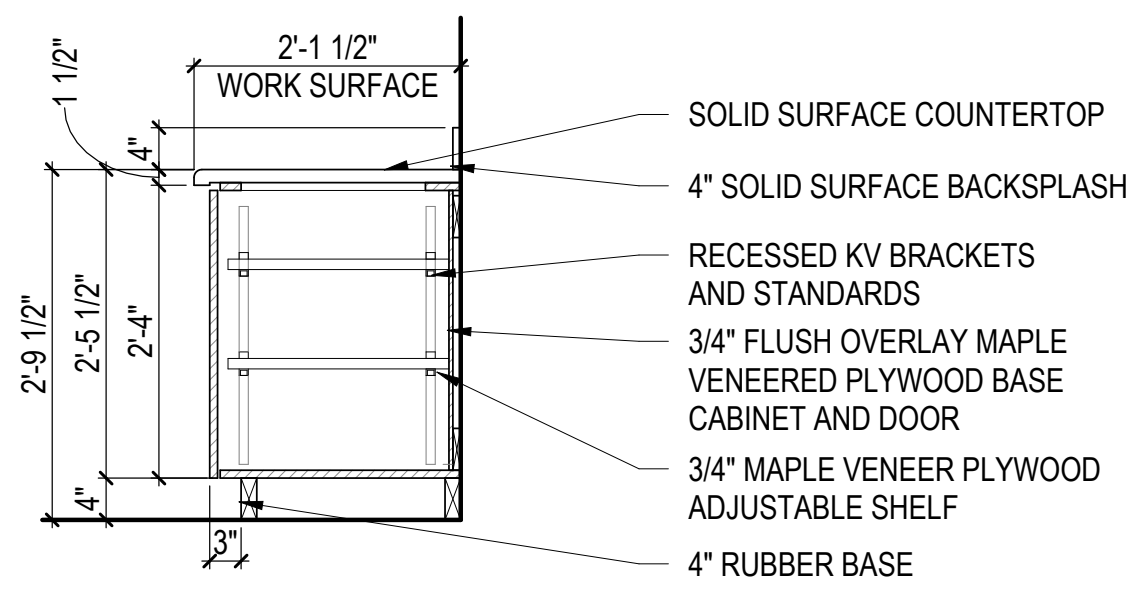
2'-1 1/2"
WORK SURFACE
1 1/2"
2'-9 1/2"
2'-5 1/2"
2'-4"
4"
3"
SOLID SURFACE COUNTERTOP
4" SOLID SURFACE BACKSPLASH
RECESSED KV BRACKETS AND STANDARDS
3/4" FLUSH OVERLAY MAPLE VENEERED PLYWOOD BASE CABINET AND DOOR
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF
4" RUBBER BASE

5 Base Cabinet Only

SCALE: 1/2" = 1'-0"

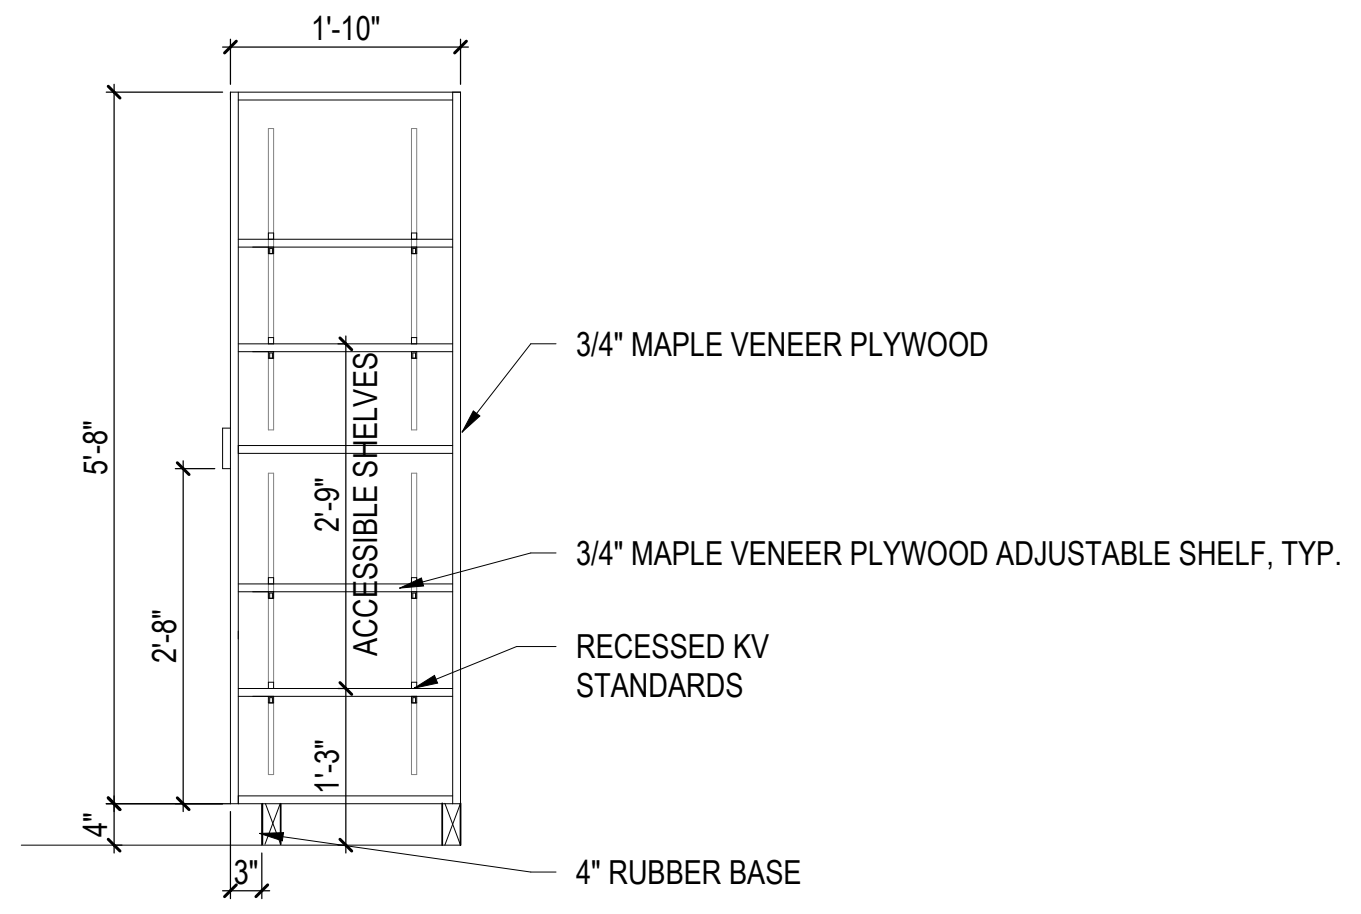
1'-10"
5'-8"
2'-8"
ACCESSIBLE SHELVES
2'-0"
1'-3"
4"
3"
3/4" MAPLE VENEER PLYWOOD
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF, TYP.
RECESSED KV STANDARDS
4" RUBBER BASE

6 Teacher Cabinet - Left

1 | A6.2

SCALE: 1/2" = 1'-0"

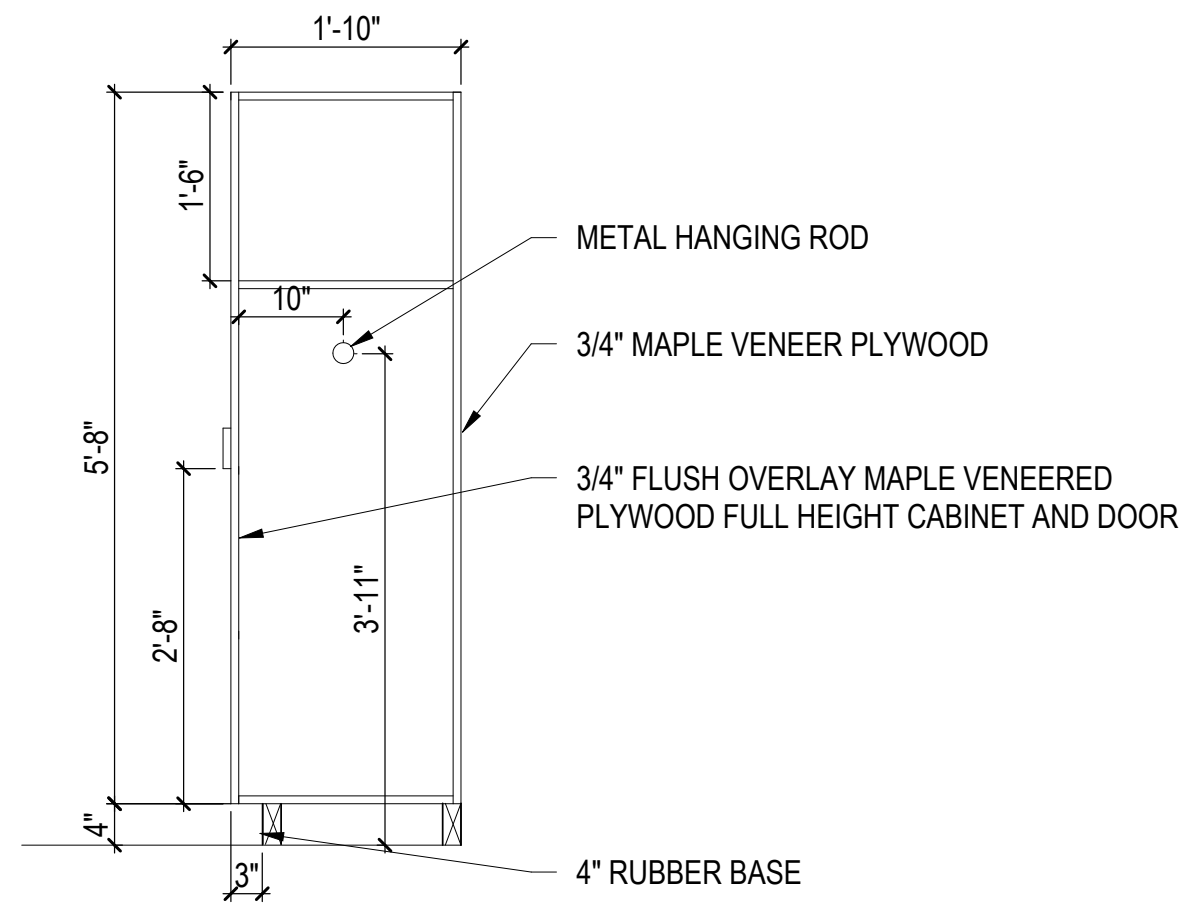
1'-10"
1'-6"
10"
5'-8"
2'-8"
3'-11"
4"
3"
METAL HANGING ROD
3/4" MAPLE VENEER PLYWOOD
3/4" FLUSH OVERLAY MAPLE VENEERED PLYWOOD FULL HEIGHT CABINET AND DOOR
4" RUBBER BASE

7 Teacher Cabinet - Right

1 | A6.2

SCALE: 1/2" = 1'-0"

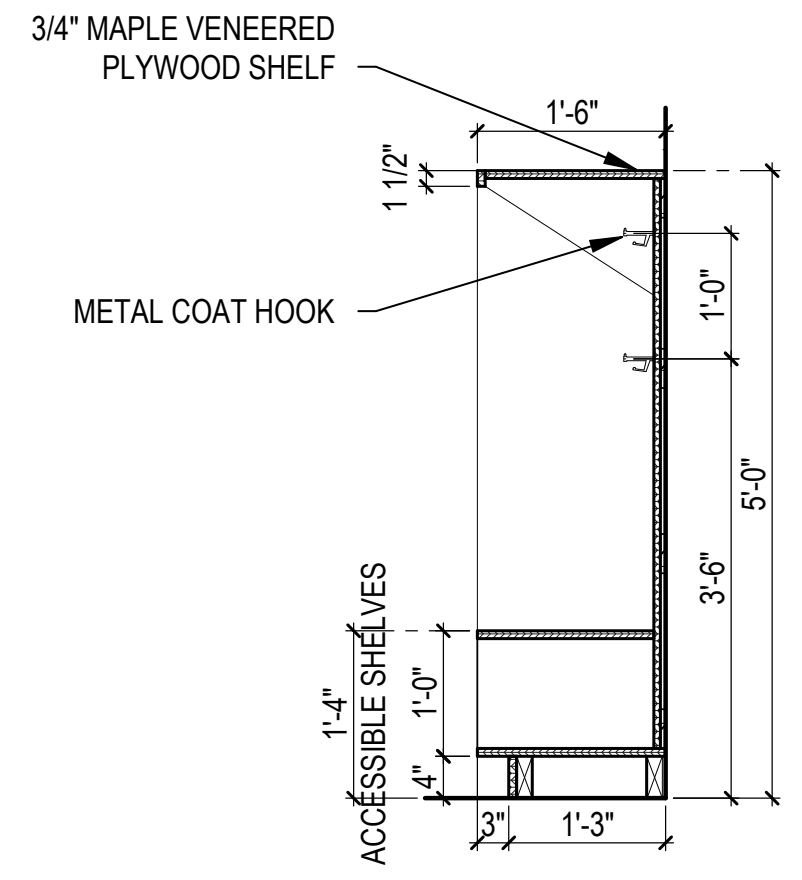
3/4" MAPLE VENEERED PLYWOOD SHELF
1'-6"
1 1/2"
METAL COAT HOOK
1'-0"
5'-0"
3'-6"
ACCESSIBLE SHELVES
1'-4"
1'-0"
4"
3"
1'-3"

8 Casework Section

1 | A6.2

SCALE: 1/2" = 1'-0"

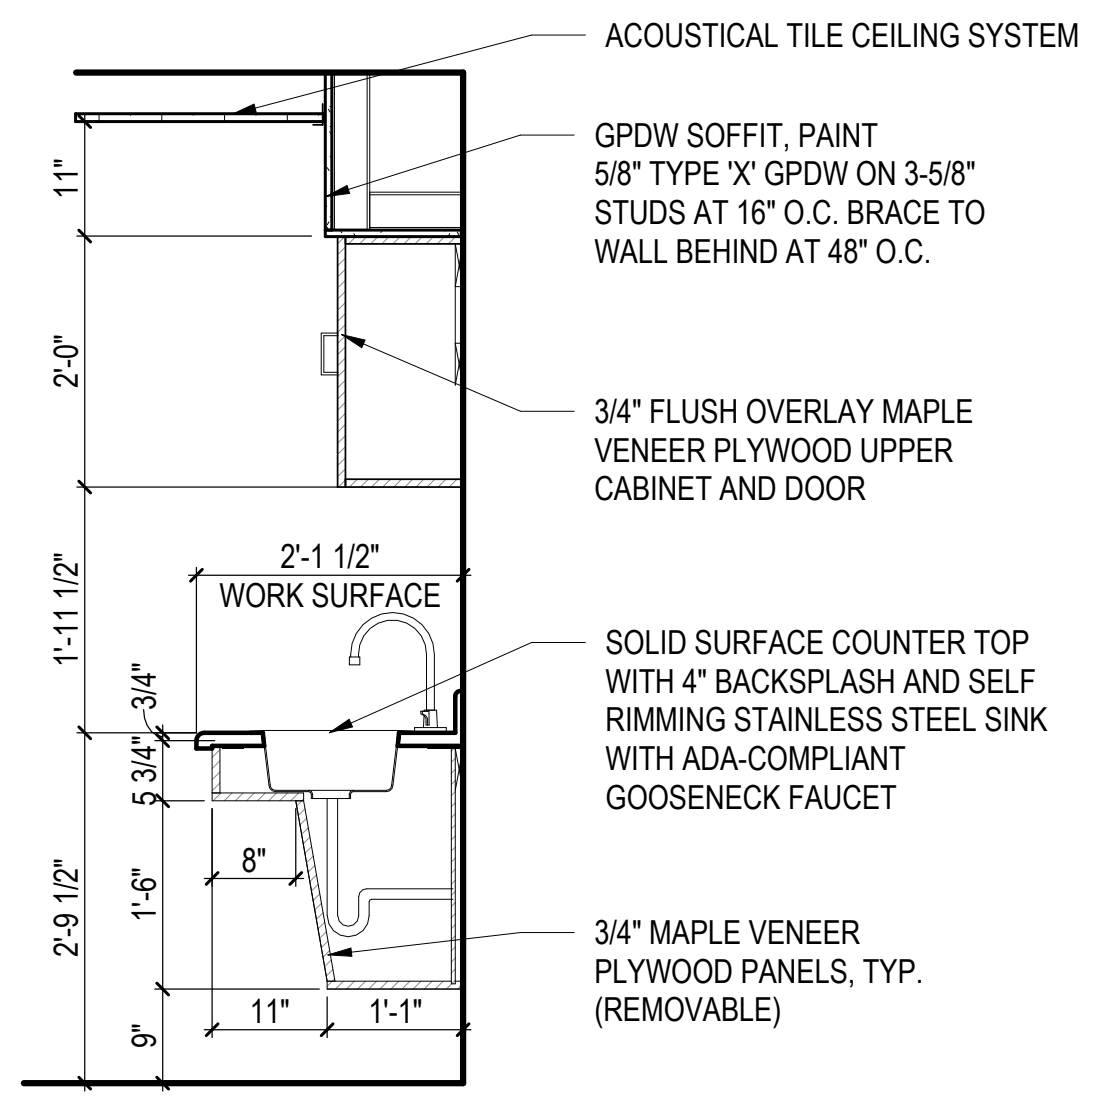
ACOUSTICAL TILE CEILING SYSTEM
GPDW SOFFIT, PAINT 5/8" TYPE 'X' GPDW ON 3-5/8" STUDS AT 16" O.C. BRACE TO WALL BEHIND AT 48" O.C.
11"
2'-0"
3/4" FLUSH OVERLAY MAPLE VENEER PLYWOOD UPPER CABINET AND DOOR
2'-1 1/2"
WORK SURFACE
1'-11 1/2"
3/4"
5 3/4"
SOLID SURFACE COUNTER TOP WITH 4" BACKSPLASH AND SELF RIMMING STAINLESS STEEL SINK WITH ADA-COMPLIANT GOOSENECK FAUCET
8"
1'-6"
2'-9 1/2"
11"
1'-1"
9"
3/4" MAPLE VENEER PLYWOOD PANELS, TYP. (REMOVABLE)

9 Sink Base Cabinet w/ 24" Uppers

7 | A6.2

SCALE: 1/2" = 1'-0"

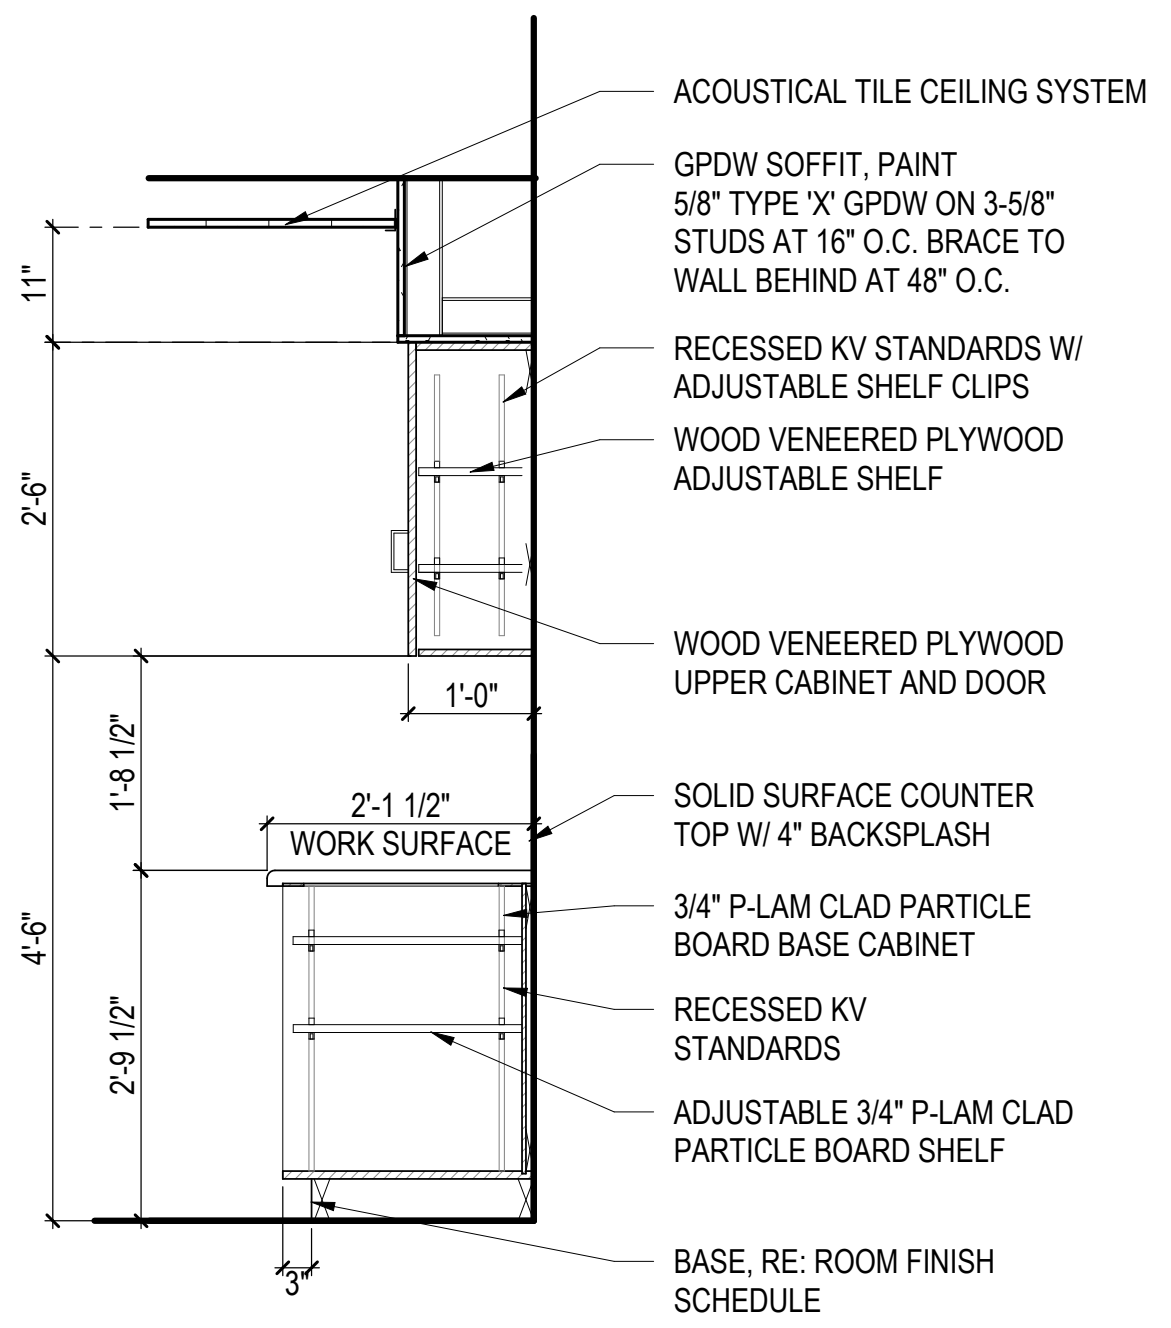
ACOUSTICAL TILE CEILING SYSTEM
GPDW SOFFIT, PAINT 5/8" TYPE 'X' GPDW ON 3-5/8" STUDS AT 16" O.C. BRACE TO WALL BEHIND AT 48" O.C.
11"
RECESSED KV STANDARDS W/ ADJUSTABLE SHELF CLIPS
WOOD VENEERED PLYWOOD ADJUSTABLE SHELF
2'-6"
WOOD VENEERED PLYWOOD UPPER CABINET AND DOOR
1'-0"
1'-8 1/2"
2'-1 1/2"
WORK SURFACE
SOLID SURFACE COUNTER TOP W/ 4" BACKSPLASH
4'-6"
3/4" P-LAM CLAD PARTICLE BOARD BASE CABINET
RECESSED KV STANDARDS
2'-9 1/2"
ADJUSTABLE 3/4" P-LAM CLAD PARTICLE BOARD SHELF
BASE, RE: ROOM FINISH SCHEDULE
3"

10 Base Open Cabinet w/ 30" Uppers

7 | A6.2

SCALE: 1/2" = 1'-0"

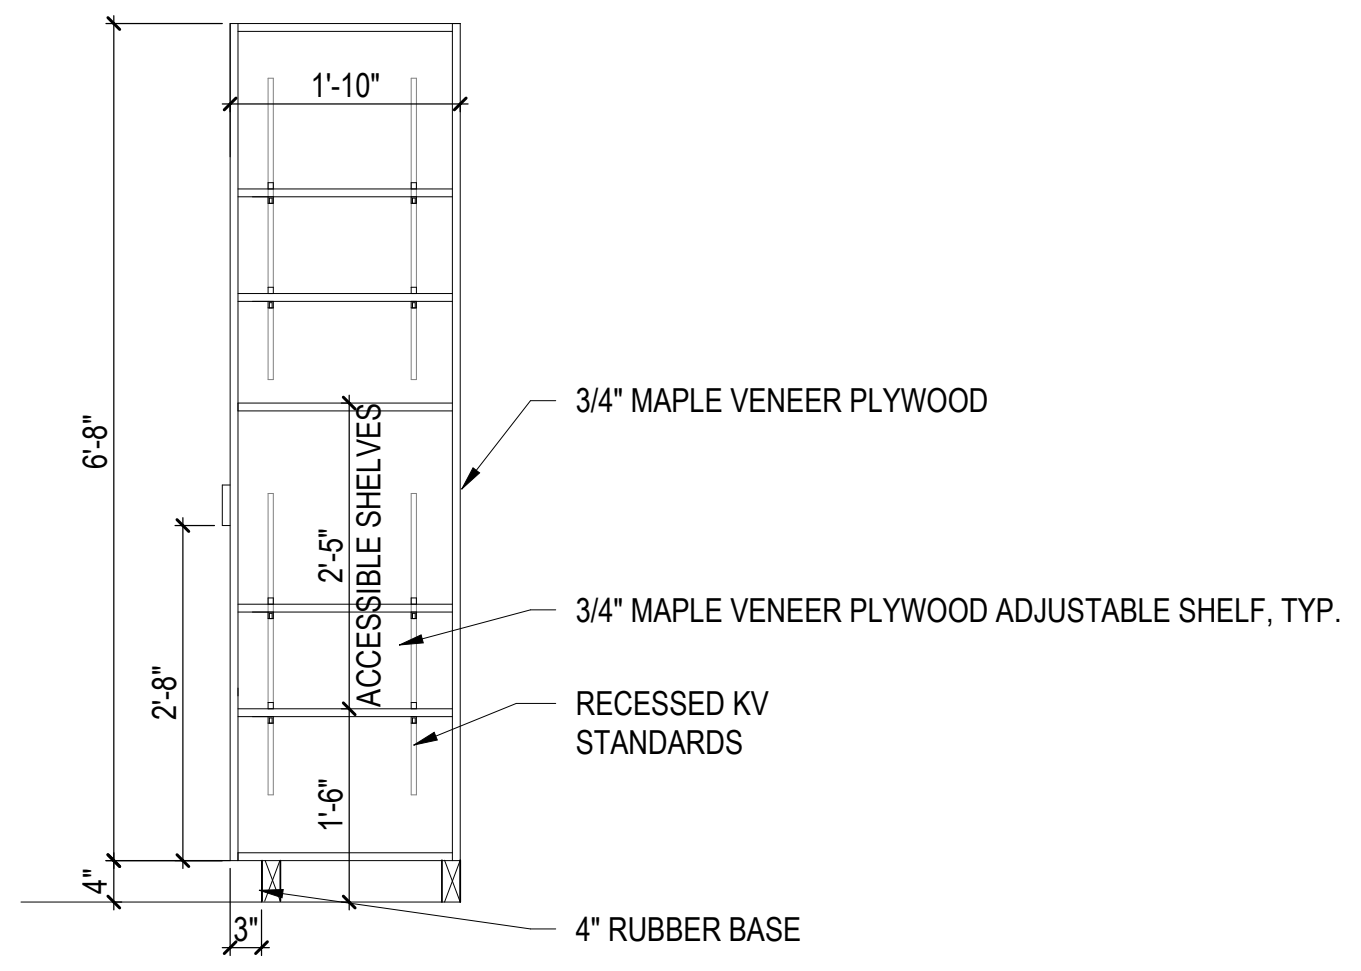
1'-10"
6'-8"
2'-8"
ACCESSIBLE SHELVES
2'-5"
1'-6"
4"
3"
3/4" MAPLE VENEER PLYWOOD
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF, TYP.
RECESSED KV STANDARDS
4" RUBBER BASE

11 Teacher Cabinet - Left

13 | A6.0

SCALE: 1/2" = 1'-0"

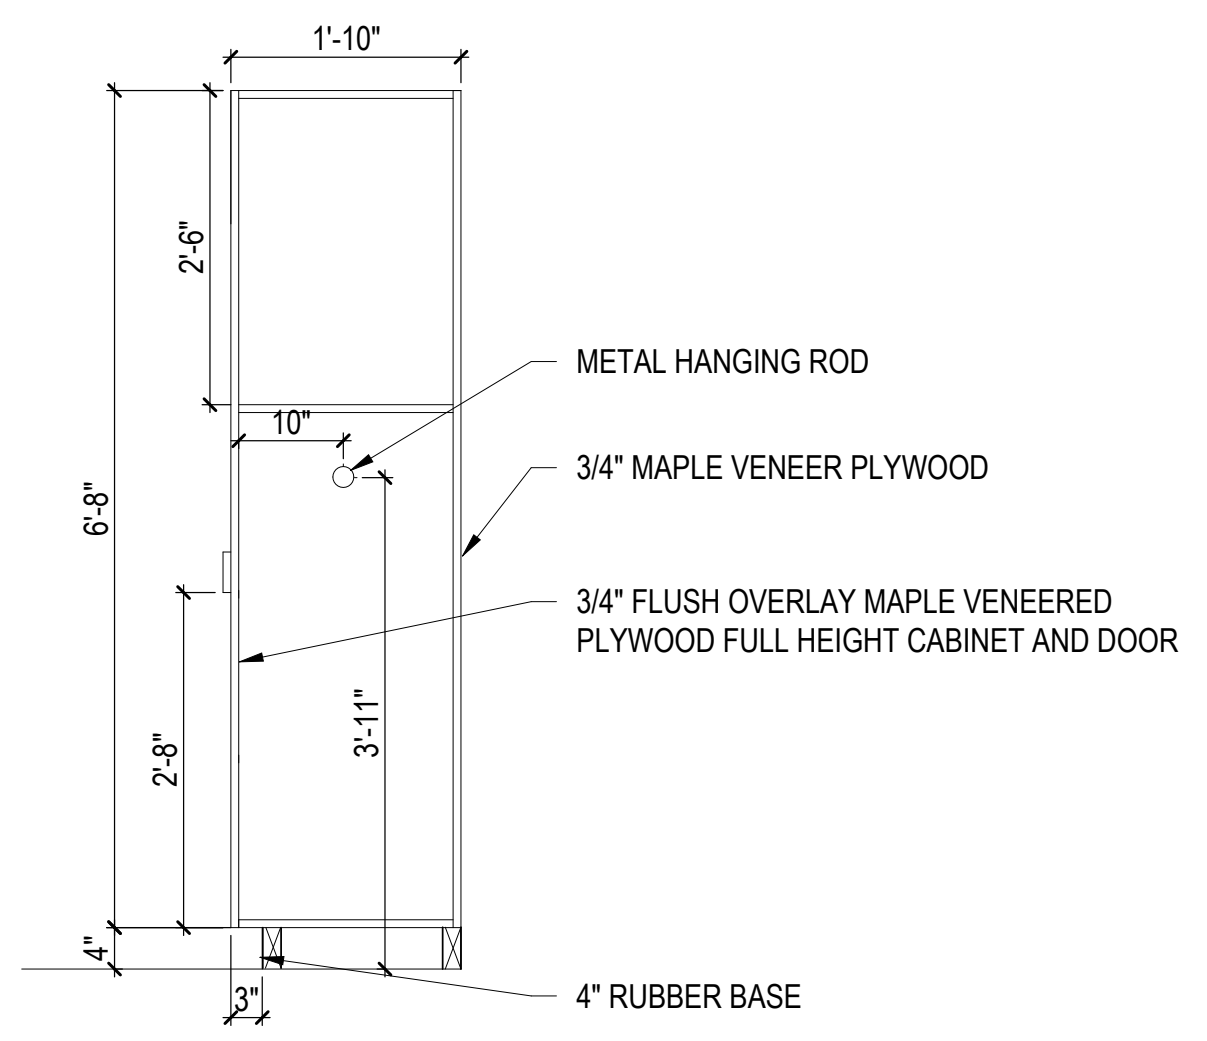
1'-10"
2'-6"
10"
6'-8"
2'-8"
3'-11"
4"
METAL HANGING ROD
3/4" MAPLE VENEER PLYWOOD
3/4" FLUSH OVERLAY MAPLE VENEERED PLYWOOD FULL HEIGHT CABINET AND DOOR
4" RUBBER BASE

12 Teacher Cabinet - Right

13 | A6.0

SCALE: 1/2" = 1'-0"

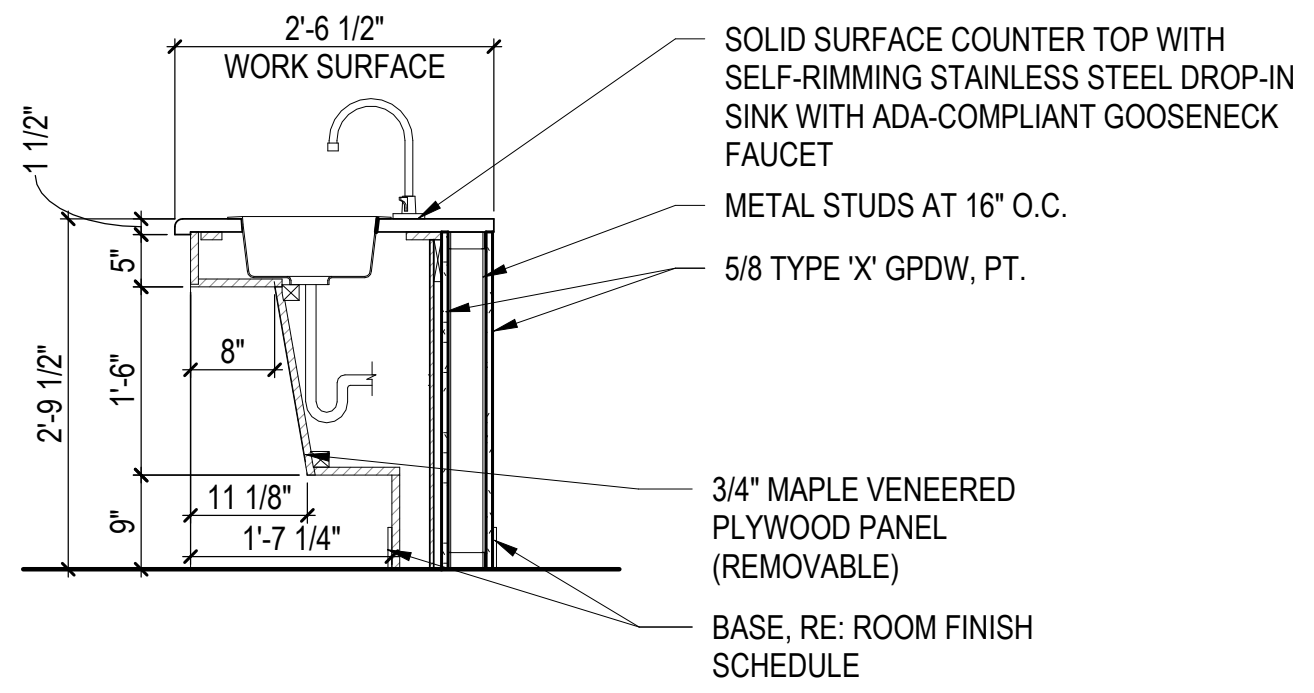
2'-6 1/2"
WORK SURFACE
1 1/2"
5"
8"
1'-6"
2'-9 1/2"
11 1/8"
1'-7 1/4"
9"
SOLID SURFACE COUNTER TOP WITH SELF-RIMMING STAINLESS STEEL DROP-IN SINK WITH ADA-COMPLIANT GOOSENECK FAUCET
METAL STUDS AT 16" O.C.
5/8 TYPE 'X' GPDW, PT.
3/4" MAPLE VENEERED PLYWOOD PANEL (REMOVABLE)
BASE, RE: ROOM FINISH SCHEDULE

15 Sink Base Cabinet Only

4 | A6.4

SCALE: 1/2" = 1'-0"

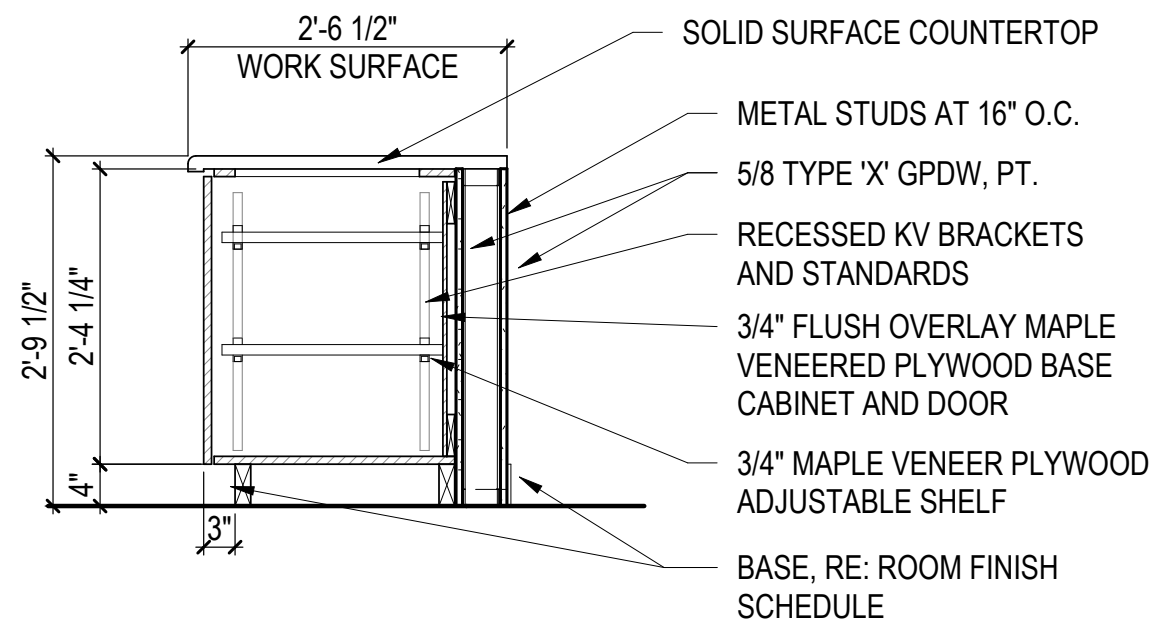
2'-6 1/2"
WORK SURFACE
2'-9 1/2"
2'-4 1/4"
4"
3"
SOLID SURFACE COUNTERTOP
METAL STUDS AT 16" O.C.
5/8 TYPE 'X' GPDW, PT.
RECESSED KV BRACKETS AND STANDARDS
3/4" FLUSH OVERLAY MAPLE VENEERED PLYWOOD BASE CABINET AND DOOR
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF
BASE, RE: ROOM FINISH SCHEDULE

17 Base Cabinet Only

4 | A6.4

SCALE: 1/2" = 1'-0"

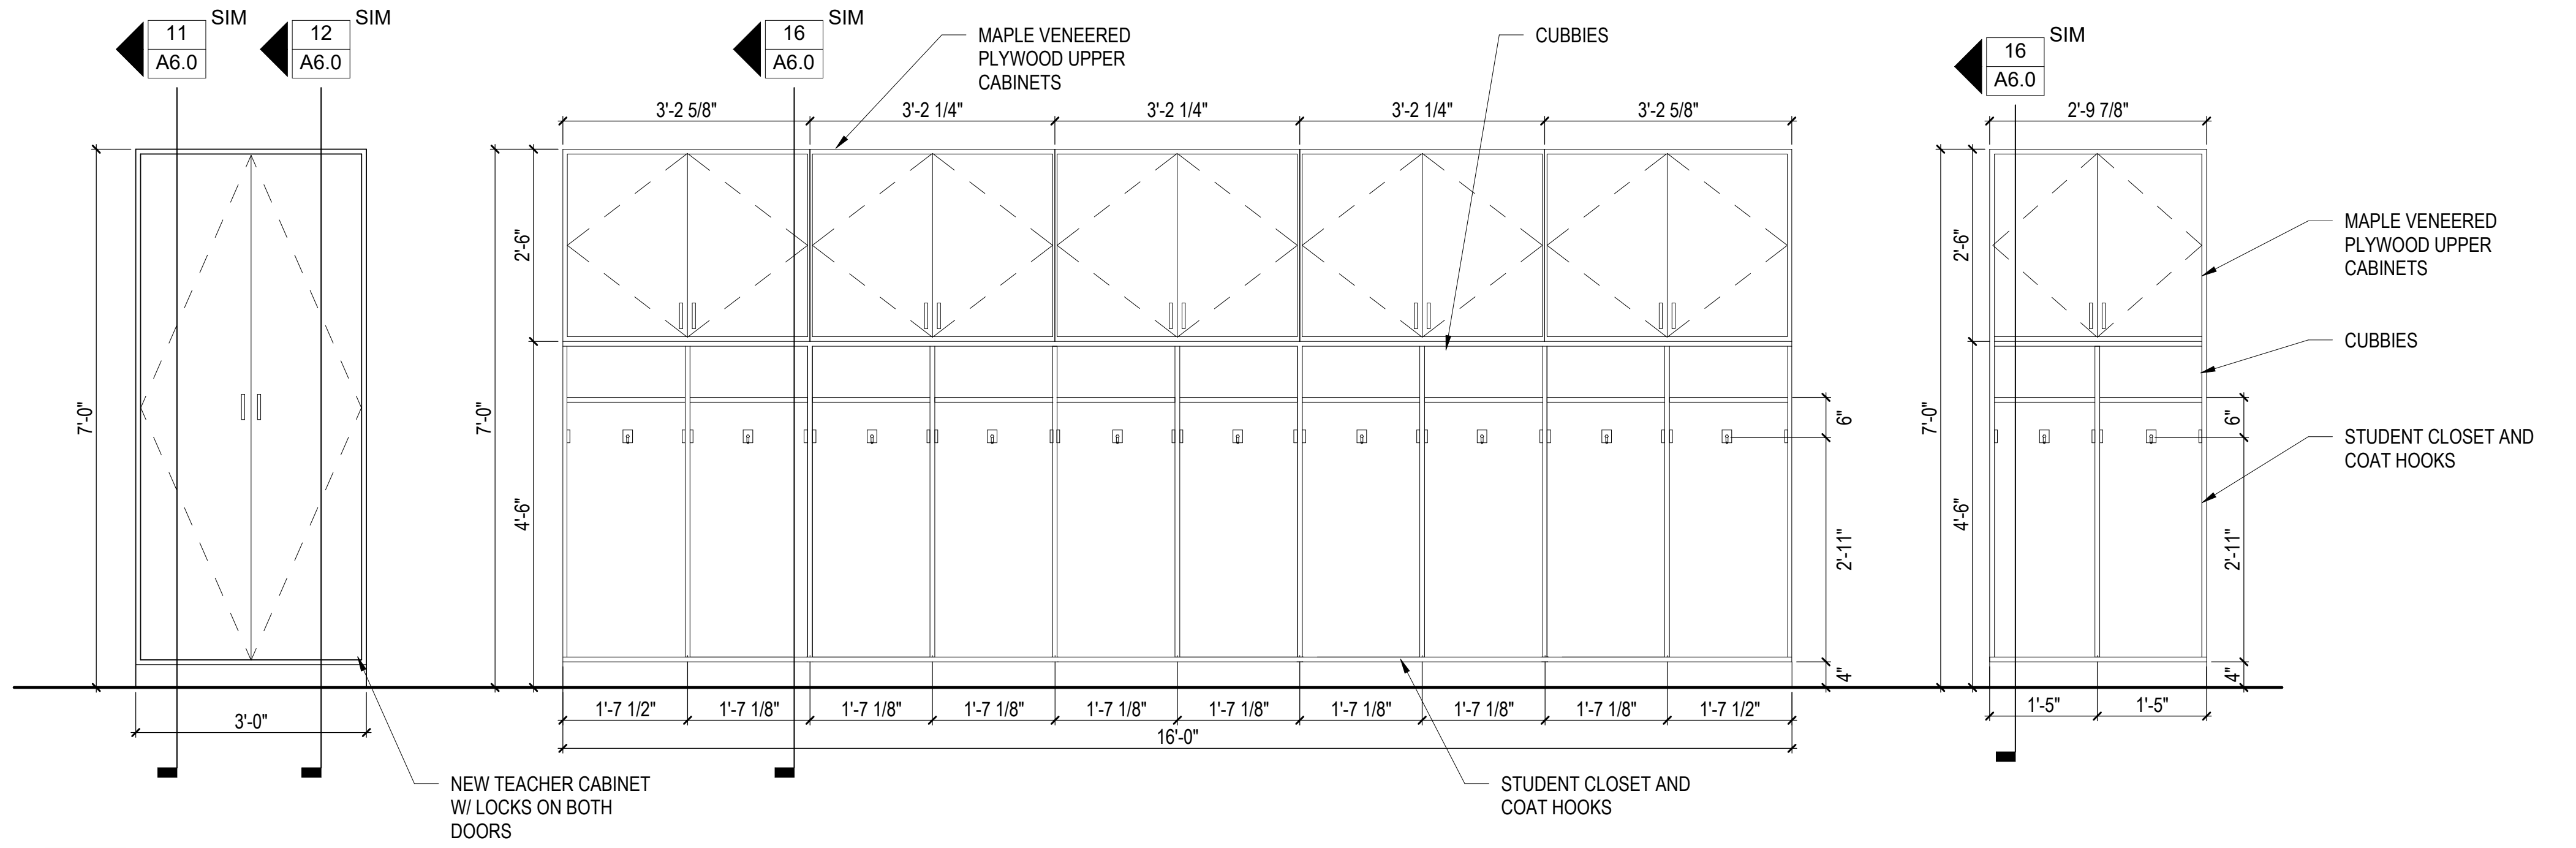
11 A6.0 SIM
12 A6.0 SIM
16 A6.0 SIM
16 A6.0 SIM
MAPLE VENEERED PLYWOOD UPPER CABINETS
CUBBIES
3'-2 5/8"
3'-2 1/4"
3'-2 1/4"
3'-2 1/4"
3'-2 5/8"
2'-9 7/8"
7'-0"
2'-6"
4'-6"
6"
2'-11"
4"
3'-0"
1'-7 1/2"
1'-7 1/8"
16'-0"
1'-5"
MAPLE VENEERED PLYWOOD UPPER CABINETS
CUBBIES
STUDENT CLOSET AND COAT HOOKS
NEW TEACHER CABINET W/ LOCKS ON BOTH DOORS
STUDENT CLOSET AND COAT HOOKS

13 Typ. Outbuilding Casework - Type I

SCALE: 1/2" = 1'-0"

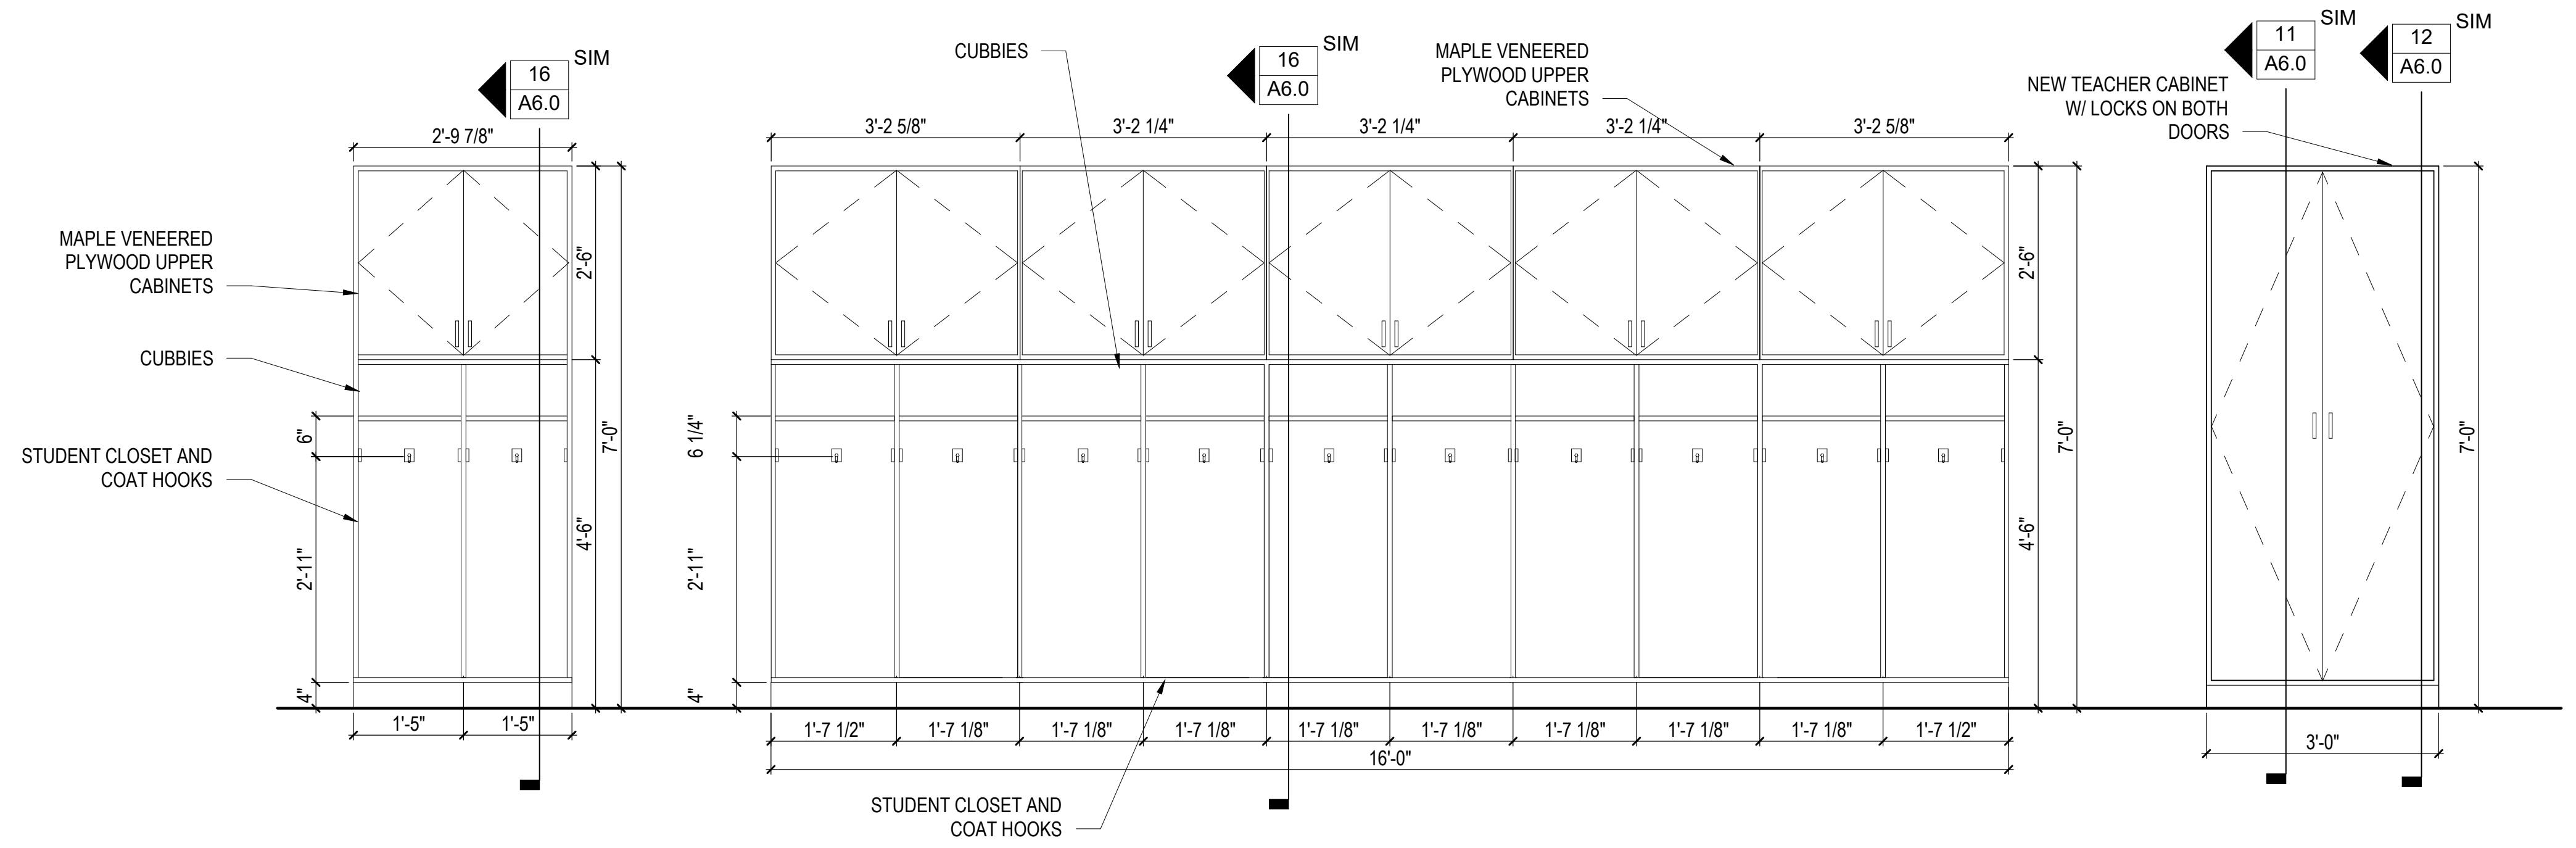
16 A6.0 SIM
16 A6.0 SIM
11 A6.0 SIM
12 A6.0 SIM
2'-9 7/8"
MAPLE VENEERED PLYWOOD UPPER CABINETS
CUBBIES
STUDENT CLOSET AND COAT HOOKS
2'-6"
7'-0"
6"
4'-6"
2'-11"
4"
1'-5"
CUBBIES
MAPLE VENEERED PLYWOOD UPPER CABINETS
3'-2 5/8"
3'-2 1/4"
6 1/4"
1'-7 1/2"
1'-7 1/8"
16'-0"
STUDENT CLOSET AND COAT HOOKS
NEW TEACHER CABINET W/ LOCKS ON BOTH DOORS
3'-0"

14 Typ. Outbuilding Casework - Type II

1 | A1.0

SCALE: 1/2" = 1'-0"

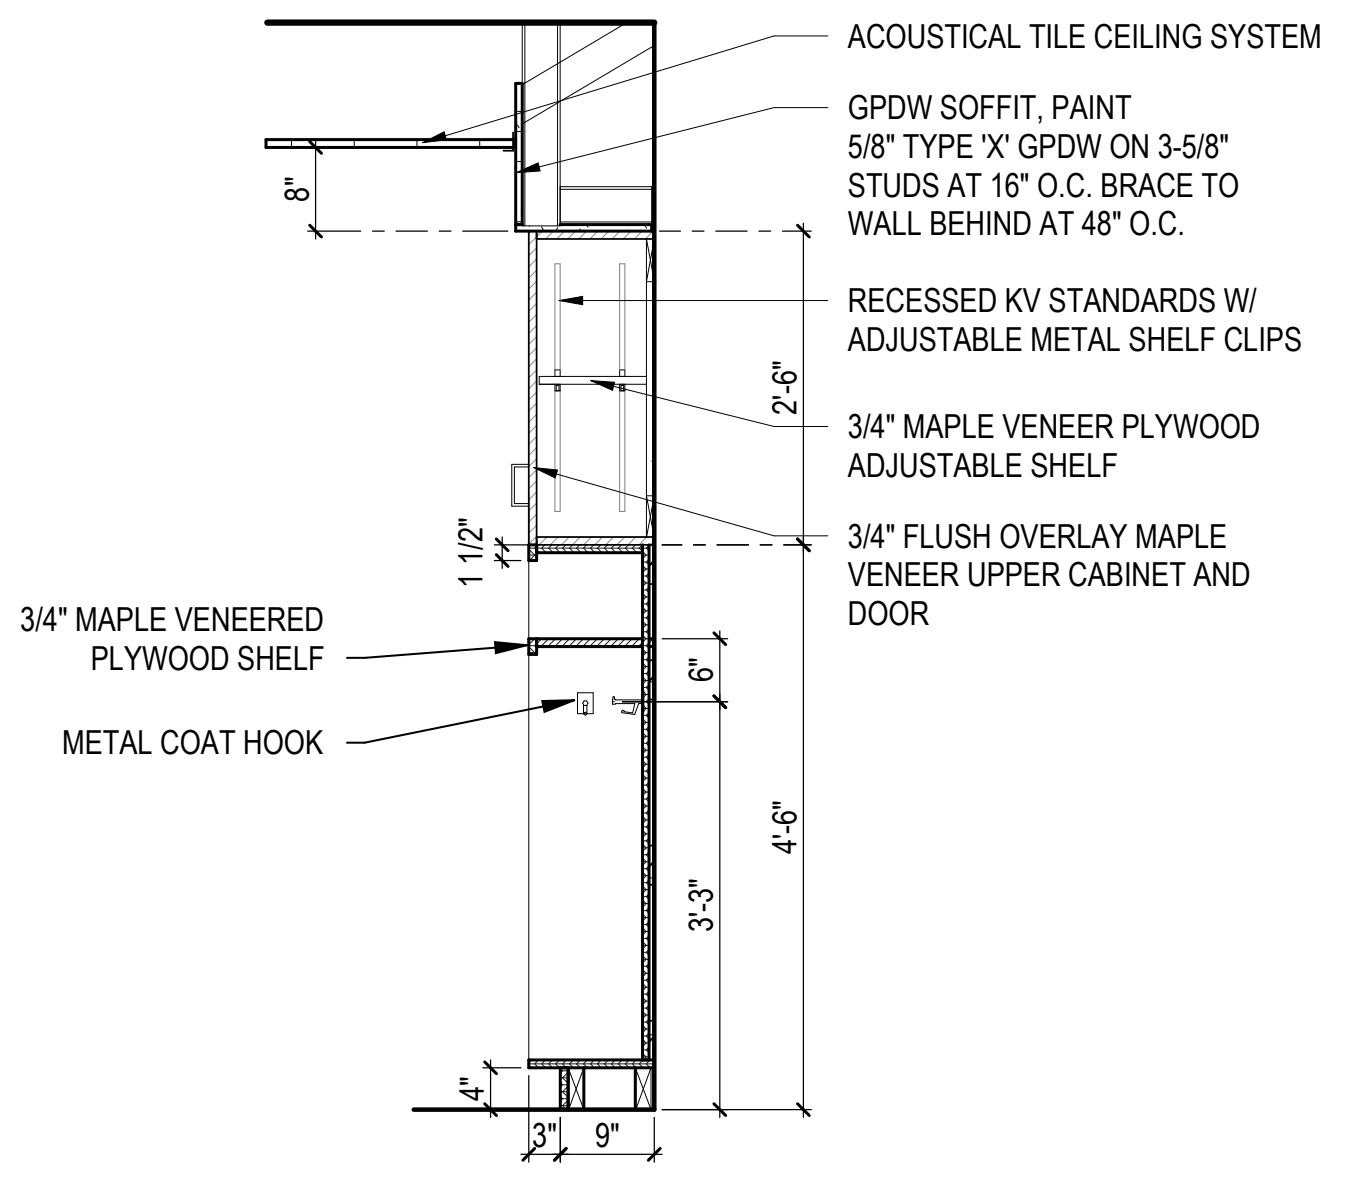
ACOUSTICAL TILE CEILING SYSTEM
GPDW SOFFIT, PAINT 5/8" TYPE 'X' GPDW ON 3-5/8" STUDS AT 16" O.C. BRACE TO WALL BEHIND AT 48" O.C.
8"
RECESSED KV STANDARDS W/ ADJUSTABLE METAL SHELF CLIPS
2'-6"
3/4" MAPLE VENEER PLYWOOD ADJUSTABLE SHELF
3/4" FLUSH OVERLAY MAPLE VENEER UPPER CABINET AND DOOR
1 1/2"
6"
3/4" MAPLE VENEERED PLYWOOD SHELF
METAL COAT HOOK
4'-6"
3'-3"
4"
3"
9"

16 Casework Section

13 | A6.0

SCALE: 1/2" = 1'-0"

9/25/2026 10:44:03 AM

9 RECORD DRAWINGS 5/5/2021
7 ASI #002 03/31/2020
6 PR #004 03/31/2020

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Casework Sections/Window Schedule/Window Details

A6.0

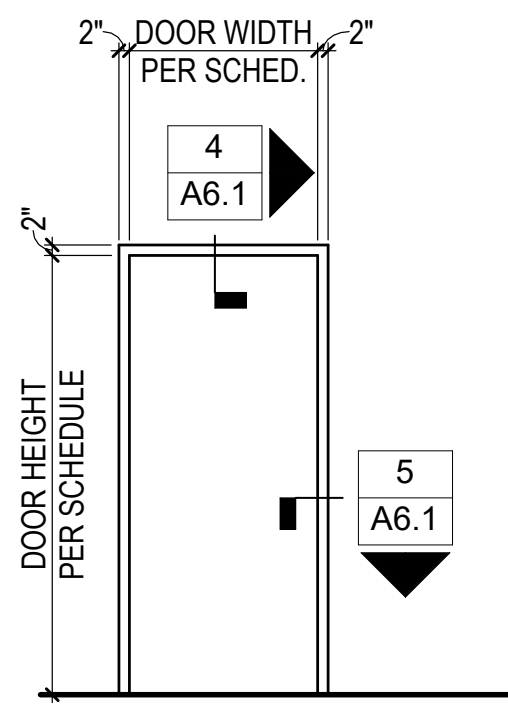
2"
DOOR WIDTH PER SCHED.
2"
2"
4
A6.1
DOOR HEIGHT PER SCHEDULE
5
A6.1

HMF-1

HM FRAME

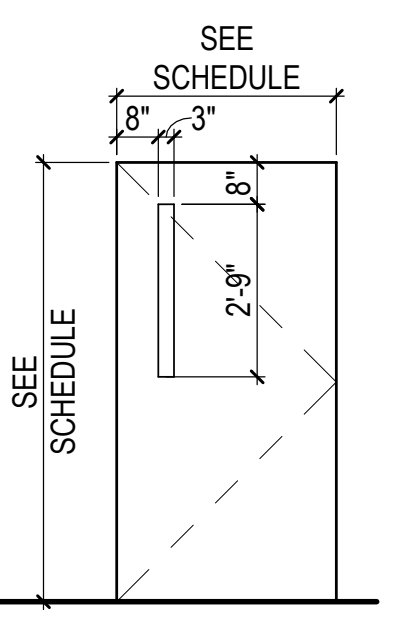
SEE SCHEDULE
8"
3"
8"
2'-9"
SEE SCHEDULE

HMD-2

HM DOOR W/ LITE

(T) TEMPERED GLASS AT THESE LOCATIONS

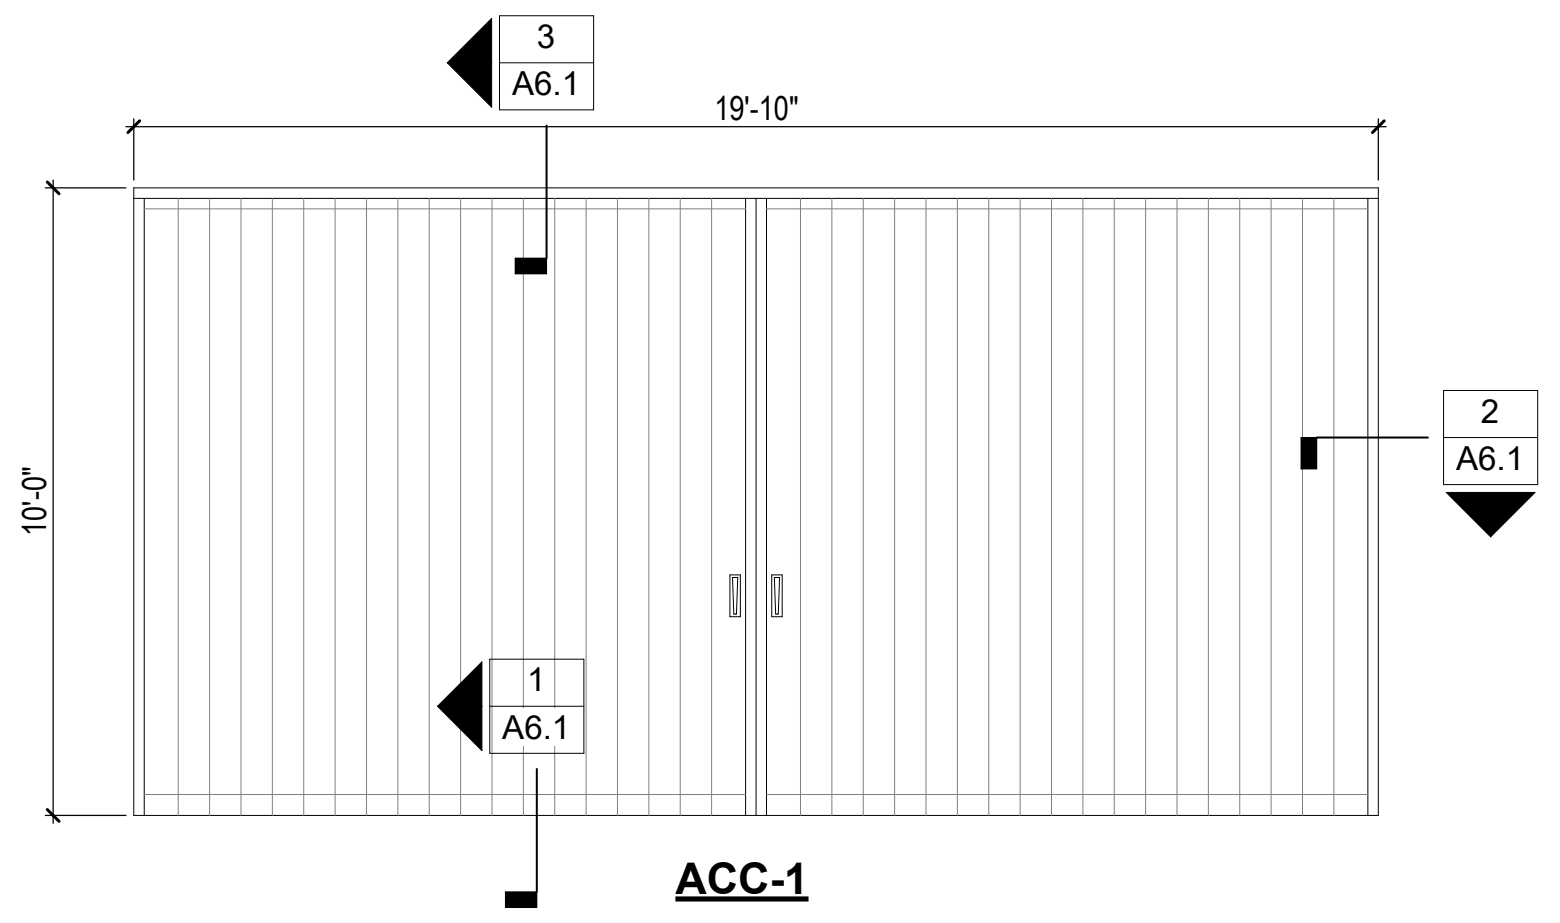
3
A6.1
19'-10"
10'-0"
2
A6.1
1
A6.1

ACC-1

ACCORDION DOOR
BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR ARCTIC 13

NOTE:
(E) = EXISTING DOOR AND FRAME

1. GENERAL CONTRACTOR TO VERIFY EXISTING DOORS AND/OR FRAMES AND COORDINATE REQUIRED PREPARATION.
2. DO NOT PAINT ANY EXISTING PRE-FINISHED MULLIONS WHICH ARE TO REMAIN.

BASIS-OF-DESIGN:
1. EXTERIOR HOLLOW METAL DOORS: CURRIES 707 Q-MAX OR EQUAL, MAX U-FACTOR 037
2. ALL LITES WITHIN DOORS ARE TO BE ANEMOSTAT LOPRO LITE KITS

DOOR AND FRAME SCHEDULE

IDENTIFICATION			DIMENSIONS			FRAME		
DOOR NO.	ROOM NO.	ROOM NAME	WIDTH	HEIGHT	DOOR TYPE	TYPE	HARDWARE	REMARKS
17b	17	Classroom	3' - 0"	7' - 0"	HMD-1	HMF-1	01	Storeroom, Small Lite, Paint Door and Frame
18b	18	Classroom	3' - 0"	7' - 0"	HMD-1	HMF-1	01	Storeroom, Small Lite, Paint Door and Frame
20b	20	Classroom	3' - 0"	7' - 0"	HMD-1	HMF-1	01	Storeroom, Small Lite, Paint Door and Frame
24a	24	Preschool	3' - 0"	6' - 8"	HMD-1	HMF-1	02	Panic Bar, Small Lite, Paint Door and Frame
25a	25	Preschool	3' - 0"	6' - 8"	HMD-1	HMF-1	02	Panic Bar, Small Lite, Paint Door and Frame

Door and Frame Types

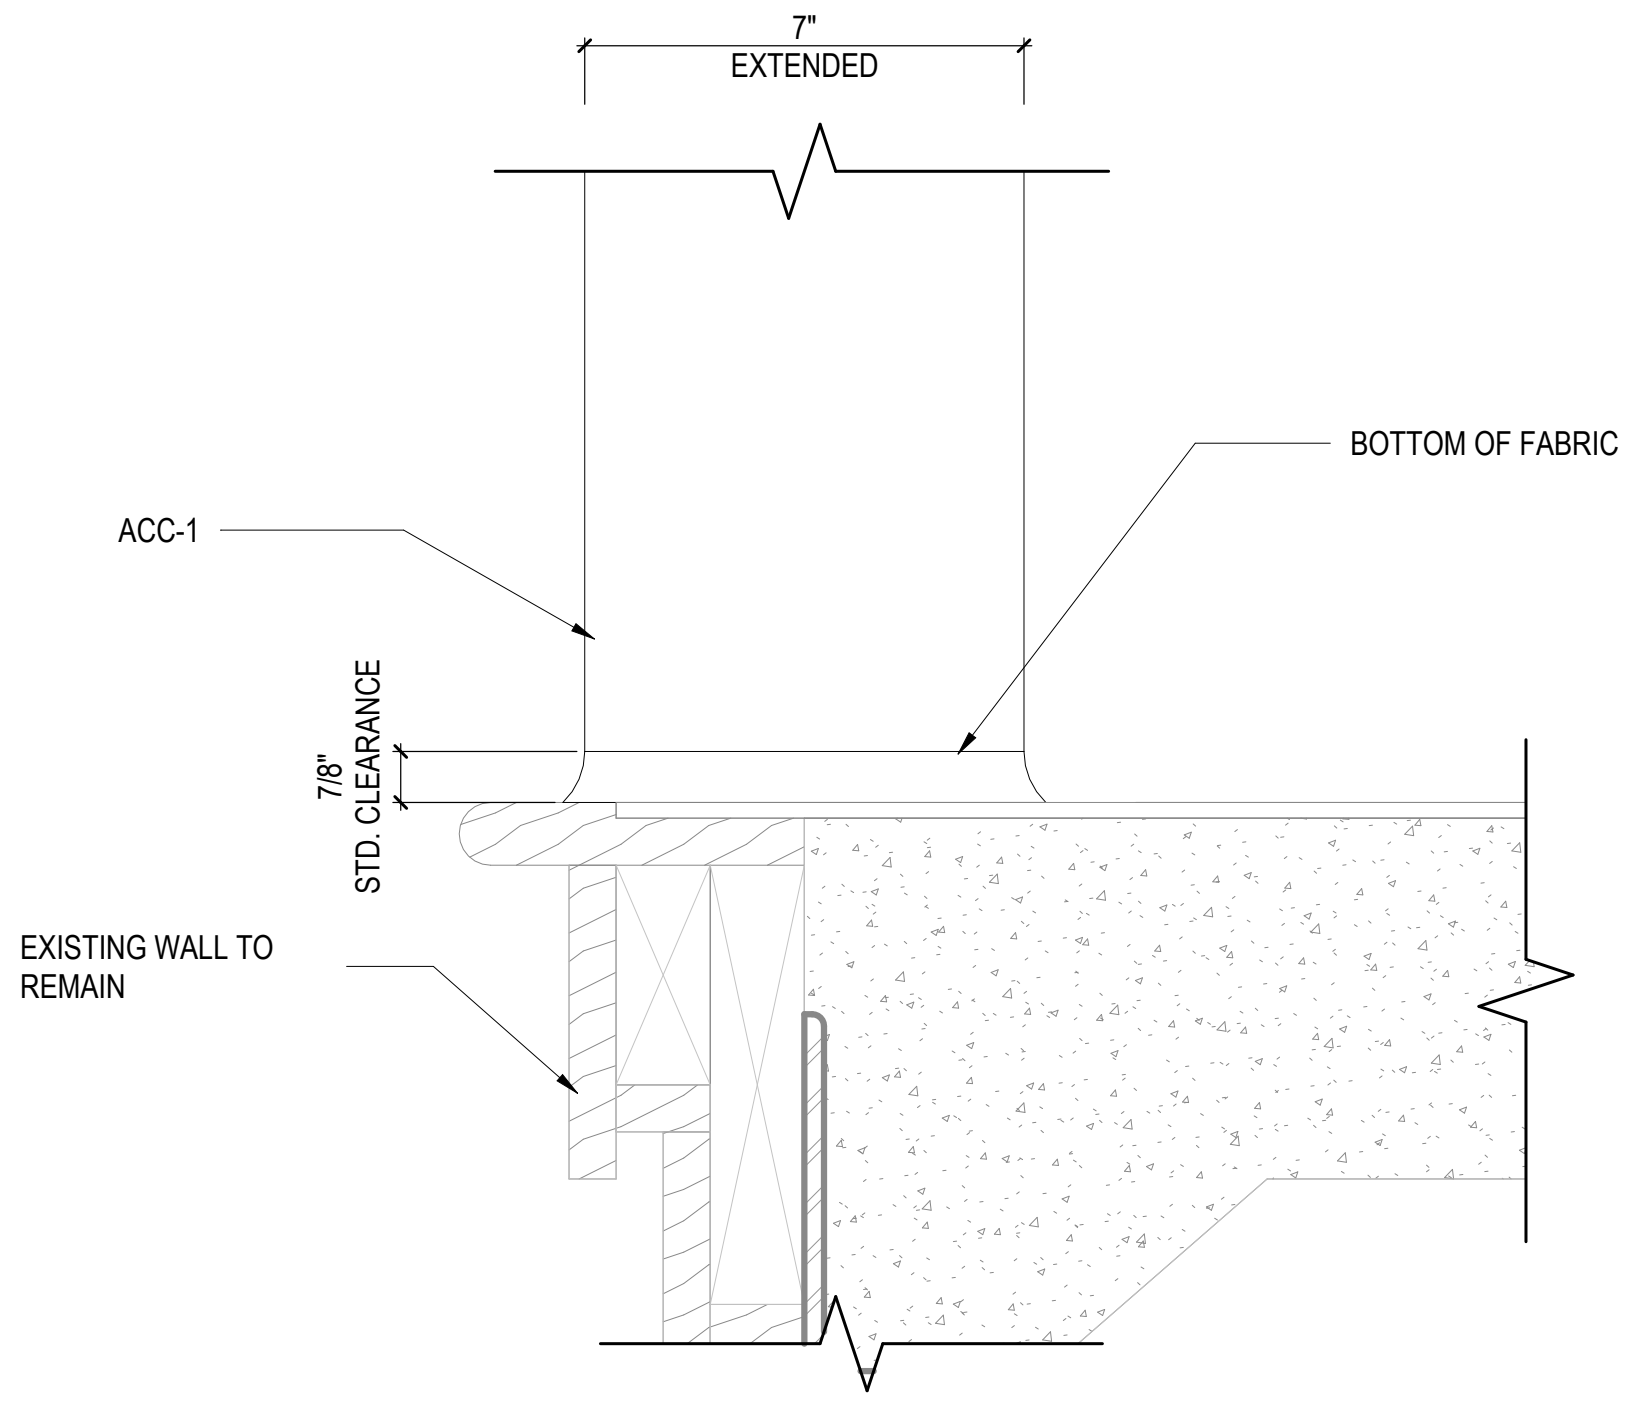
7"
EXTENDED
BOTTOM OF FABRIC
ACC-1
7/8" STD. CLEARANCE
EXISTING WALL TO REMAIN

1 ACC - 1 Frame Sill Detail

SCALE: 3" = 1'-0"

1.0 A6.1

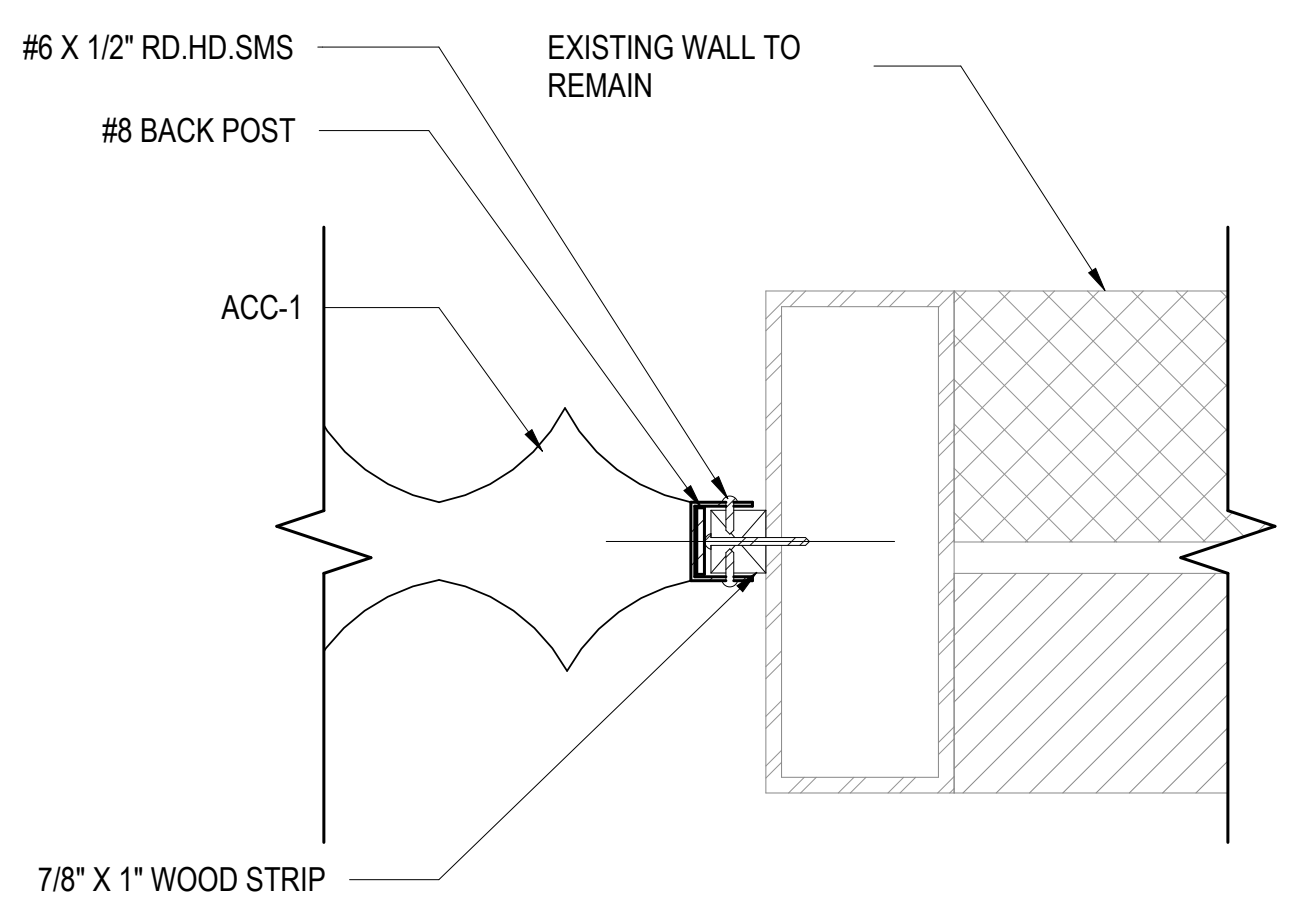
#6 X 1/2" RD.HD.SMS
#8 BACK POST
EXISTING WALL TO REMAIN
ACC-1
7/8" X 1" WOOD STRIP

2 ACC - 1 Frame Jambl Detail

SCALE: 3" = 1'-0"

1.0 A6.1

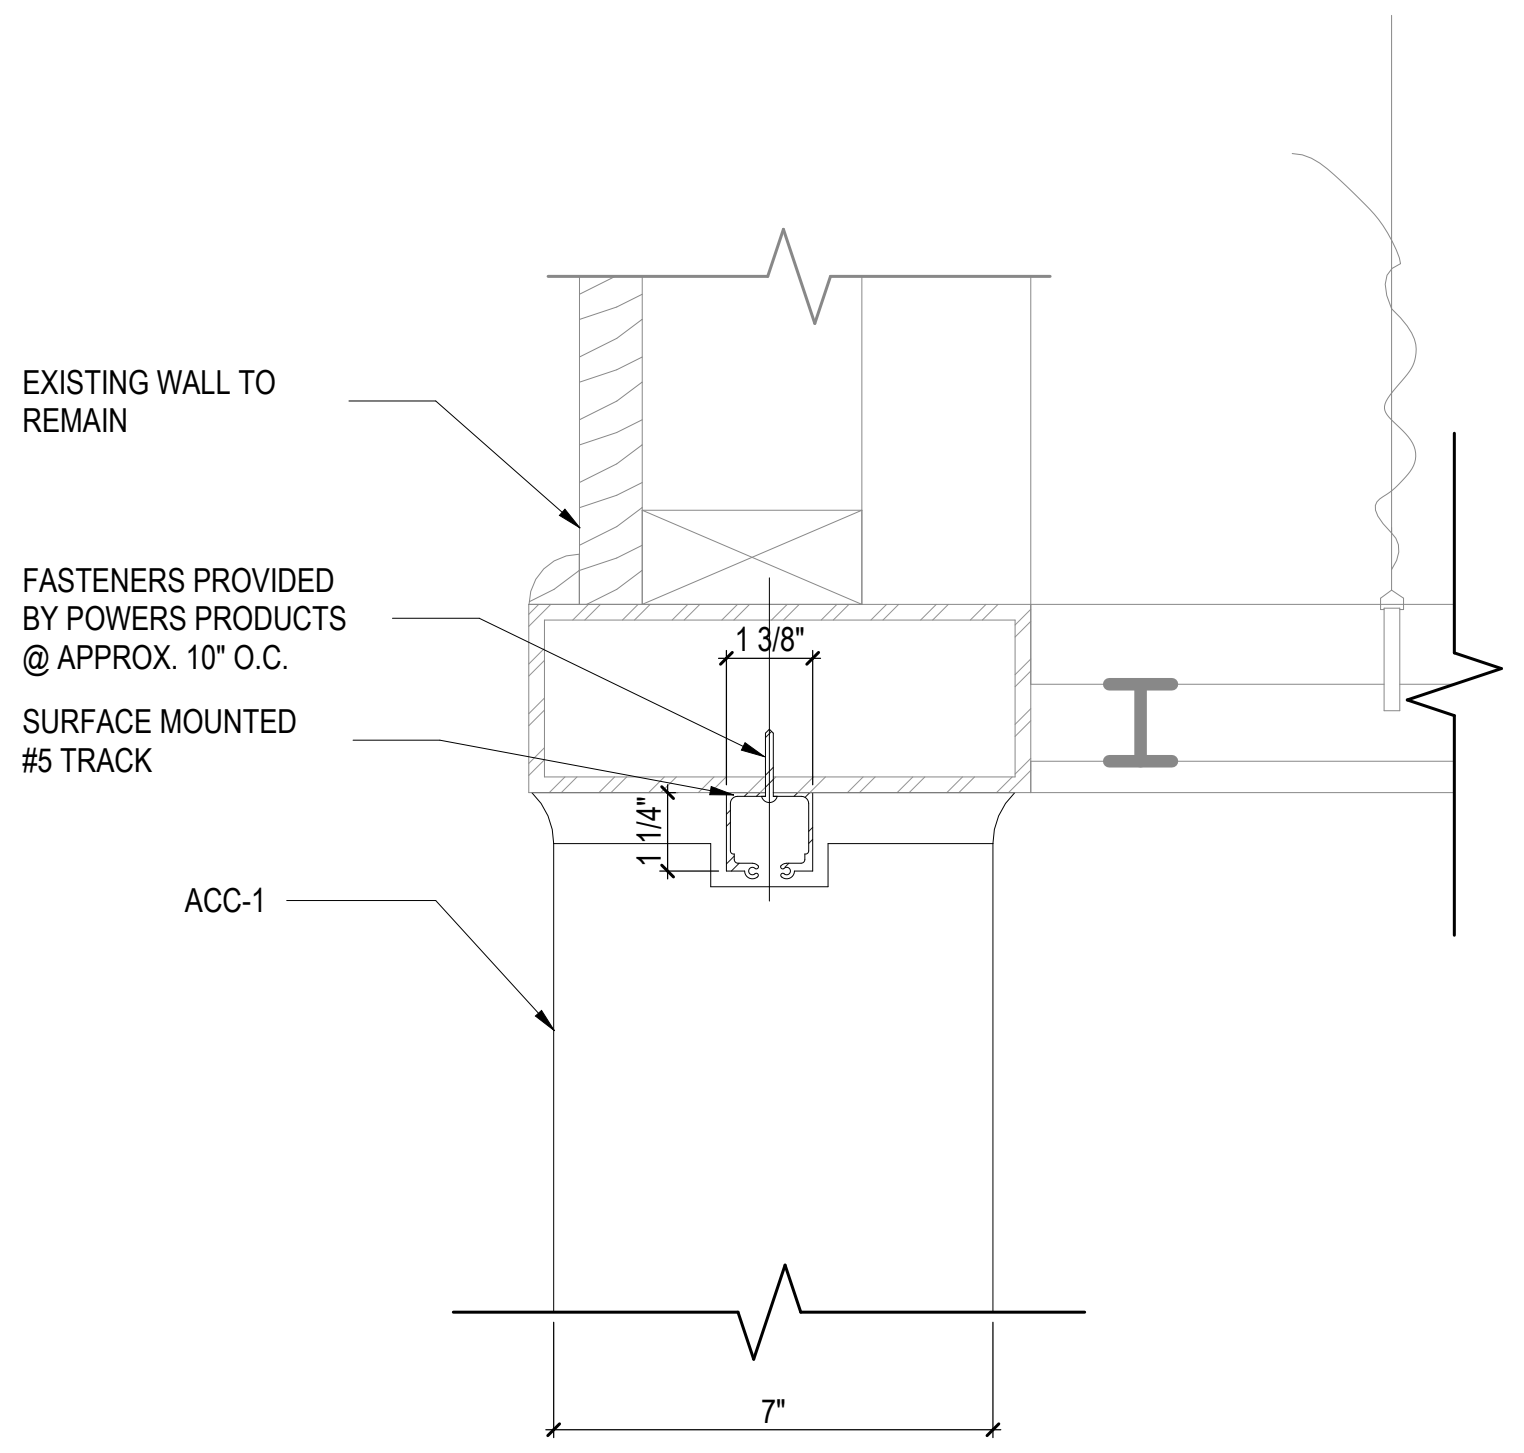
EXISTING WALL TO REMAIN
FASTENERS PROVIDED BY POWERS PRODUCTS @ APPROX. 10" O.C.
1 3/8"
SURFACE MOUNTED #5 TRACK
1 1/4"
ACC-1
7"

3 ACC - 1 Frame Head Detail

SCALE: 3" = 1'-0"

1.0 A6.1

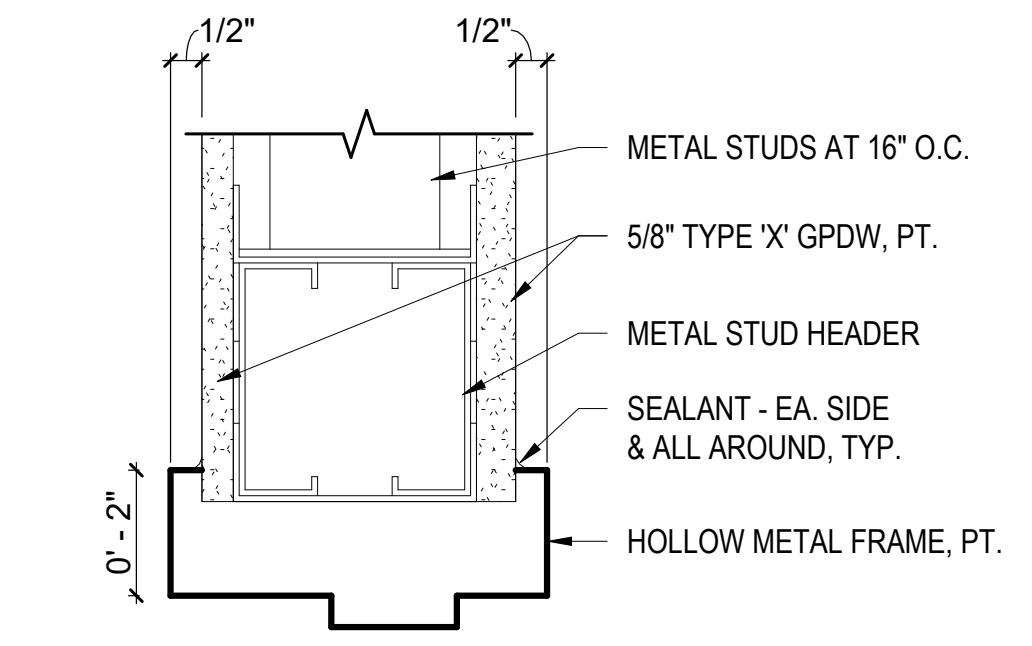
1/2"
1/2"
METAL STUDS AT 16" O.C.
5/8" TYPE 'X' GPDW, PT.
METAL STUD HEADER
SEALANT - EA. SIDE & ALL AROUND, TYP.
0' - 2"
HOLLOW METAL FRAME, PT.

4 HM Frame Head Detail

SCALE: 3" = 1'-0"

1.0 A6.1

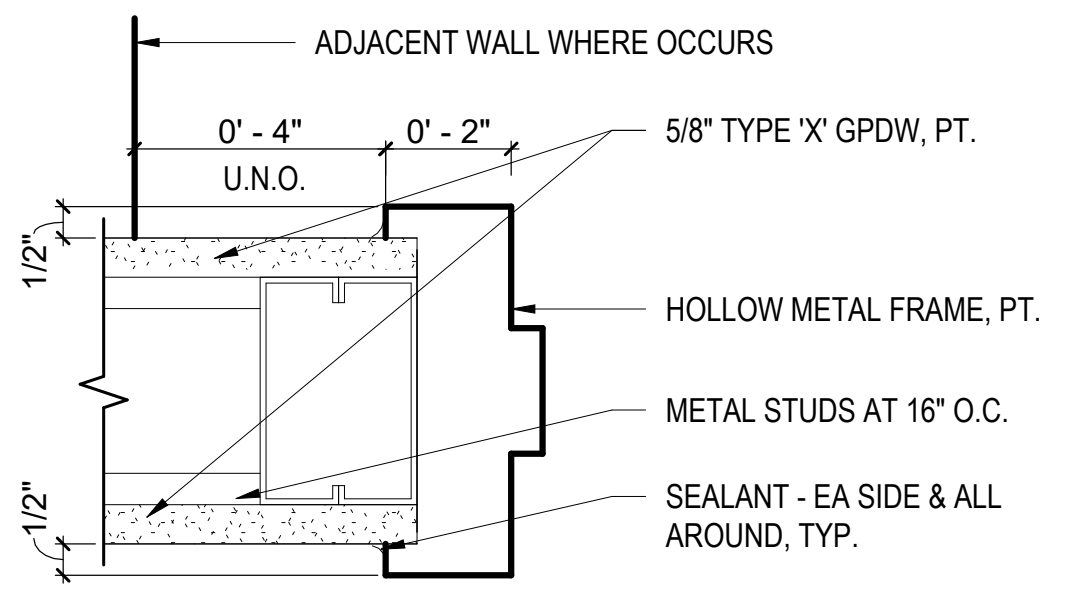
ADJACENT WALL WHERE OCCURS
0' - 4"
0' - 2"
U.N.O.
5/8" TYPE 'X' GPDW, PT.
1/2"
HOLLOW METAL FRAME, PT.
METAL STUDS AT 16" O.C.
1/2"
SEALANT - EA SIDE & ALL AROUND, TYP.

5 HM Frame Jamb Detail

SCALE: 3" = 1'-0"

1.0 A6.1

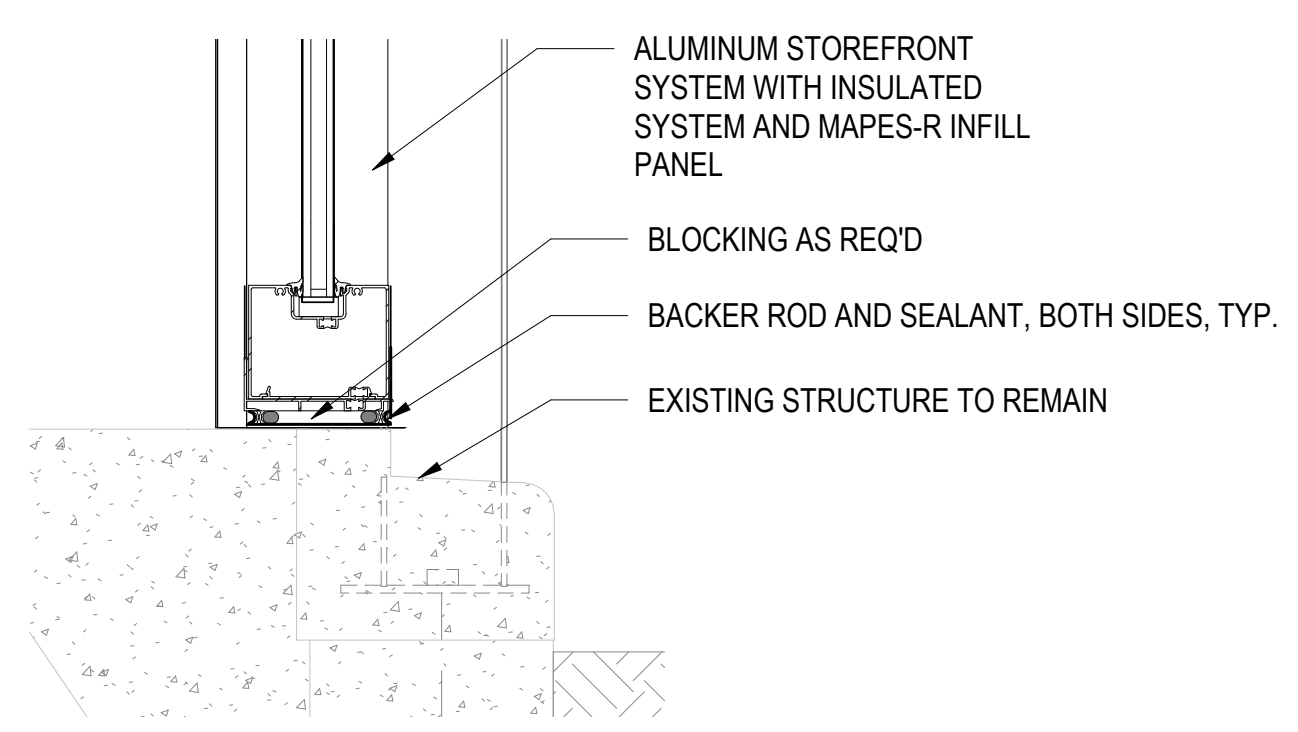
ALUMINUM STOREFRONT SYSTEM WITH INSULATED SYSTEM AND MAPES-R INFILL PANEL
BLOCKING AS REQ'D
BACKER ROD AND SEALANT, BOTH SIDES, TYP.
EXISTING STRUCTURE TO REMAIN

6 Section Detail

SCALE: 1 1/2" = 1'-0"

1 A4.0

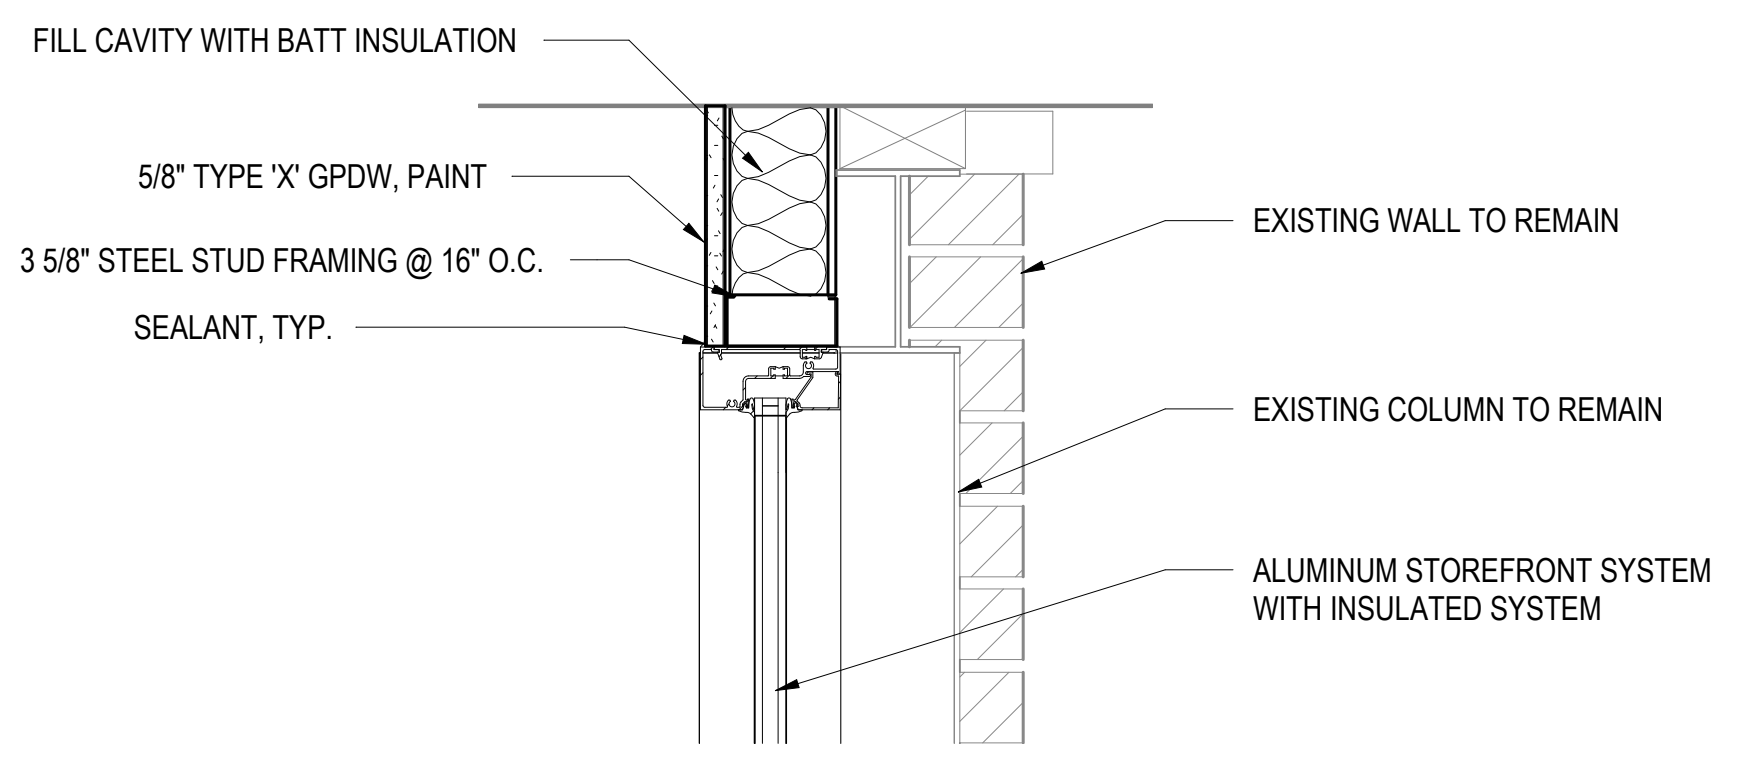
FILL CAVITY WITH BATT INSULATION
5/8" TYPE 'X' GPDW, PAINT
3 5/8" STEEL STUD FRAMING @ 16" O.C.
SEALANT, TYP.
EXISTING WALL TO REMAIN
EXISTING COLUMN TO REMAIN
ALUMINUM STOREFRONT SYSTEM WITH INSULATED SYSTEM

7 Section Detail

SCALE: 1 1/2" = 1'-0"

1 A4.0

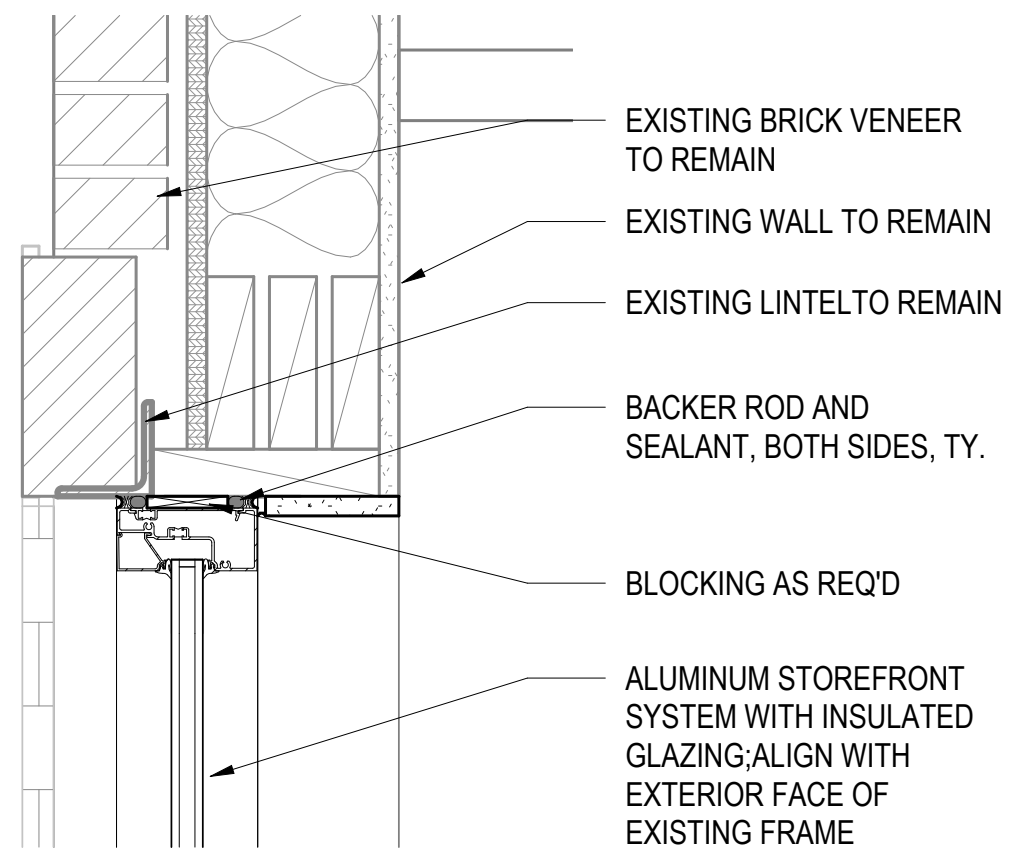
EXISTING BRICK VENEER TO REMAIN
EXISTING WALL TO REMAIN
EXISTING LINTELTO REMAIN
BACKER ROD AND SEALANT, BOTH SIDES, TY.
BLOCKING AS REQ'D
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING;ALIGN WITH EXTERIOR FACE OF EXISTING FRAME

8 Section Detail

SCALE: 1 1/2" = 1'-0"

5 A4.0

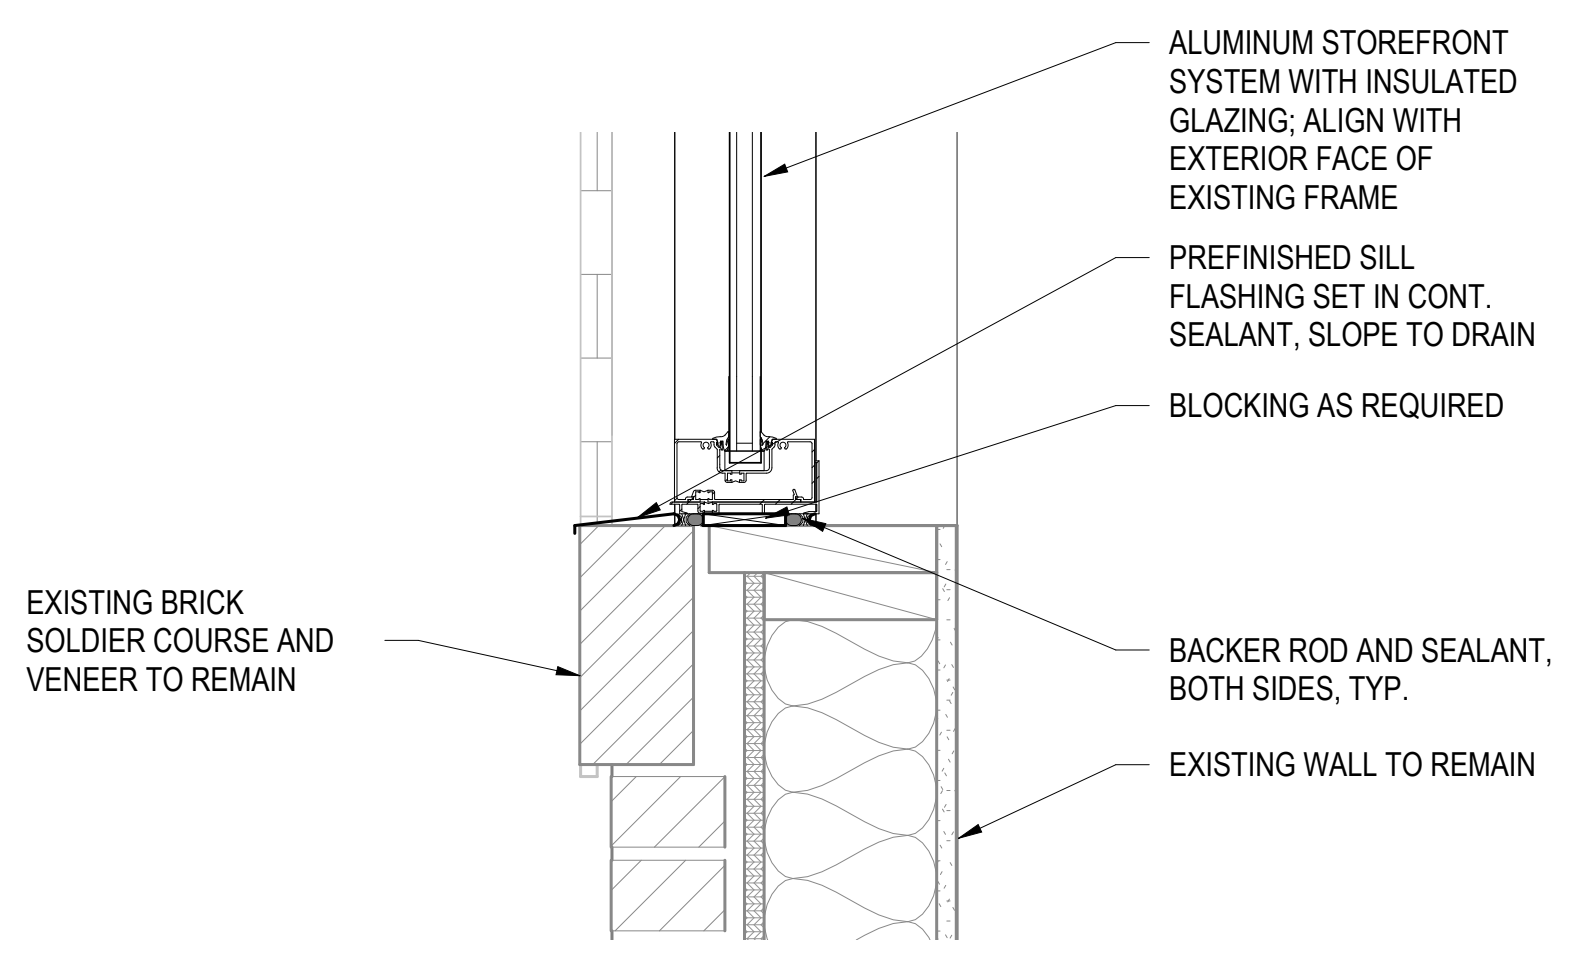
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING; ALIGN WITH EXTERIOR FACE OF EXISTING FRAME
PREFINISHED SILL FLASHING SET IN CONT. SEALANT, SLOPE TO DRAIN
BLOCKING AS REQUIRED
EXISTING BRICK SOLDIER COURSE AND VENEER TO REMAIN
BACKER ROD AND SEALANT, BOTH SIDES, TYP.
EXISTING WALL TO REMAIN

9 Section Detail

SCALE: 1 1/2" = 1'-0"

5 A4.0

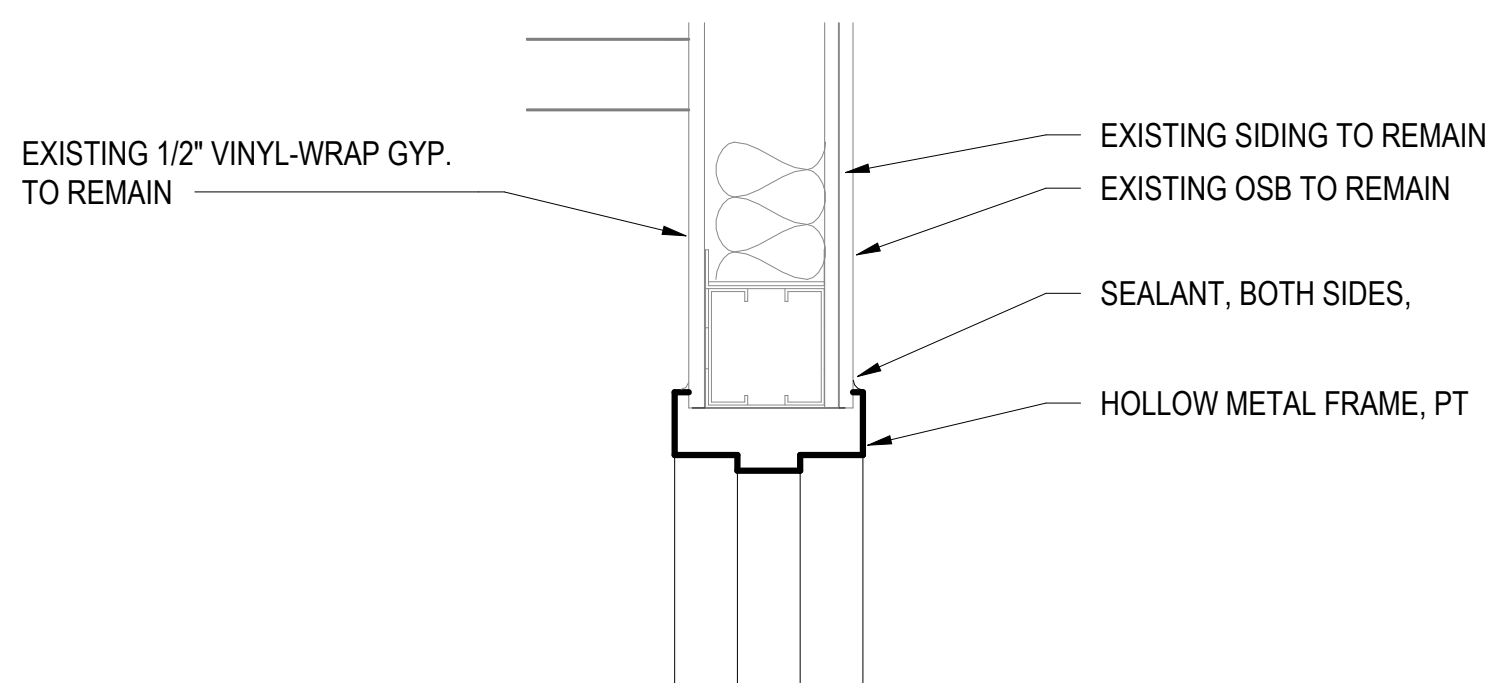
EXISTING 1/2" VINYL-WRAP GYP. TO REMAIN
EXISTING SIDING TO REMAIN
EXISTING OSB TO REMAIN
SEALANT, BOTH SIDES,
HOLLOW METAL FRAME, PT

10 Section Detail

SCALE: 1 1/2" = 1'-0"

3 A4.0

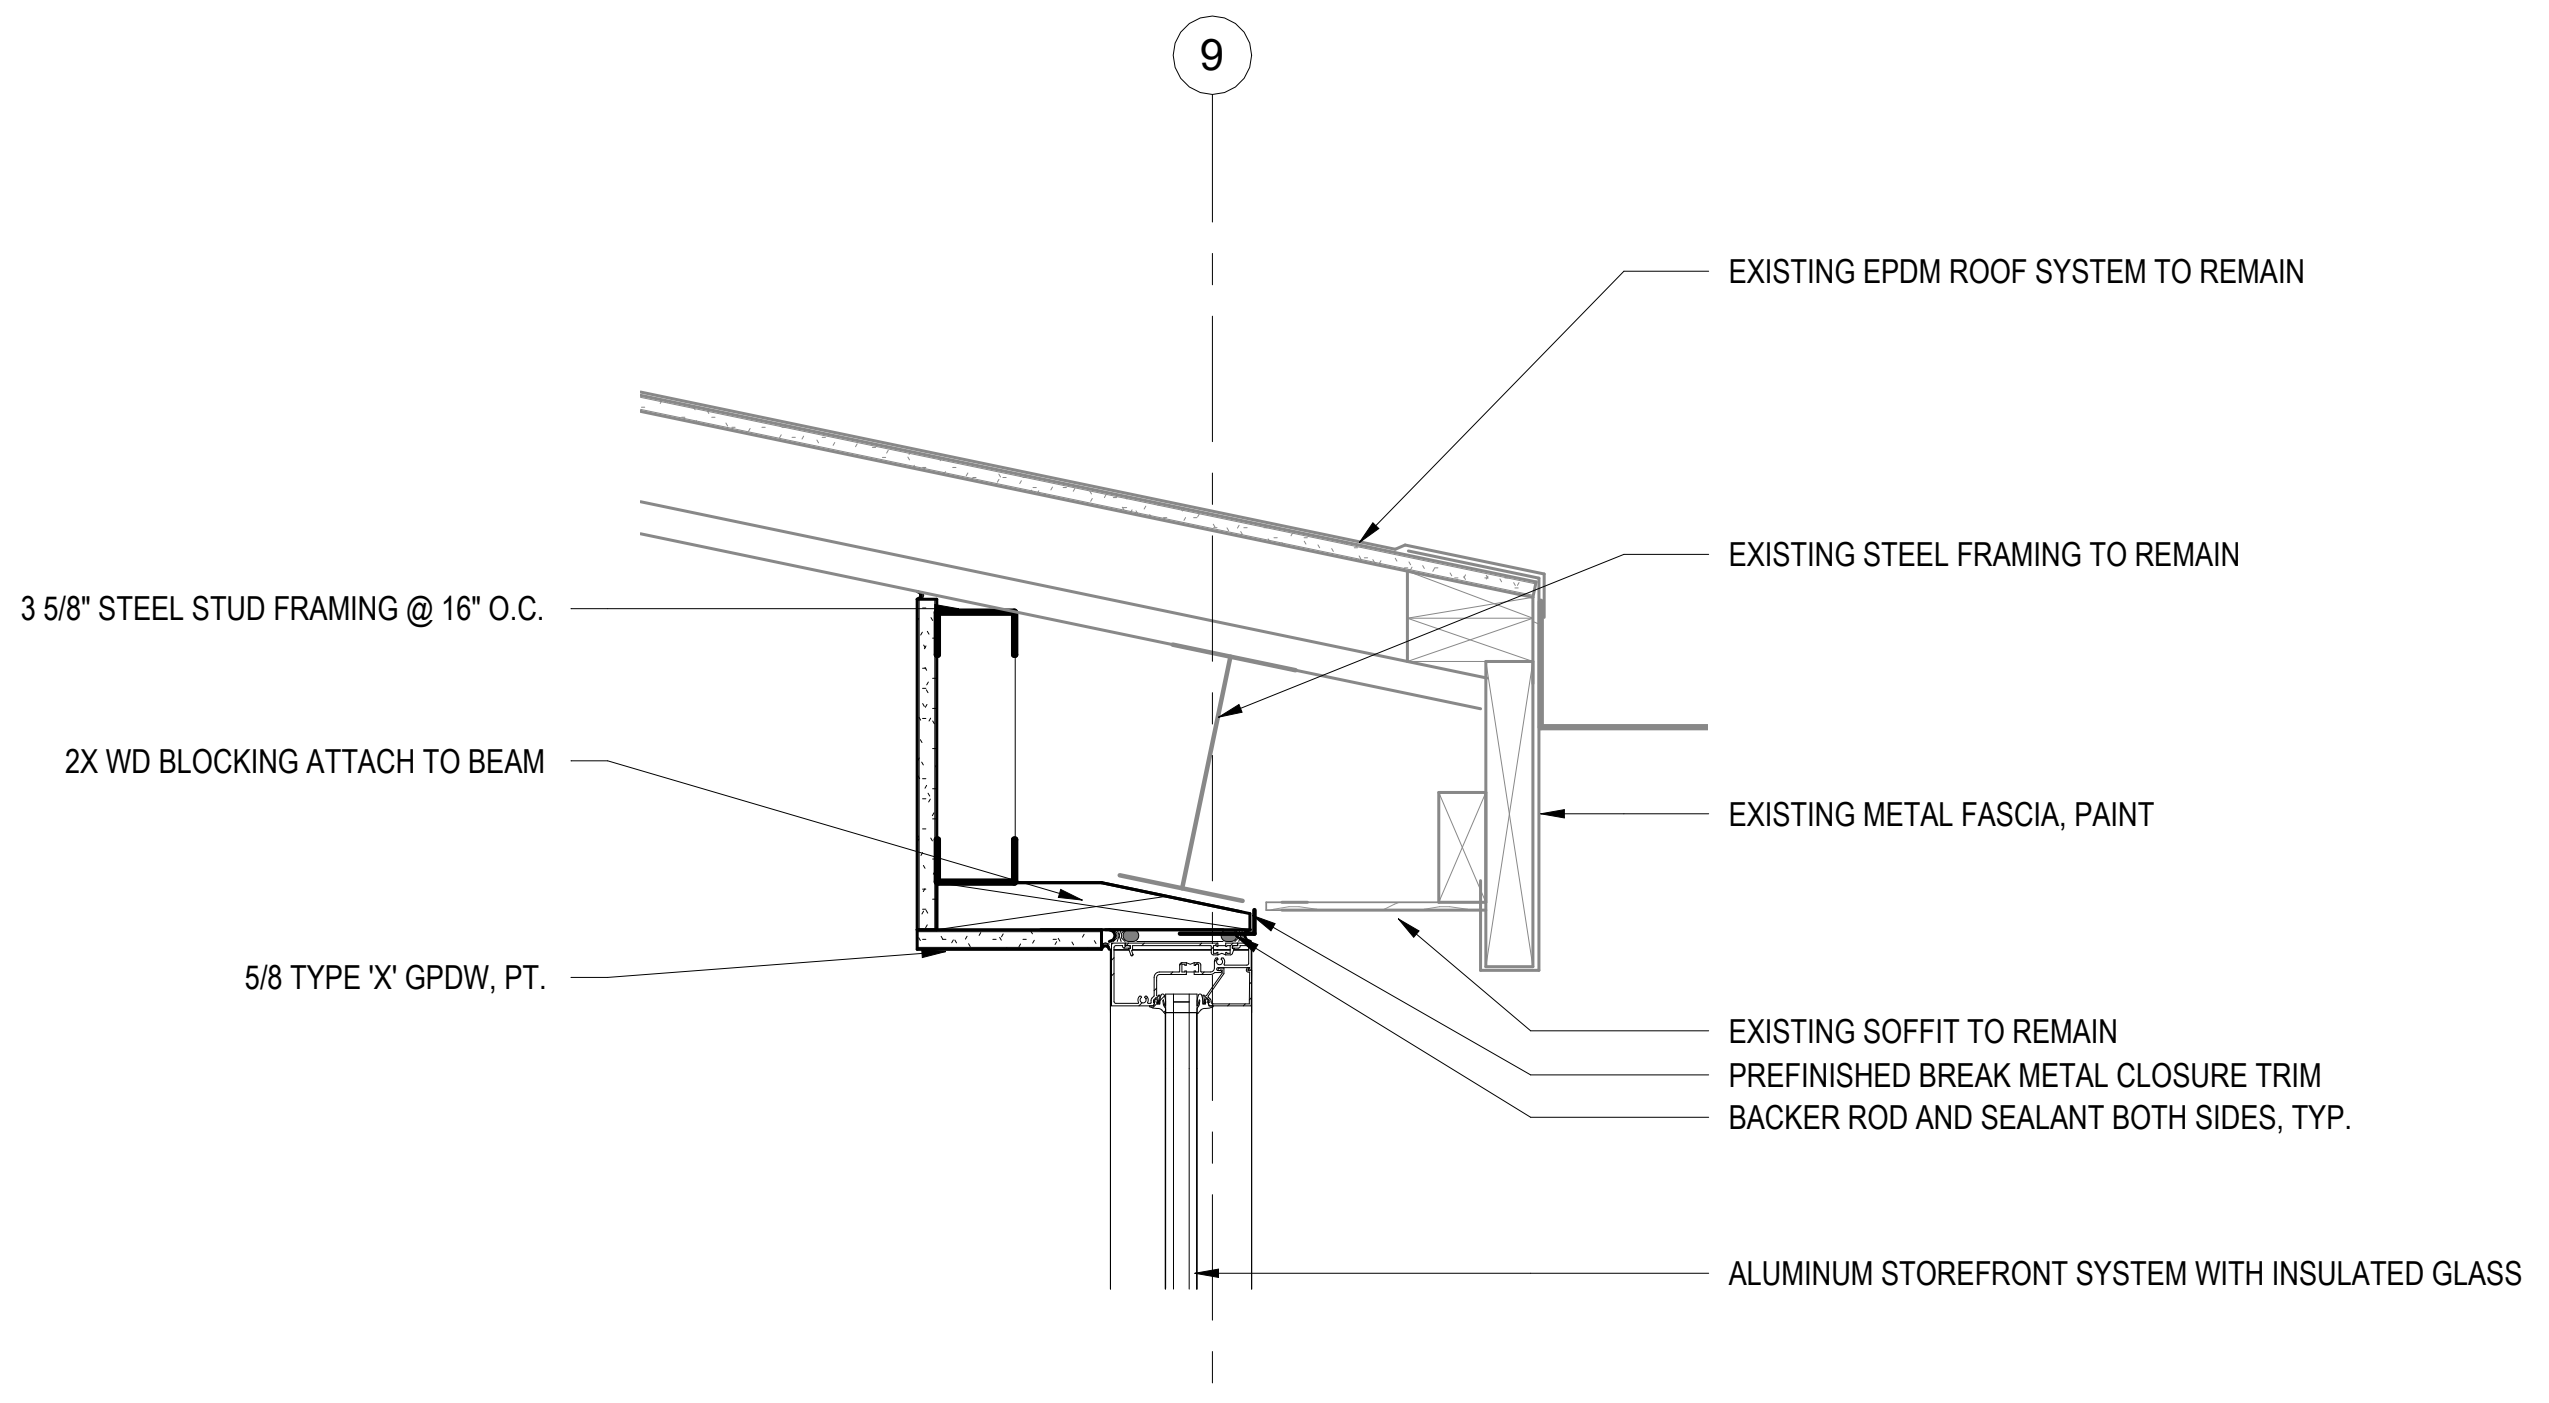
9
EXISTING EPDM ROOF SYSTEM TO REMAIN
EXISTING STEEL FRAMING TO REMAIN
3 5/8" STEEL STUD FRAMING @ 16" O.C.
2X WD BLOCKING ATTACH TO BEAM
EXISTING METAL FASCIA, PAINT
5/8 TYPE 'X' GPDW, PT.
EXISTING SOFFIT TO REMAIN
PREFINISHED BREAK METAL CLOSURE TRIM
BACKER ROD AND SEALANT BOTH SIDES, TYP.
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLASS

11 Section Detail

SCALE: 1 1/2" = 1'-0"

4 A4.0

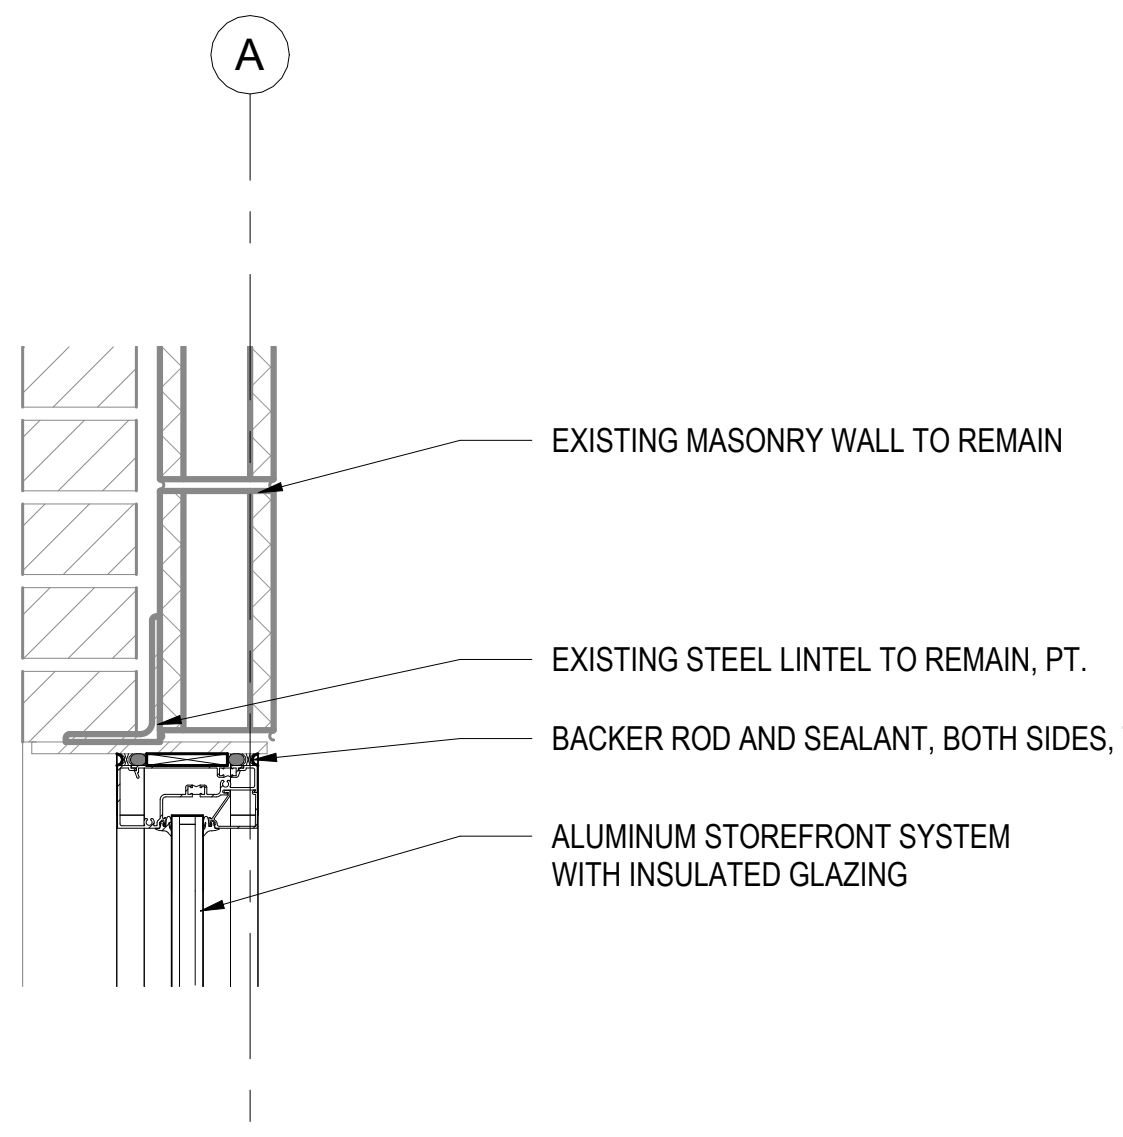
A
EXISTING MASONRY WALL TO REMAIN
EXISTING STEEL LINTEL TO REMAIN, PT.
BACKER ROD AND SEALANT, BOTH SIDES, TPC.
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING

12 Section Detail

SCALE: 1 1/2" = 1'-0"

6 A4.0

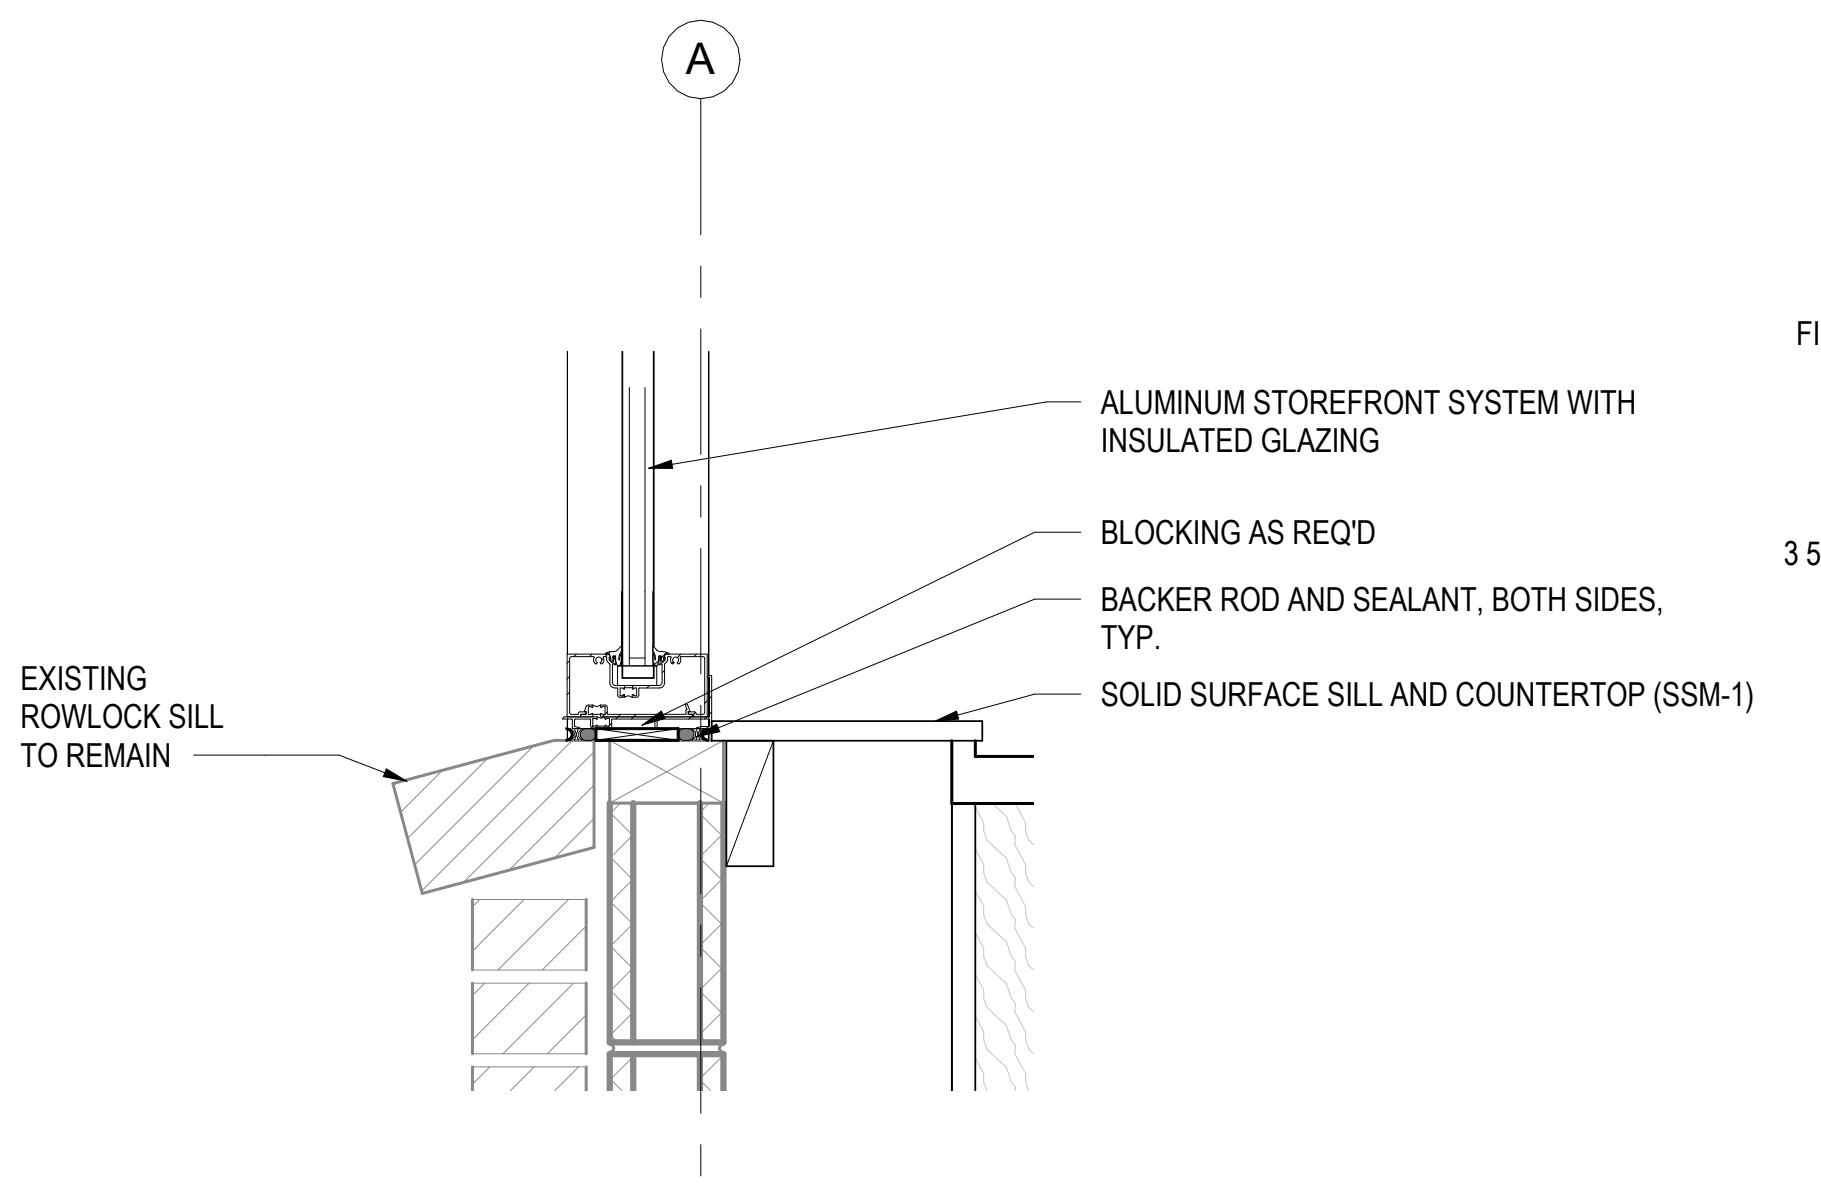
A
ALUMINUM STOREFRONT SYSTEM WITH INSULATED GLAZING
BLOCKING AS REQ'D
BACKER ROD AND SEALANT, BOTH SIDES, TYP.
EXISTING ROWLOCK SILL TO REMAIN
SOLID SURFACE SILL AND COUNTERTOP (SSM-1)

13 Section Detail

SCALE: 1 1/2" = 1'-0"

6 A4.0

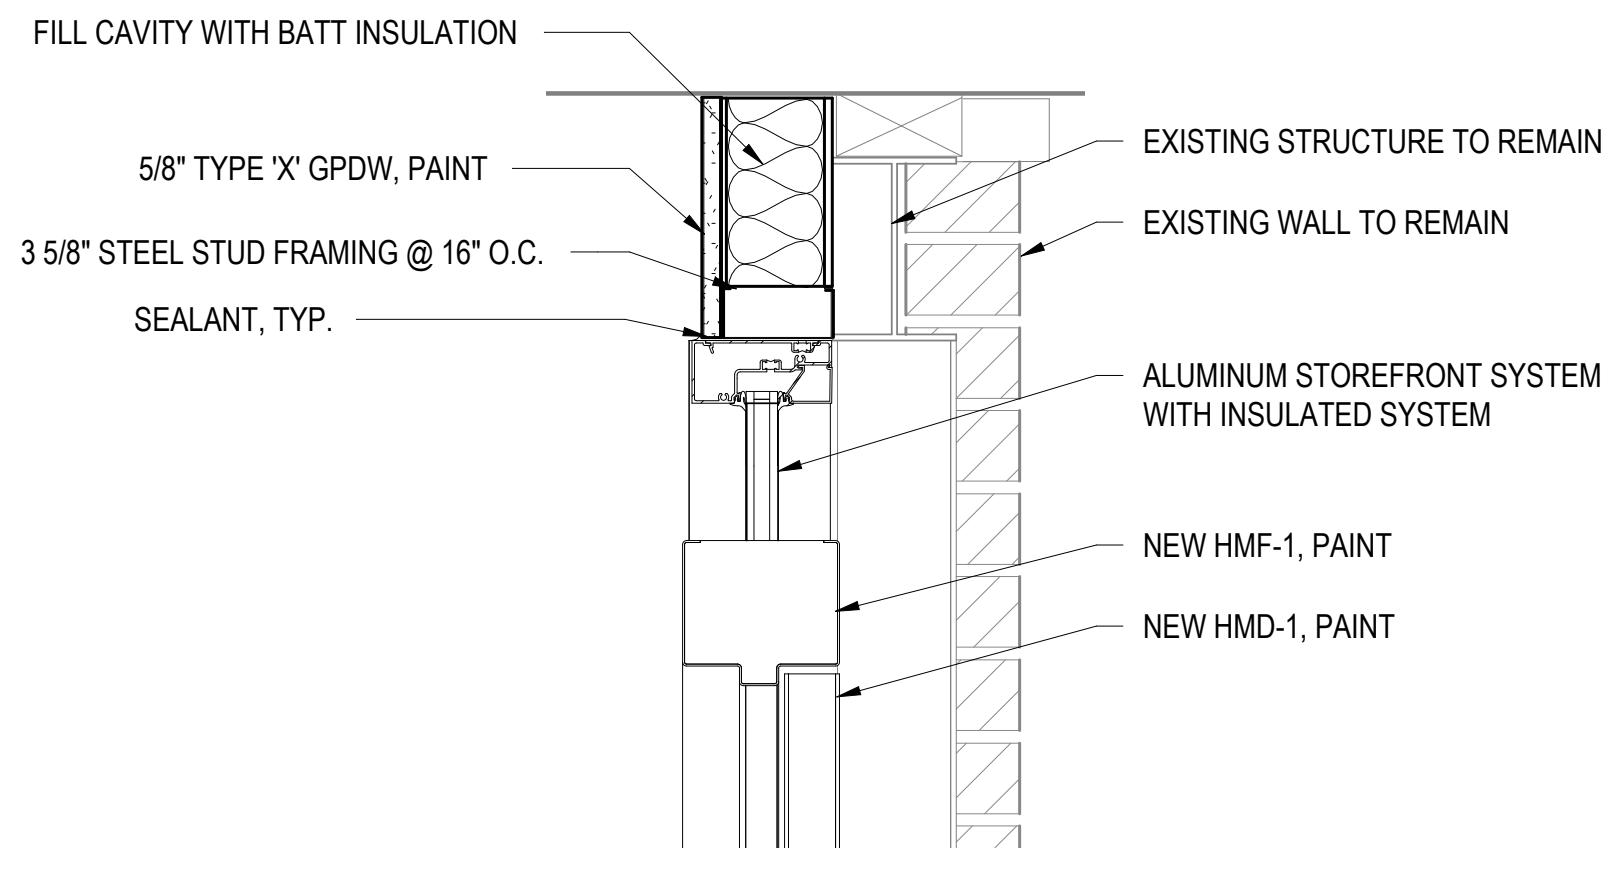
FILL CAVITY WITH BATT INSULATION
5/8" TYPE 'X' GPDW, PAINT
3 5/8" STEEL STUD FRAMING @ 16" O.C.
SEALANT, TYP.
EXISTING STRUCTURE TO REMAIN
EXISTING WALL TO REMAIN
ALUMINUM STOREFRONT SYSTEM WITH INSULATED SYSTEM
NEW HMF-1, PAINT
NEW HMD-1, PAINT

14 Section Detail

SCALE: 1 1/2" = 1'-0"

2 A4.0

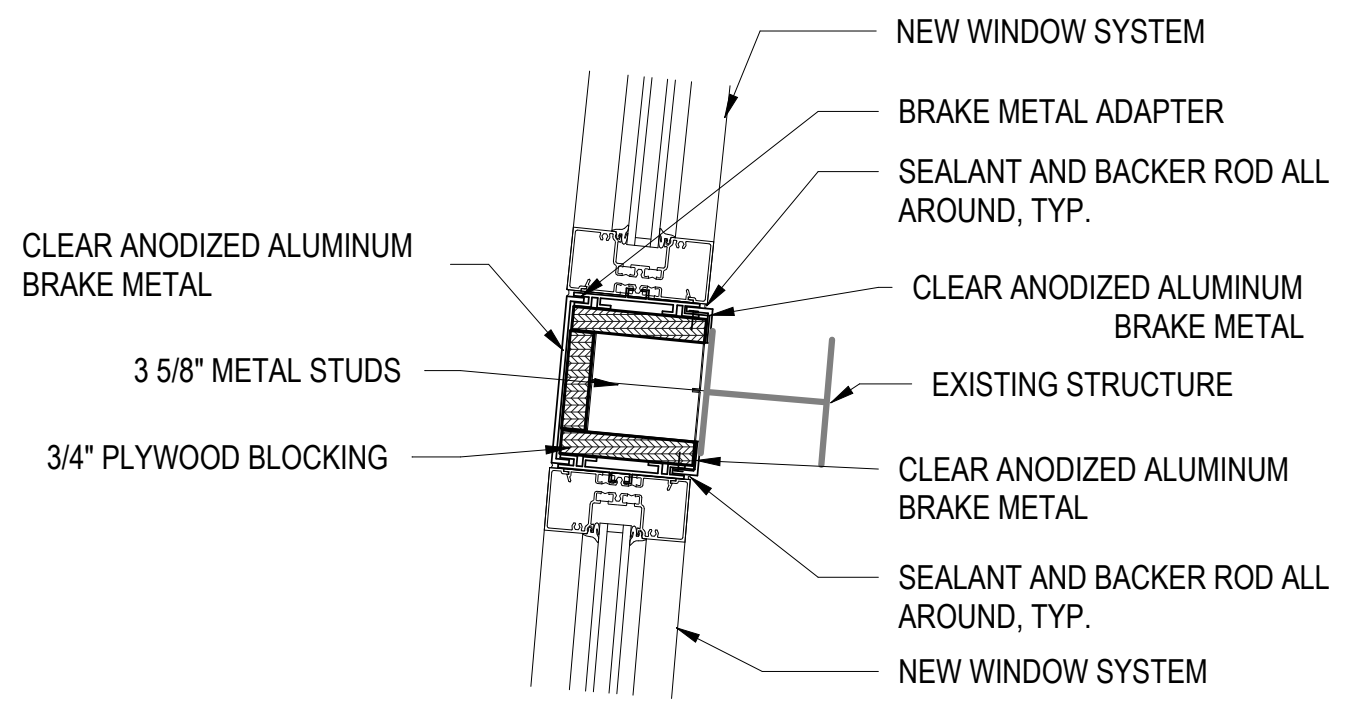
NEW WINDOW SYSTEM
BRAKE METAL ADAPTER
SEALANT AND BACKER ROD ALL AROUND, TYP.
CLEAR ANODIZED ALUMINUM BRAKE METAL
CLEAR ANODIZED ALUMINUM BRAKE METAL
3 5/8" METAL STUDS
EXISTING STRUCTURE
3/4" PLYWOOD BLOCKING
CLEAR ANODIZED ALUMINUM BRAKE METAL
SEALANT AND BACKER ROD ALL AROUND, TYP.
NEW WINDOW SYSTEM

15 Detail

SCALE: 1 1/2" = 1'-0"

1 A1.0

C:\Users\Anon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8a73f1d1564.rvt
9/25/2026 10:44:06 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Details/Door Schedule/Door & Window Details

A6.1

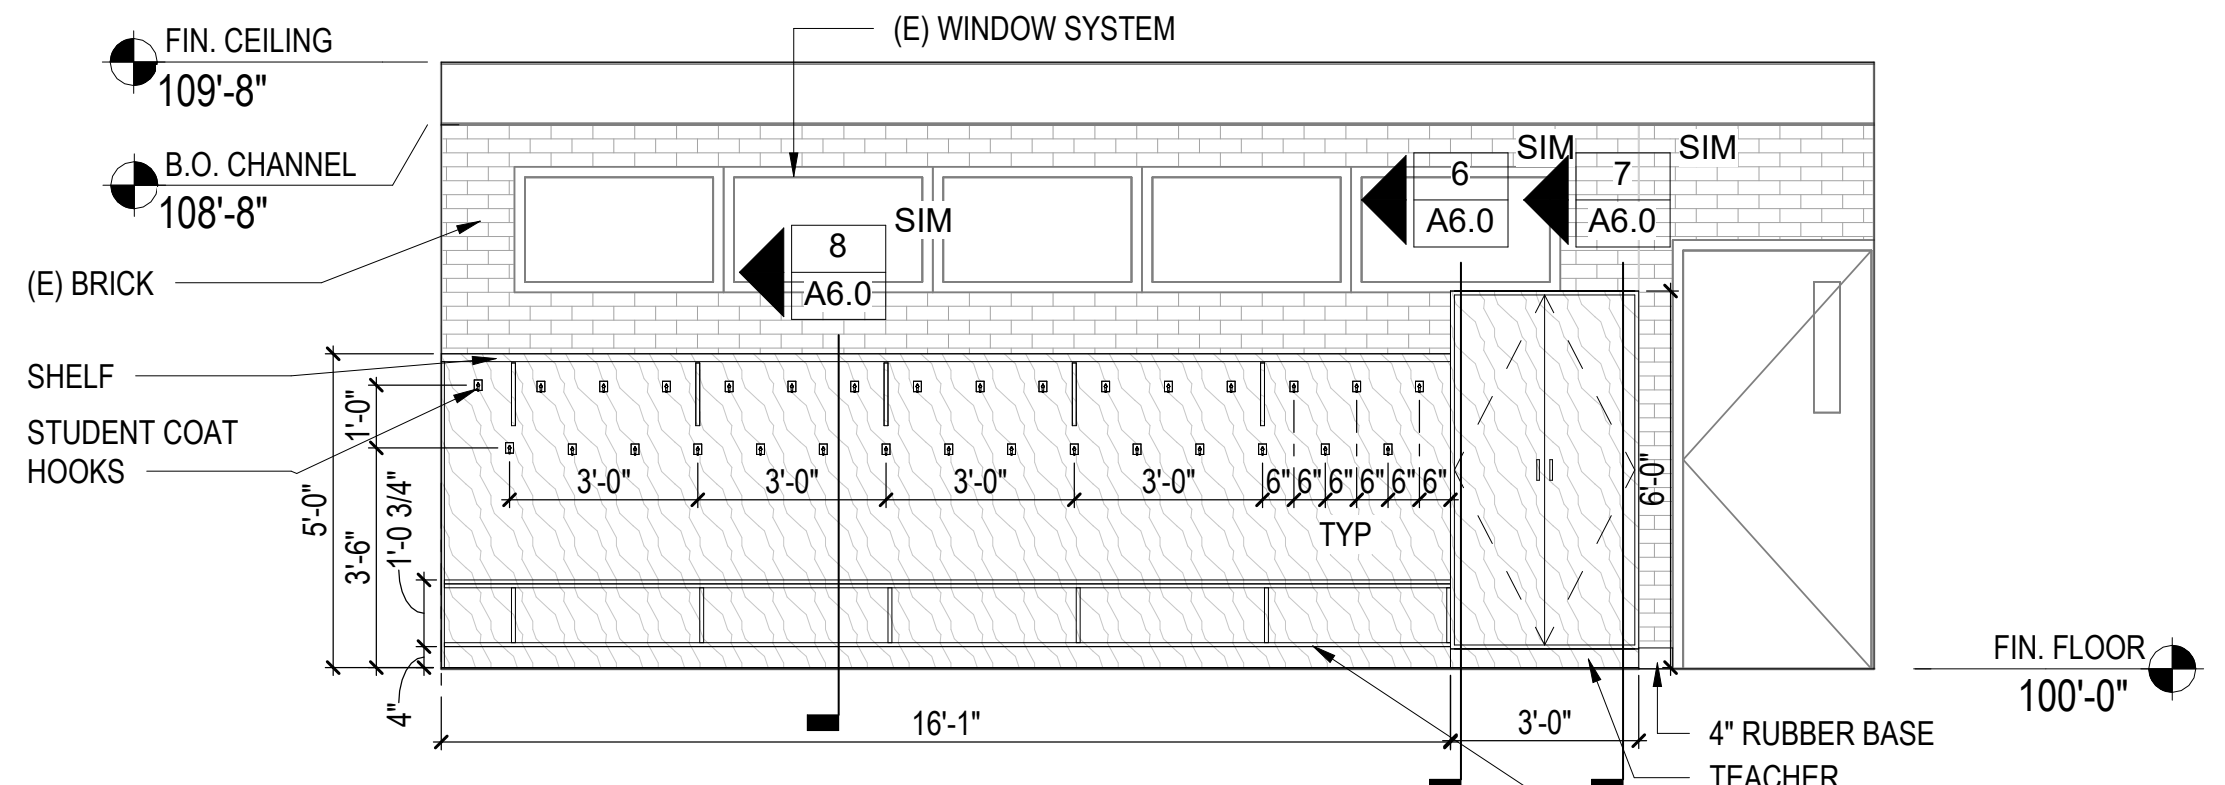
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
(E) WINDOW SYSTEM
(E) BRICK
SHELF
STUDENT COAT HOOKS
8 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
3'-0"
6"
TYP
5'-0"
3'-6"
1'-0"
1'-0 3/4"
4"
6'-0"
16'-1"
FIN. FLOOR
100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

1 Classroom (2) - North
SCALE: 1/4" = 1'-0"
1 A1.0

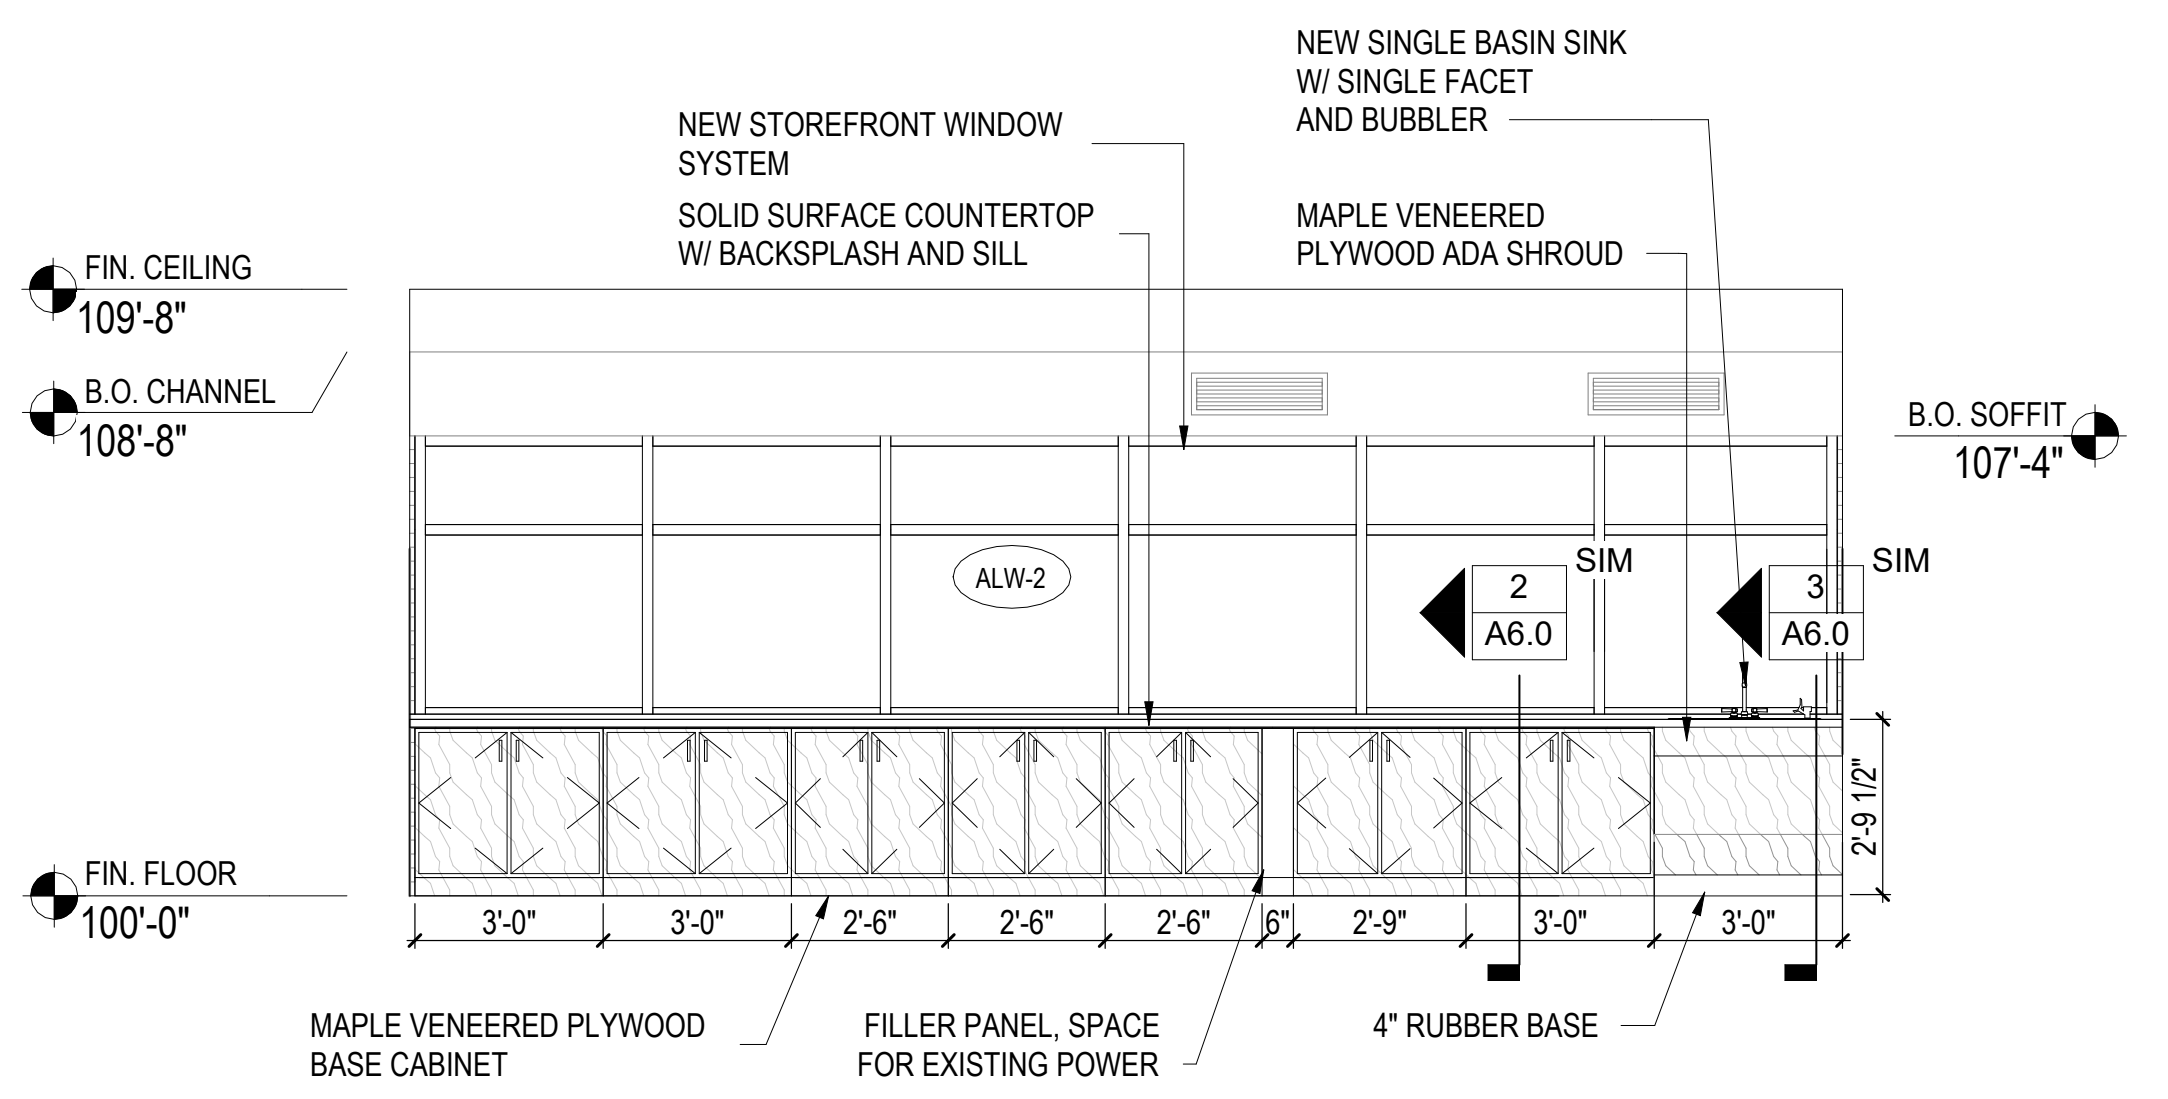
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
B.O. SOFFIT
107'-4"
ALW-2
2 A6.0 SIM
3 A6.0 SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-6"
2'-9"
MAPLE VENEERED PLYWOOD BASE CABINET
FILLER PANEL, SPACE FOR EXISTING POWER
4" RUBBER BASE

2 Classroom (2) - South
SCALE: 1/4" = 1'-0"
1 A1.0

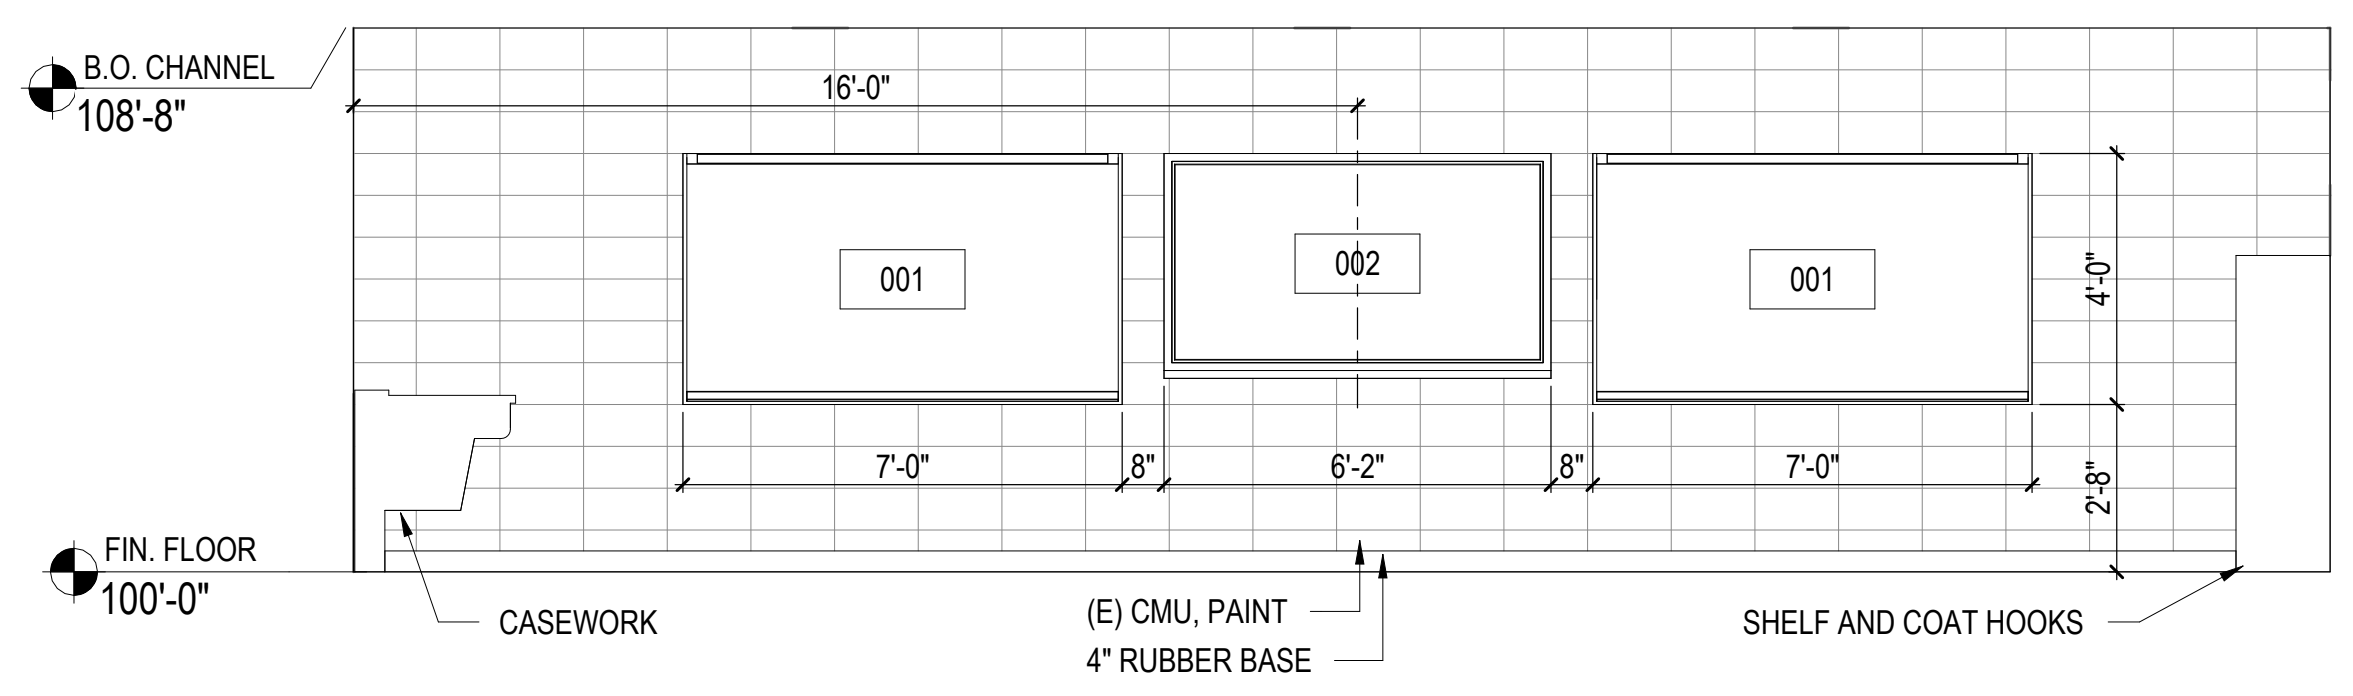
B.O. CHANNEL
108'-8"
16'-0"
001
002
001
7'-0"
8"
6'-2"
4'-0"
2'-8"
FIN. FLOOR
100'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

3 Classroom (2) - West
SCALE: 1/4" = 1'-0"
1 A1.0

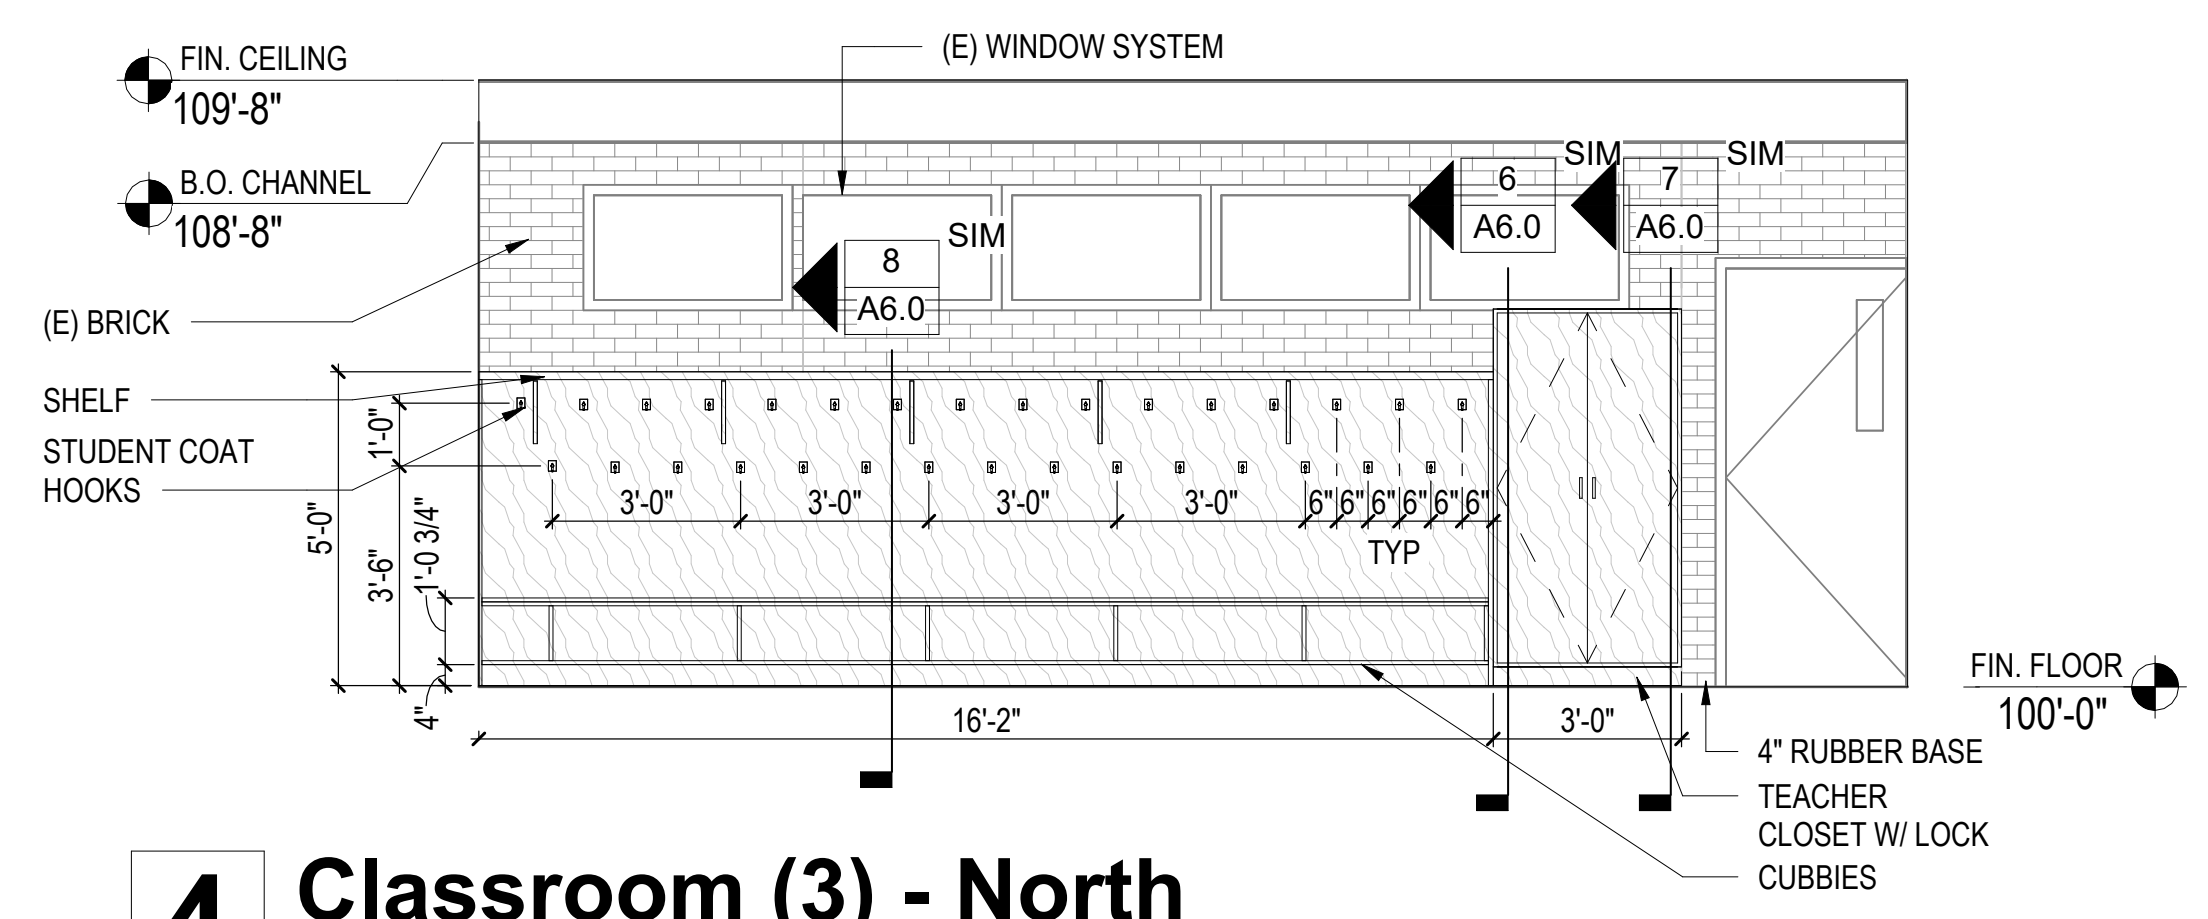
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
(E) WINDOW SYSTEM
(E) BRICK
SHELF
STUDENT COAT HOOKS
8 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
3'-0"
TYP
16'-2"
FIN. FLOOR
100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

4 Classroom (3) - North
SCALE: 1/4" = 1'-0"
1 A1.0

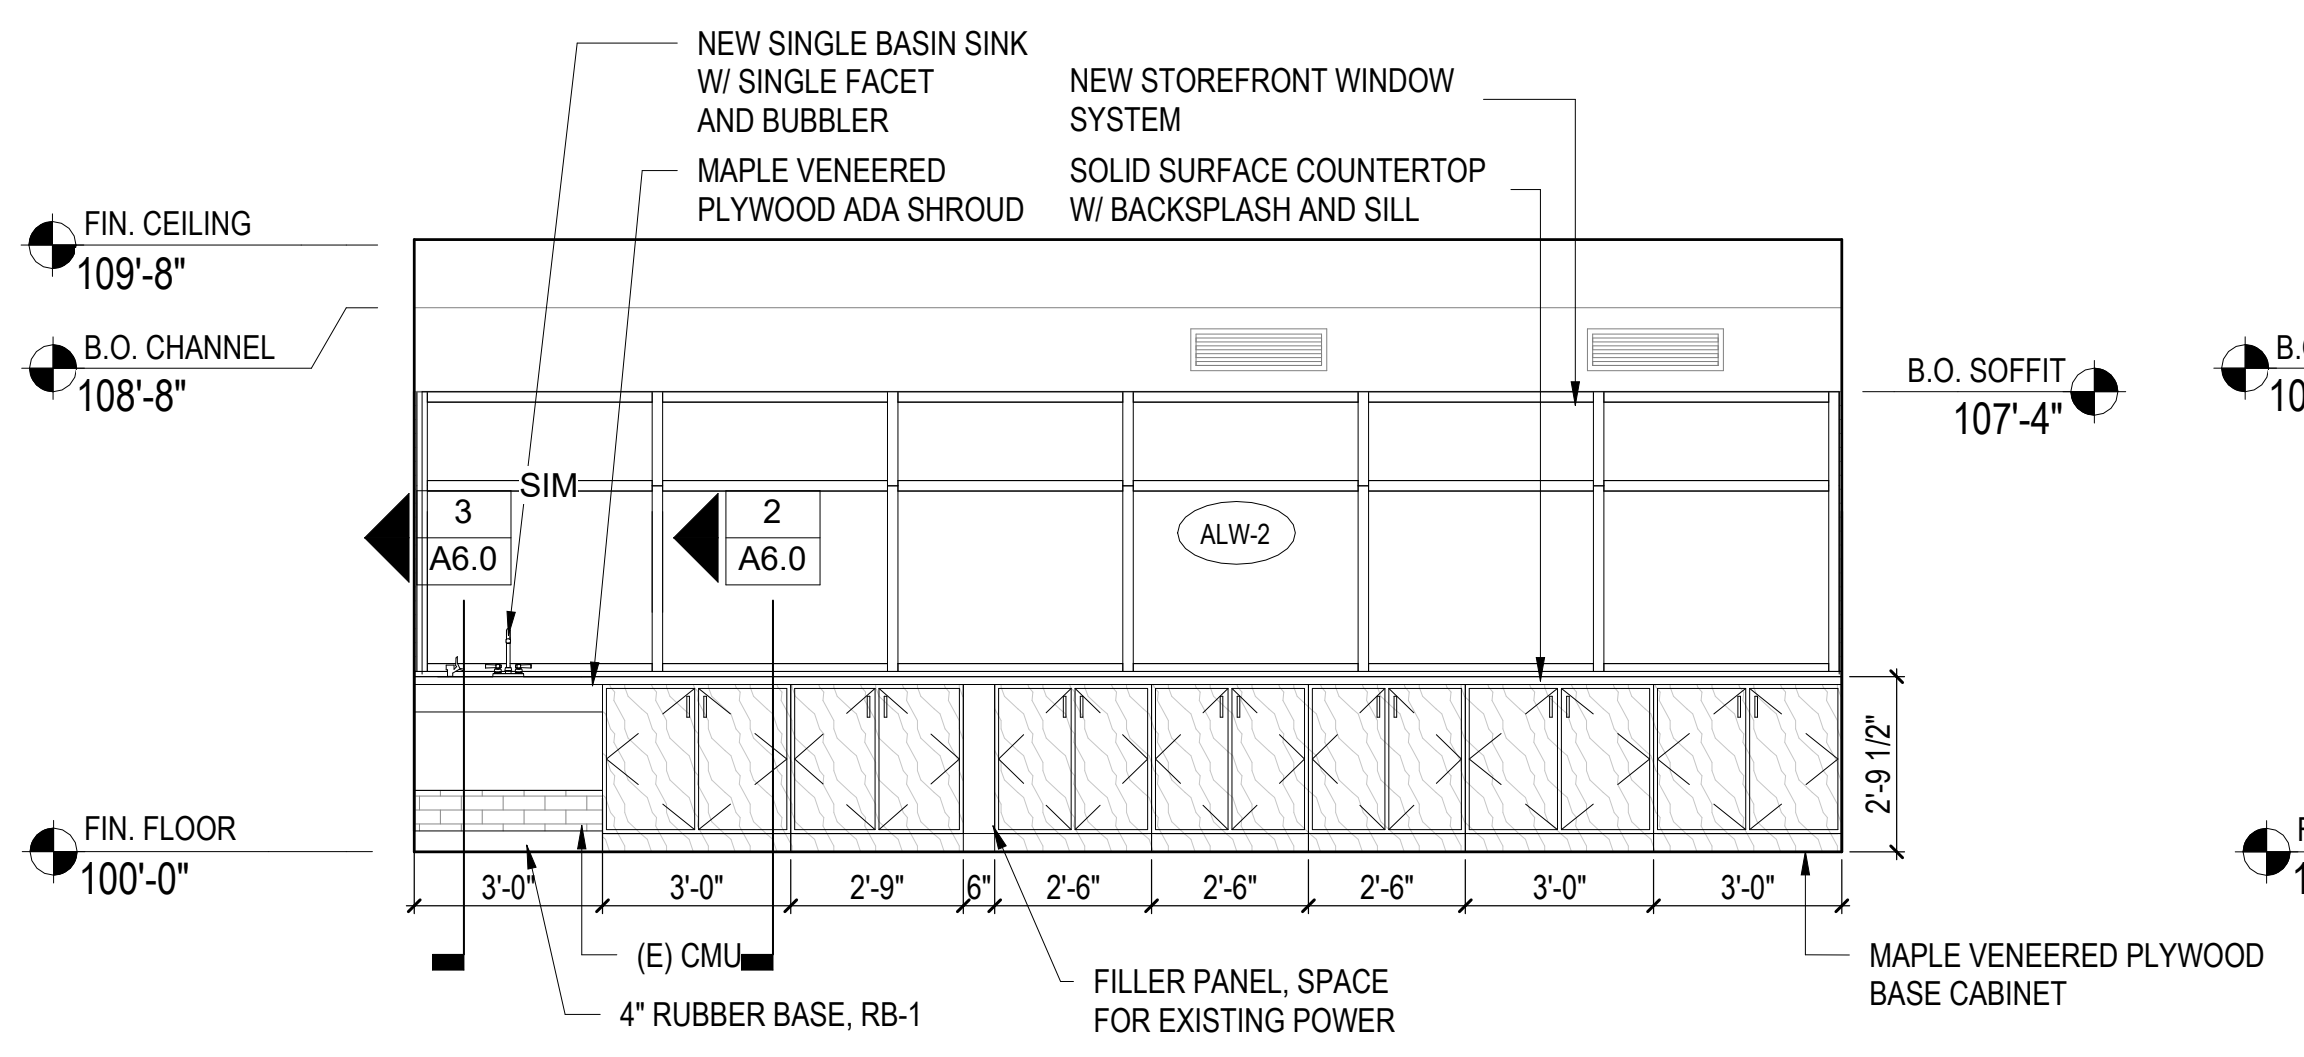
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
B.O. SOFFIT
107'-4"
3 A6.0 SIM
2 A6.0
ALW-2
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-9"
2'-6"
(E) CMU
4" RUBBER BASE, RB-1
FILLER PANEL, SPACE FOR EXISTING POWER
MAPLE VENEERED PLYWOOD BASE CABINET

5 Classroom (3) - South
SCALE: 1/4" = 1'-0"
1 A1.0

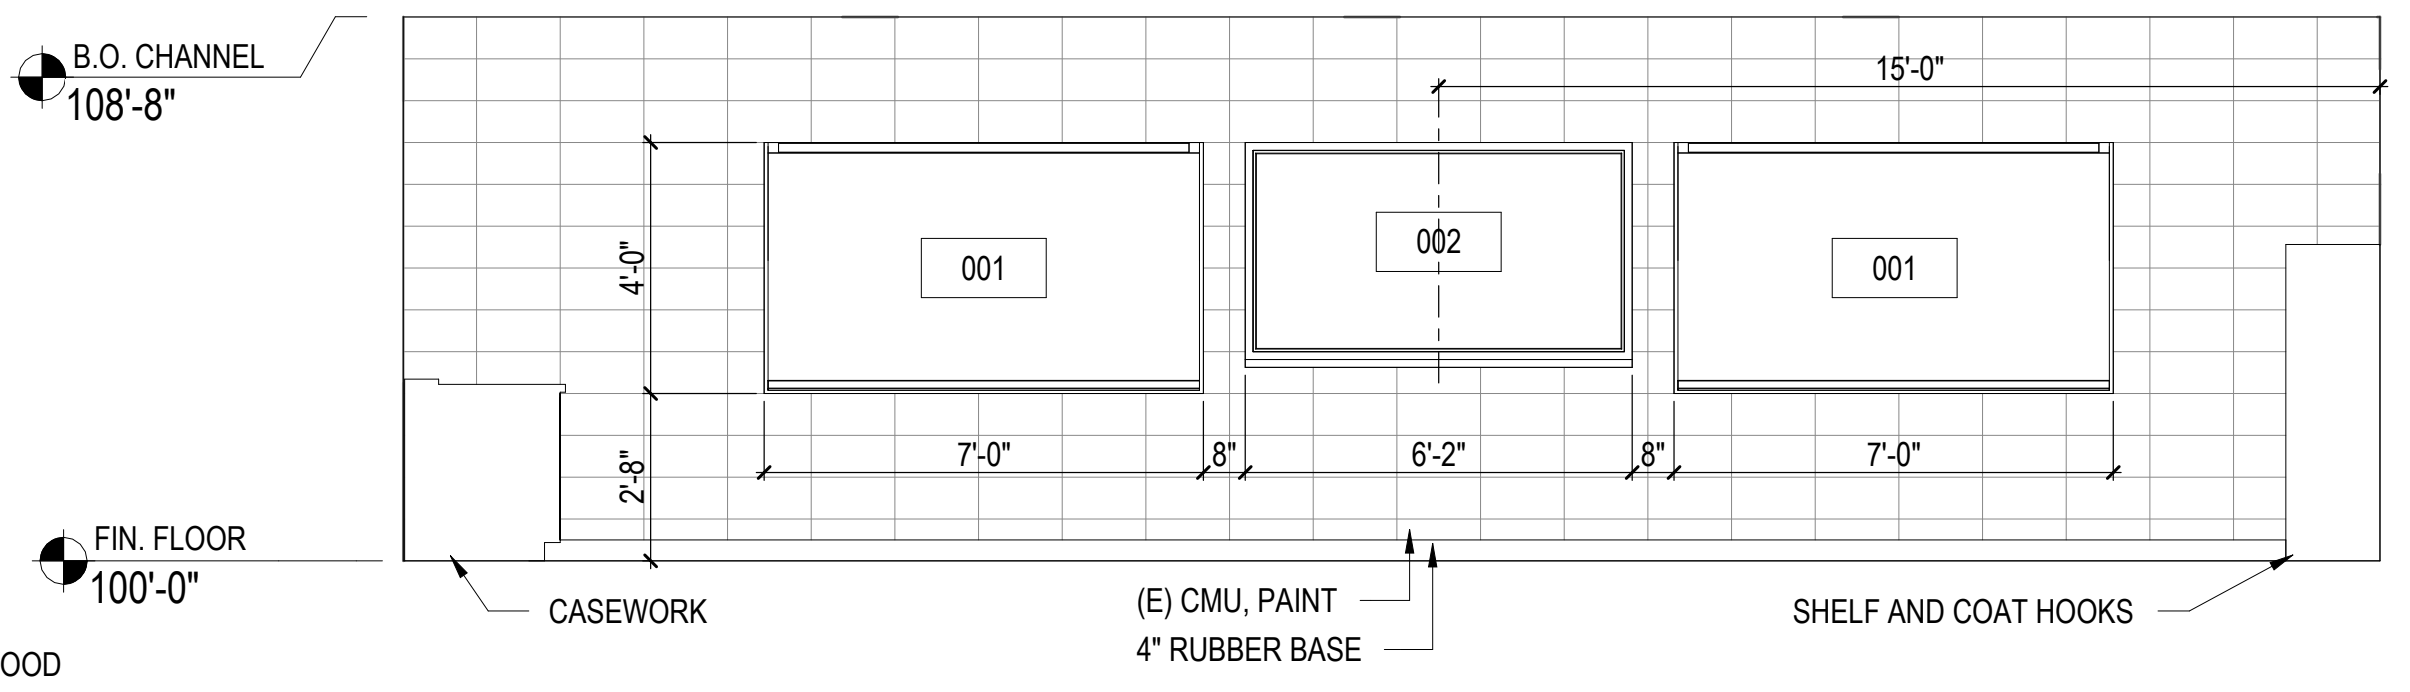
B.O. CHANNEL
108'-8"
15'-0"
001
002
001
7'-0"
8"
6'-2"
4'-0"
2'-8"
FIN. FLOOR
100'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

6 Classroom (3) - West
SCALE: 1/4" = 1'-0"
1 A1.0

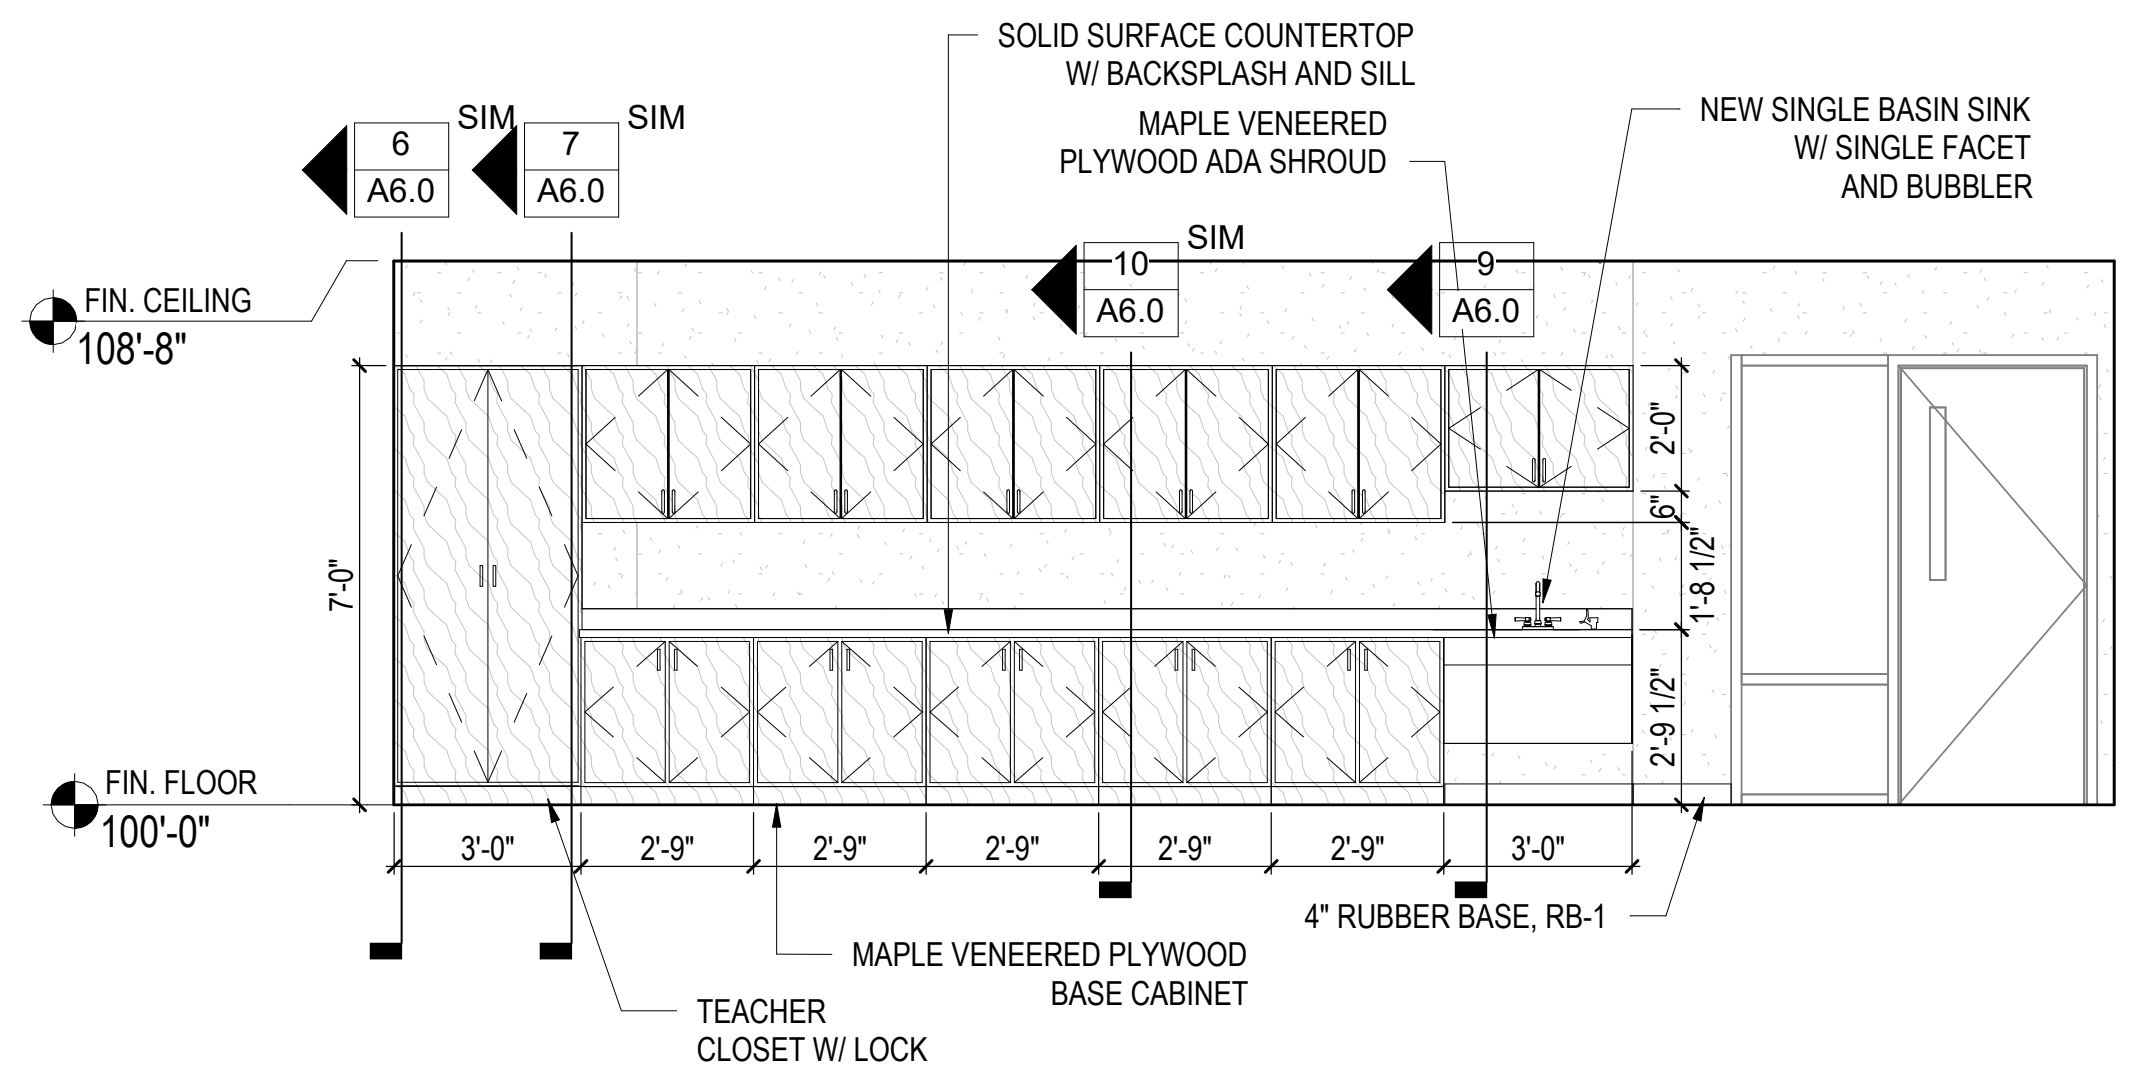
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
6 A6.0 SIM
7 A6.0 SIM
10 A6.0 SIM
9 A6.0
FIN. CEILING
108'-8"
7'-0"
2'-0"
1'-8 1/2"
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-9"
4" RUBBER BASE, RB-1
TEACHER CLOSET W/ LOCK
MAPLE VENEERED PLYWOOD BASE CABINET

7 Classroom (4) - North
SCALE: 1/4" = 1'-0"
1 A1.0

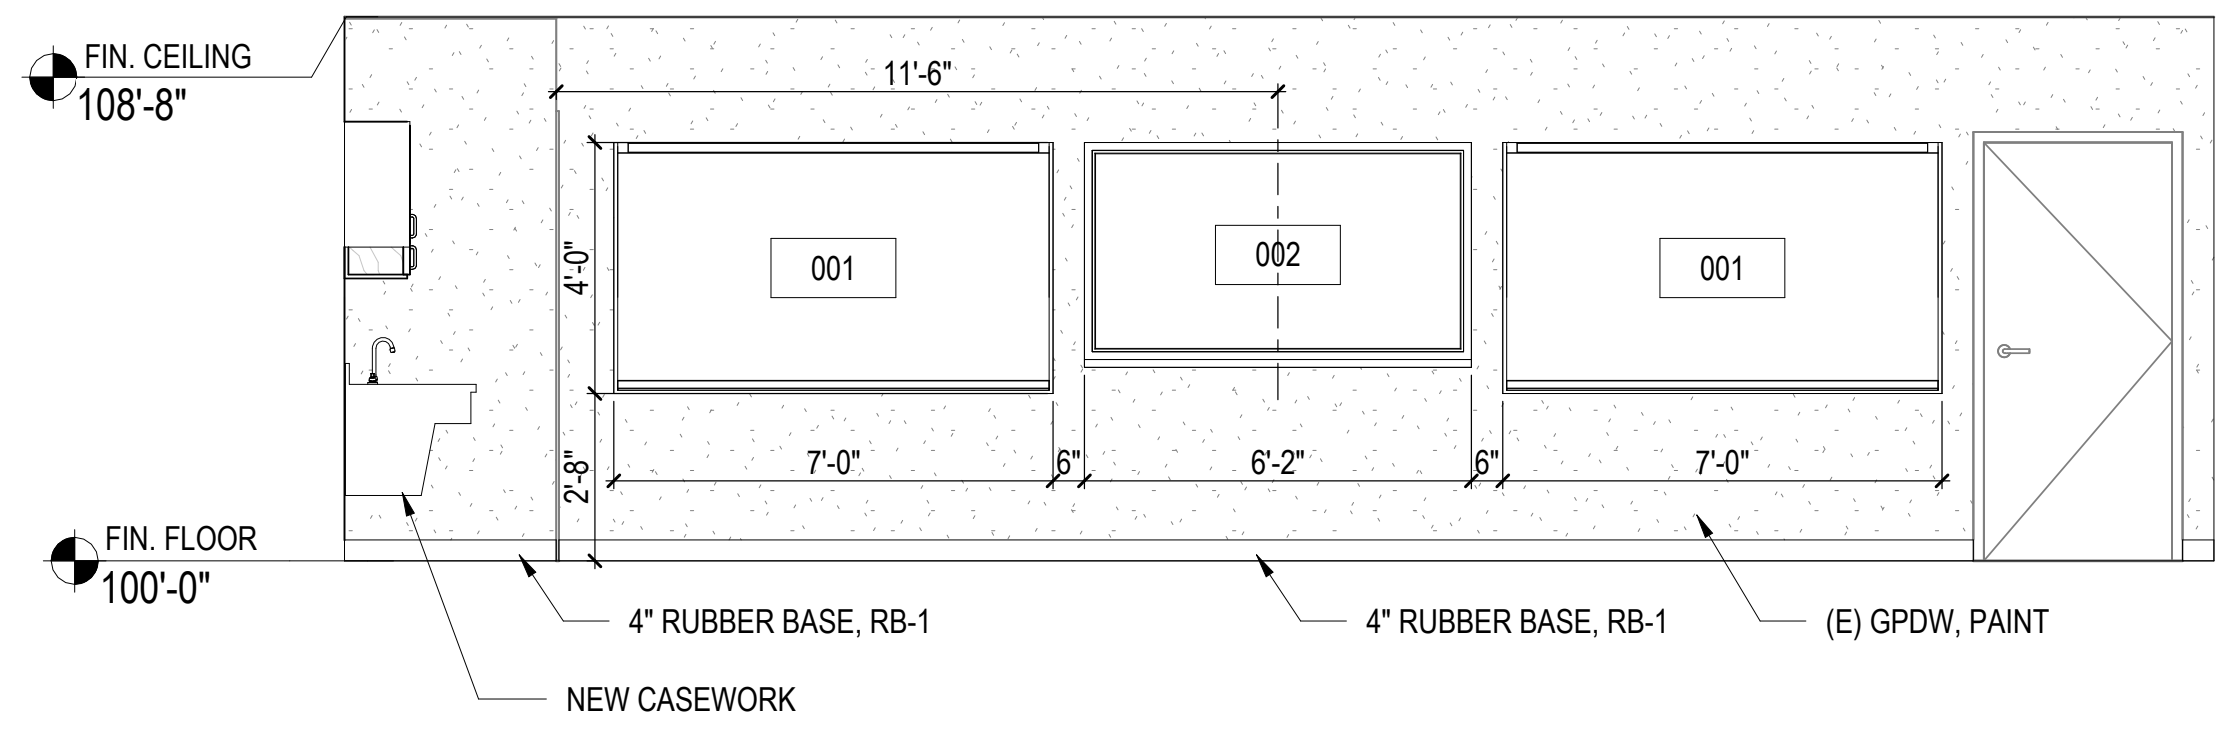
FIN. CEILING
108'-8"
11'-6"
001
002
001
7'-0"
8"
6'-2"
4'-0"
2'-8"
FIN. FLOOR
100'-0"
4" RUBBER BASE, RB-1
(E) GPDW, PAINT
NEW CASEWORK

8 Classroom (4) - East
SCALE: 1/4" = 1'-0"
1 A1.0

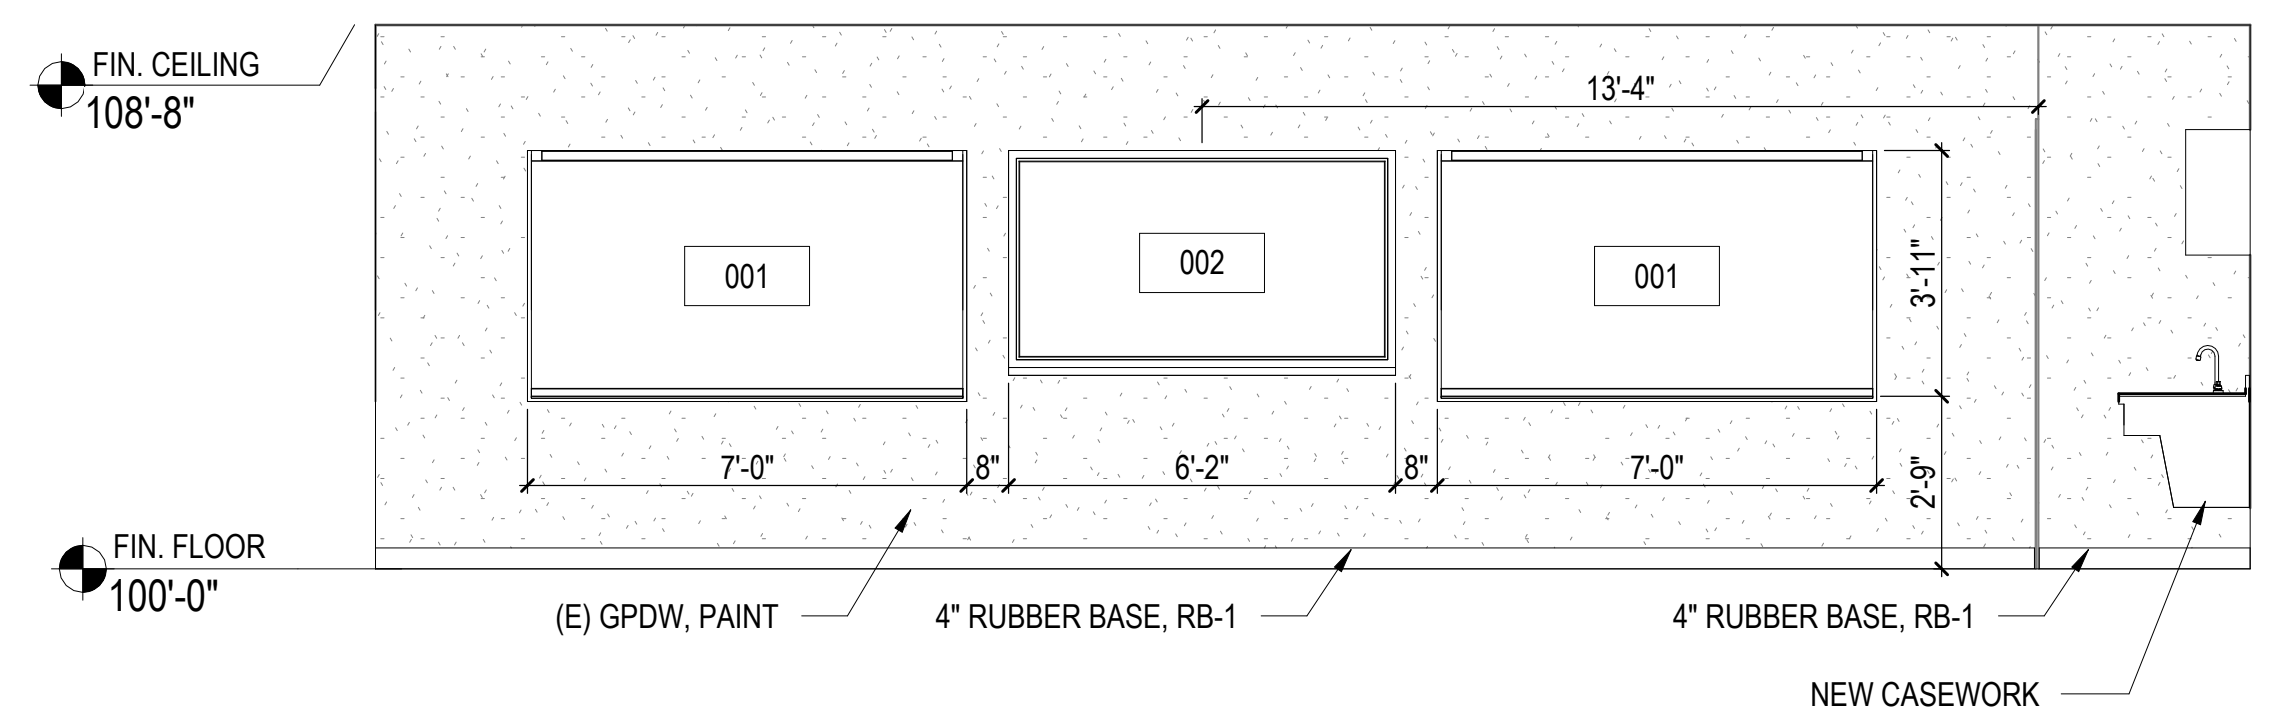
FIN. CEILING
108'-8"
13'-4"
001
002
001
7'-0"
8"
6'-2"
3'-11"
2'-8"
FIN. FLOOR
100'-0"
(E) GPDW, PAINT
4" RUBBER BASE, RB-1
NEW CASEWORK

11 Classroom (5) - East
SCALE: 1/4" = 1'-0"
1 A1.0

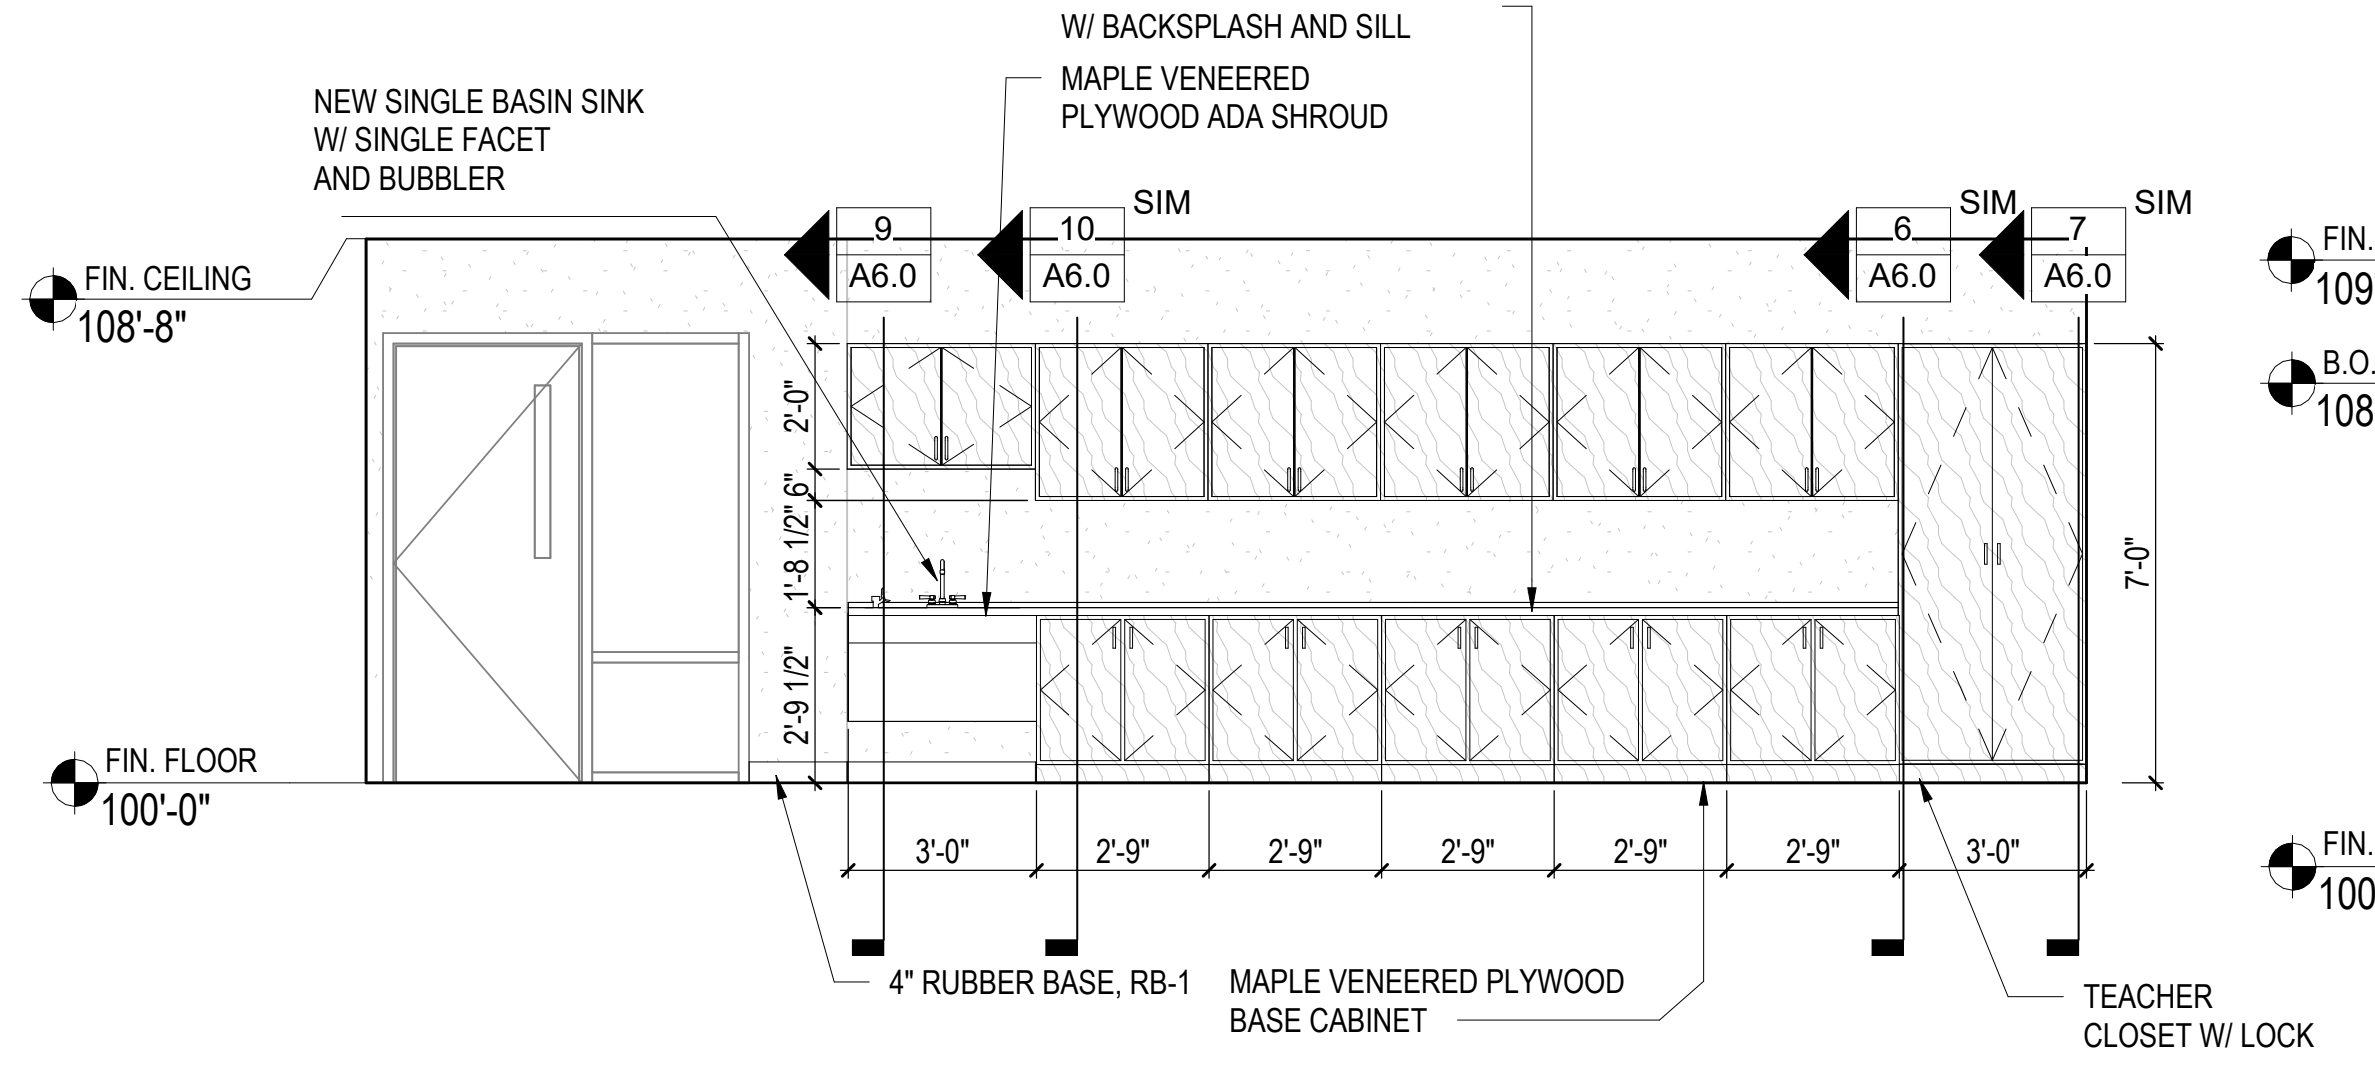
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
9 A6.0
10 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
FIN. CEILING
108'-8"
2'-0"
6"
1'-8 1/2"
2'-9 1/2"
7'-0"
FIN. FLOOR
100'-0"
3'-0"
2'-9"
4" RUBBER BASE, RB-1
MAPLE VENEERED PLYWOOD BASE CABINET
TEACHER CLOSET W/ LOCK

12 Classroom (5) - South
SCALE: 1/4" = 1'-0"
1 A1.0

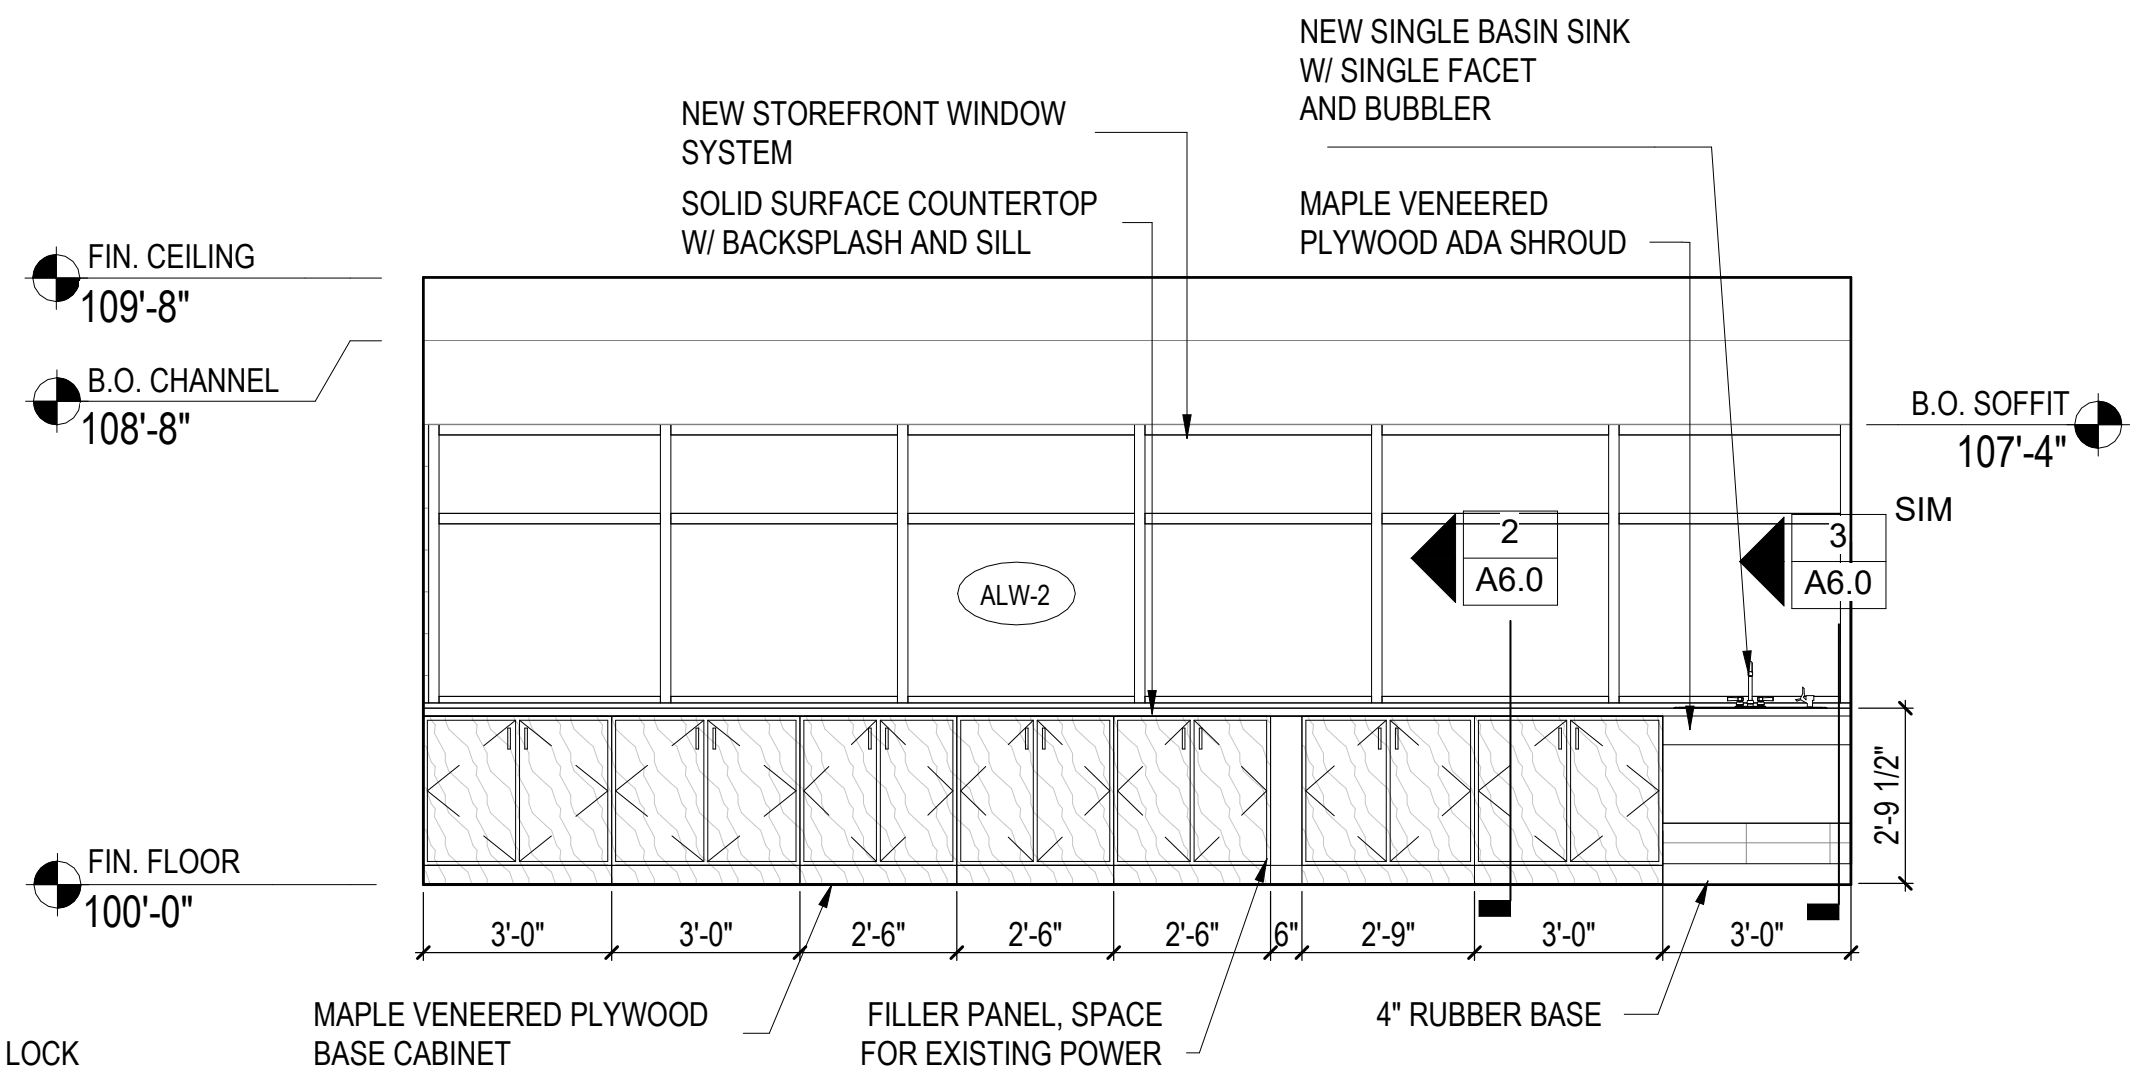
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
B.O. SOFFIT
107'-4"
ALW-2
2 A6.0
3 A6.0 SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-6"
2'-9"
MAPLE VENEERED PLYWOOD BASE CABINET
FILLER PANEL, SPACE FOR EXISTING POWER
4" RUBBER BASE

13 Classroom (6) - North
SCALE: 1/4" = 1'-0"
1 A1.0

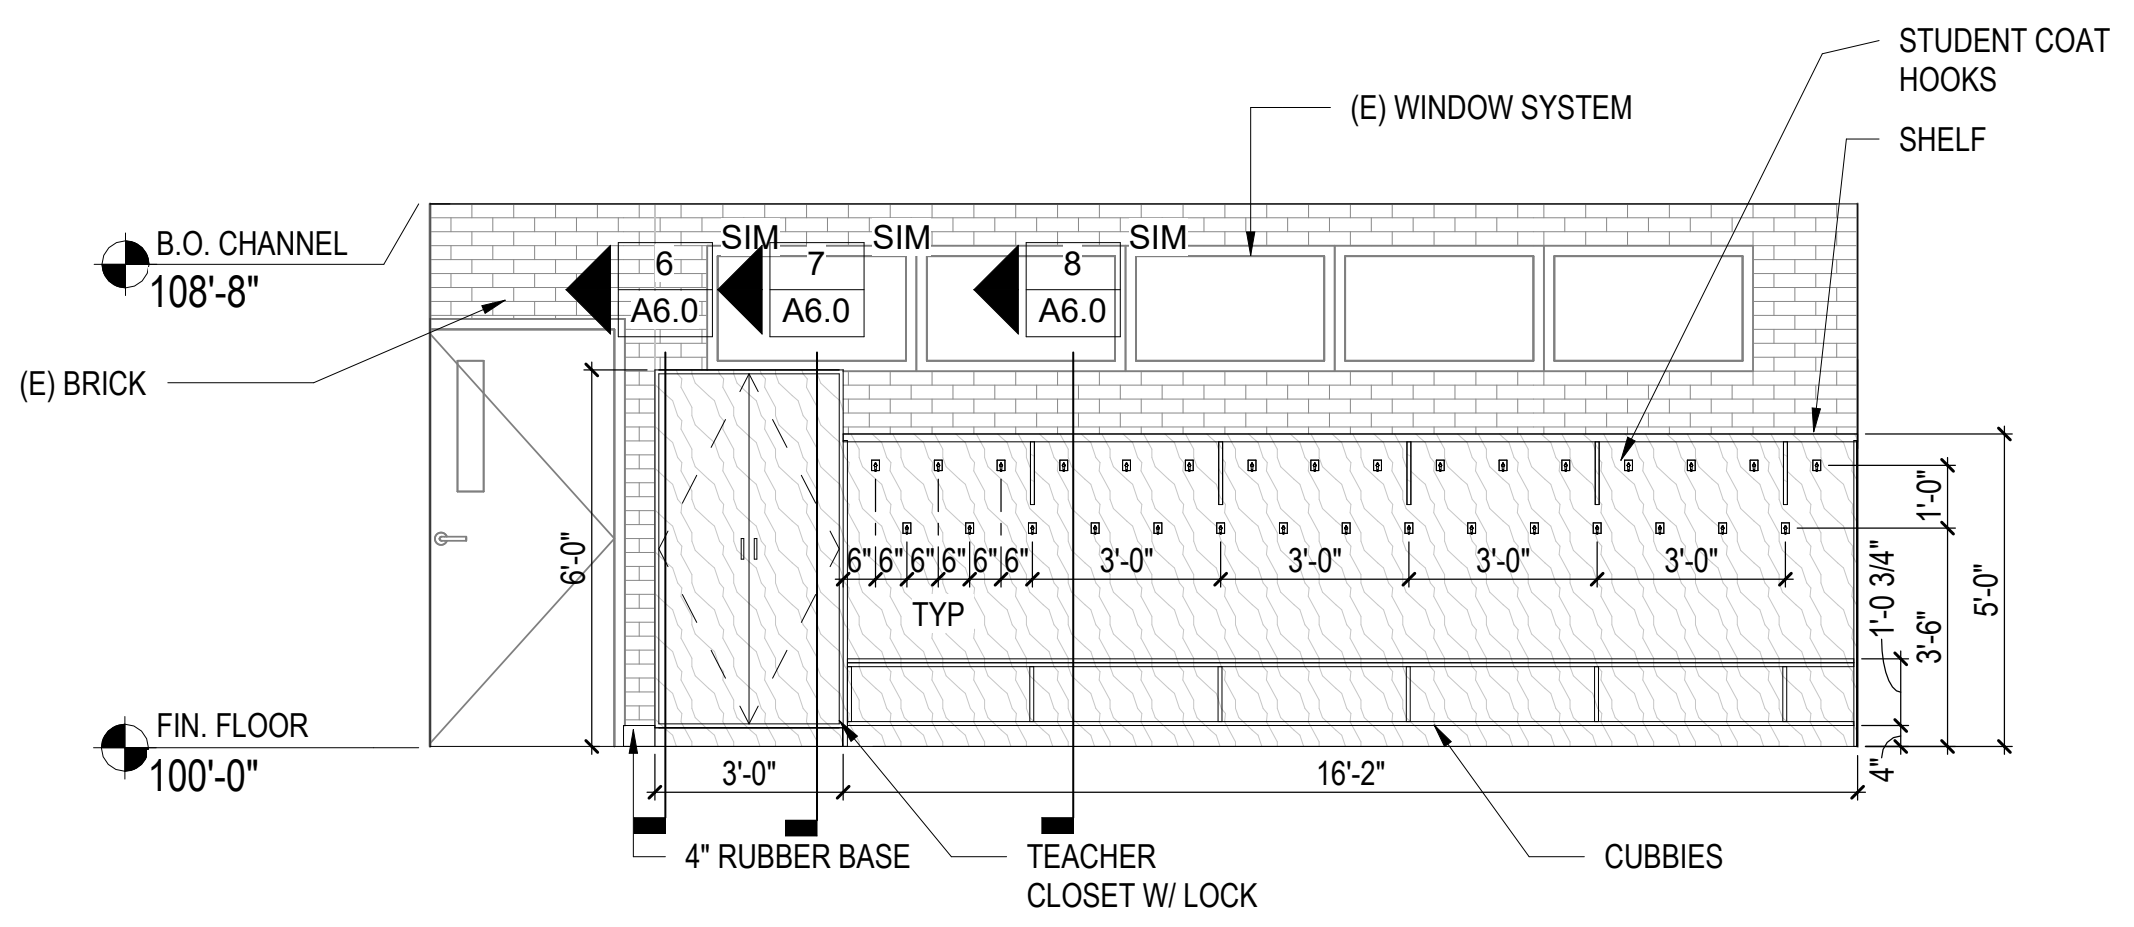
(E) WINDOW SYSTEM
STUDENT COAT HOOKS
SHELF
B.O. CHANNEL
108'-8"
(E) BRICK
6 A6.0 SIM
7 A6.0 SIM
8 A6.0 SIM
6'-0"
3'-0"
TYP
1'-0"
1'-0 3/4"
3'-6"
5'-0"
4"
16'-2"
FIN. FLOOR
100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

14 Classroom (6) - South
SCALE: 1/4" = 1'-0"
1 A1.0

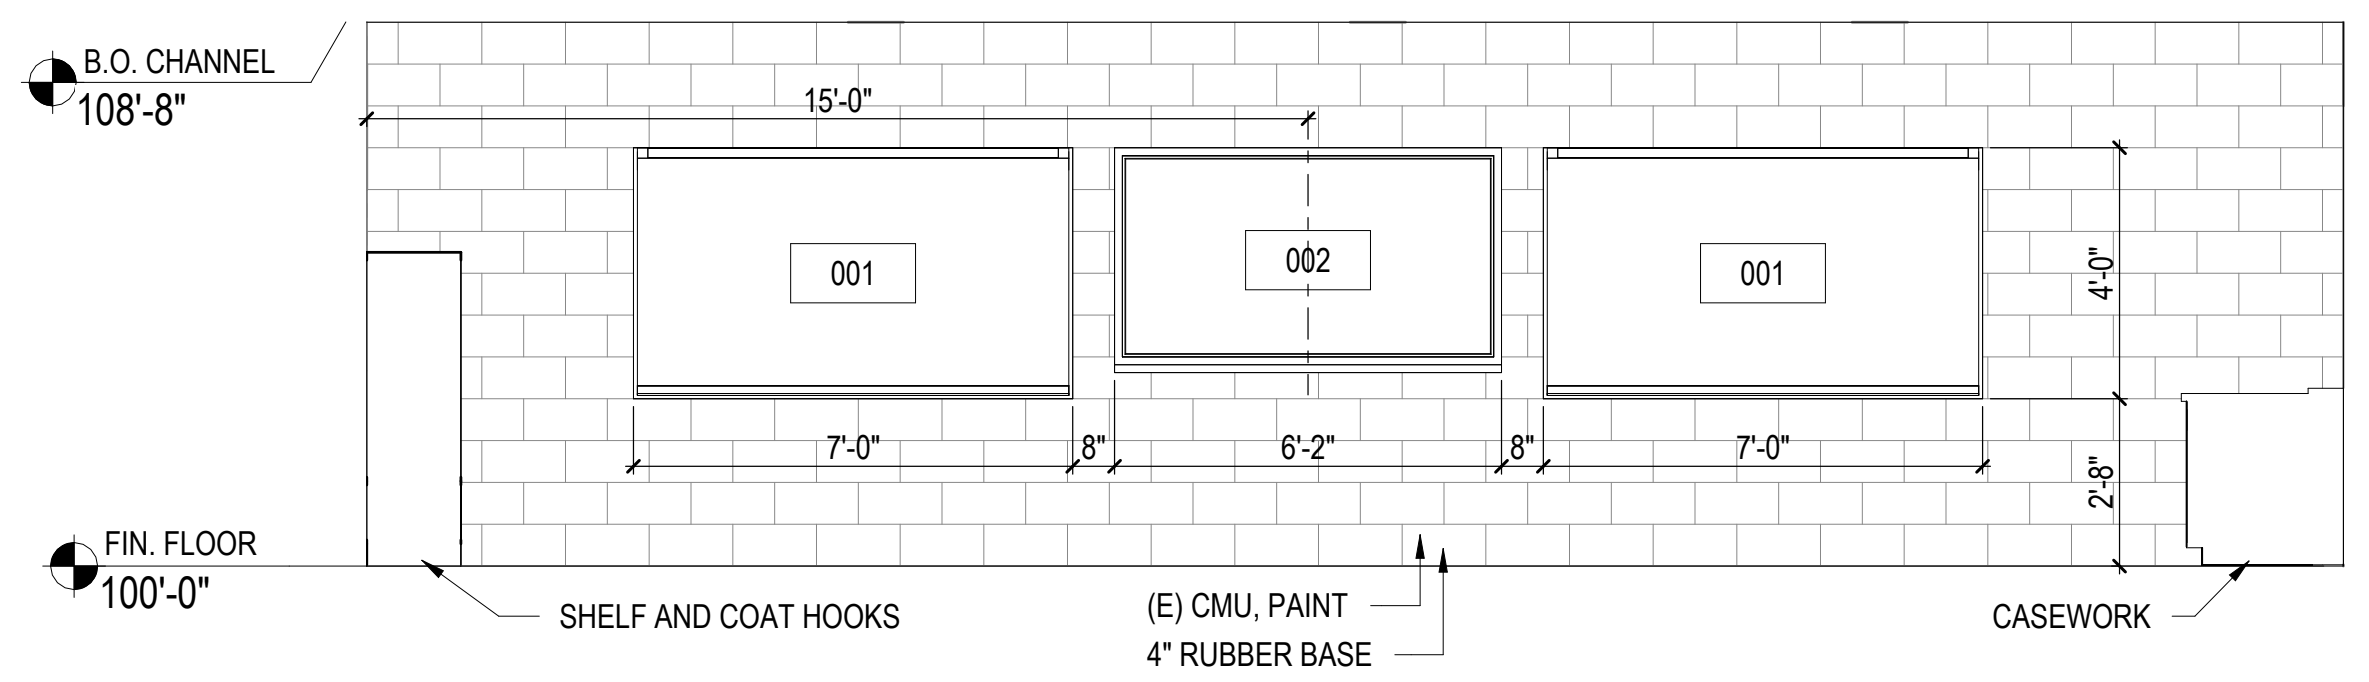
B.O. CHANNEL
108'-8"
15'-0"
001
002
001
7'-0"
8"
6'-2"
4'-0"
2'-8"
FIN. FLOOR
100'-0"
SHELF AND COAT HOOKS
(E) CMU, PAINT
4" RUBBER BASE
CASEWORK

15 Classroom (6) - West
SCALE: 1/4" = 1'-0"
1 A1.0

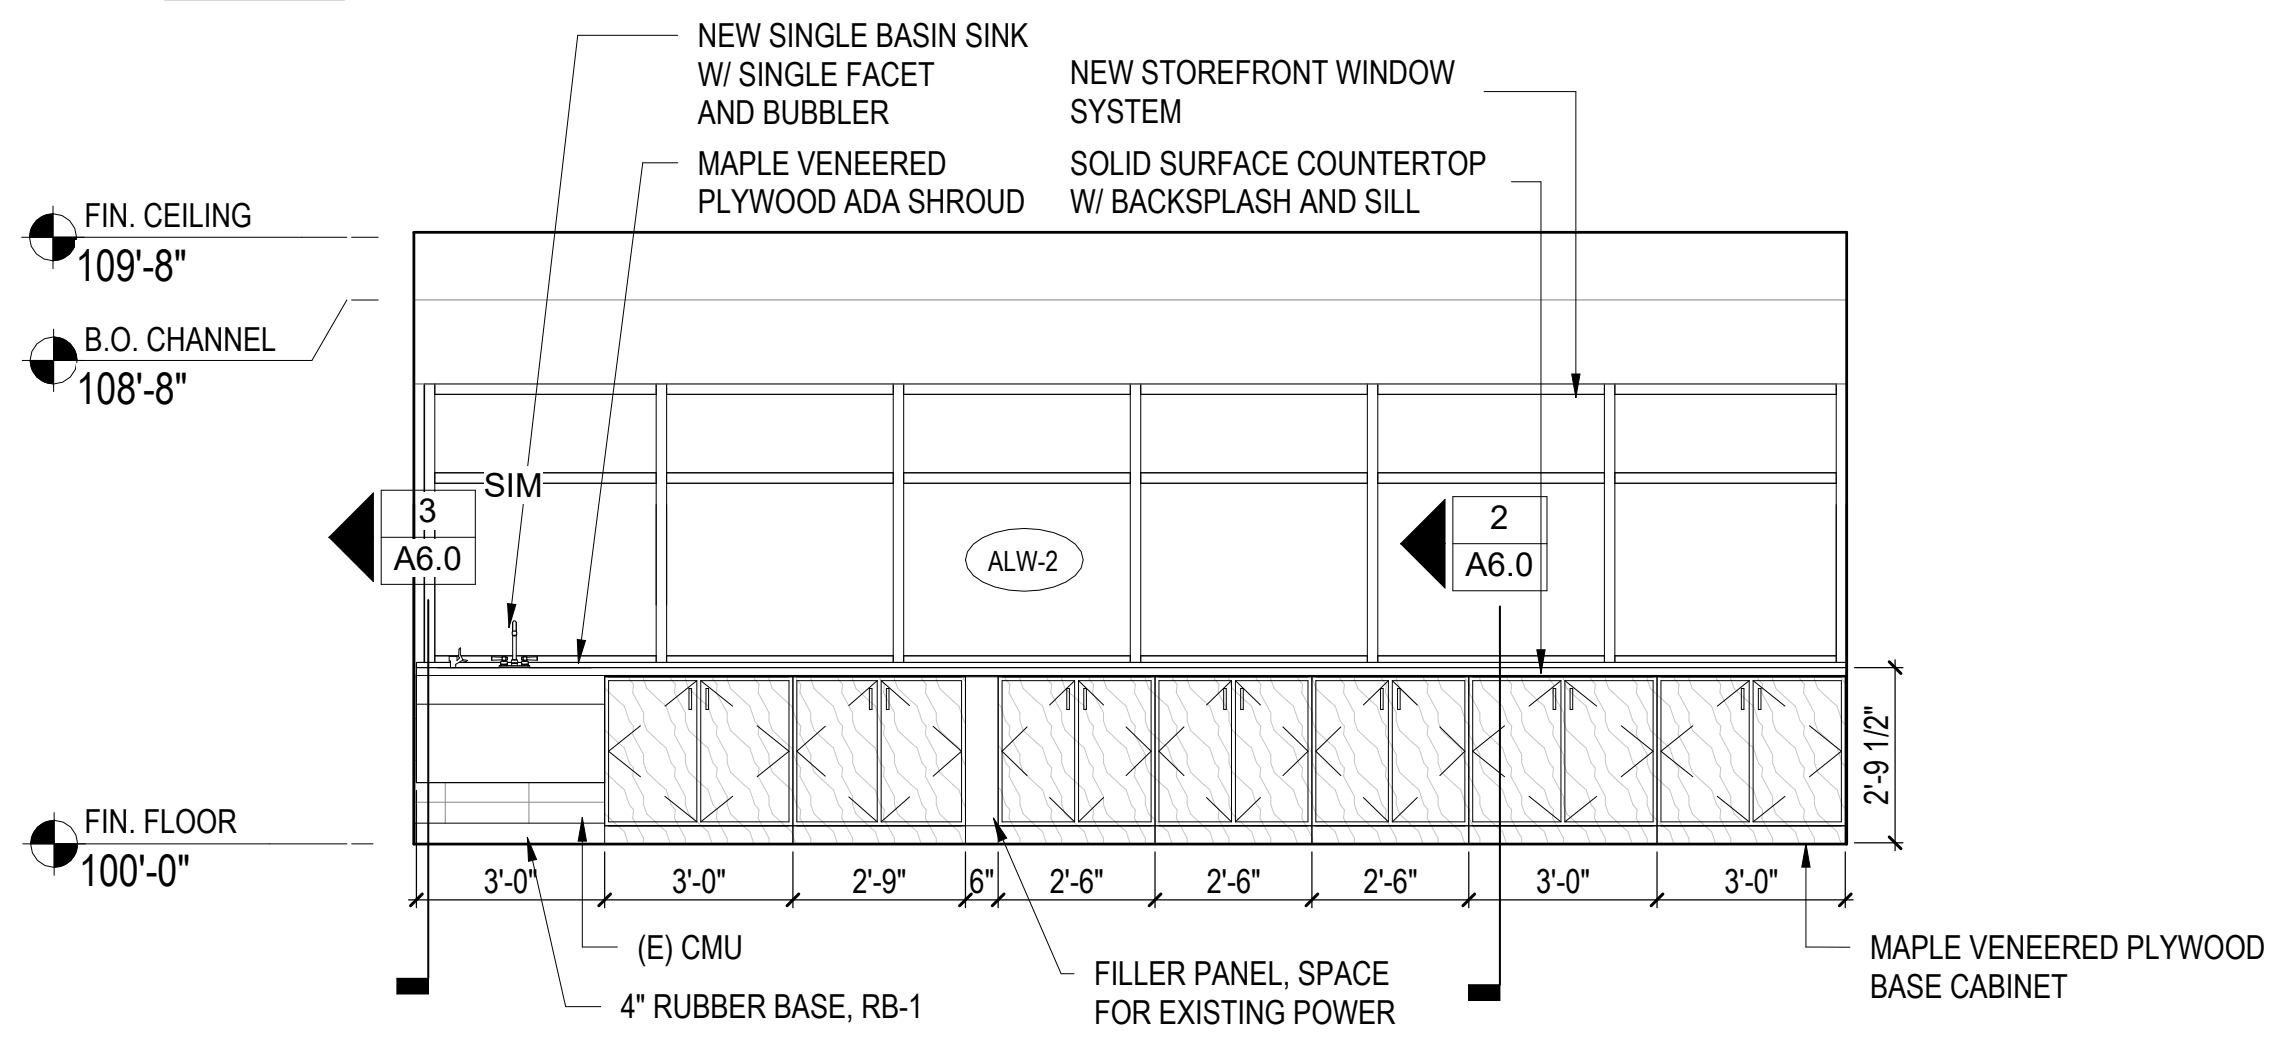
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
3 A6.0 SIM
2 A6.0
ALW-2
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-9"
2'-6"
(E) CMU
4" RUBBER BASE, RB-1
FILLER PANEL, SPACE FOR EXISTING POWER
MAPLE VENEERED PLYWOOD BASE CABINET

16 Classroom (7) - North
SCALE: 1/4" = 1'-0"
1 A1.0

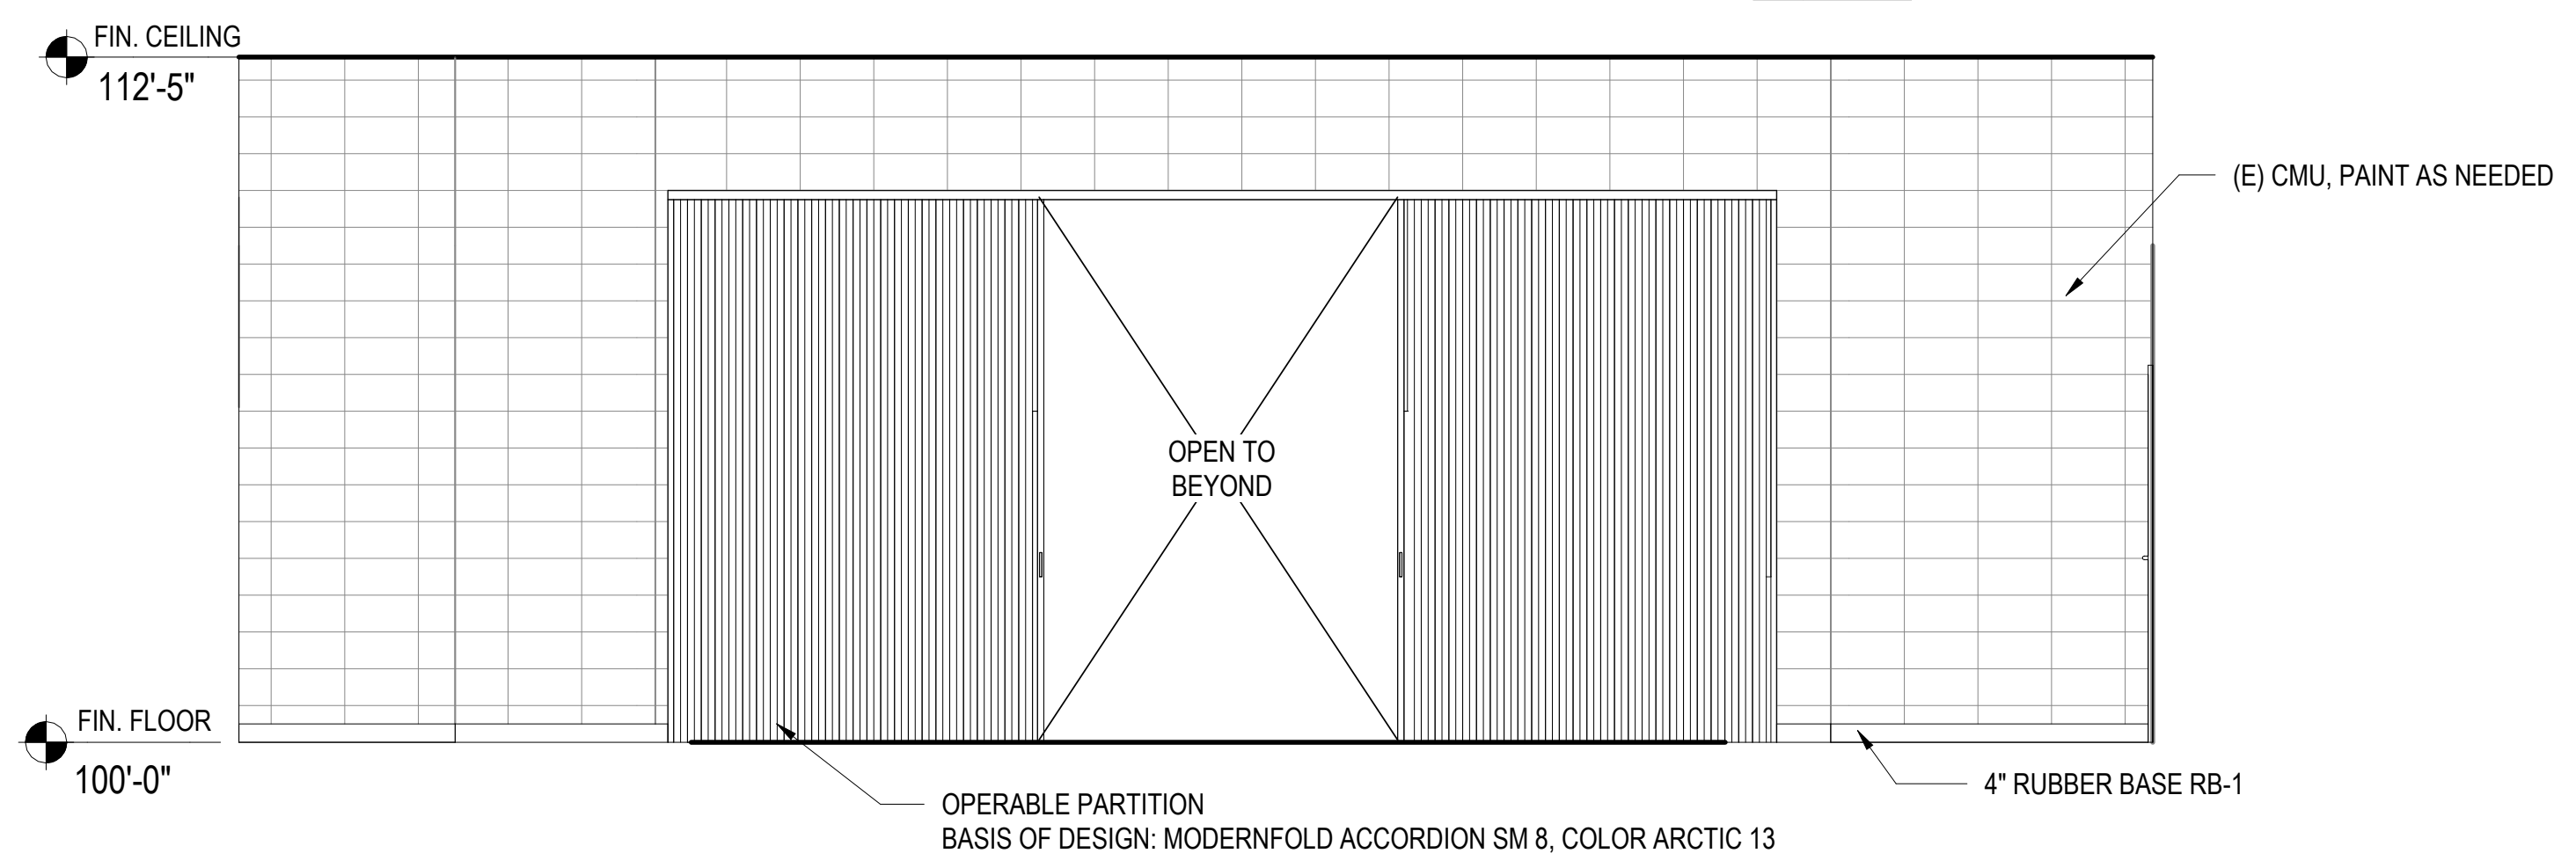
FIN. CEILING
112'-5"
(E) CMU, PAINT AS NEEDED
OPEN TO BEYOND
FIN. FLOOR
100'-0"
OPERABLE PARTITION
BASIS OF DESIGN: MODERNFOLD ACCORDION SM 8, COLOR ARCTIC 13
4" RUBBER BASE RB-1

20 Platform (10) - North
SCALE: 1/4" = 1'-0"
1 A1.0

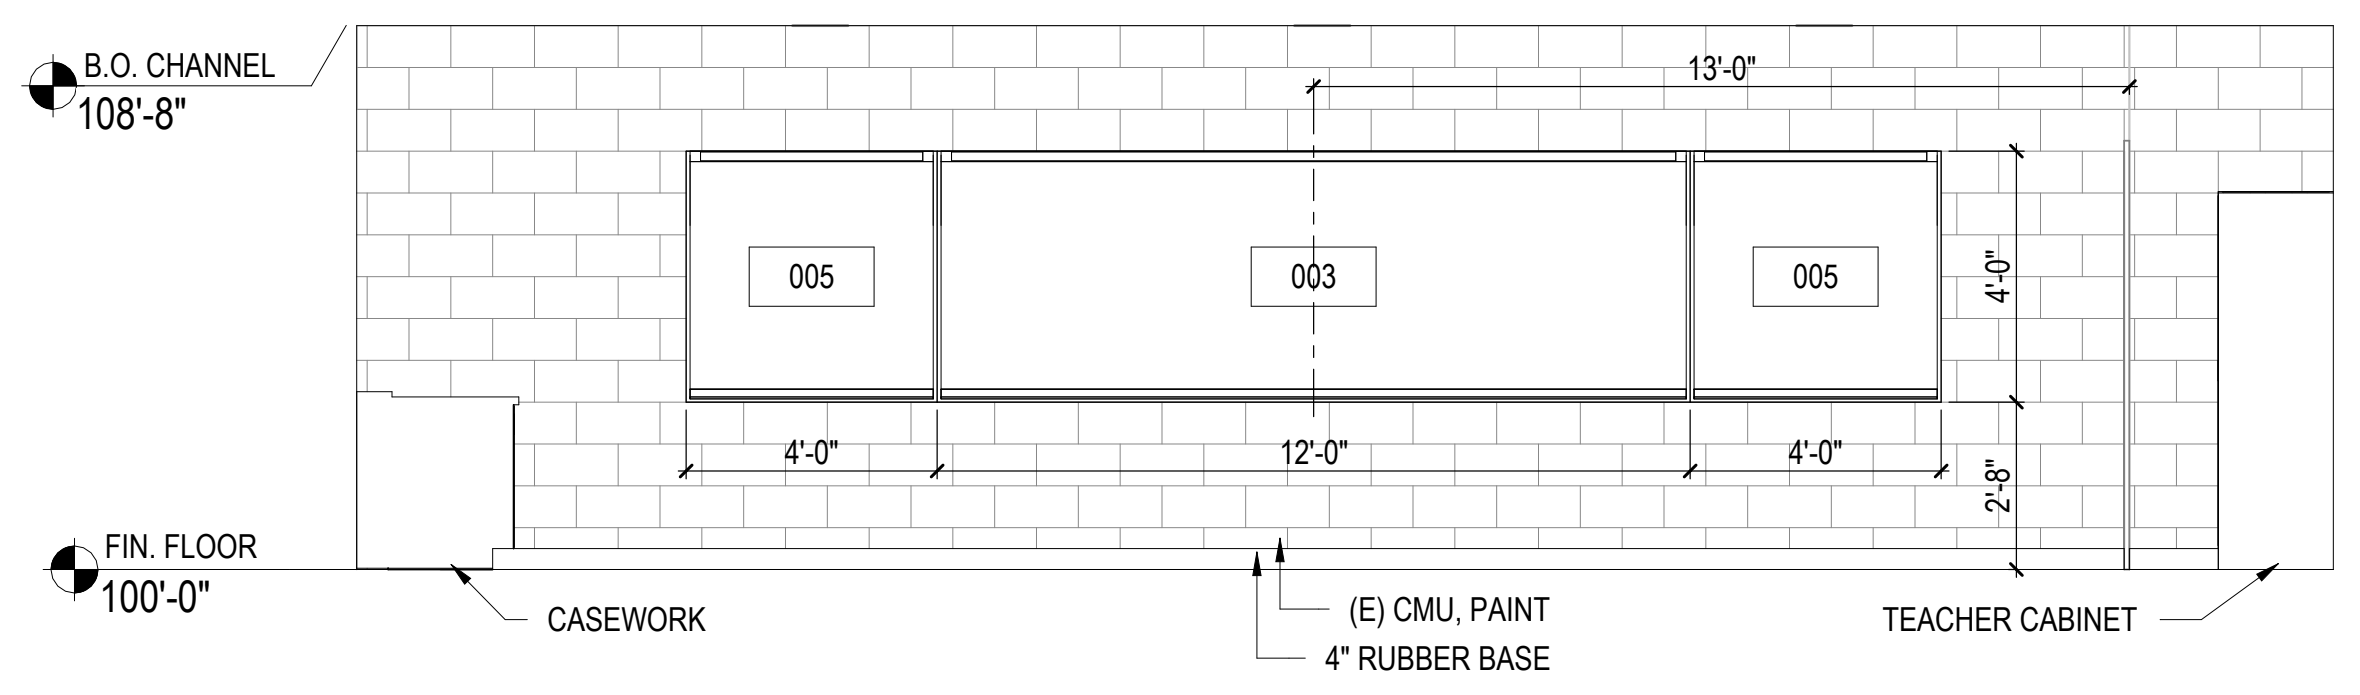
B.O. CHANNEL
108'-8"
13'-0"
005
003
005
4'-0"
12'-0"
2'-8"
FIN. FLOOR
100'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
TEACHER CABINET

17 Classroom (7) - East
SCALE: 1/4" = 1'-0"
1 A1.0

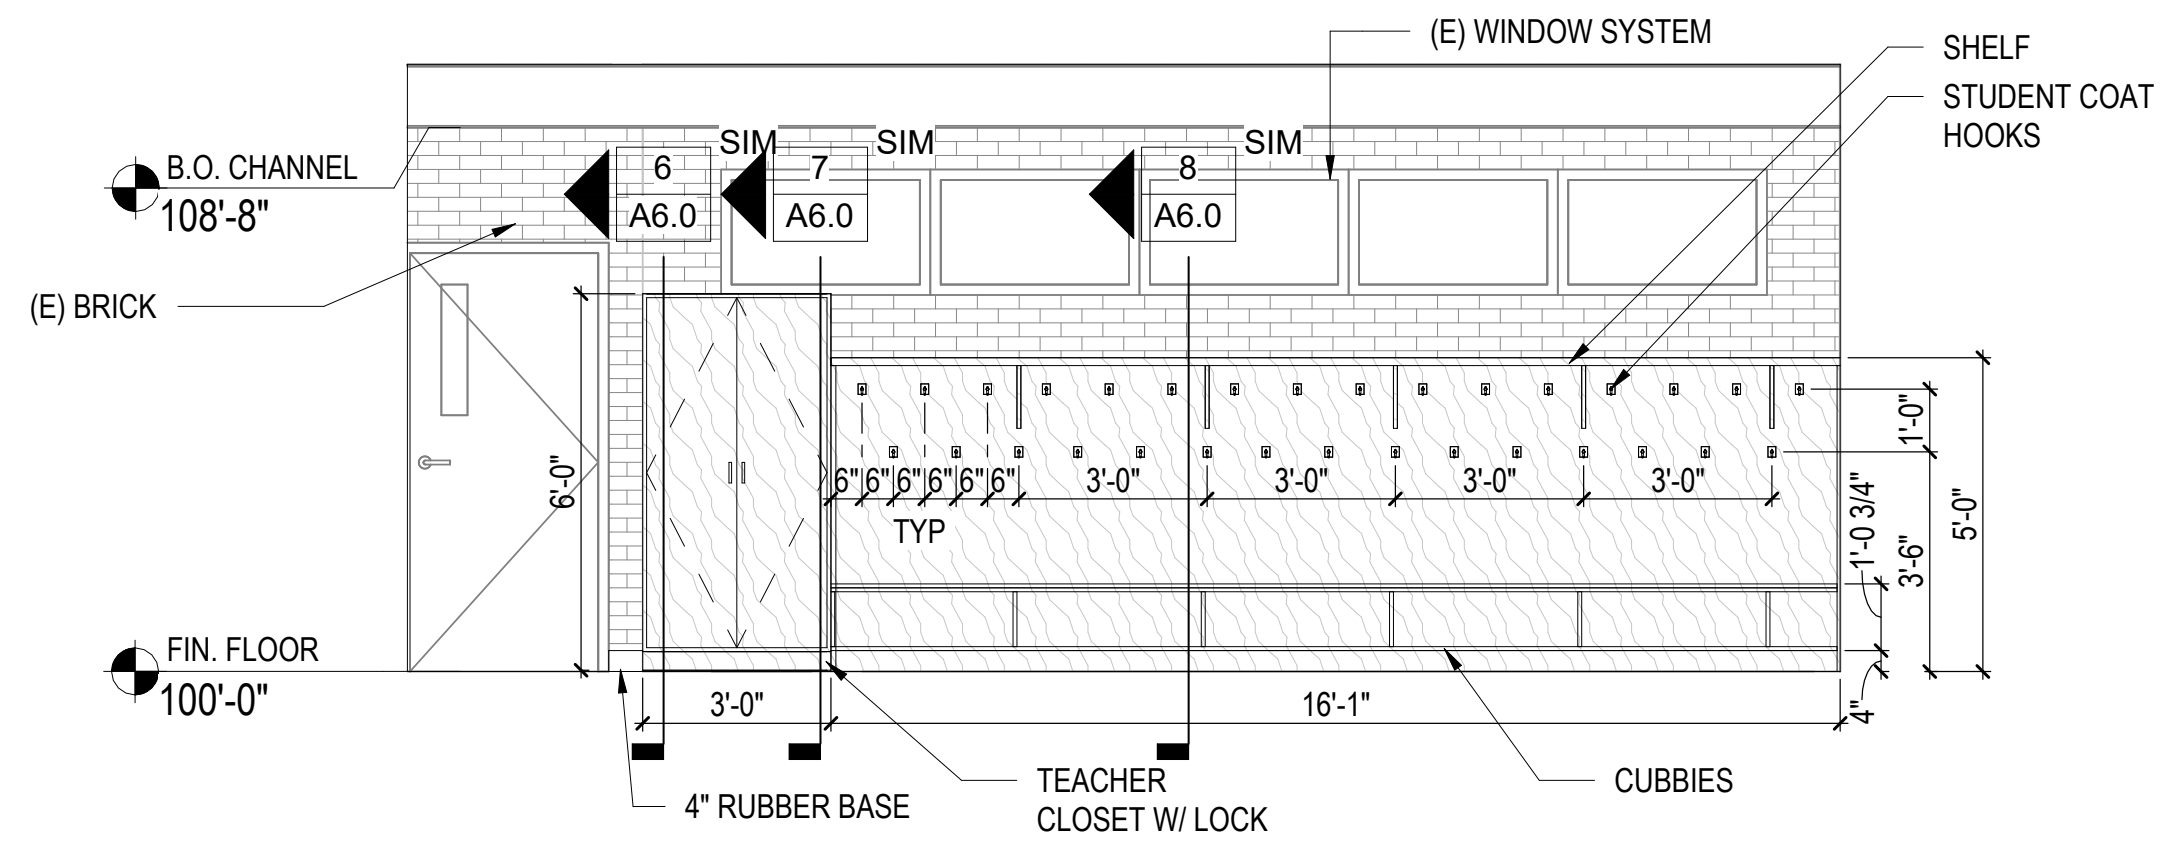
(E) WINDOW SYSTEM
SHELF
STUDENT COAT HOOKS
B.O. CHANNEL
108'-8"
(E) BRICK
6 A6.0 SIM
7 A6.0 SIM
8 A6.0 SIM
6'-0"
TYP
3'-0"
1'-0"
1'-0 3/4"
3'-6"
5'-0"
16'-1"
FIN. FLOOR
100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

18 Classroom (7) - South
SCALE: 1/4" = 1'-0"
1 A1.0

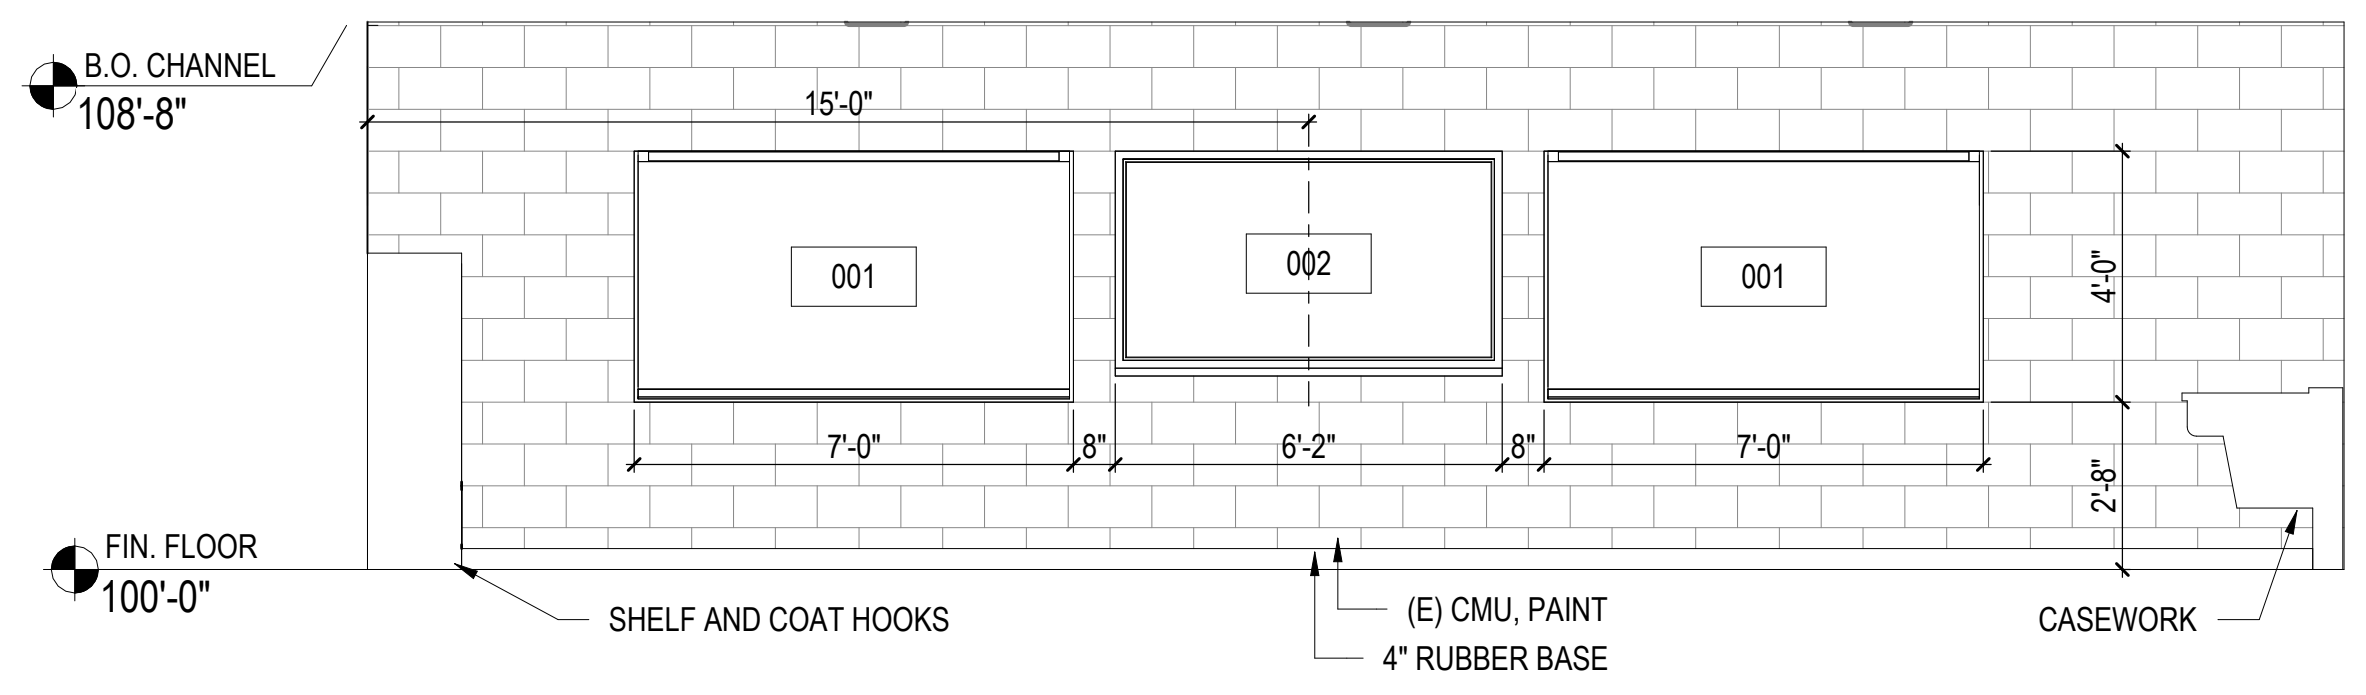
B.O. CHANNEL
108'-8"
15'-0"
001
002
001
7'-0"
8"
6'-2"
4'-0"
2'-8"
FIN. FLOOR
100'-0"
SHELF AND COAT HOOKS
(E) CMU, PAINT
4" RUBBER BASE
CASEWORK

19 Classroom (7) - West
SCALE: 1/4" = 1'-0"
1 A1.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:44:14 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Interior Elevations

A6.2

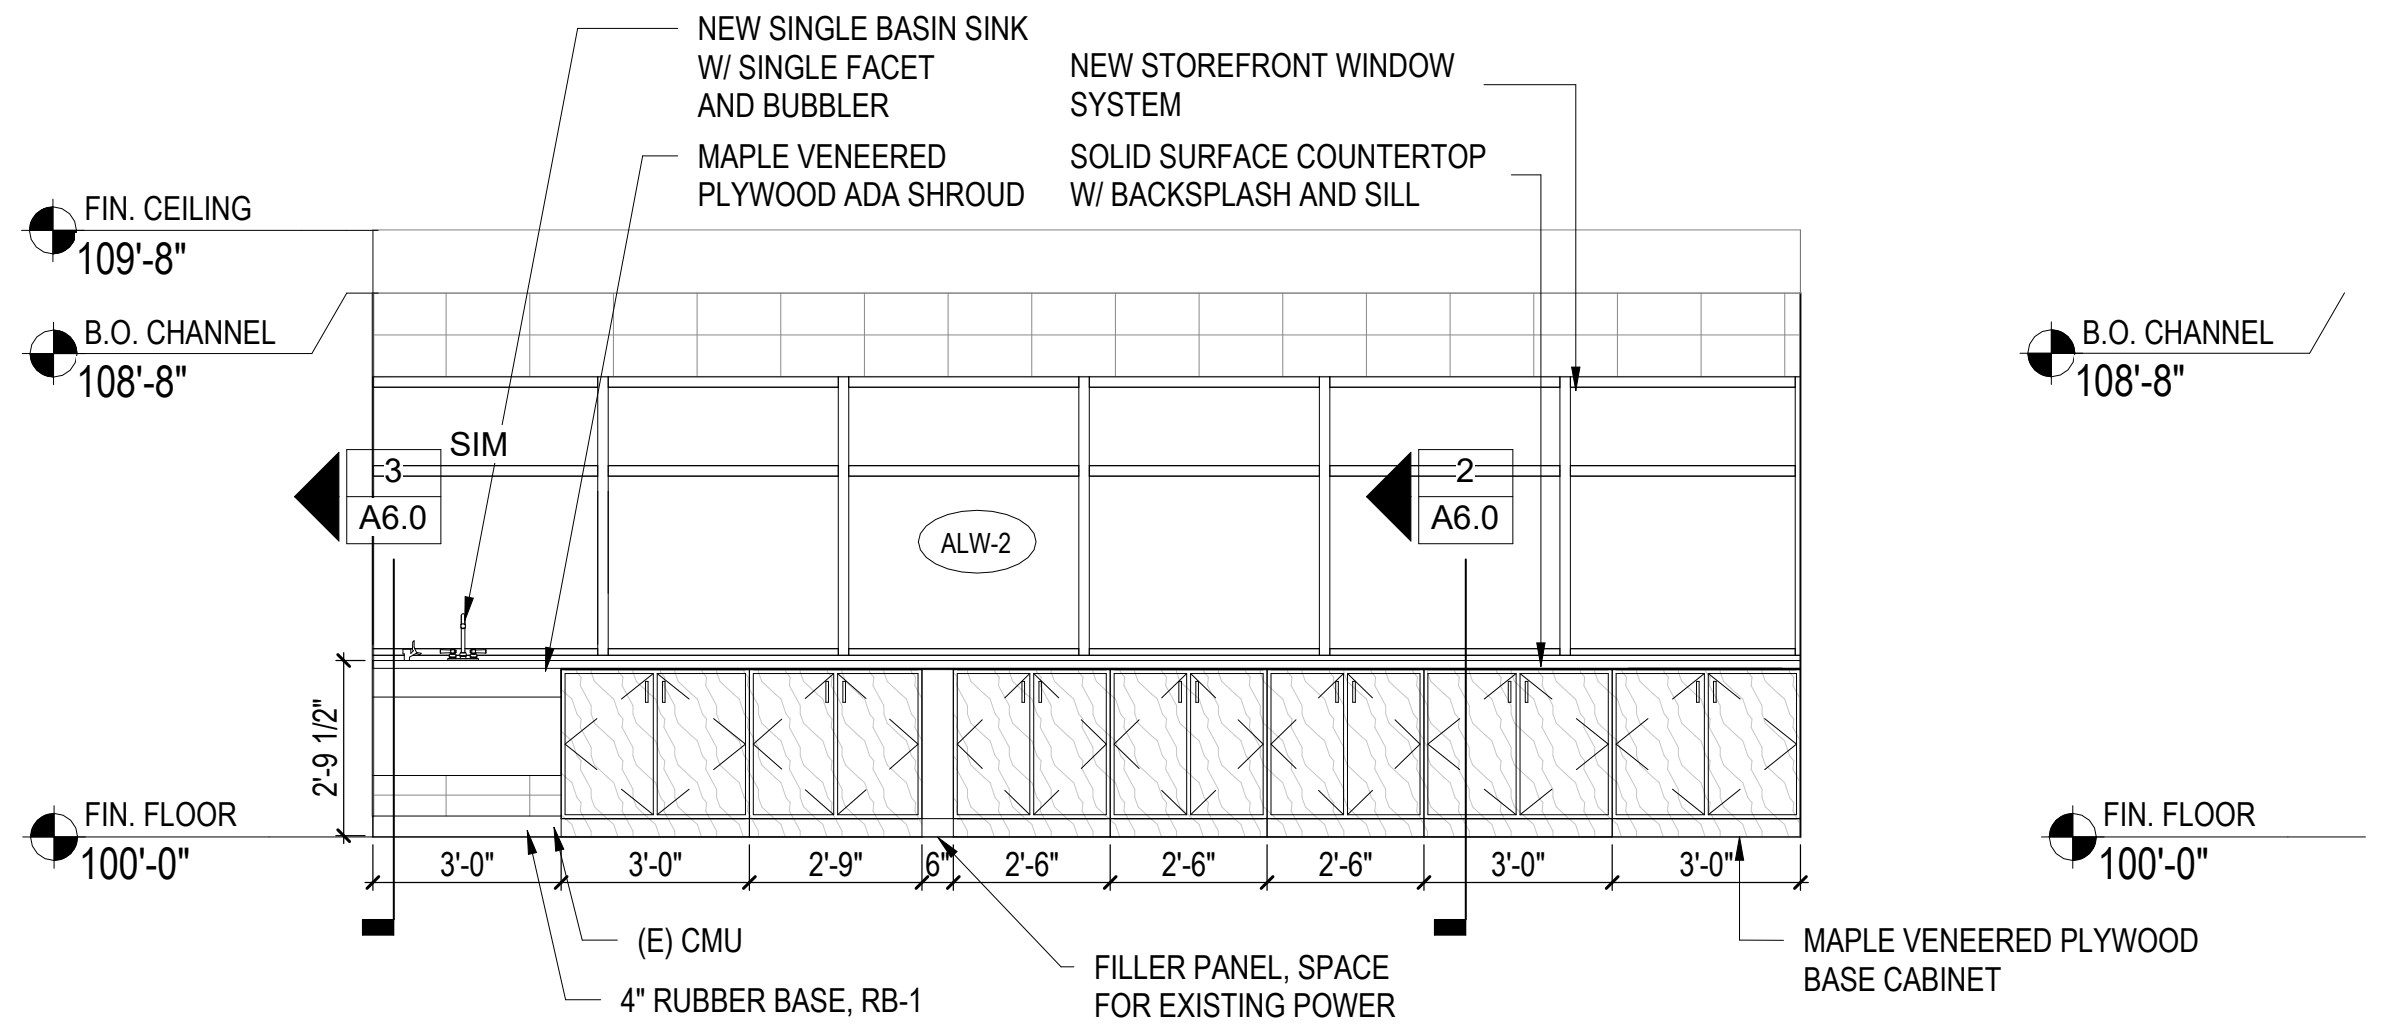
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
3 A6.0 SIM
2 A6.0
ALW-2
2'-9 1/2"
3'-0"
3'-0"
2'-9"
6"
2'-6"
2'-6"
2'-6"
3'-0"
3'-0"
(E) CMU
4" RUBBER BASE, RB-1
FILLER PANEL, SPACE FOR EXISTING POWER
MAPLE VENEERED PLYWOOD BASE CABINET

1 **Classroom (8) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

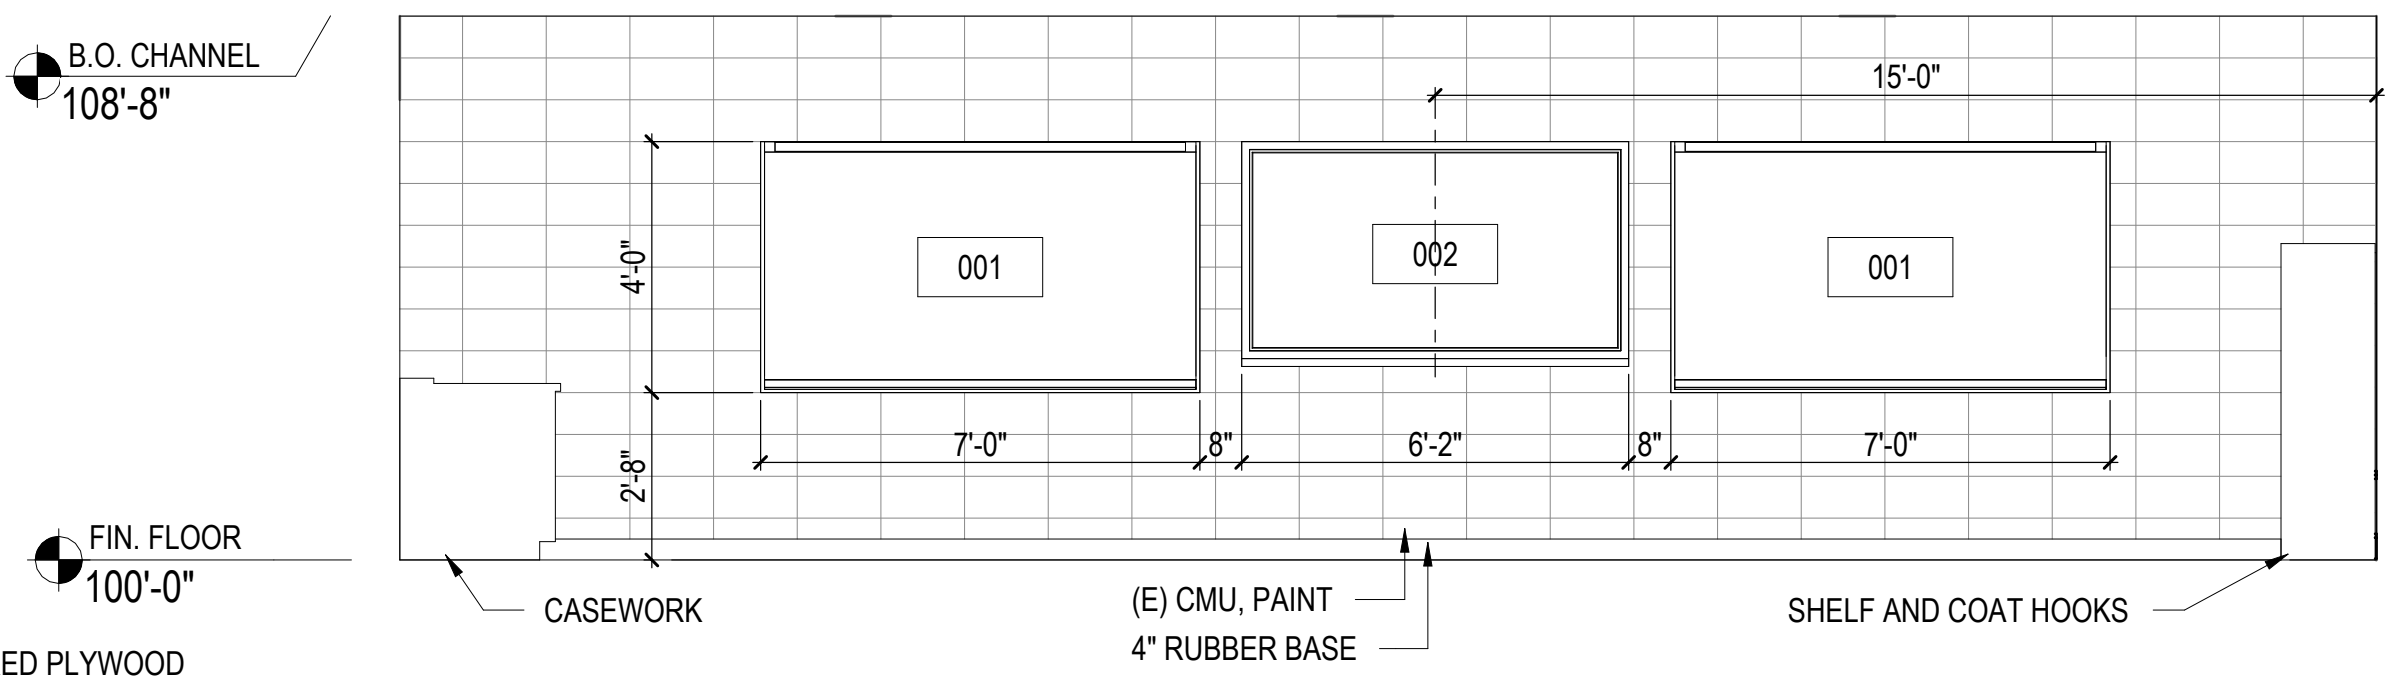
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

2 **Classroom (8) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

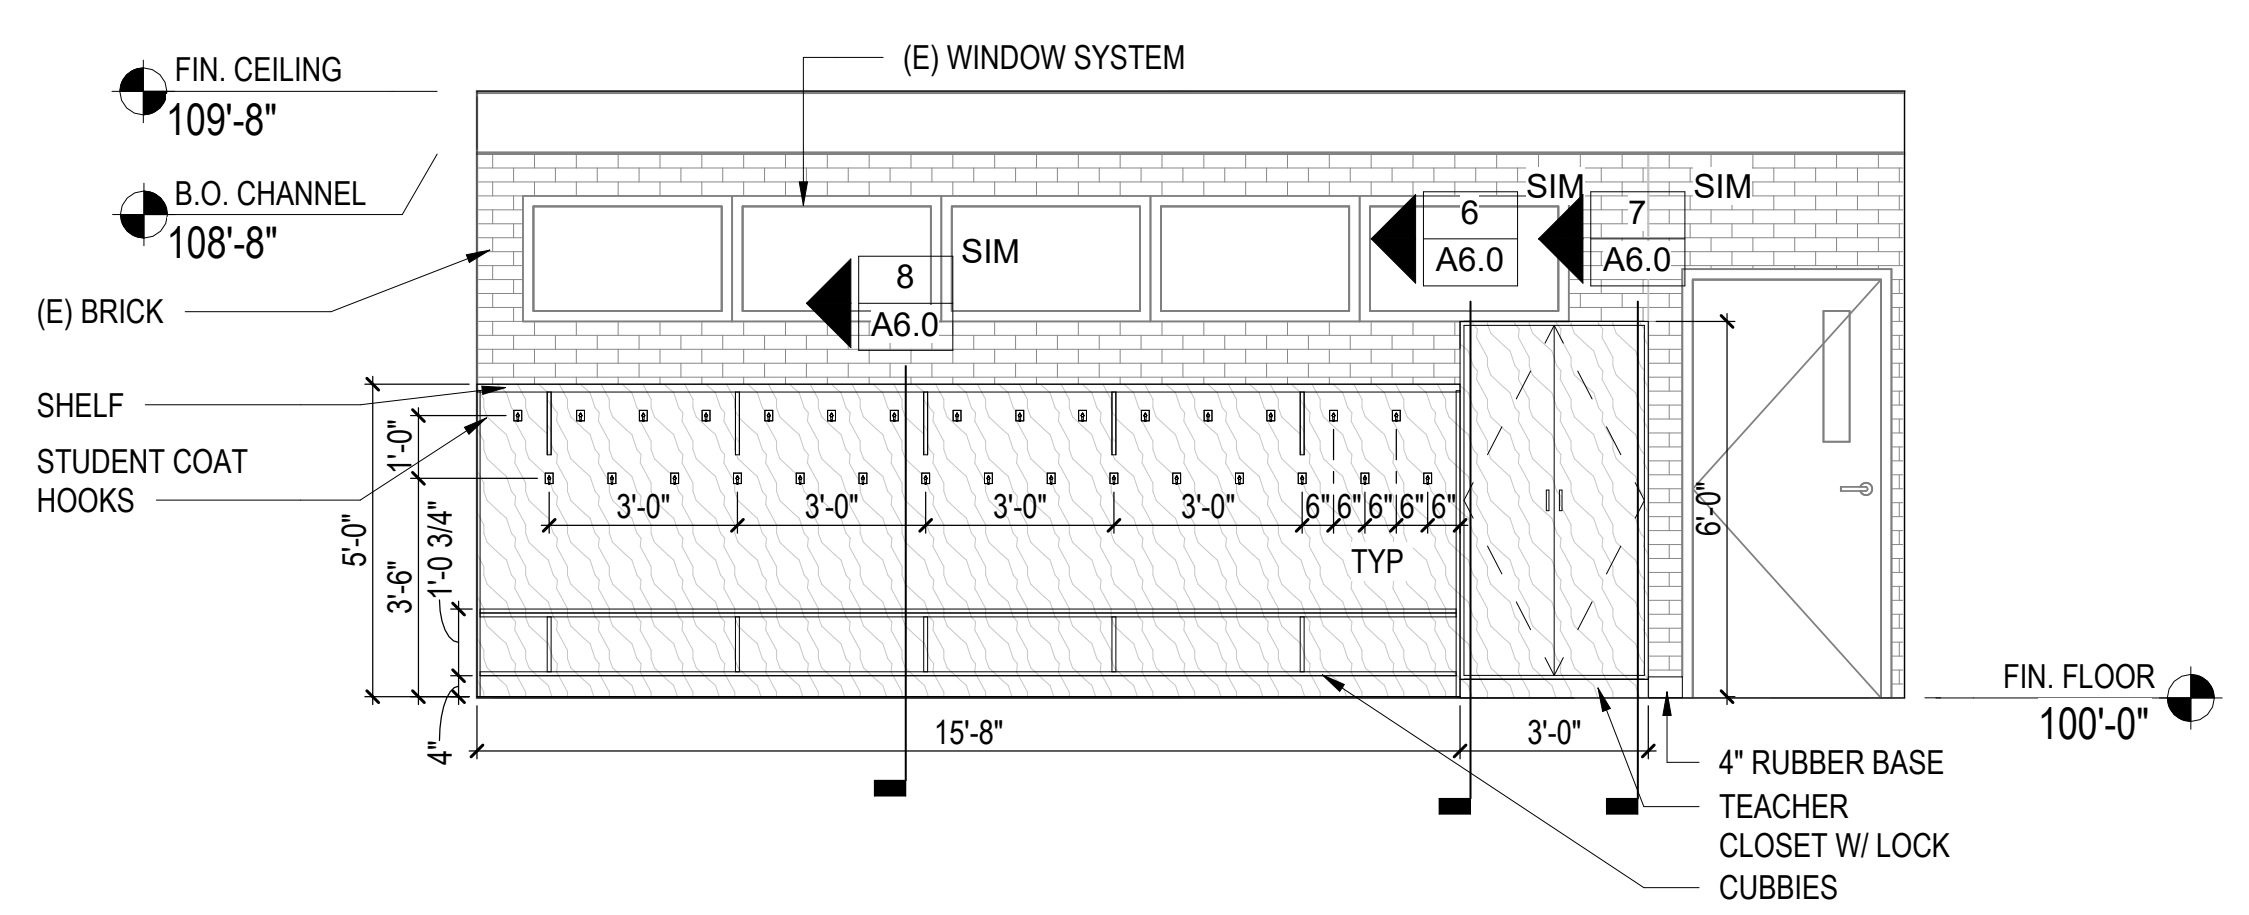
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) WINDOW SYSTEM
(E) BRICK
SHELF
STUDENT COAT HOOKS
8 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
1'-0"
5'-0"
3'-6"
1'-0 3/4"
4"
3'-0"
3'-0"
3'-0"
3'-0"
6" 6" 6" 6" 6"
TYP
6'-0"
15'-8"
3'-0"
FIN. FLOOR 100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

3 **Classroom (8) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

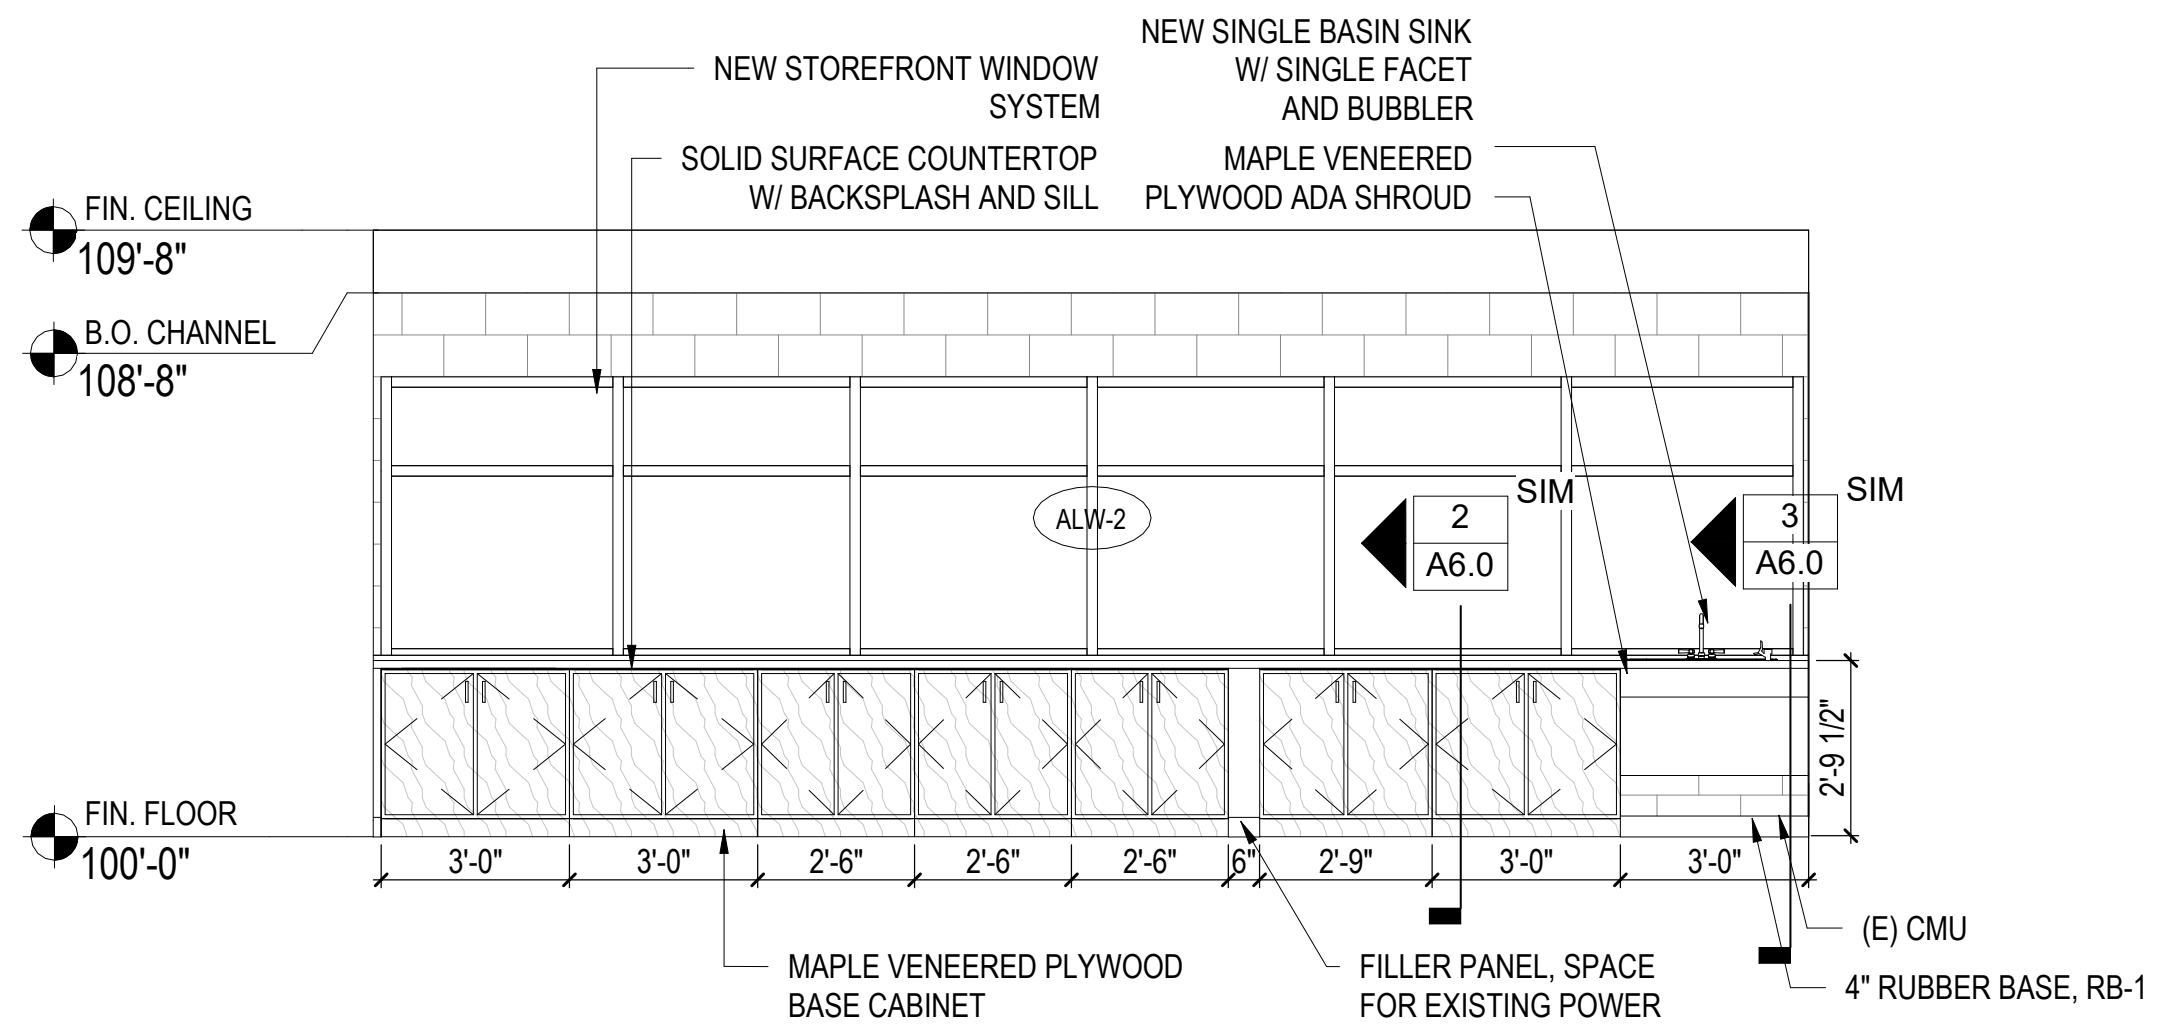
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
ALW-2
2 A6.0 SIM
3 A6.0 SIM
2'-9 1/2"
3'-0"
3'-0"
2'-6"
2'-6"
2'-6"
6"
2'-9"
3'-0"
3'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
FILLER PANEL, SPACE FOR EXISTING POWER
(E) CMU
4" RUBBER BASE, RB-1

4 **Classroom (11) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

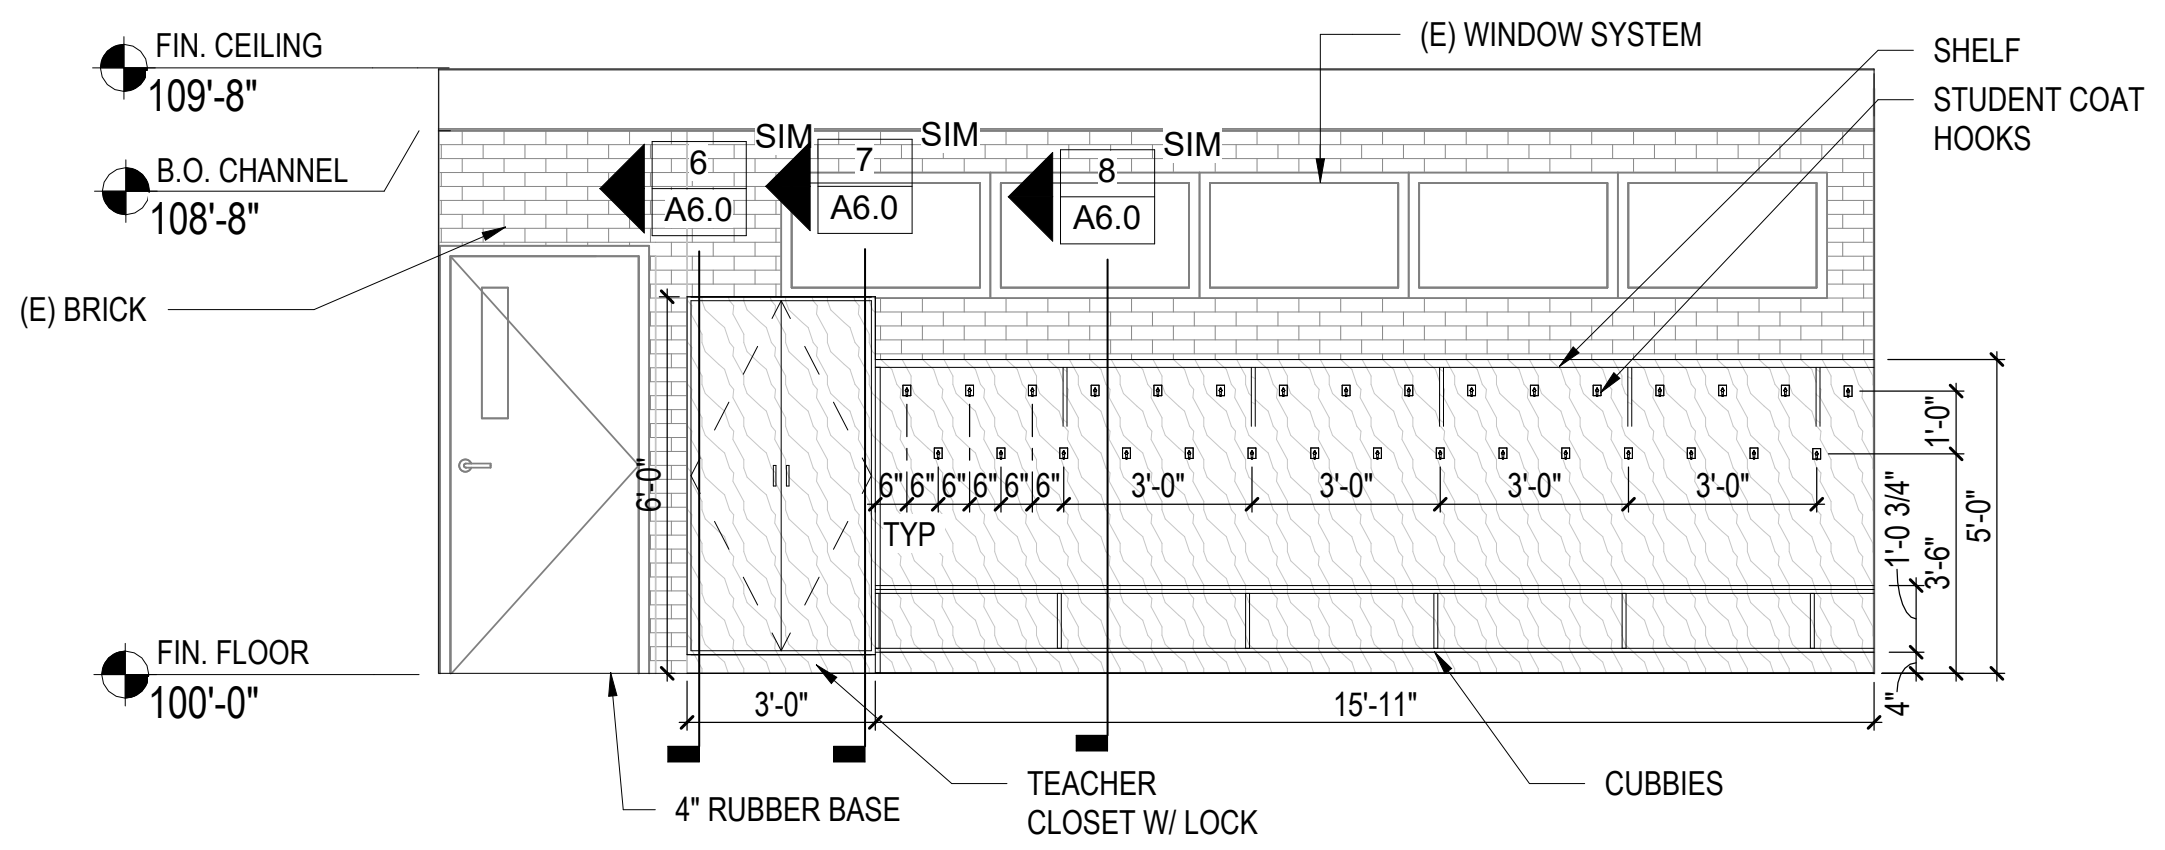
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) BRICK
FIN. FLOOR 100'-0"
(E) WINDOW SYSTEM
SHELF
STUDENT COAT HOOKS
6 A6.0 SIM
7 A6.0 SIM
8 A6.0 SIM
6'-0"
6" 6" 6" 6" 6"
3'-0"
3'-0"
3'-0"
3'-0"
TYP
1'-0"
1'-0 3/4"
3'-6"
5'-0"
4"
3'-0"
15'-11"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

5 **Classroom (11) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

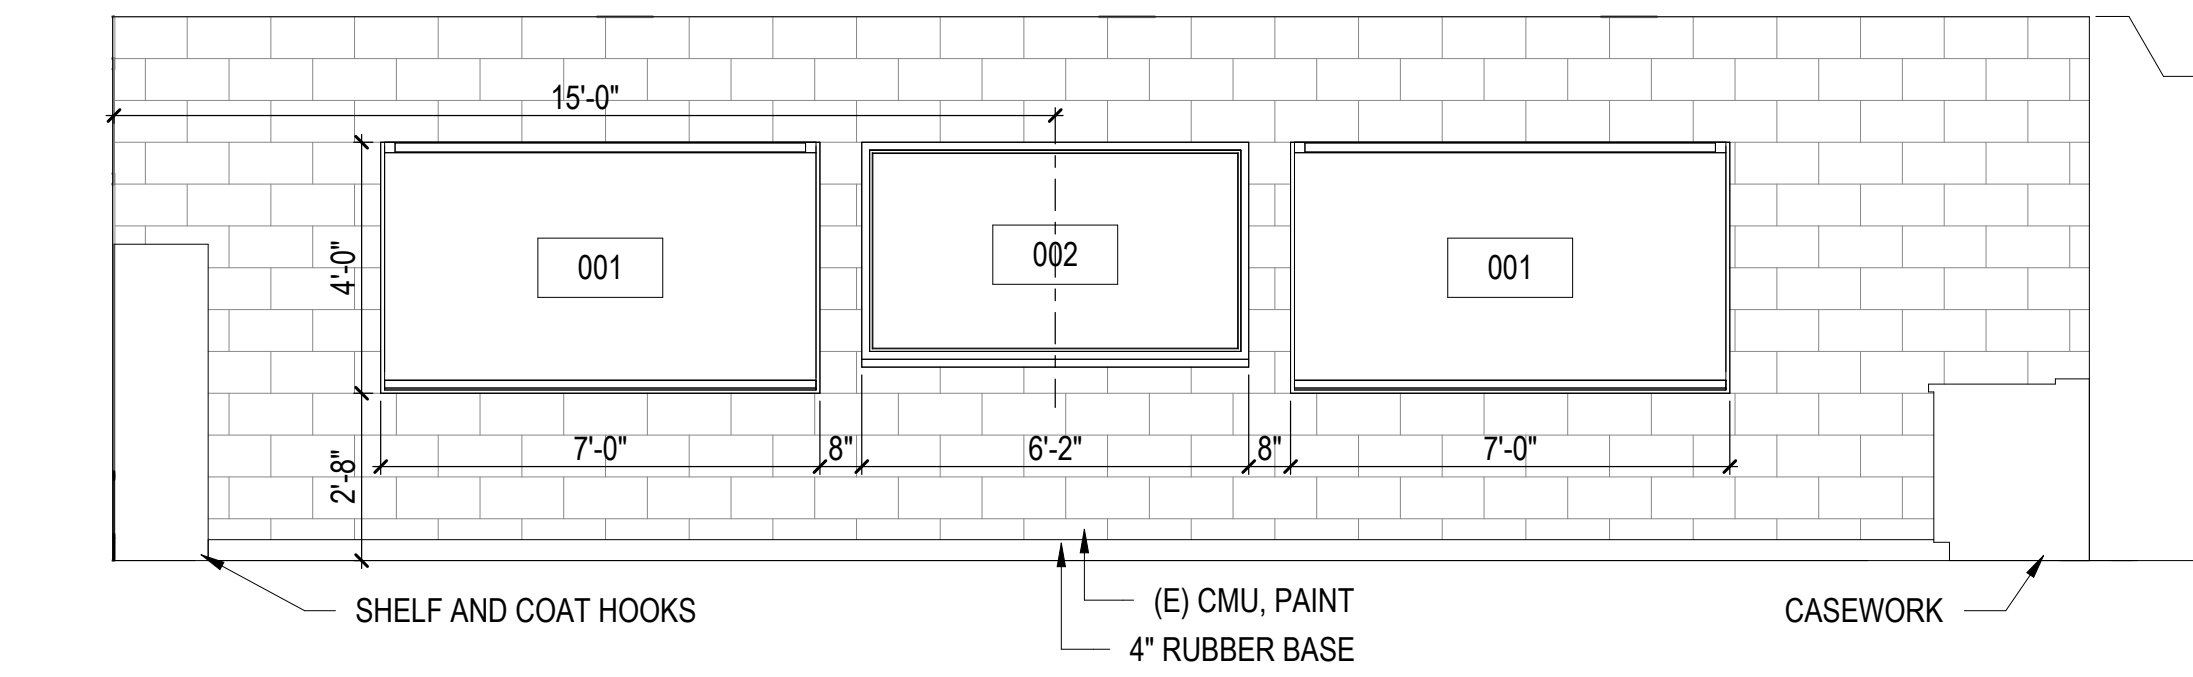
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
SHELF AND COAT HOOKS
(E) CMU, PAINT
4" RUBBER BASE
CASEWORK

6 **Classroom (11) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

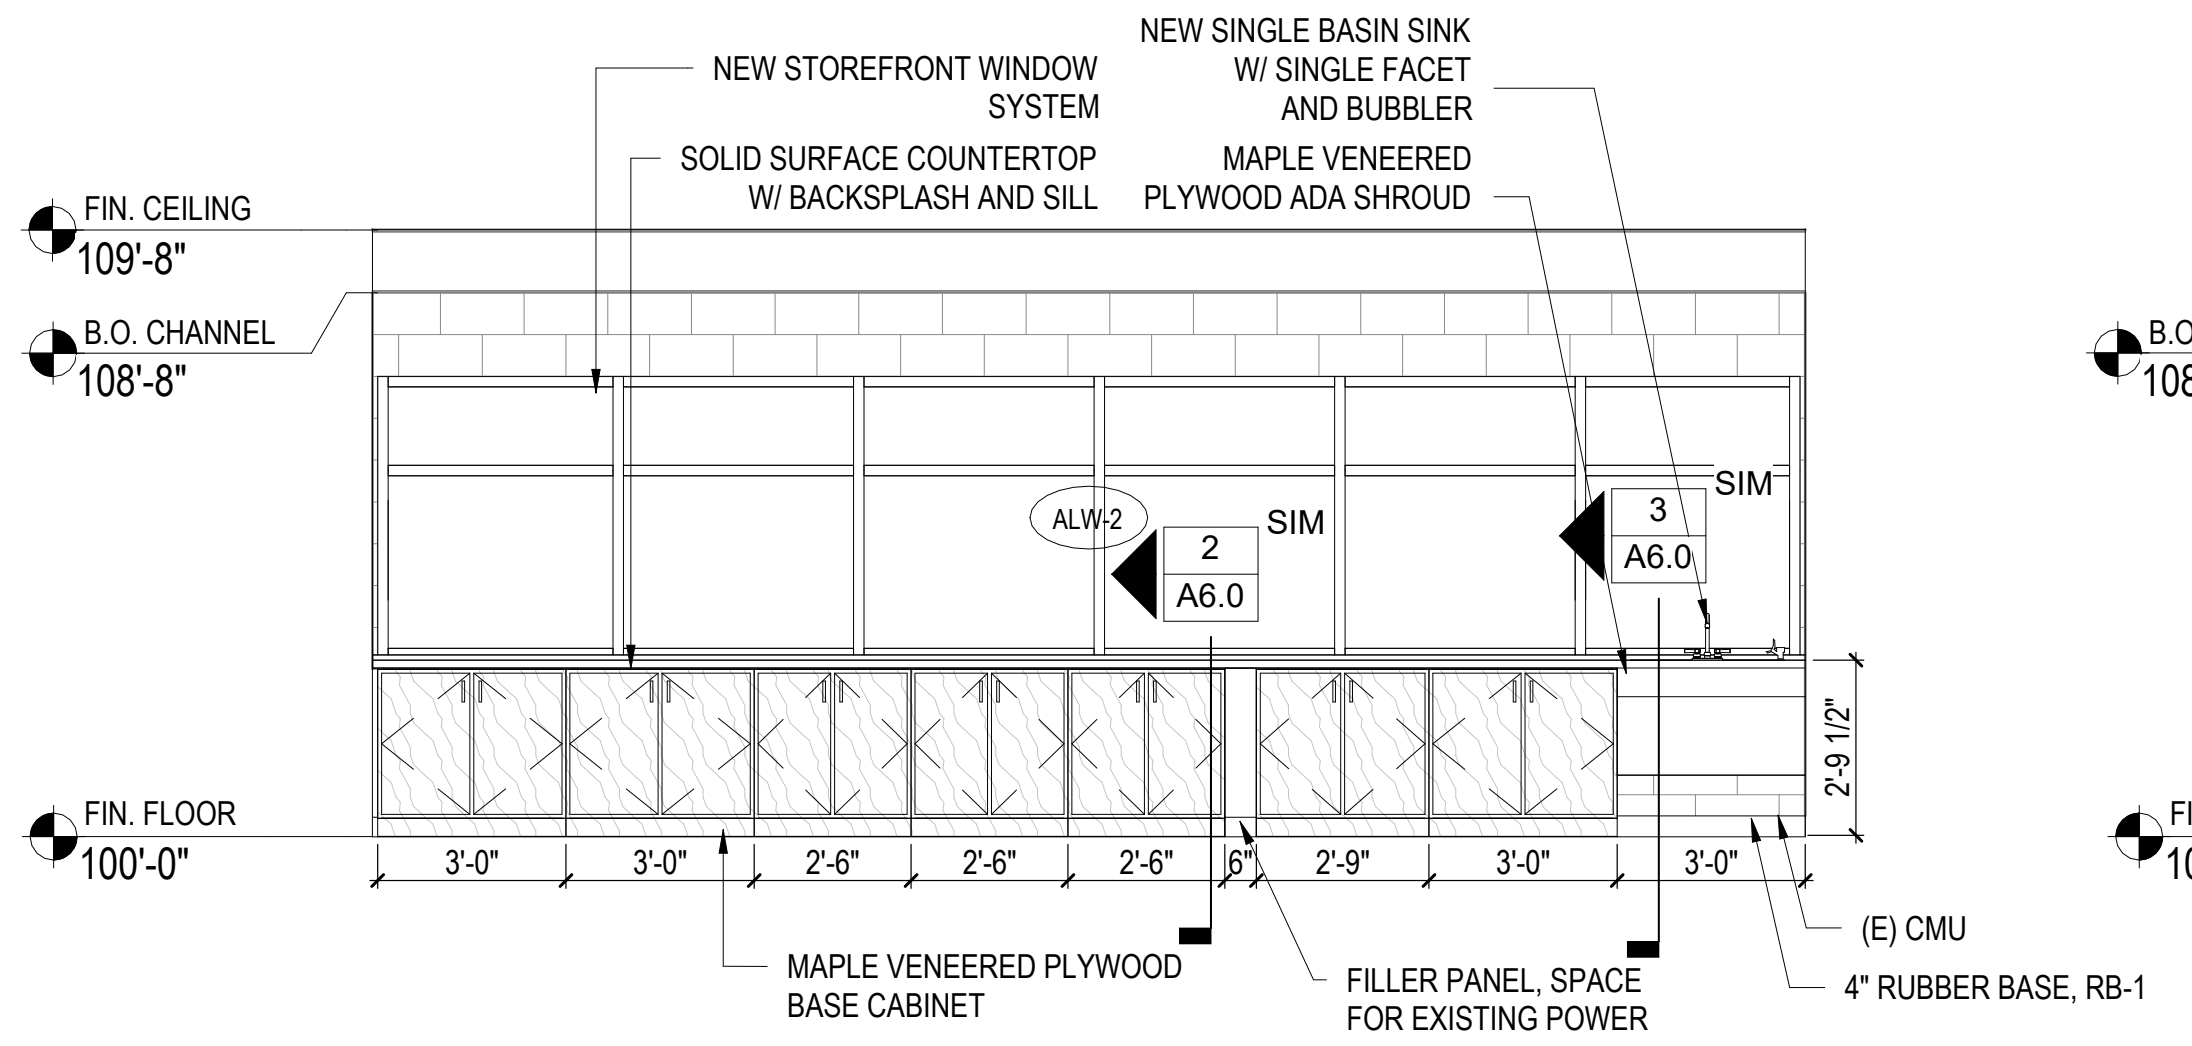
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
ALW-2
2 A6.0 SIM
3 A6.0 SIM
2'-9 1/2"
3'-0"
3'-0"
2'-6"
2'-6"
2'-6"
6"
2'-9"
3'-0"
3'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
FILLER PANEL, SPACE FOR EXISTING POWER
(E) CMU
4" RUBBER BASE, RB-1

7 **Classroom (12) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

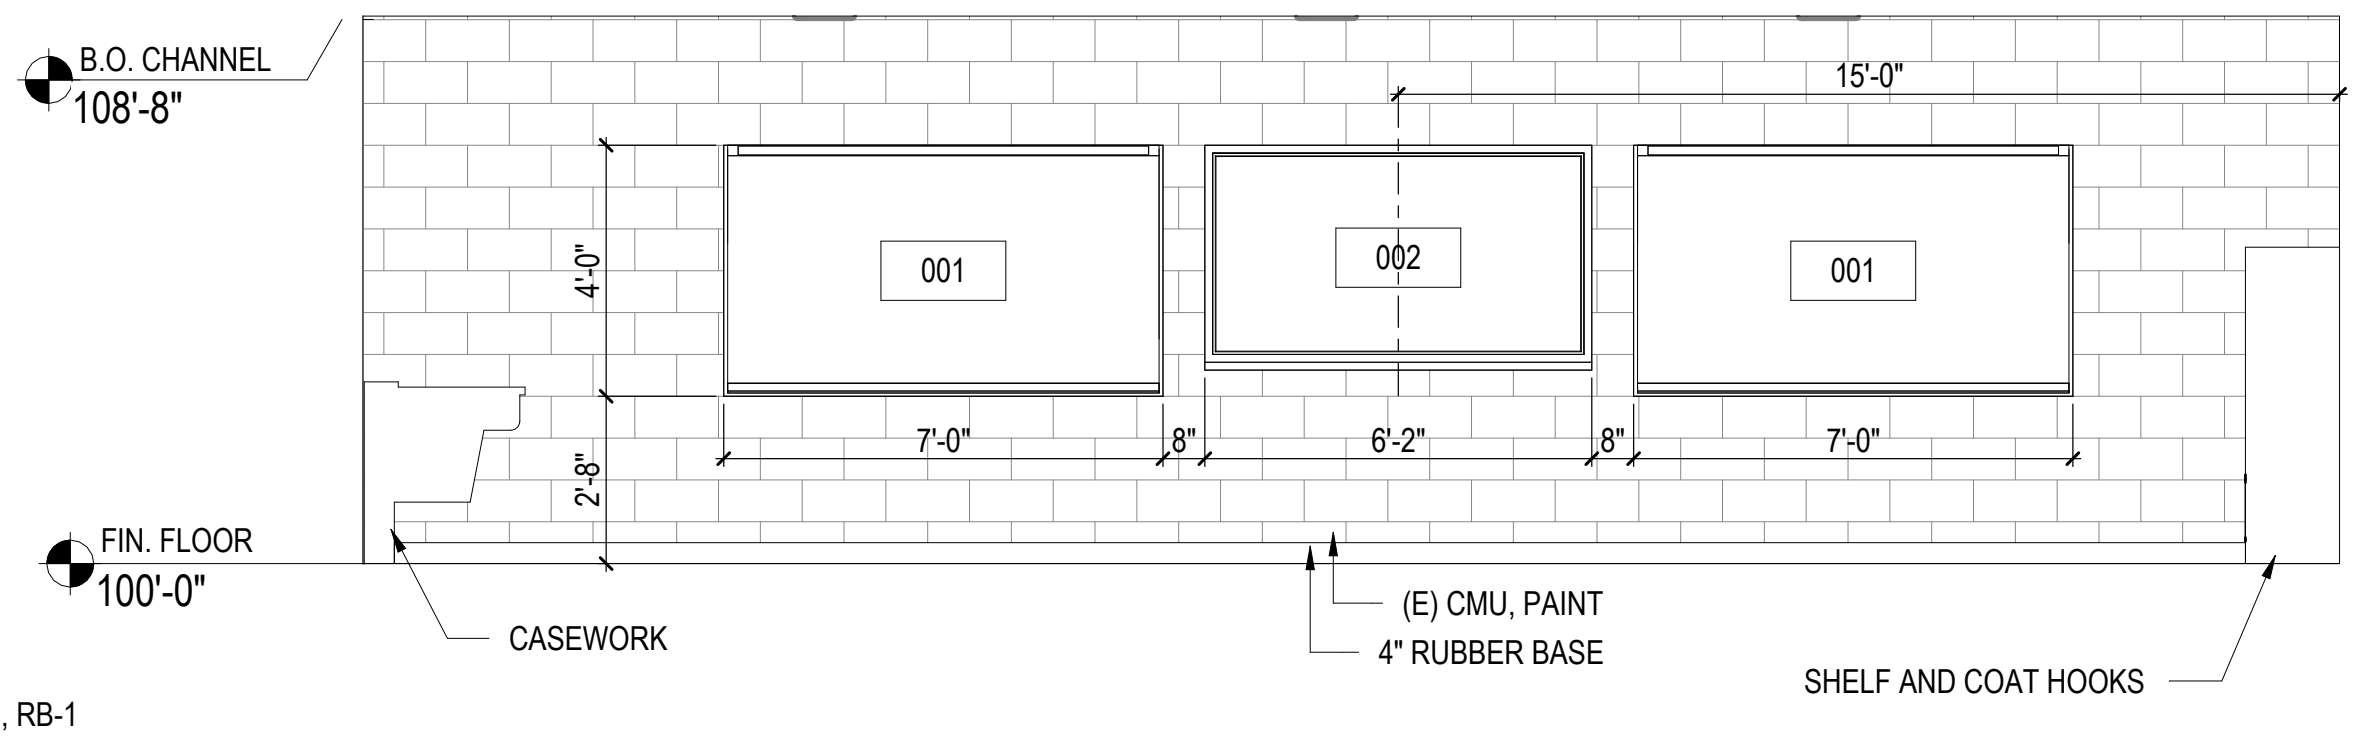
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

8 **Classroom (12) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

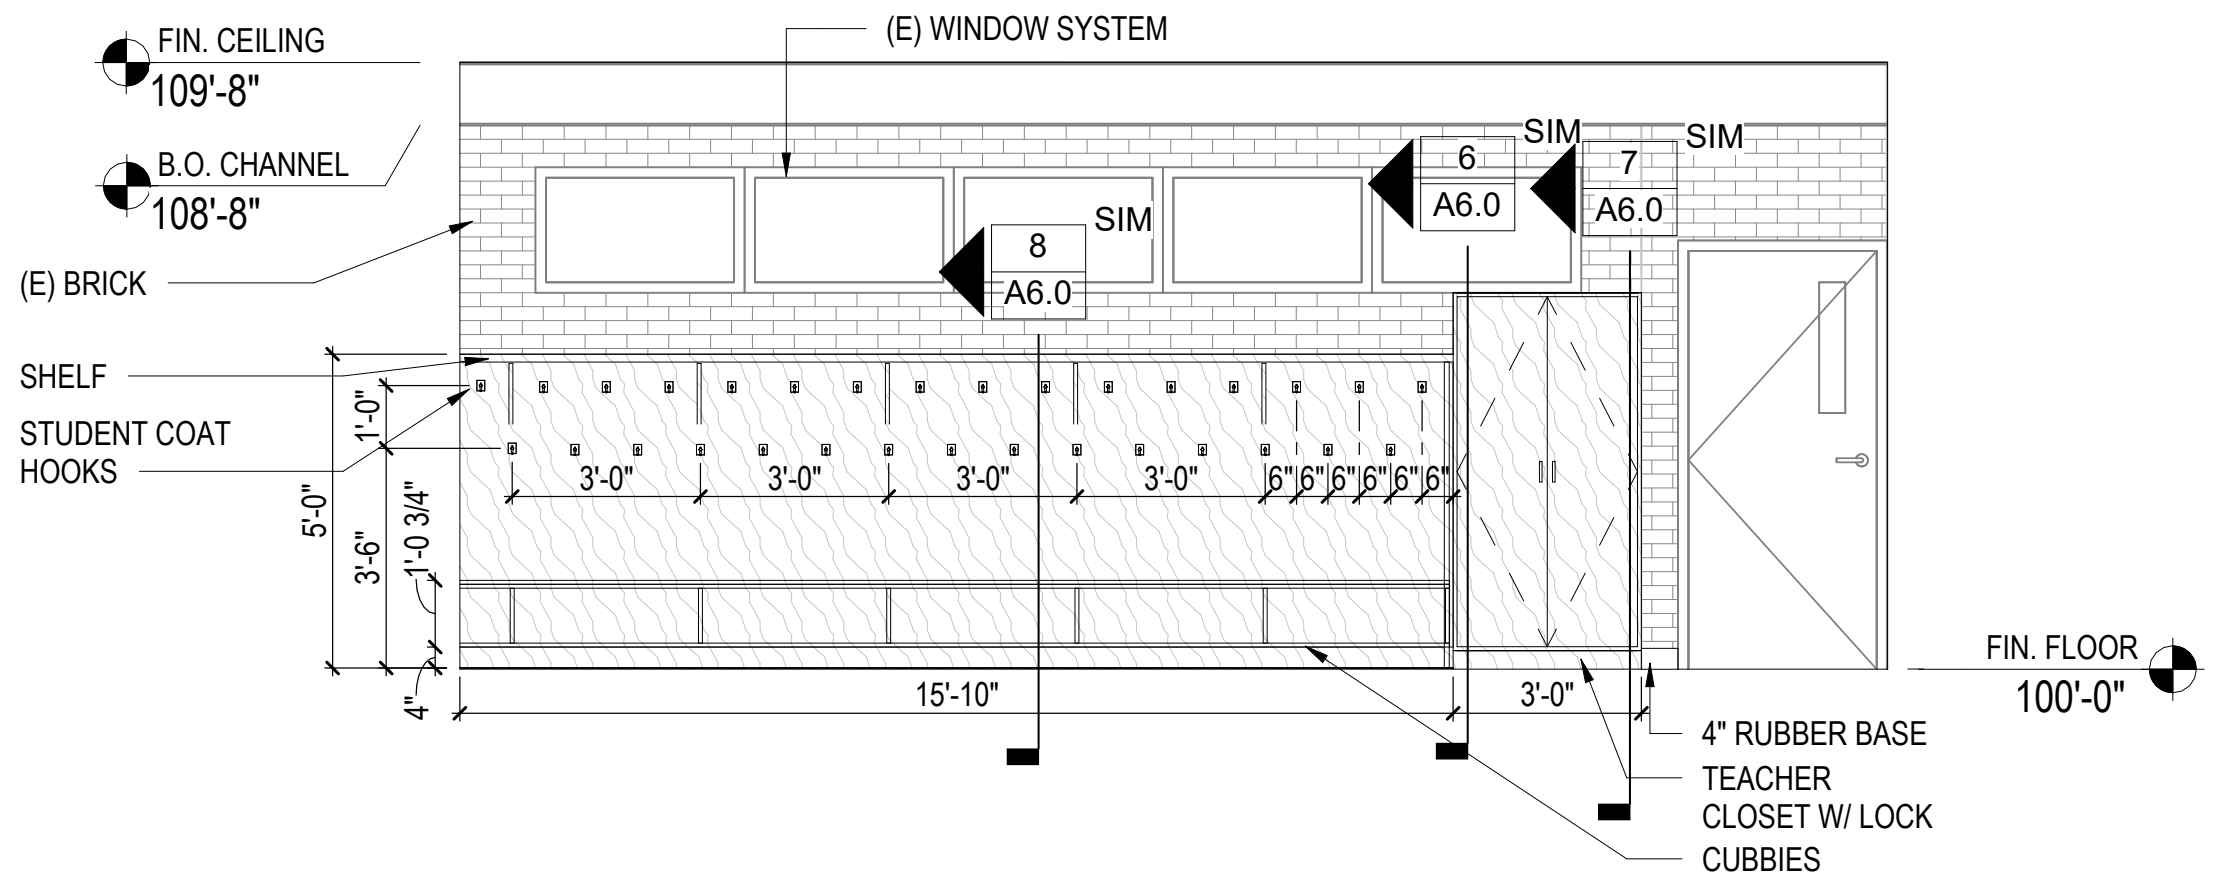
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) WINDOW SYSTEM
(E) BRICK
SHELF
STUDENT COAT HOOKS
8 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
1'-0"
5'-0"
3'-6"
1'-0 3/4"
4"
3'-0"
3'-0"
3'-0"
3'-0"
6" 6" 6" 6" 6"
15'-10"
3'-0"
FIN. FLOOR 100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

9 **Classroom (12) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

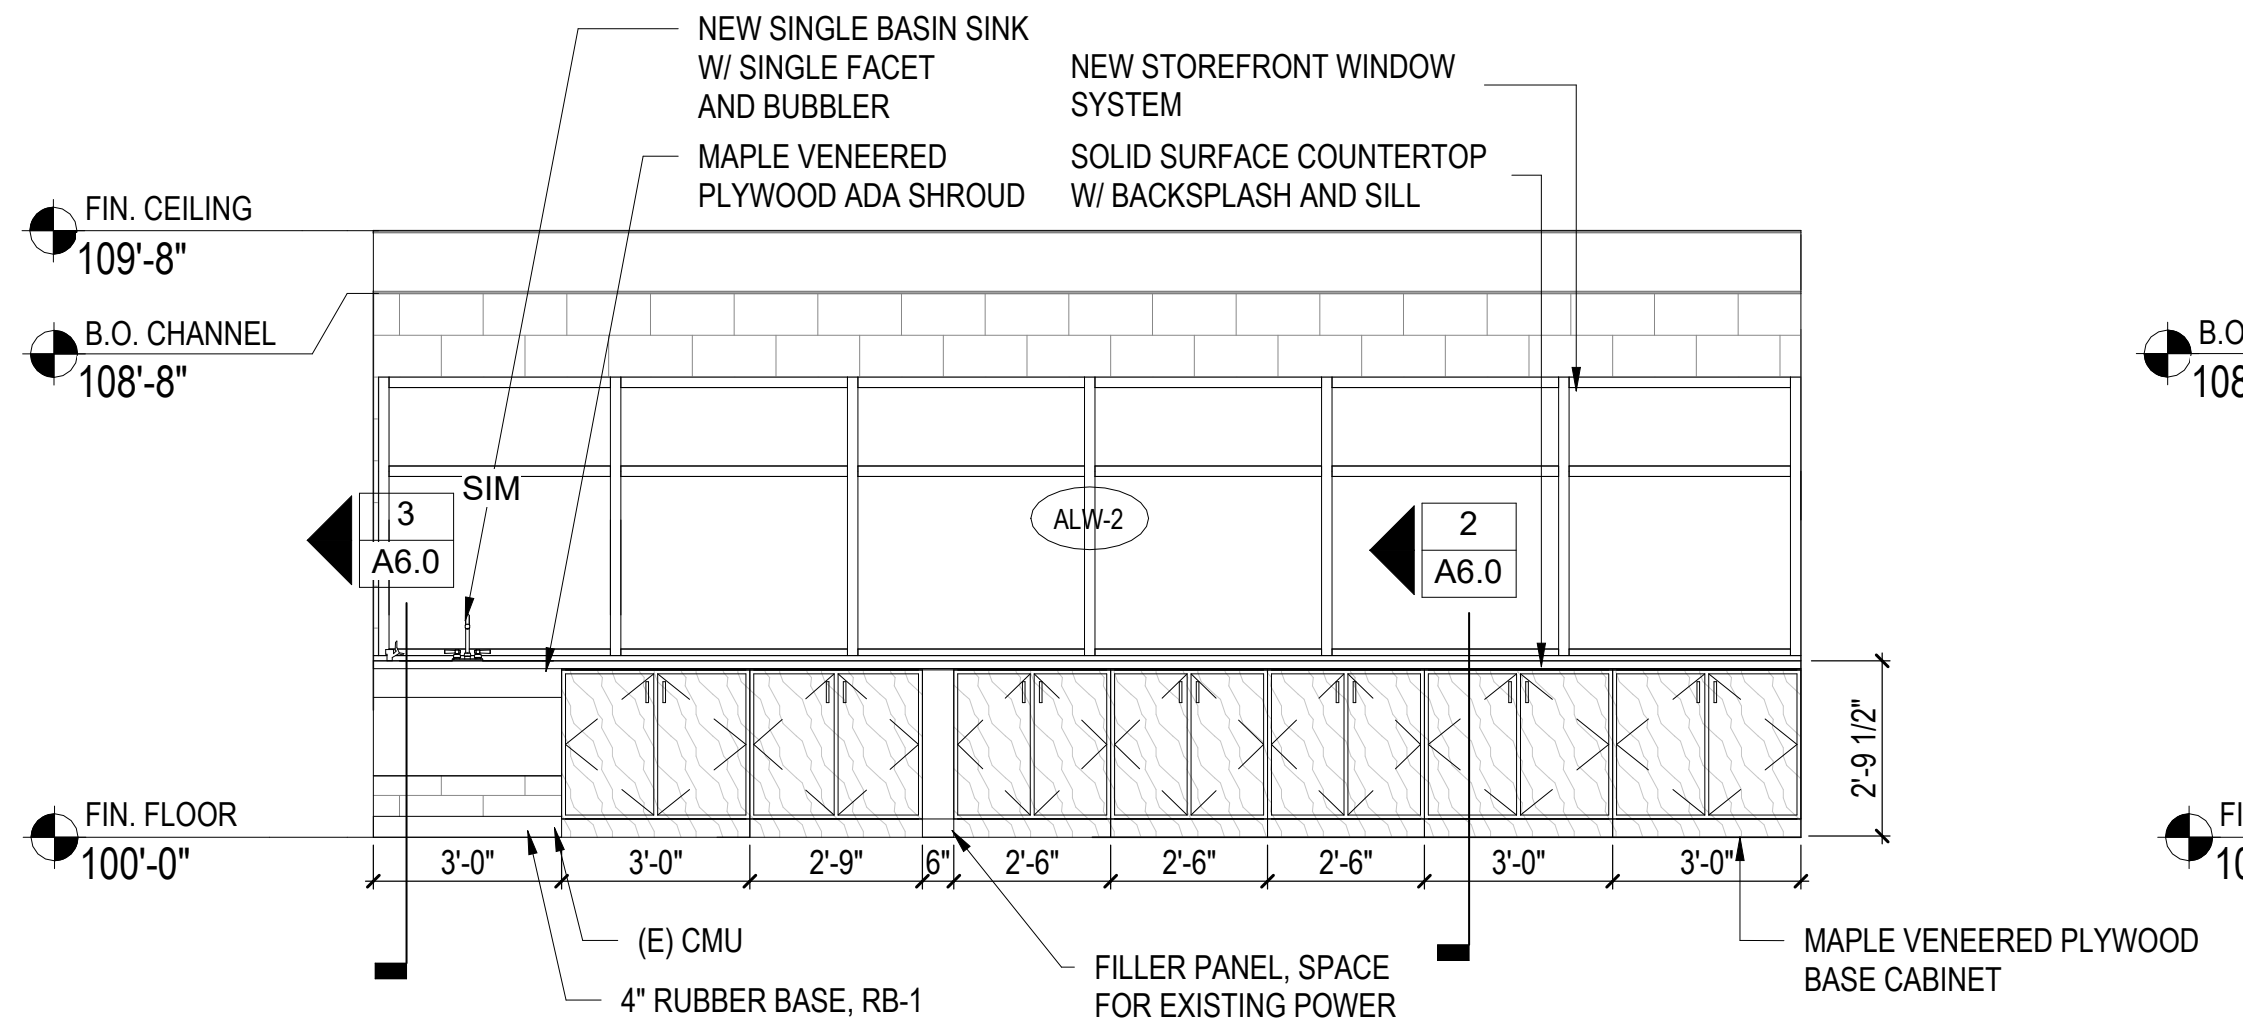
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
3 A6.0 SIM
ALW-2
2 A6.0
2'-9 1/2"
3'-0"
3'-0"
2'-9"
6"
2'-6"
2'-6"
2'-6"
3'-0"
3'-0"
(E) CMU
4" RUBBER BASE, RB-1
FILLER PANEL, SPACE FOR EXISTING POWER
MAPLE VENEERED PLYWOOD BASE CABINET

10 **Classroom (13) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

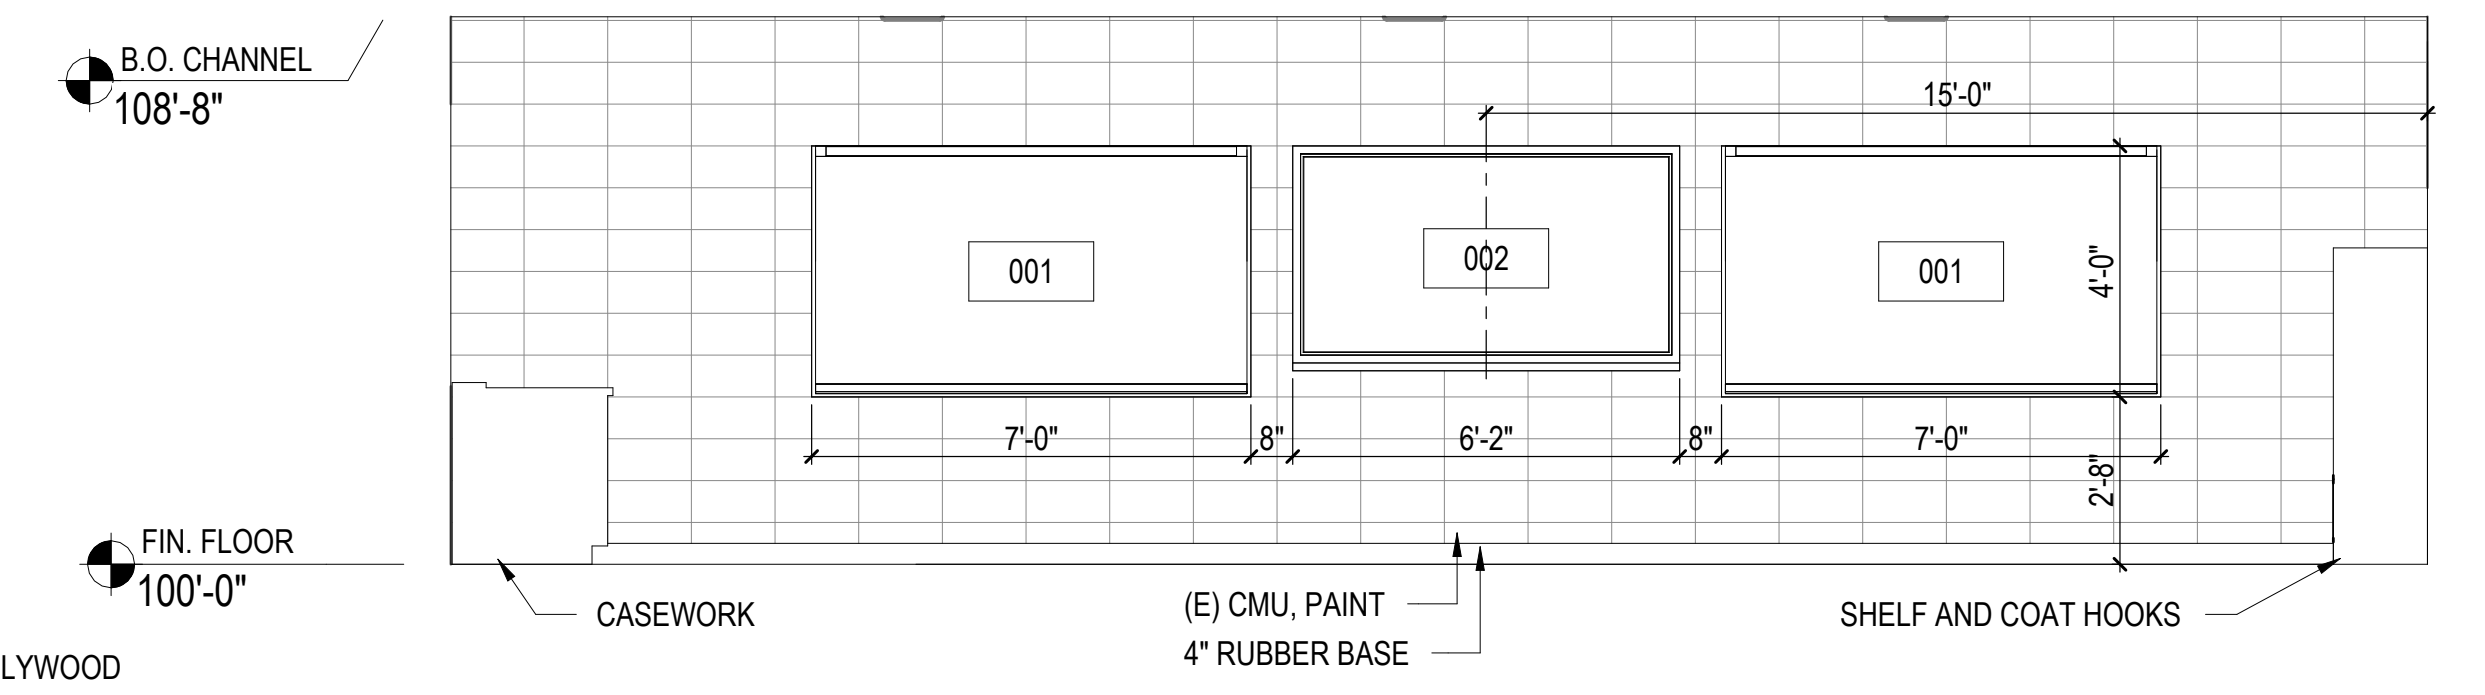
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

11 **Classroom (13) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

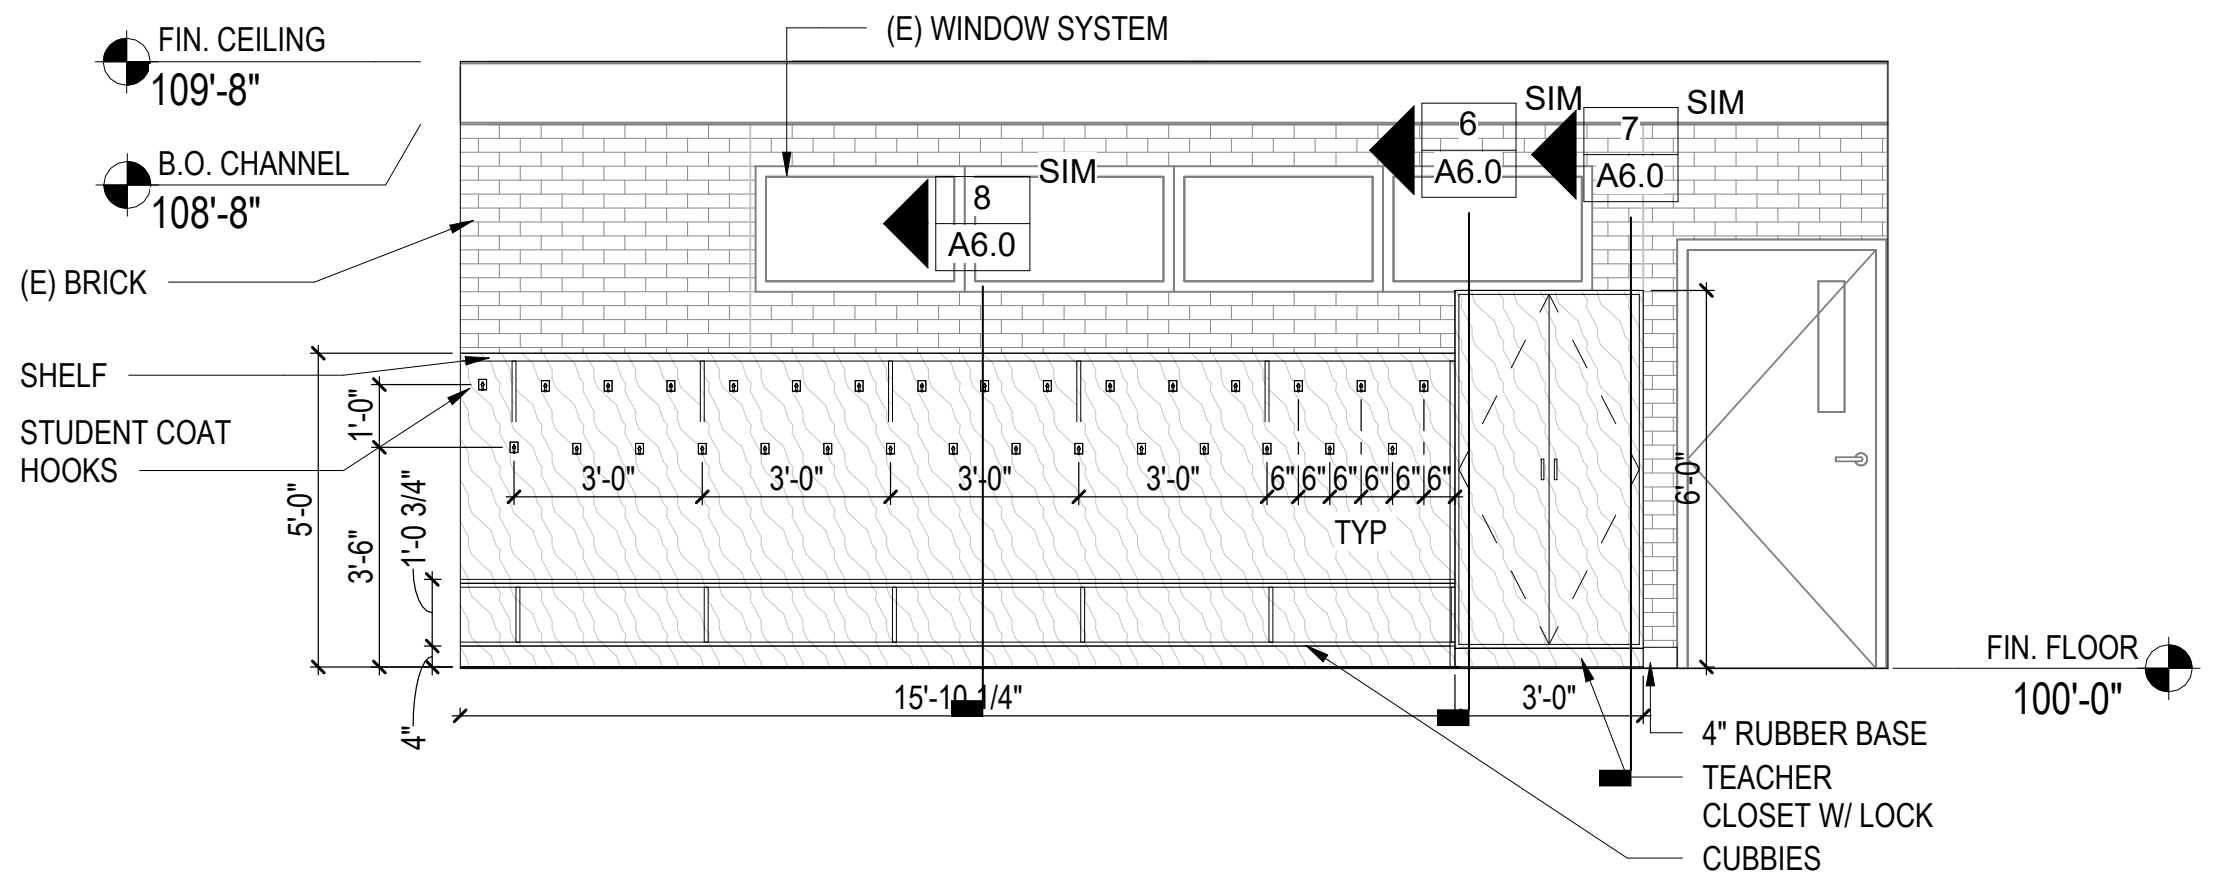
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) WINDOW SYSTEM
(E) BRICK
SHELF
STUDENT COAT HOOKS
8 A6.0 SIM
6 A6.0 SIM
7 A6.0 SIM
1'-0"
5'-0"
3'-6"
1'-0 3/4"
4"
3'-0"
3'-0"
3'-0"
3'-0"
6" 6" 6" 6" 6"
TYP
6'-0"
15'-10 1/4"
3'-0"
FIN. FLOOR 100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

12 **Classroom (13) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

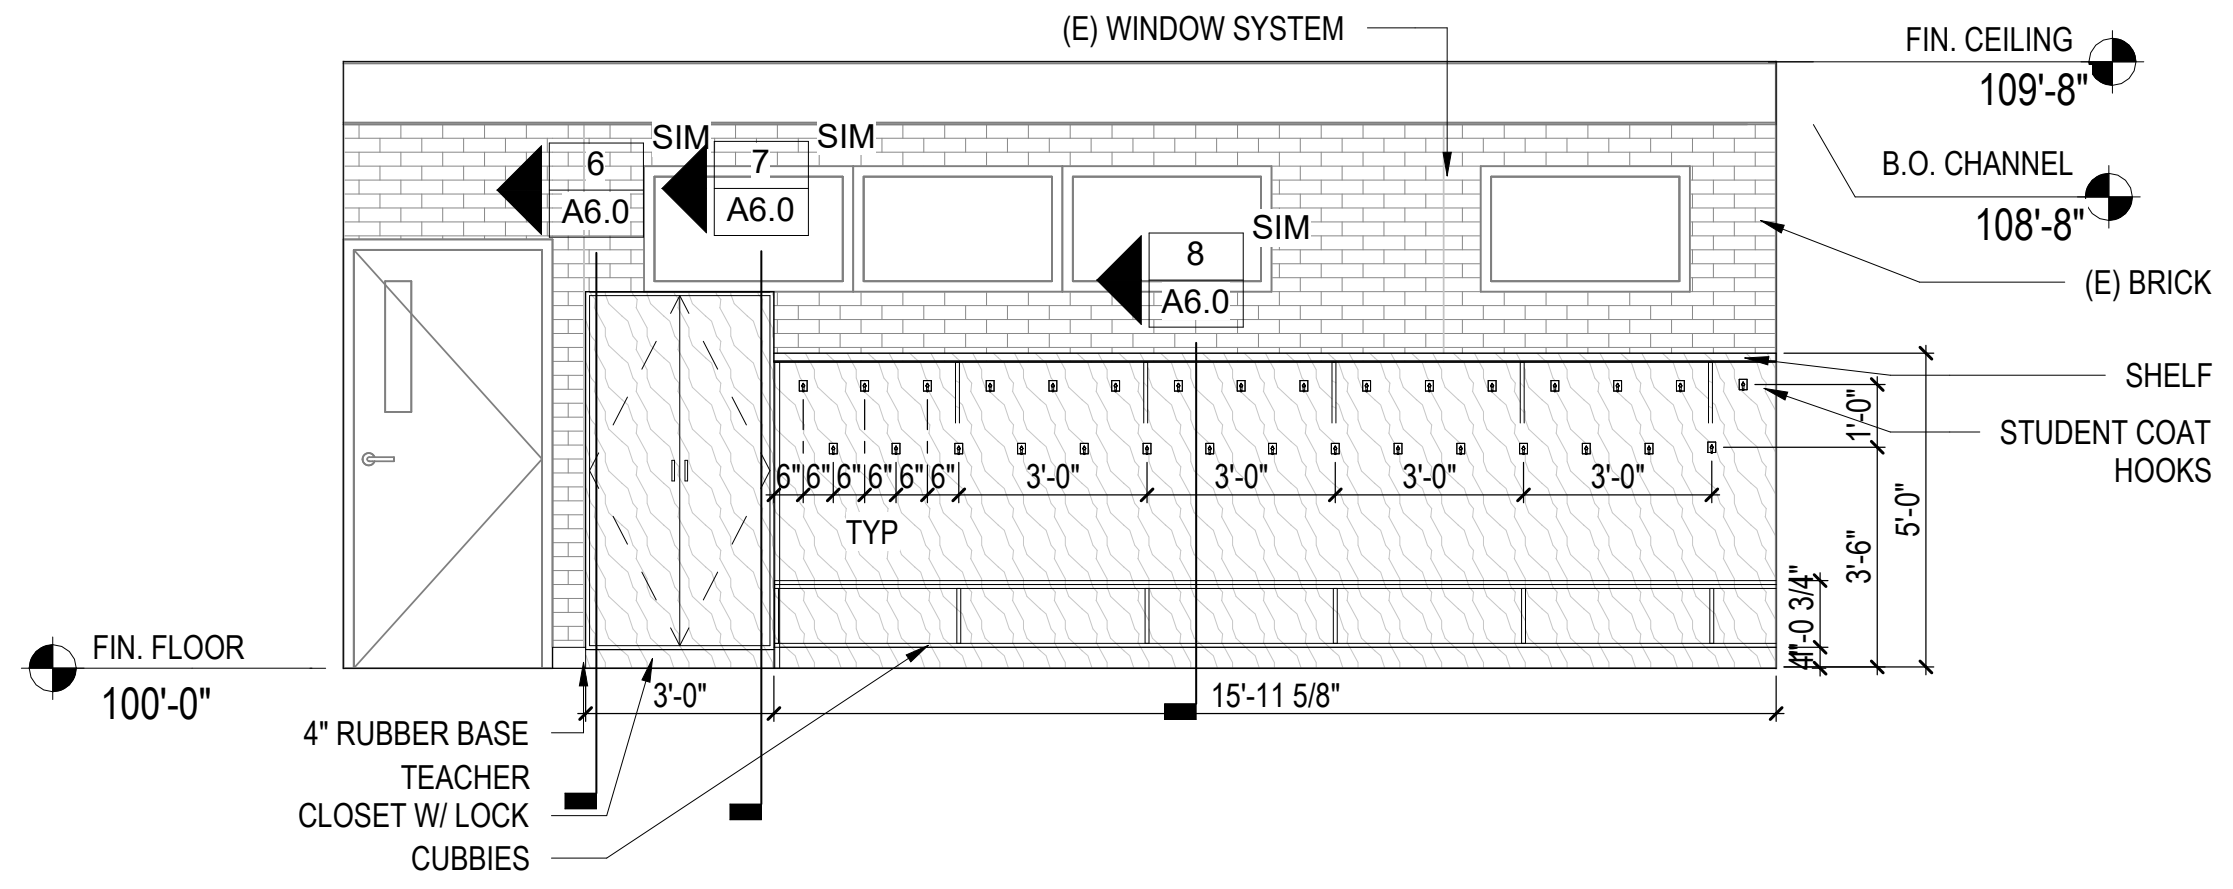
(E) WINDOW SYSTEM
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) BRICK
SHELF
STUDENT COAT HOOKS
6 A6.0 SIM
7 A6.0 SIM
8 A6.0 SIM
6" 6" 6" 6" 6"
3'-0"
3'-0"
3'-0"
3'-0"
TYP
1'-0"
1'-0 3/4"
3'-6"
5'-0"
3'-0"
15'-11 5/8"
FIN. FLOOR 100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

13 **Classroom (14) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

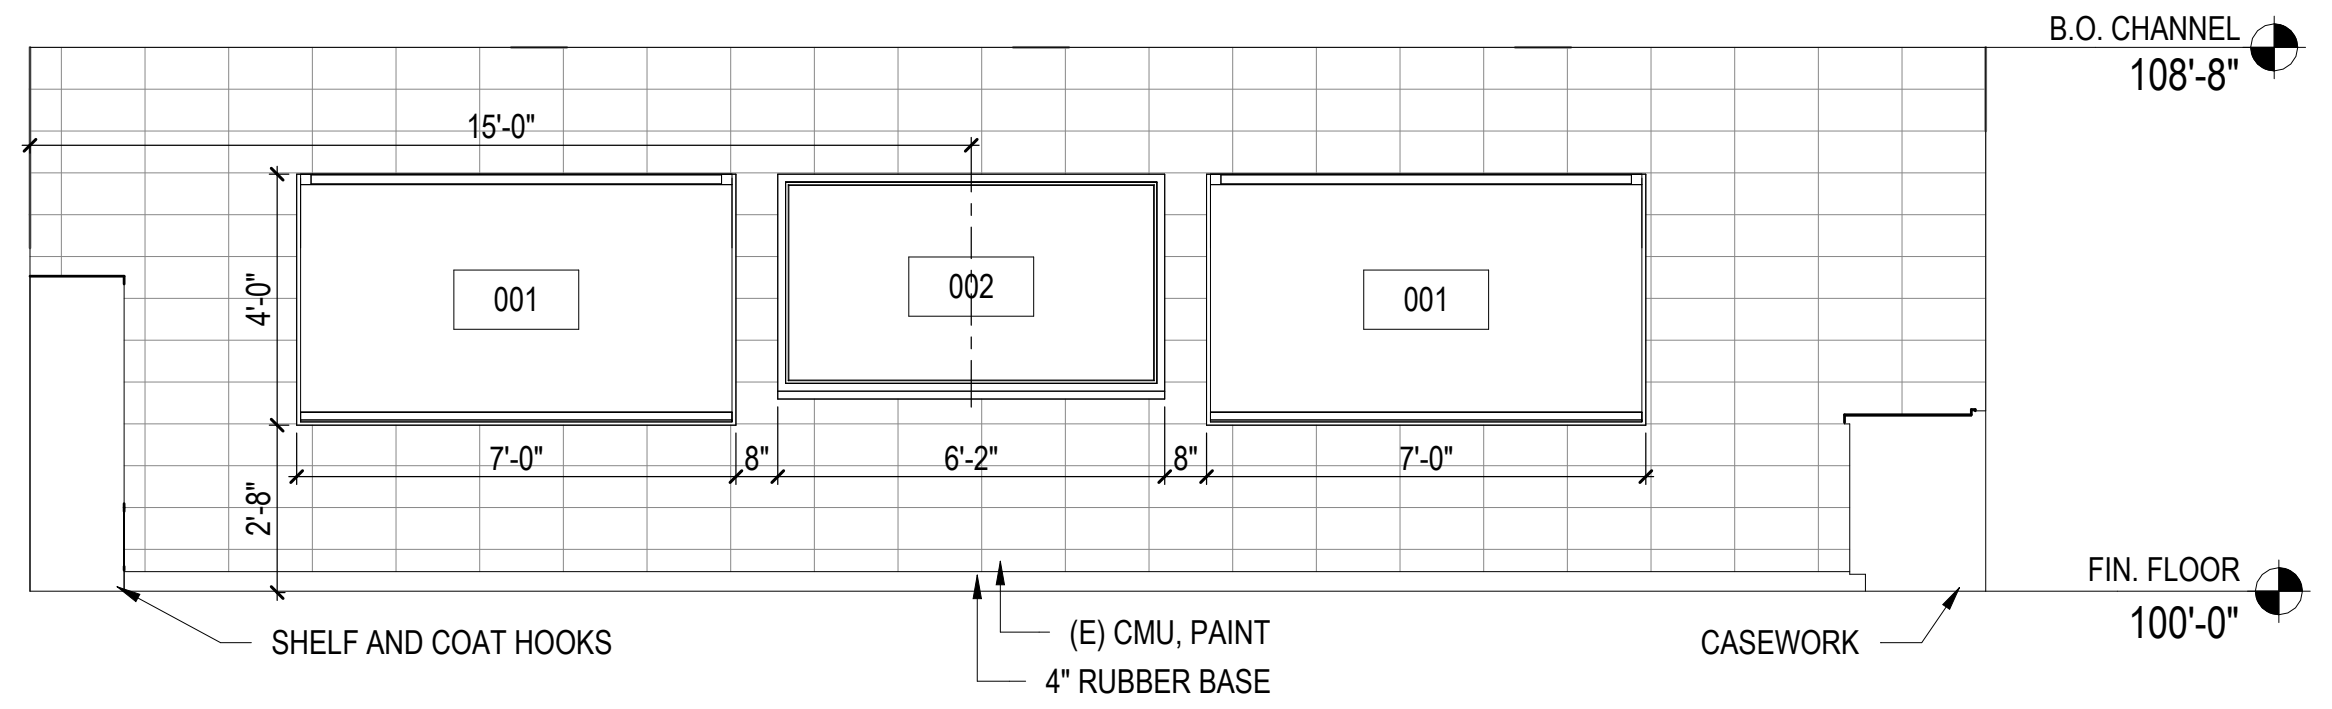
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
SHELF AND COAT HOOKS
(E) CMU, PAINT
4" RUBBER BASE
CASEWORK

14 **Classroom (14) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

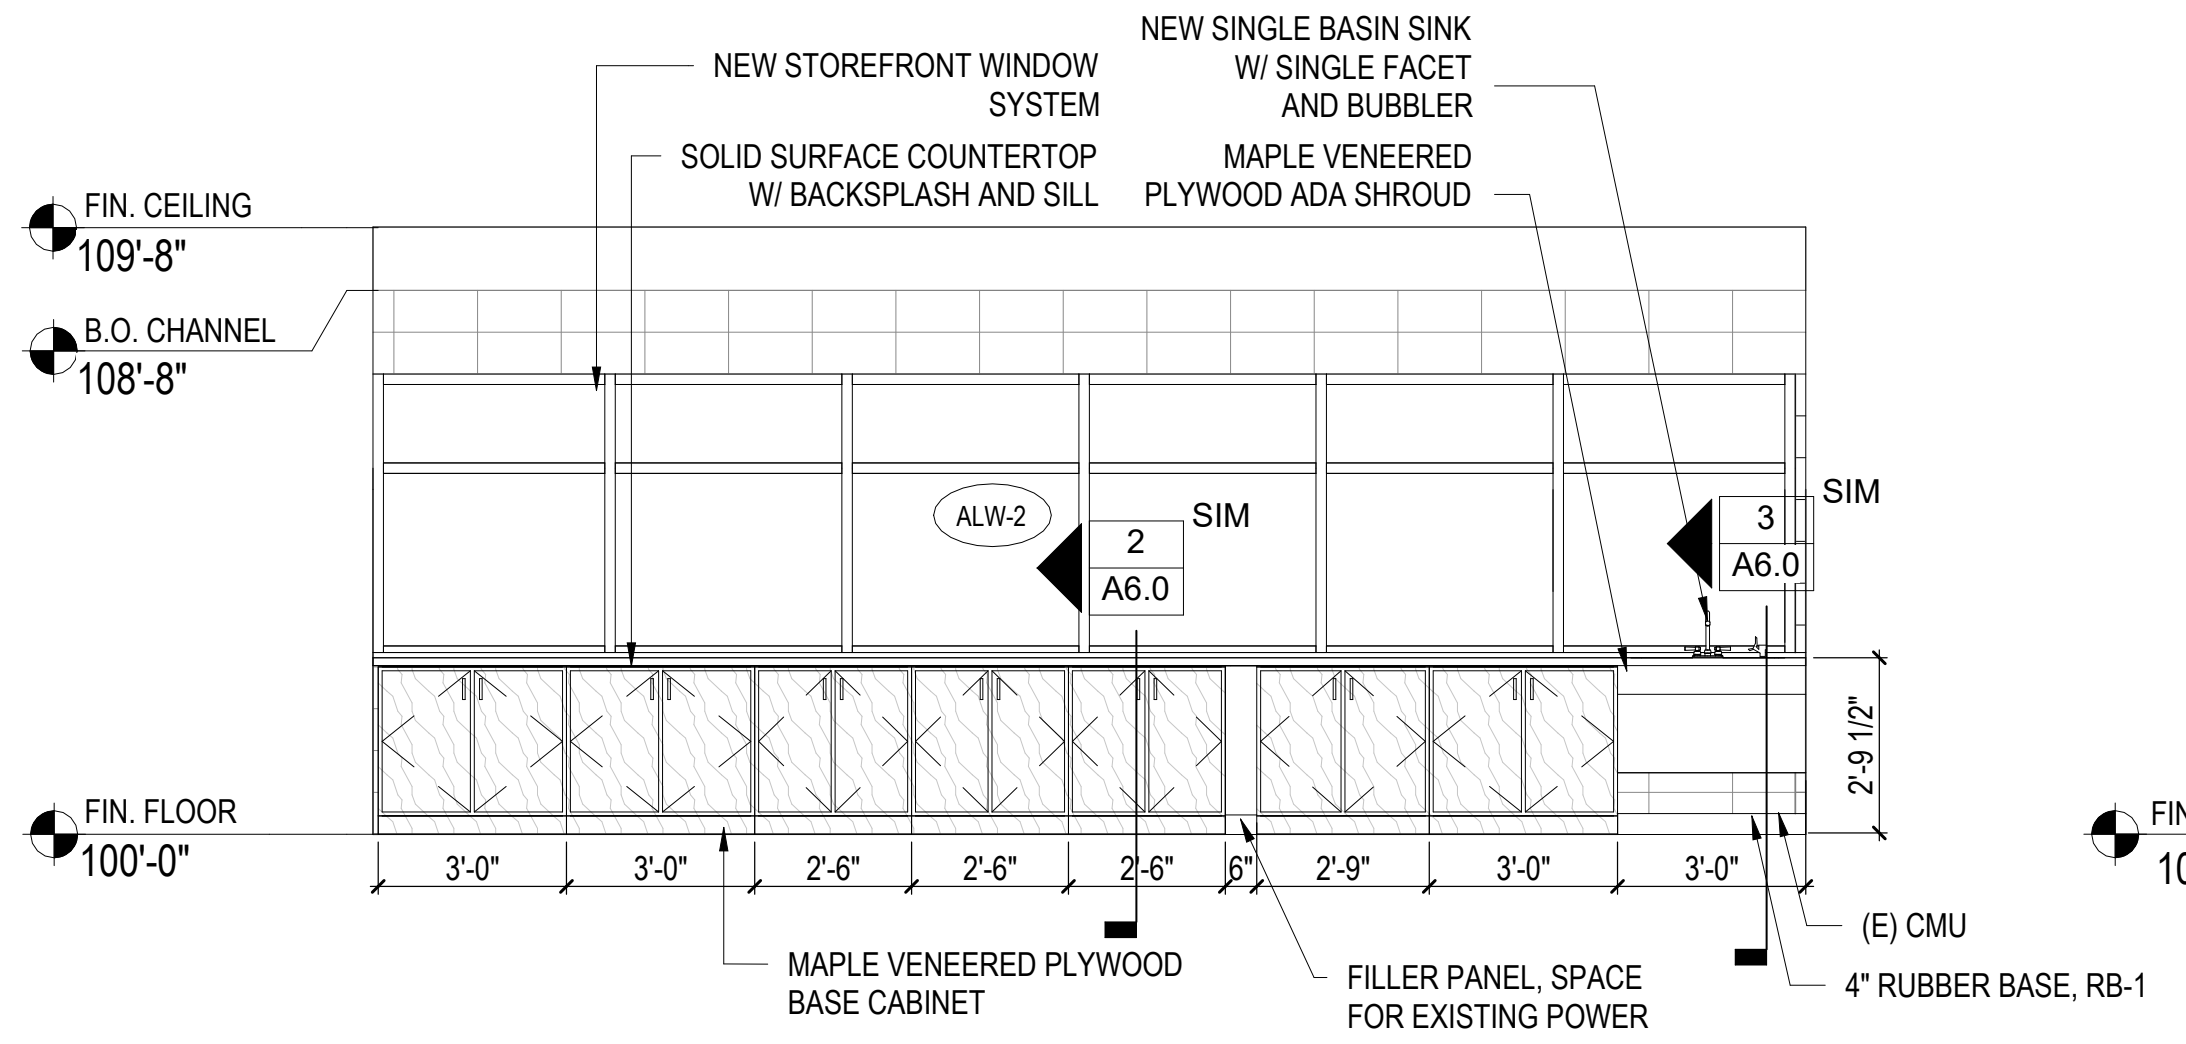
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
ALW-2
2 A6.0 SIM
3 A6.0 SIM
2'-9 1/2"
3'-0"
3'-0"
2'-6"
2'-6"
2'-6"
6"
2'-9"
3'-0"
3'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
FILLER PANEL, SPACE FOR EXISTING POWER
(E) CMU
4" RUBBER BASE, RB-1

15 **Classroom (14) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

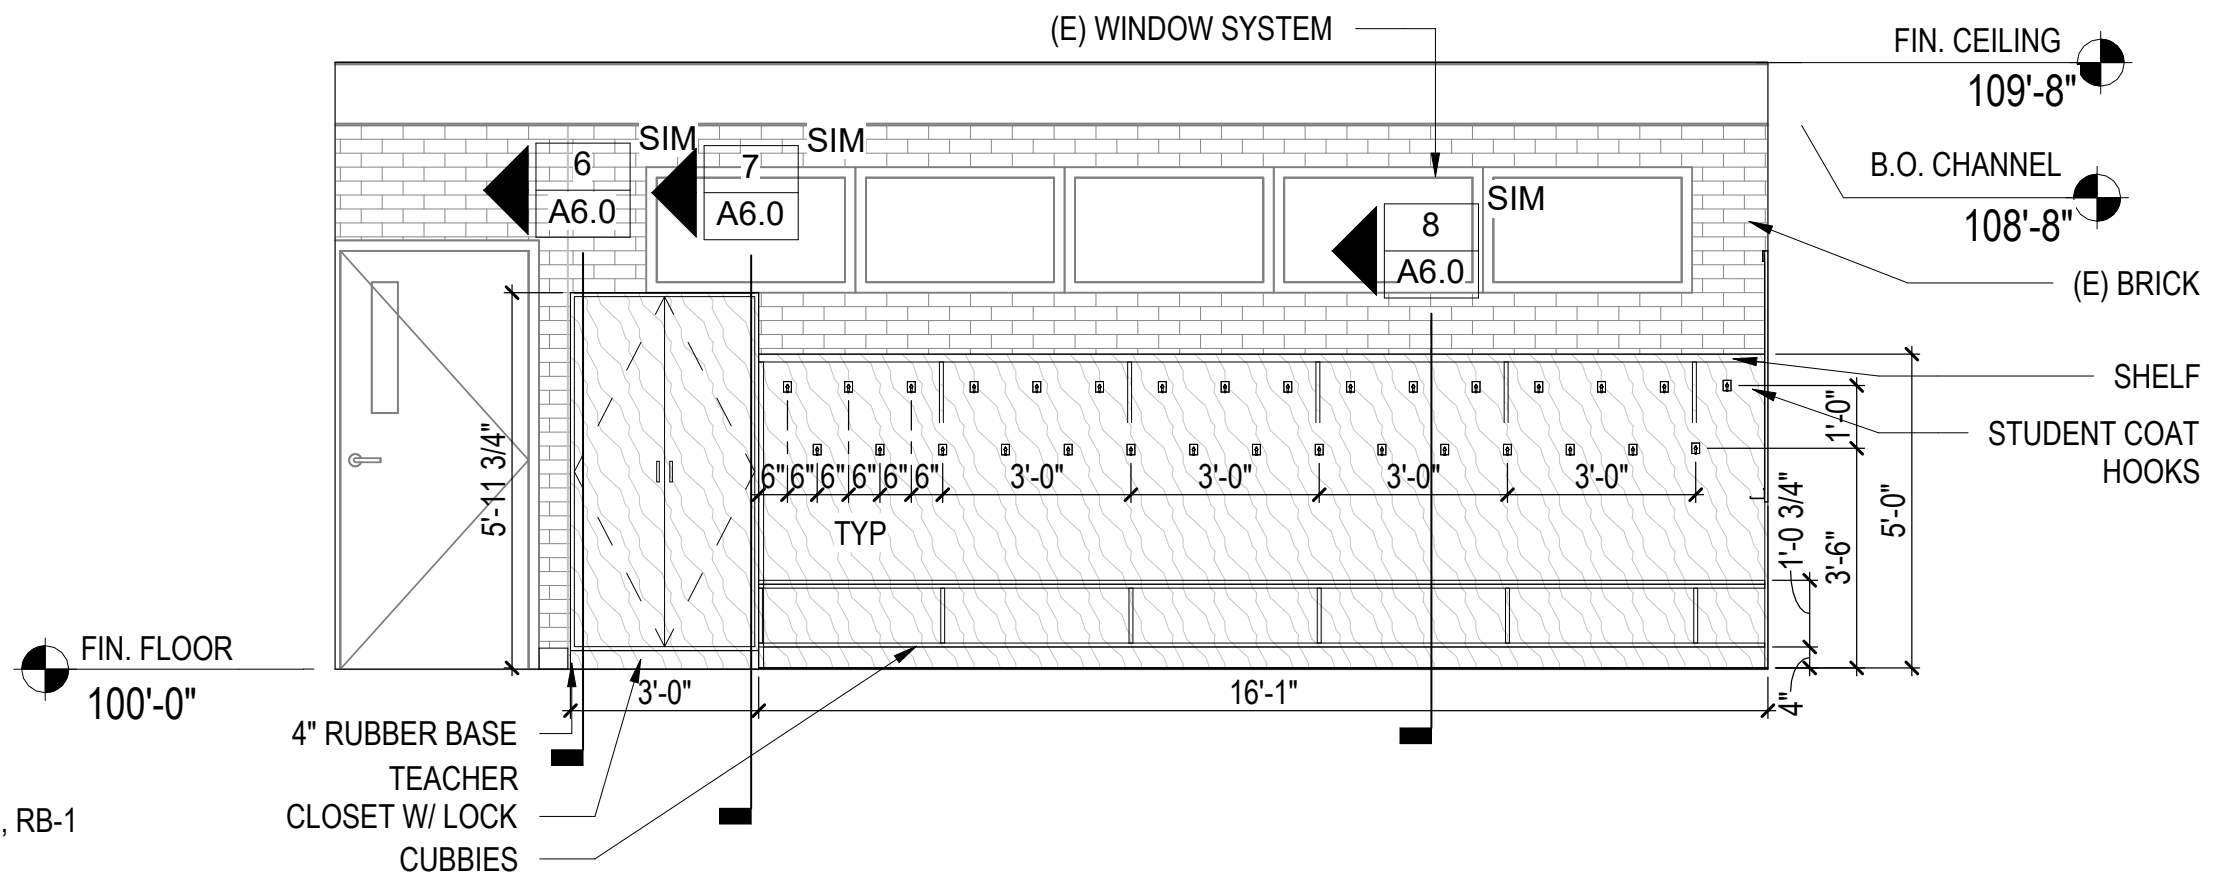
(E) WINDOW SYSTEM
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
(E) BRICK
SHELF
STUDENT COAT HOOKS
6 A6.0 SIM
7 A6.0 SIM
8 A6.0 SIM
5'-11 3/4"
6" 6" 6" 6" 6"
3'-0"
3'-0"
3'-0"
3'-0"
TYP
1'-0"
1'-0 3/4"
3'-6"
5'-0"
4"
3'-0"
16'-1"
FIN. FLOOR 100'-0"
4" RUBBER BASE
TEACHER CLOSET W/ LOCK
CUBBIES

16 **Classroom (15) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

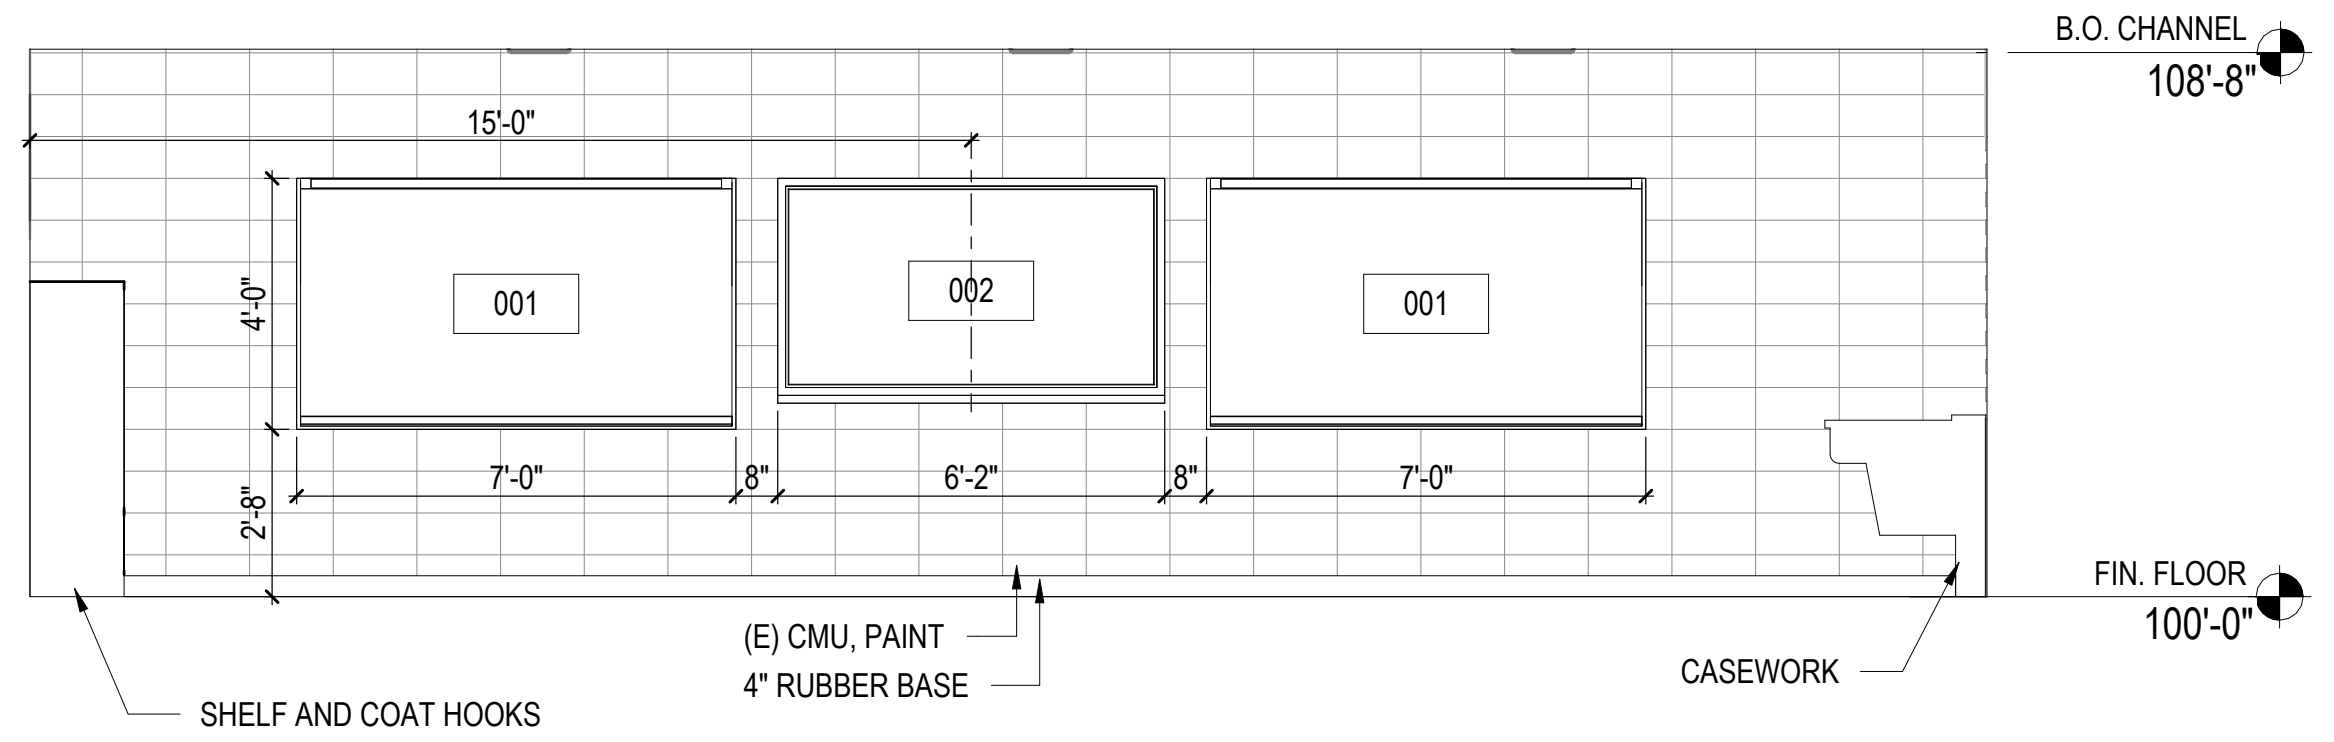
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
15'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
SHELF AND COAT HOOKS
(E) CMU, PAINT
4" RUBBER BASE
CASEWORK

17 **Classroom (15) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

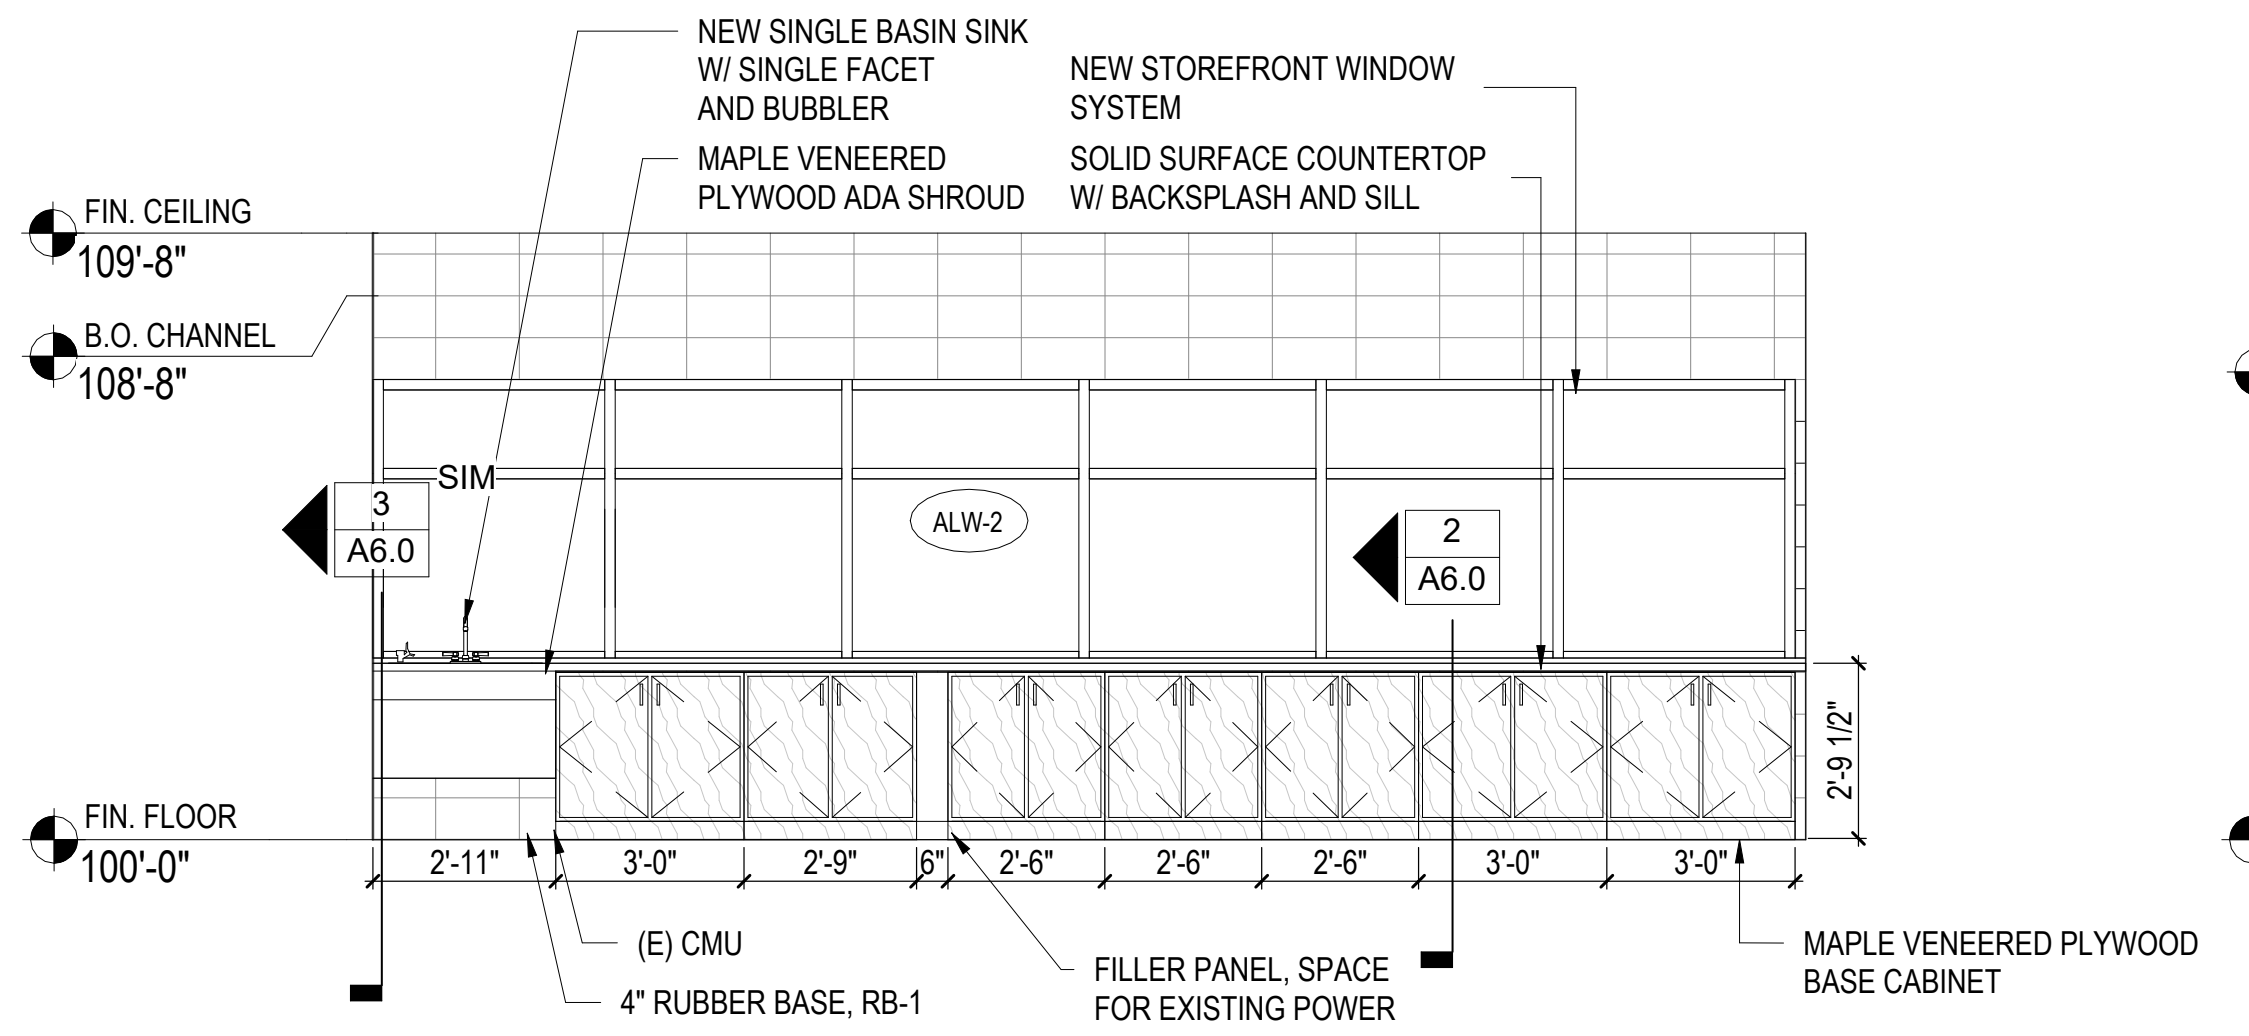
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW STOREFRONT WINDOW SYSTEM
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
FIN. CEILING 109'-8"
B.O. CHANNEL 108'-8"
FIN. FLOOR 100'-0"
3 A6.0 SIM
ALW-2
2 A6.0
2'-9 1/2"
2'-11"
3'-0"
2'-9"
6"
2'-6"
2'-6"
2'-6"
3'-0"
3'-0"
(E) CMU
4" RUBBER BASE, RB-1
FILLER PANEL, SPACE FOR EXISTING POWER
MAPLE VENEERED PLYWOOD BASE CABINET

18 **Classroom (15) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

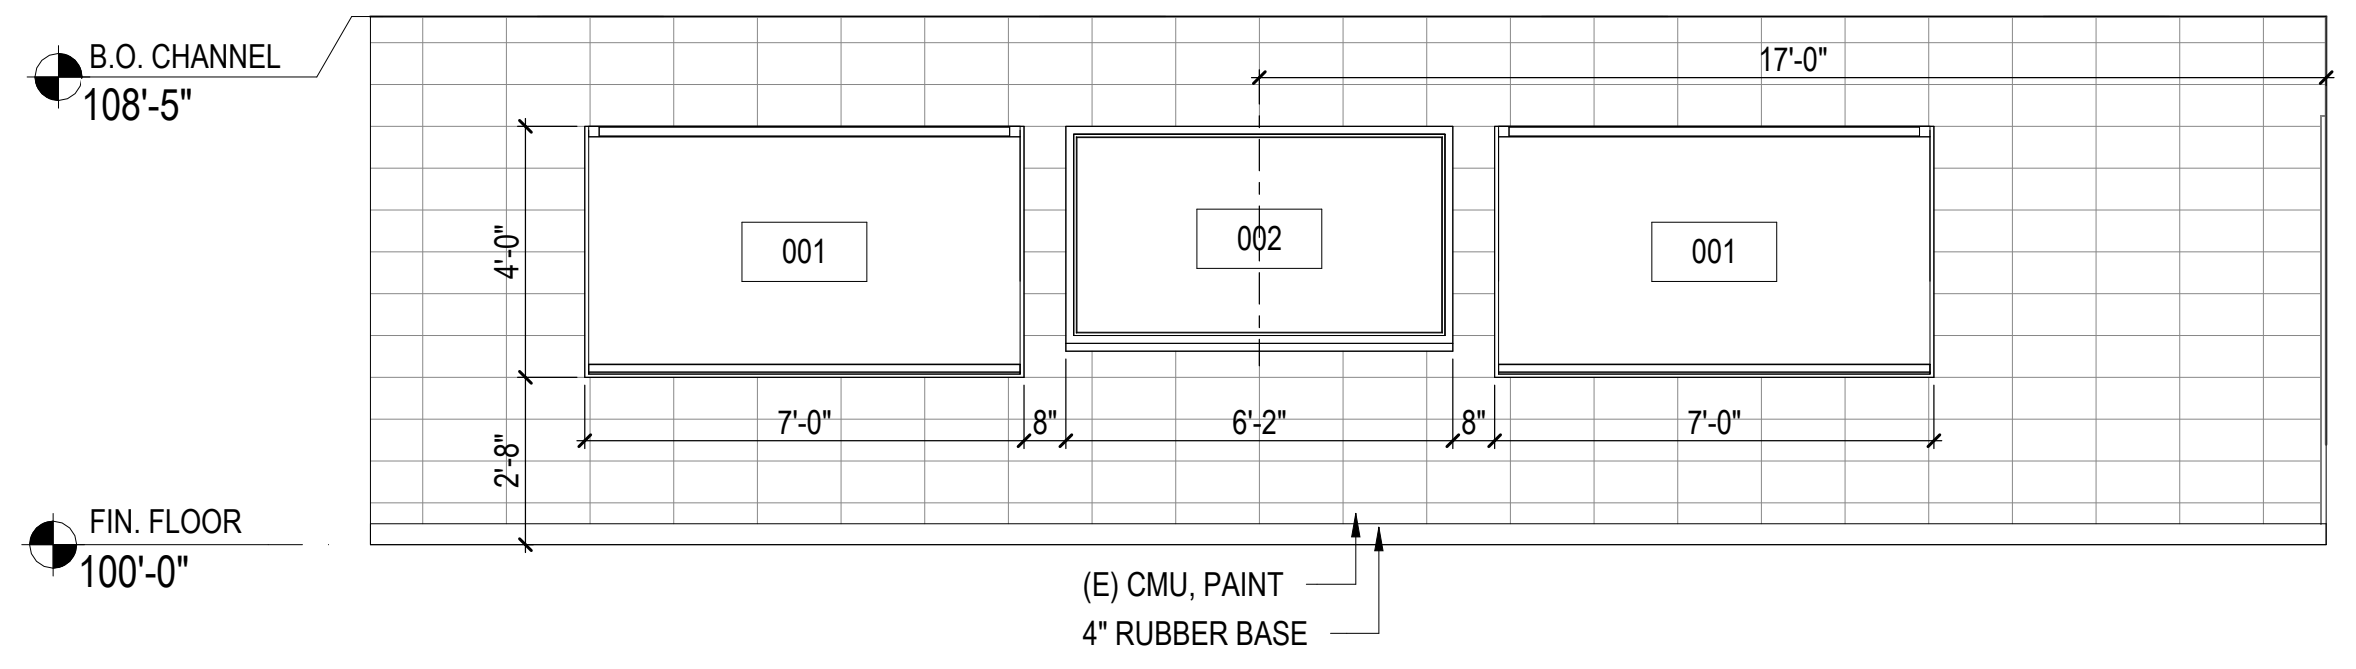
B.O. CHANNEL 108'-5"
FIN. FLOOR 100'-0"
17'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
(E) CMU, PAINT
4" RUBBER BASE

19 **Classroom (23) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

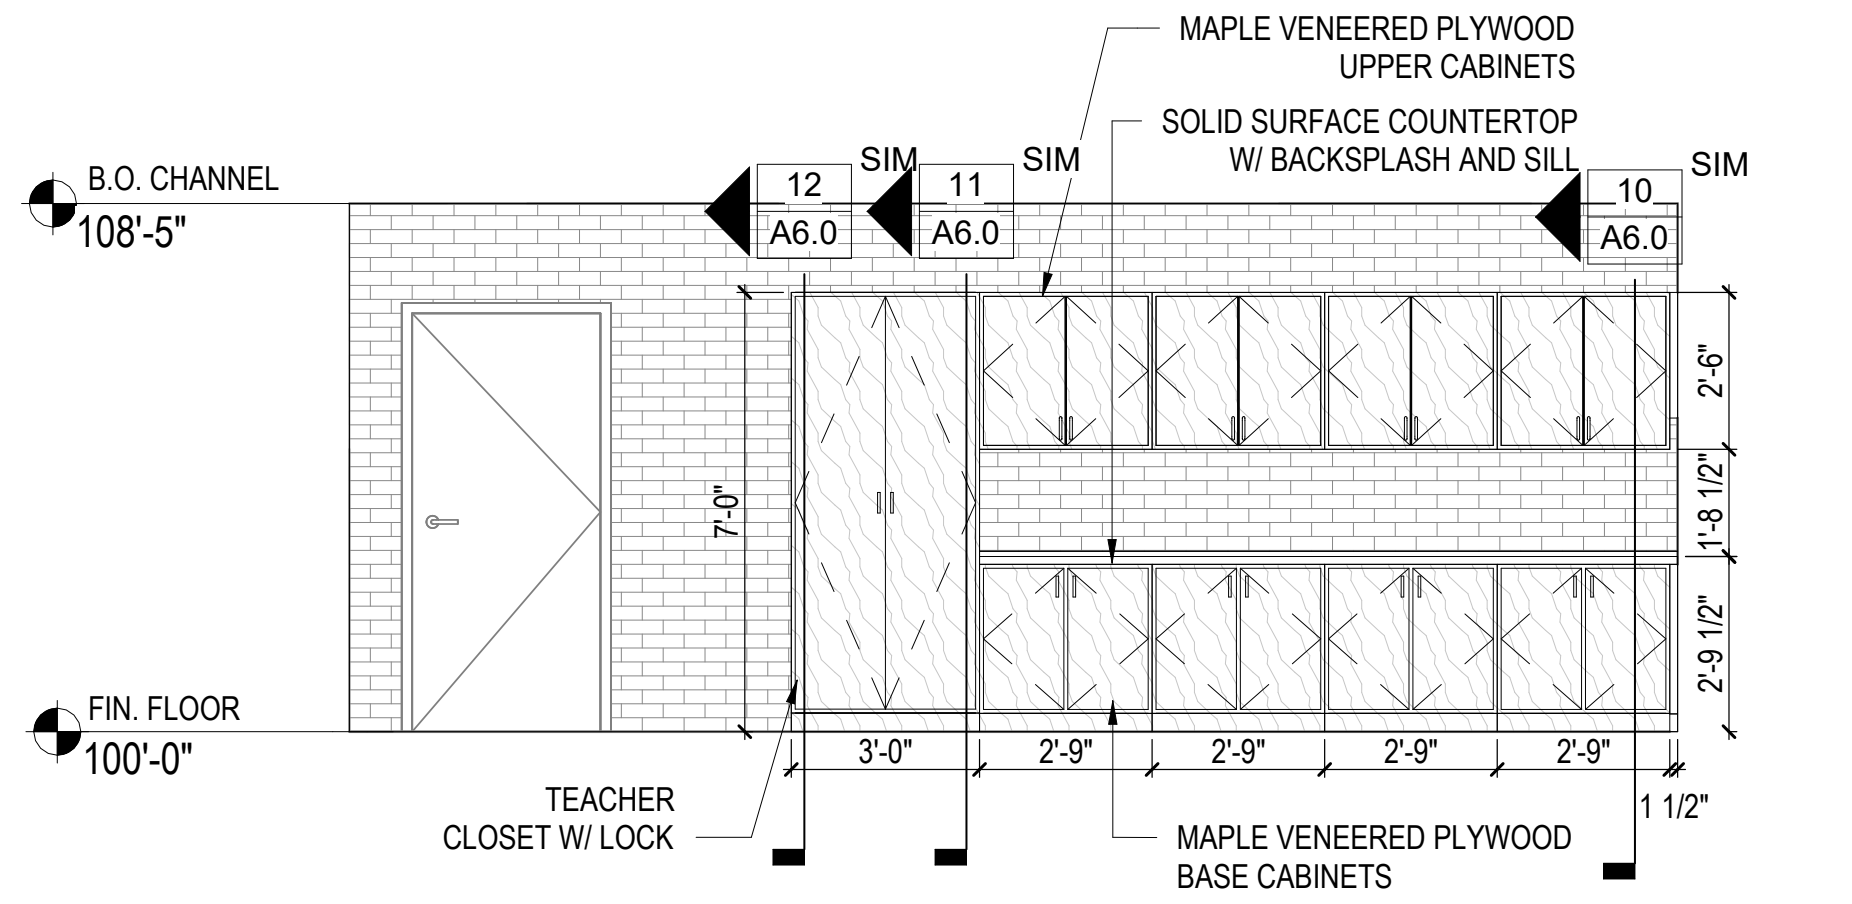
MAPLE VENEERED PLYWOOD UPPER CABINETS
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
B.O. CHANNEL 108'-5"
12 A6.0 SIM
11 A6.0 SIM
10 A6.0 SIM
7'-0"
2'-6"
1'-8 1/2"
2'-9 1/2"
FIN. FLOOR 100'-0"
3'-0"
2'-9"
2'-9"
2'-9"
2'-9"
1 1/2"
TEACHER CLOSET W/ LOCK
MAPLE VENEERED PLYWOOD BASE CABINETS

20 **Classroom (23) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

9 RECORD DRAWINGS 5/5/2021

Interior Elevations

A6.3

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:44:24 AM

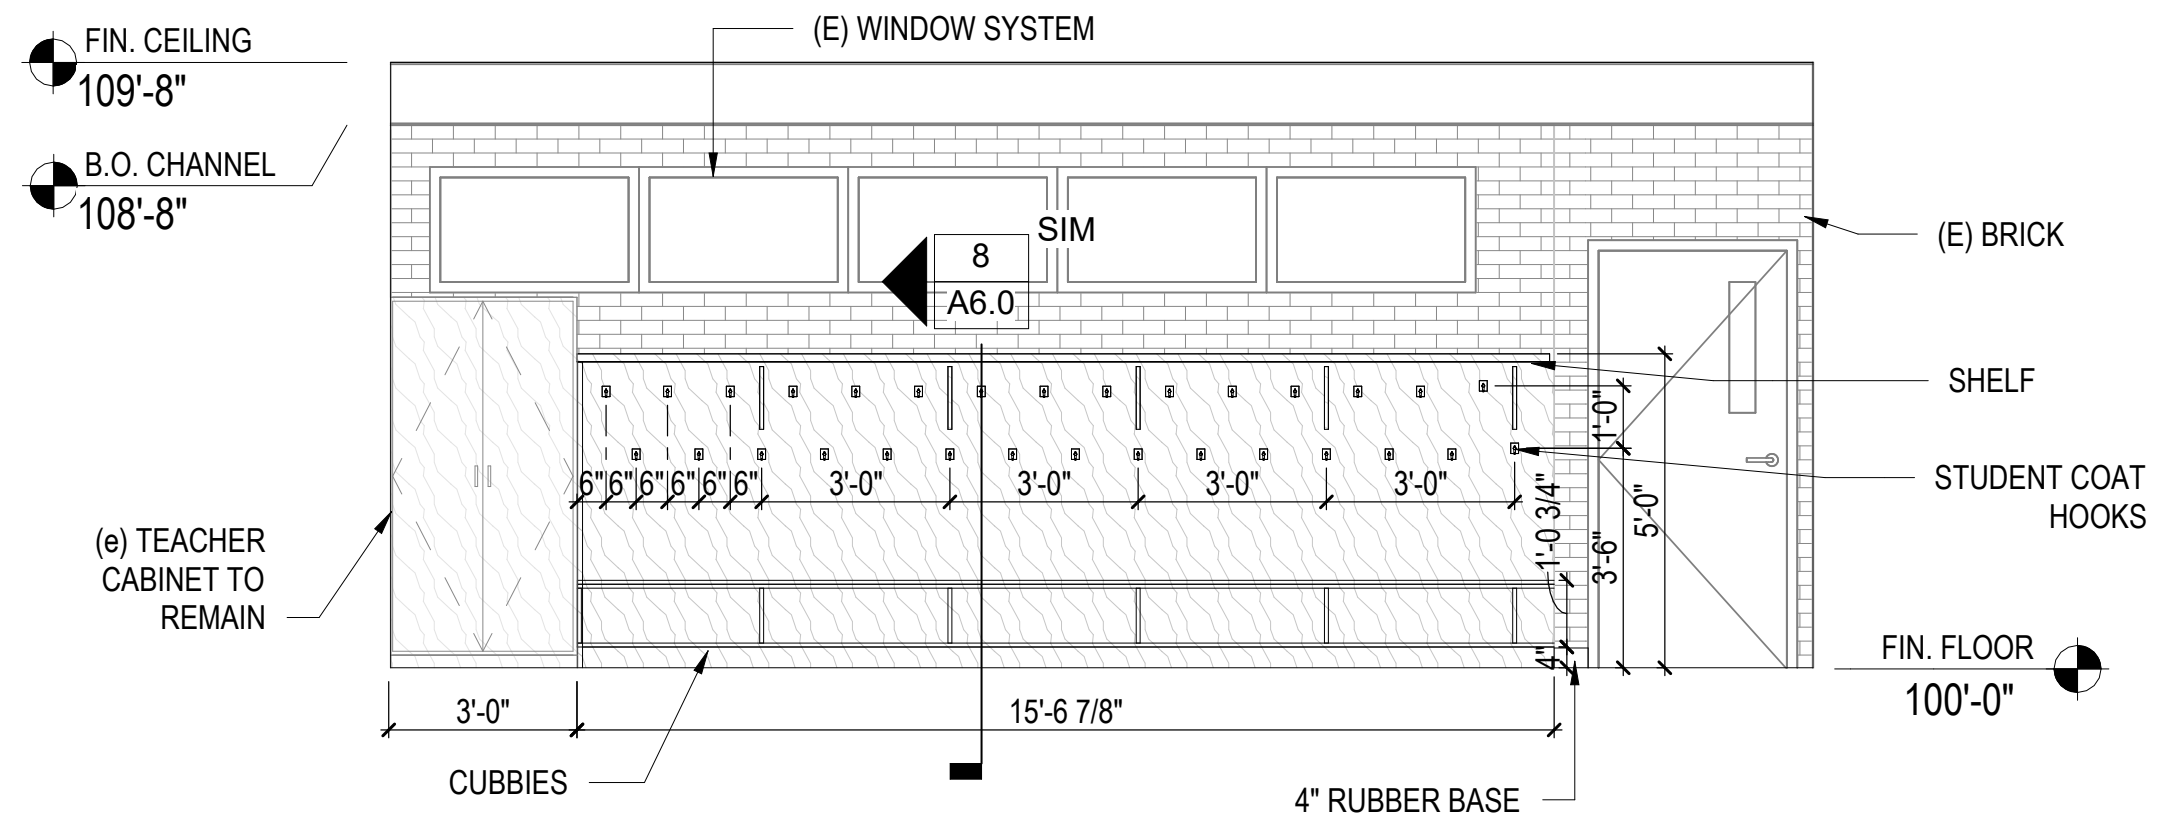
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
(E) WINDOW SYSTEM
8
A6.0
SIM
(E) BRICK
SHELF
STUDENT COAT HOOKS
(e) TEACHER CABINET TO REMAIN
6" 6" 6" 6" 6" 6"
3'-0"
3'-0"
3'-0"
3'-0"
1'-0"
1'-0 3/4"
3'-6"
5'-0"
4"
FIN. FLOOR
100'-0"
3'-0"
15'-6 7/8"
CUBBIES
4" RUBBER BASE

1 **Classroom (16) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

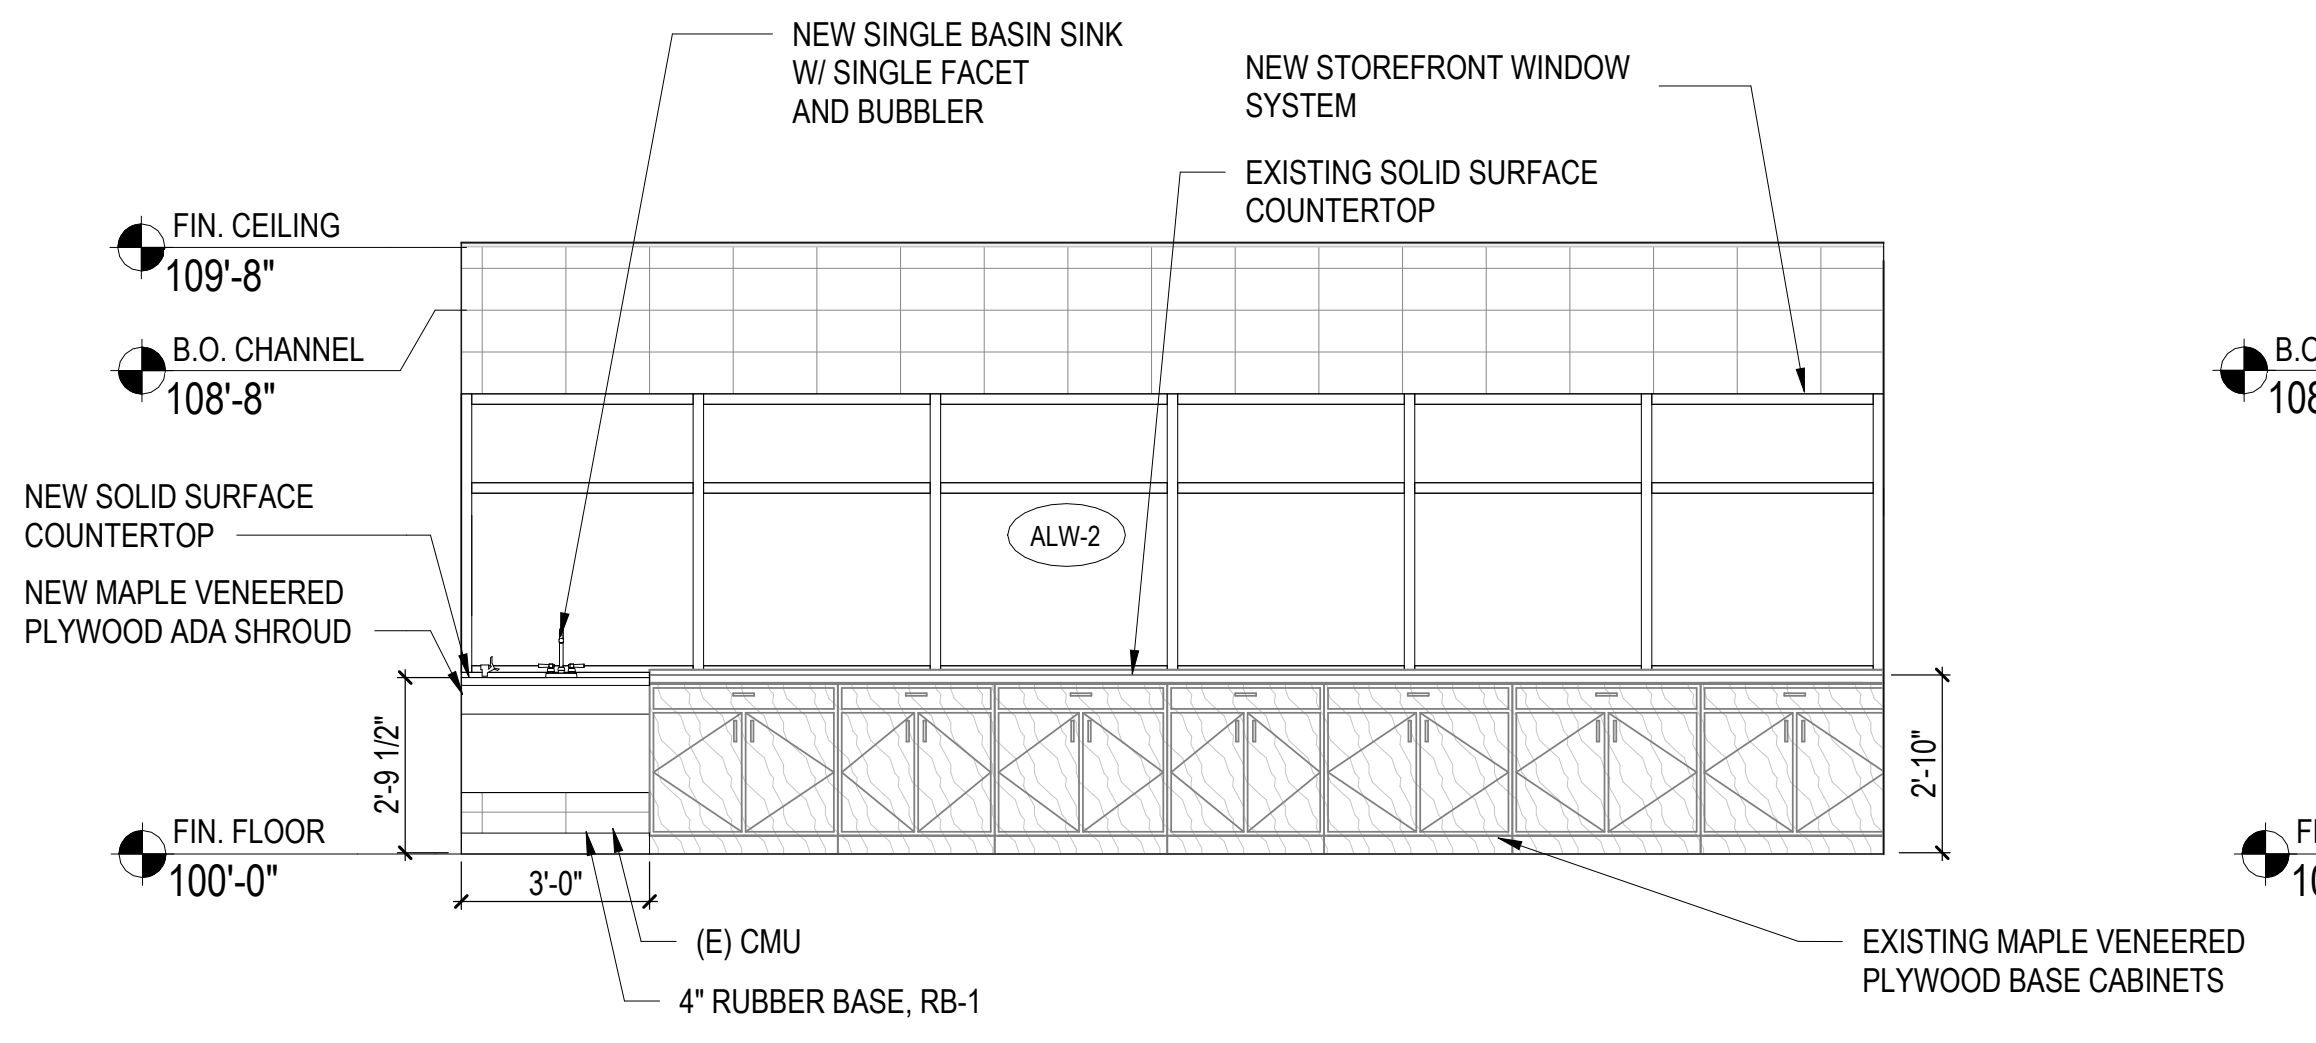
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
NEW STOREFRONT WINDOW SYSTEM
EXISTING SOLID SURFACE COUNTERTOP
FIN. CEILING
109'-8"
B.O. CHANNEL
108'-8"
NEW SOLID SURFACE COUNTERTOP
NEW MAPLE VENEERED PLYWOOD ADA SHROUD
ALW-2
2'-9 1/2"
2'-10"
FIN. FLOOR
100'-0"
3'-0"
(E) CMU
4" RUBBER BASE, RB-1
EXISTING MAPLE VENEERED PLYWOOD BASE CABINETS

2 **Classroom (16) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

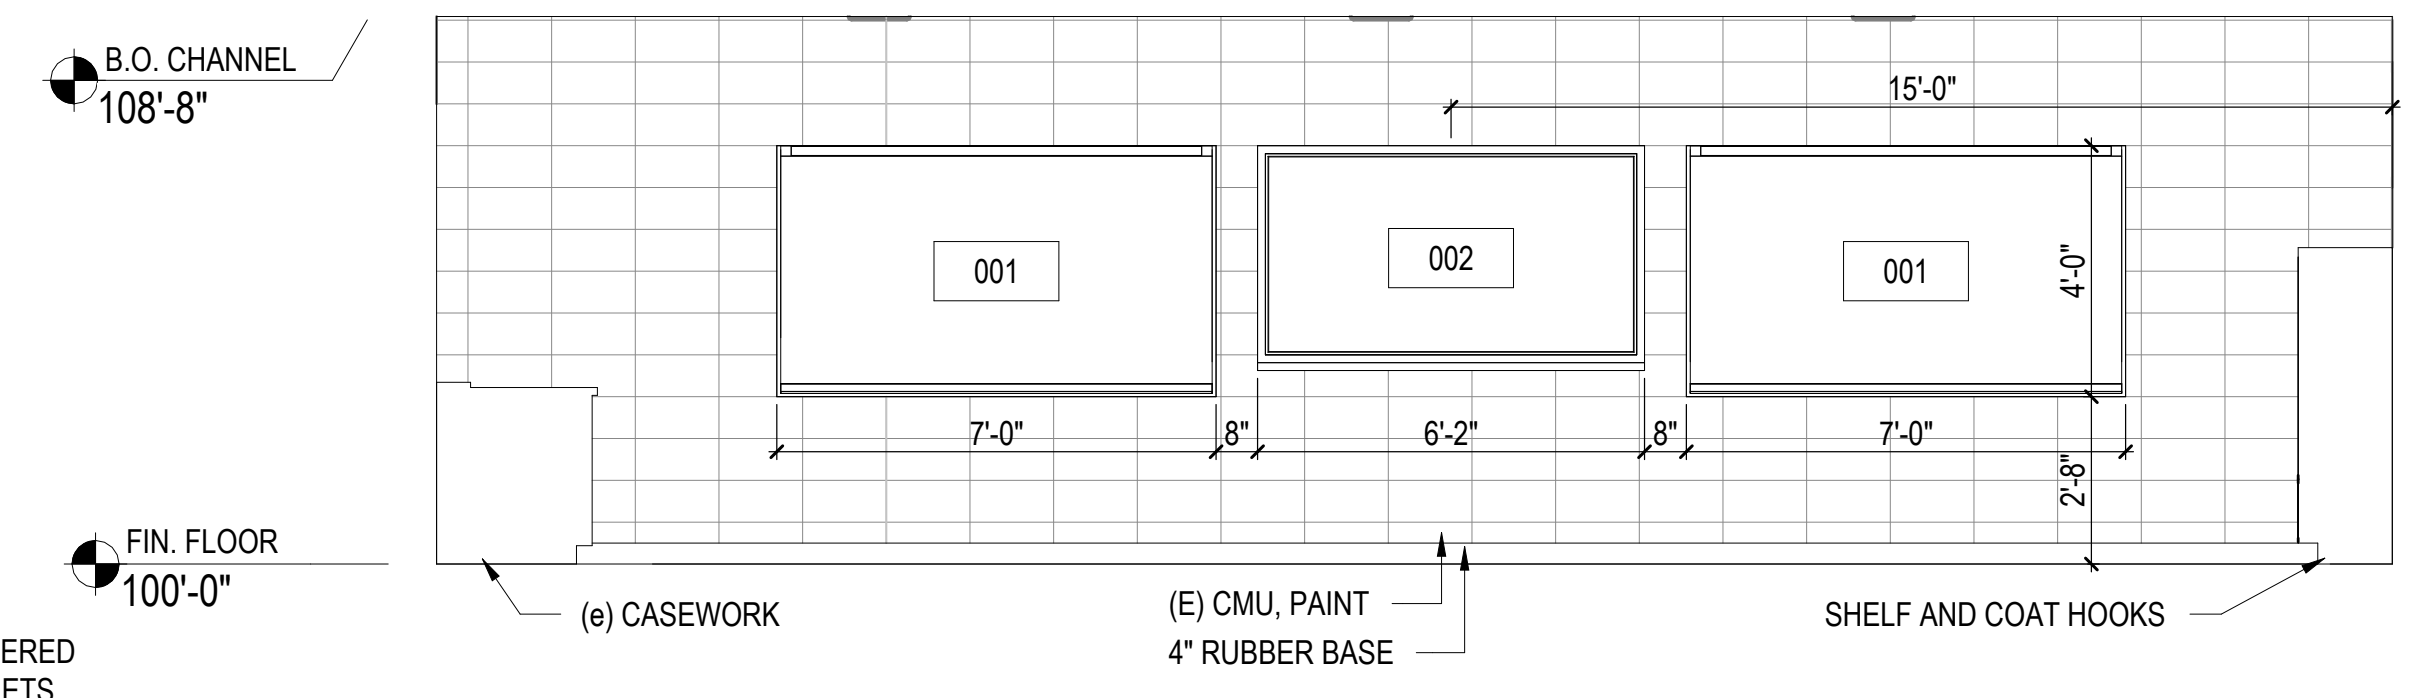
B.O. CHANNEL
108'-8"
15'-0"
001
002
001
4'-0"
7'-0"
8"
6'-2"
8"
7'-0"
2'-8"
FIN. FLOOR
100'-0"
(e) CASEWORK
(E) CMU, PAINT
4" RUBBER BASE
SHELF AND COAT HOOKS

3 **Classroom (16) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

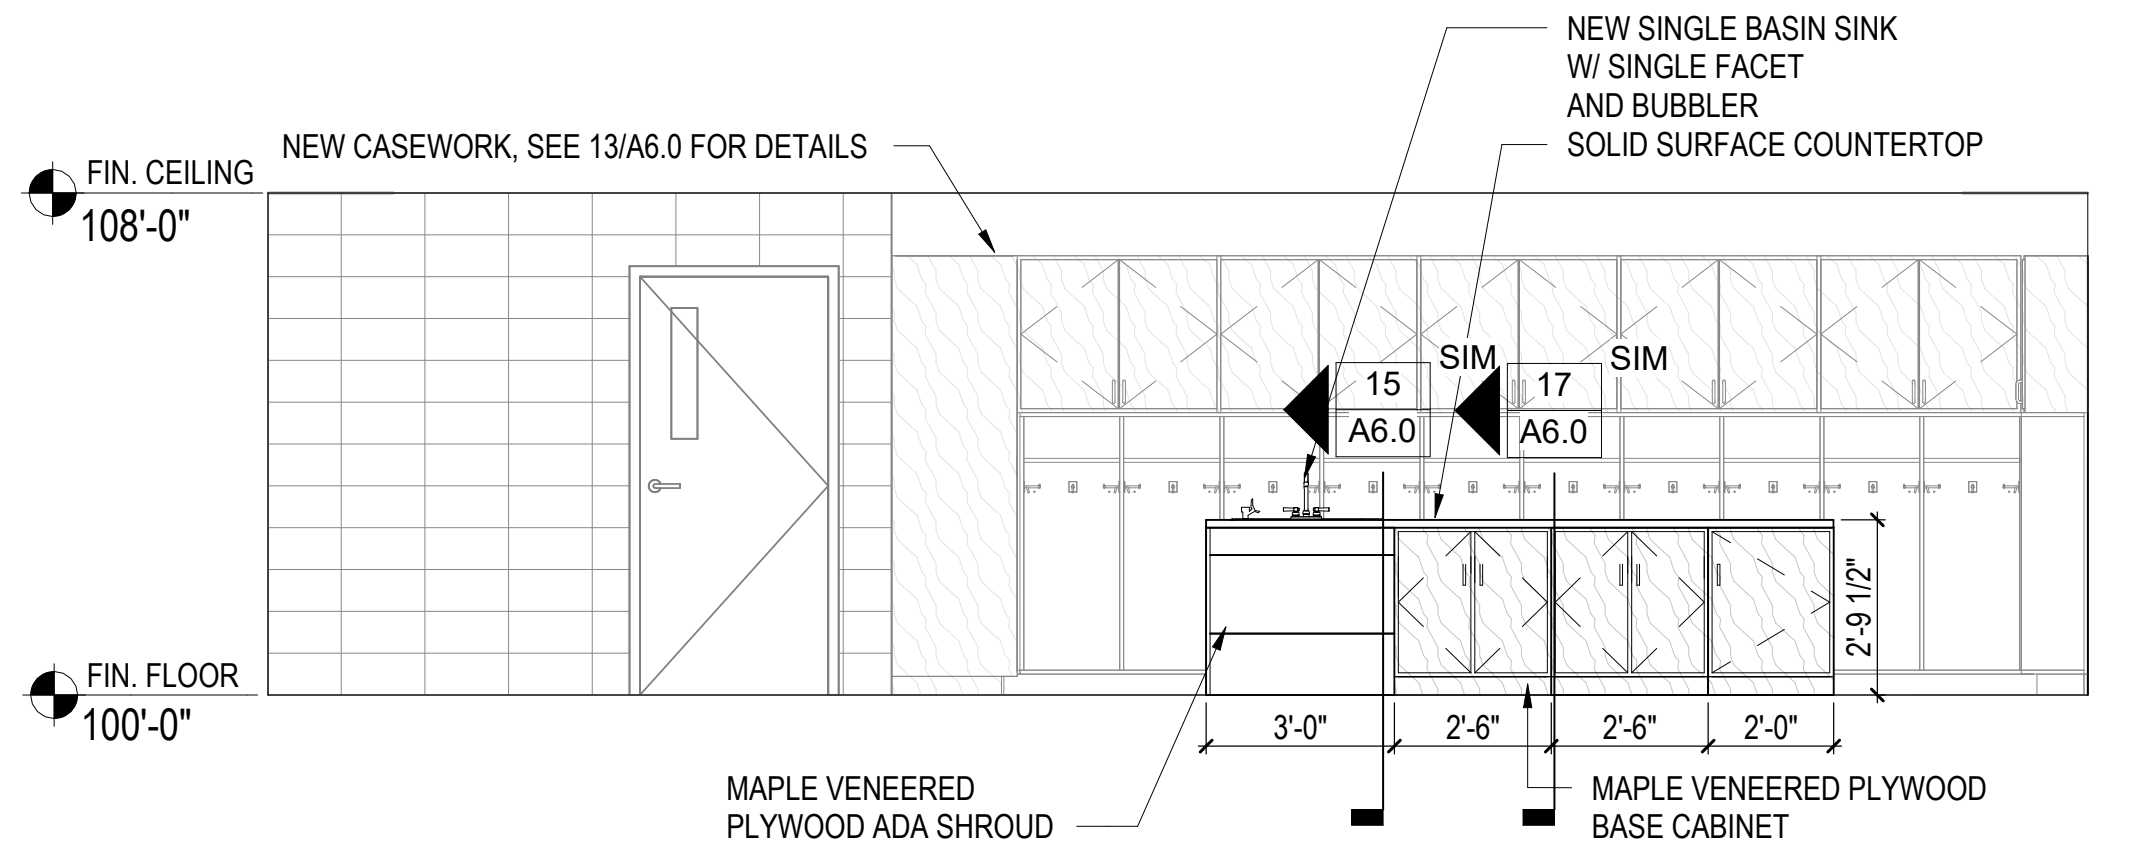
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
SOLID SURFACE COUNTERTOP
NEW CASEWORK, SEE 13/A6.0 FOR DETAILS
FIN. CEILING
108'-0"
15
A6.0
SIM
17
A6.0
SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
2'-6"
2'-6"
2'-0"
MAPLE VENEERED PLYWOOD ADA SHROUD
MAPLE VENEERED PLYWOOD BASE CABINET

4 **Outbuilding Clasroom (17) -East**
SCALE: 1/4" = 1'-0"
1 A1.0

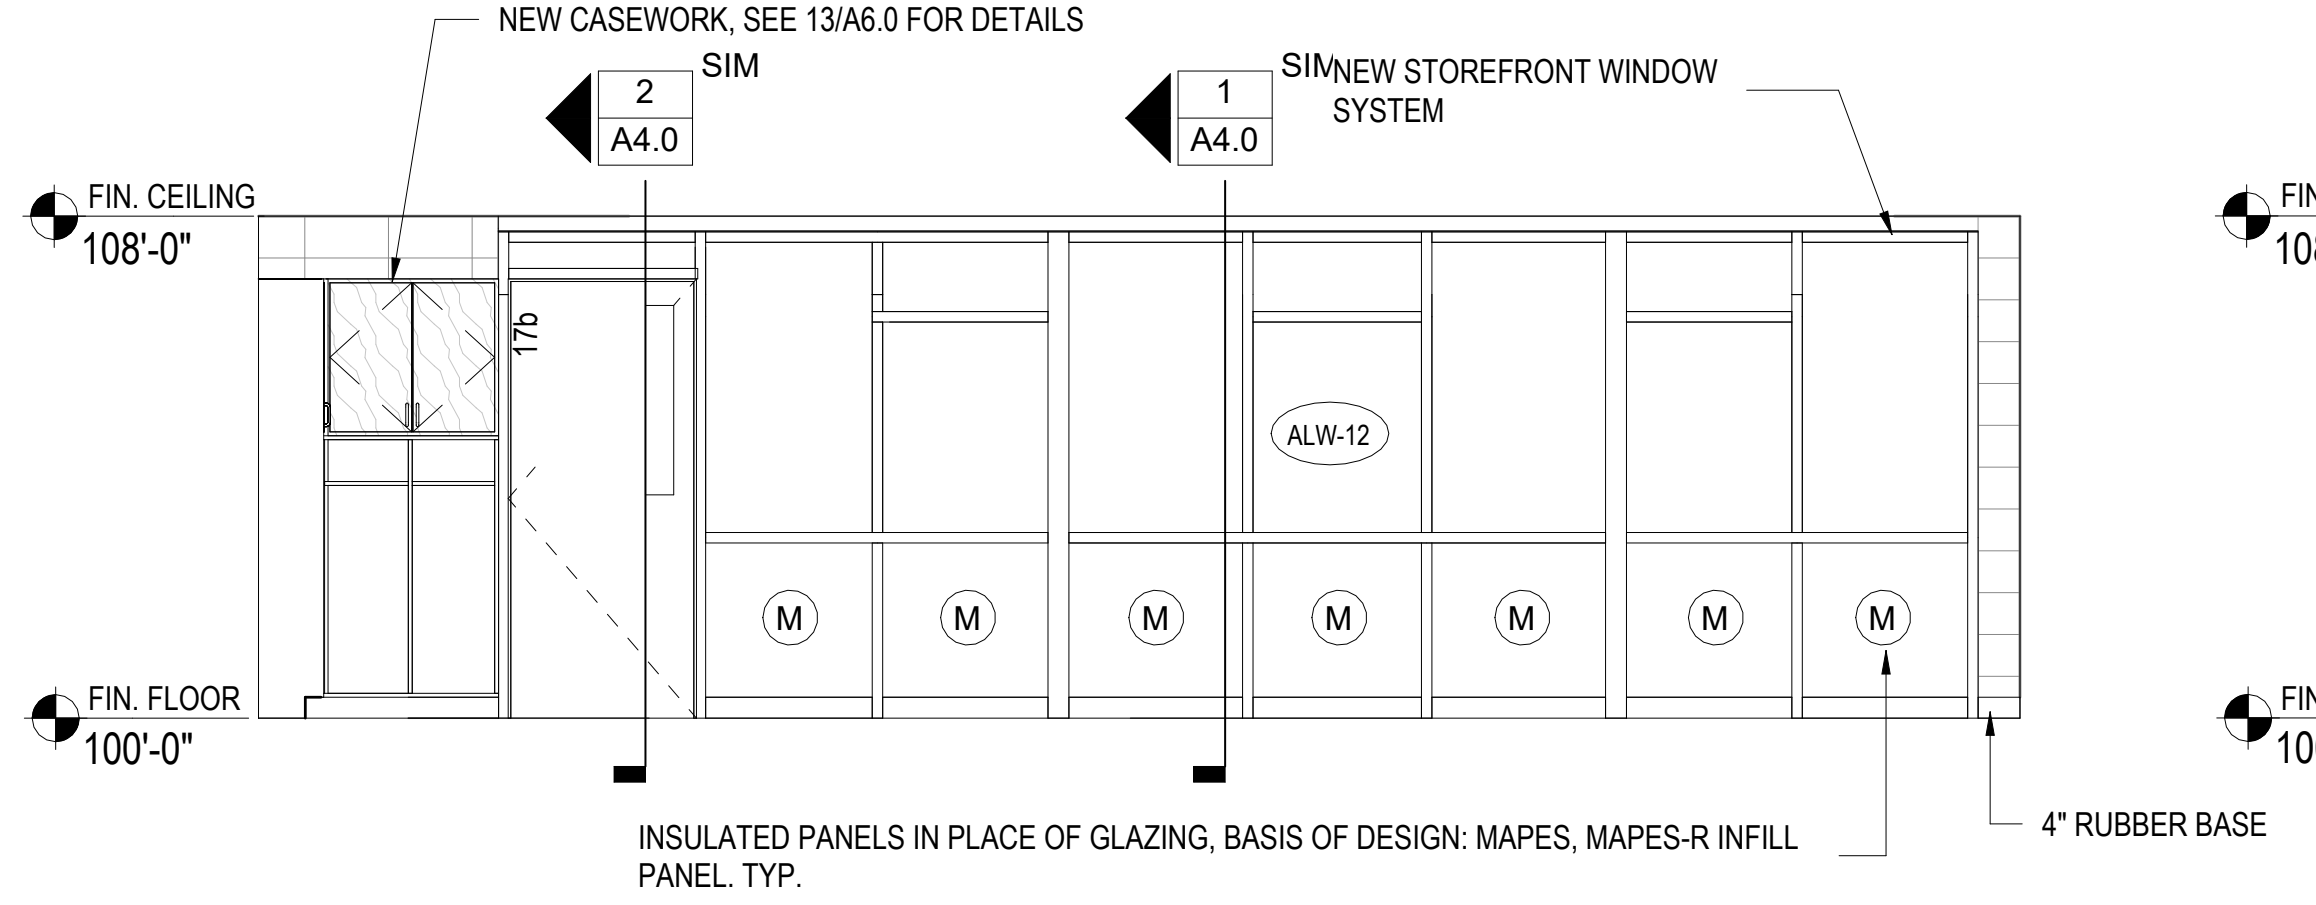
NEW CASEWORK, SEE 13/A6.0 FOR DETAILS
2
A4.0
SIM
1
A4.0
SIM
NEW STOREFRONT WINDOW SYSTEM
FIN. CEILING
108'-0"
ALW-12
M
FIN. FLOOR
100'-0"
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL. TYP.
4" RUBBER BASE

5 **Outbuilding Clasroom (17) -South**
SCALE: 1/4" = 1'-0"
1 A1.0

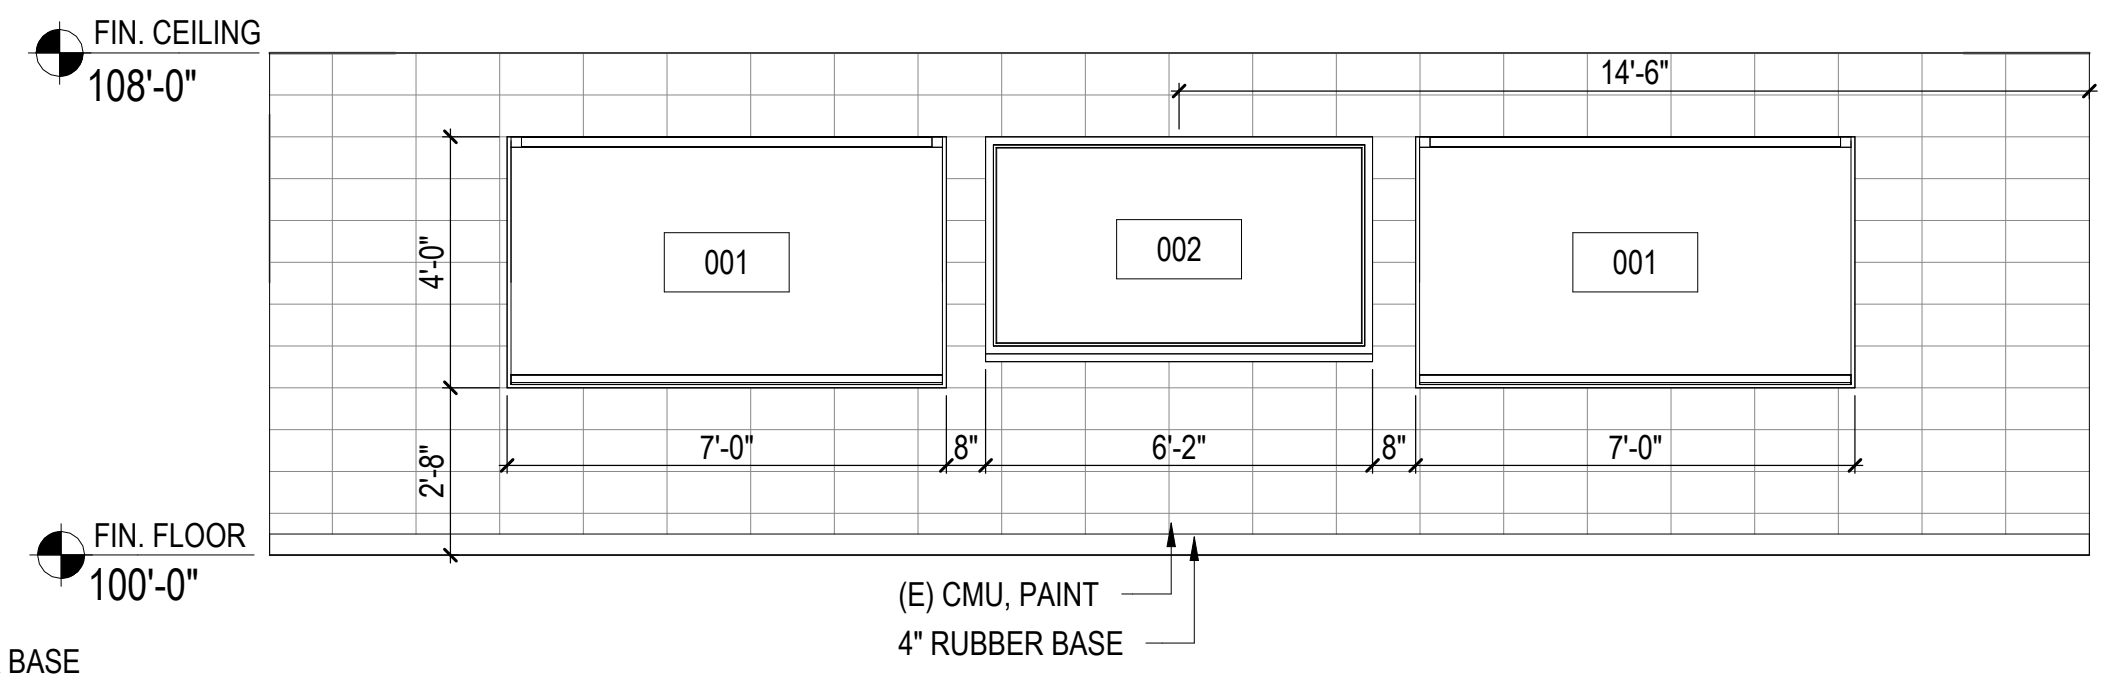
FIN. CEILING
108'-0"
14'-6"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
(E) CMU, PAINT
4" RUBBER BASE

6 **Outbuilding Clasroom (17) -West**
SCALE: 1/4" = 1'-0"
1 A1.0

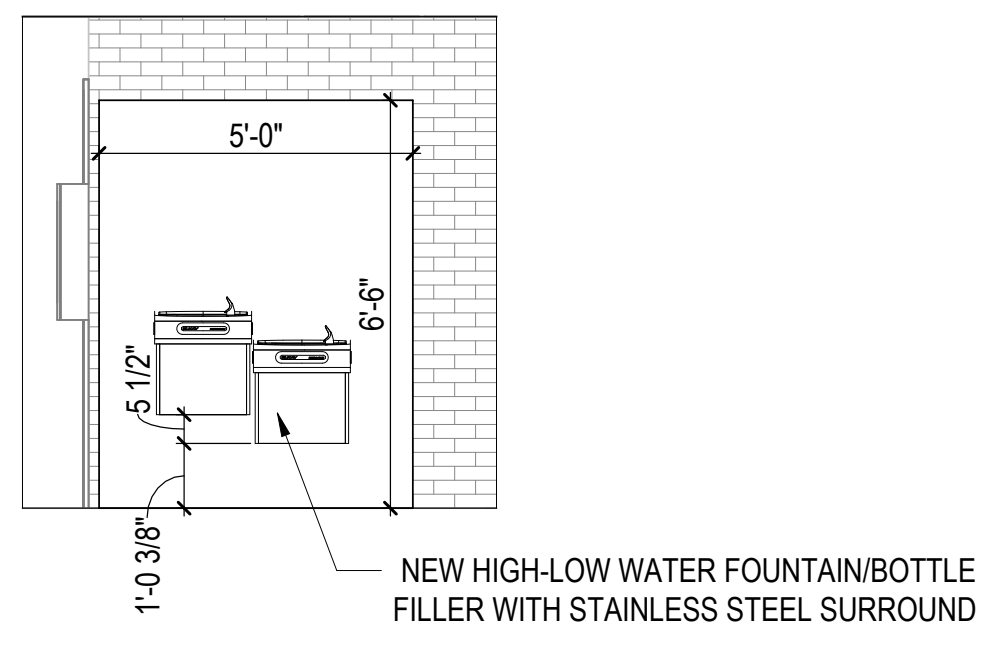
5'-0"
6'-6"
5 1/2"
1'-0 3/8"
NEW HIGH-LOW WATER FOUNTAIN/BOTTLE FILLER WITH STAINLESS STEEL SURROUND

7 **Outbuilding Water Fountain Elevation**
SCALE: 1/4" = 1'-0"
1 A1.0

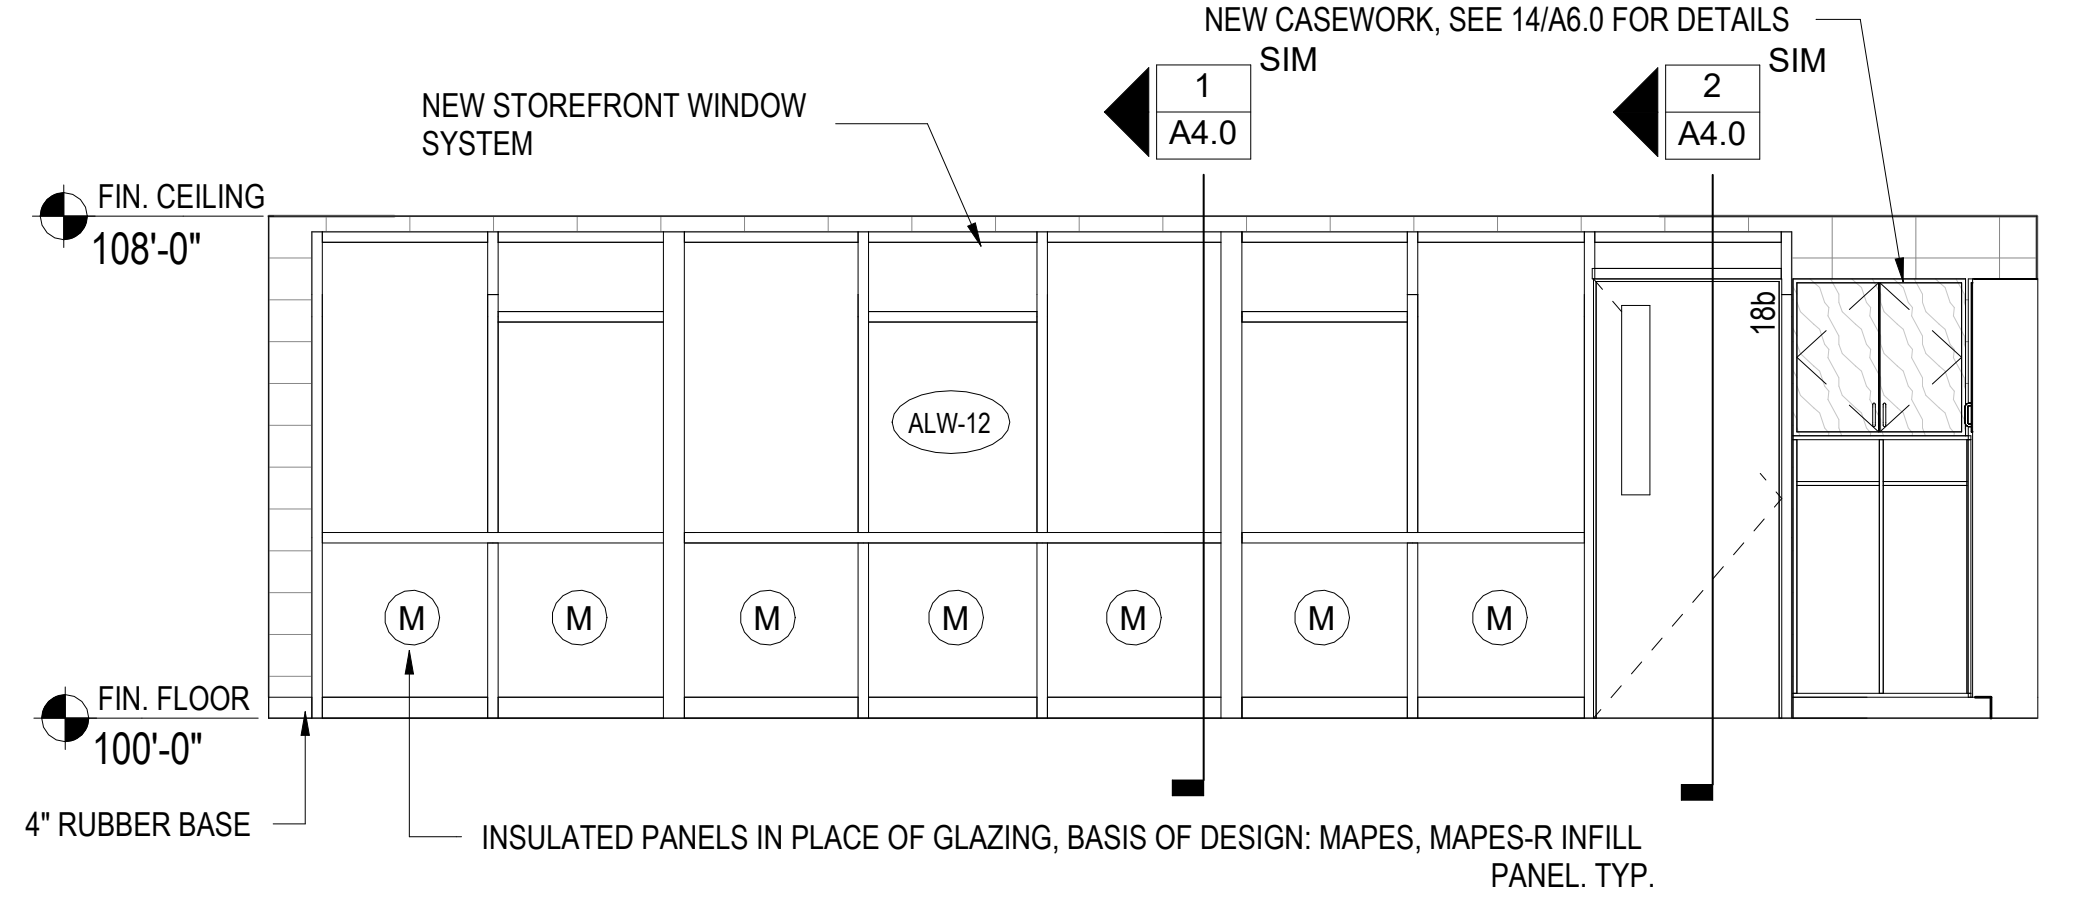
NEW CASEWORK, SEE 14/A6.0 FOR DETAILS
NEW STOREFRONT WINDOW SYSTEM
1
A4.0
SIM
2
A4.0
SIM
FIN. CEILING
108'-0"
ALW-12
M
FIN. FLOOR
100'-0"
4" RUBBER BASE
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL. TYP.

8 **Outbuilding Classroom (18) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

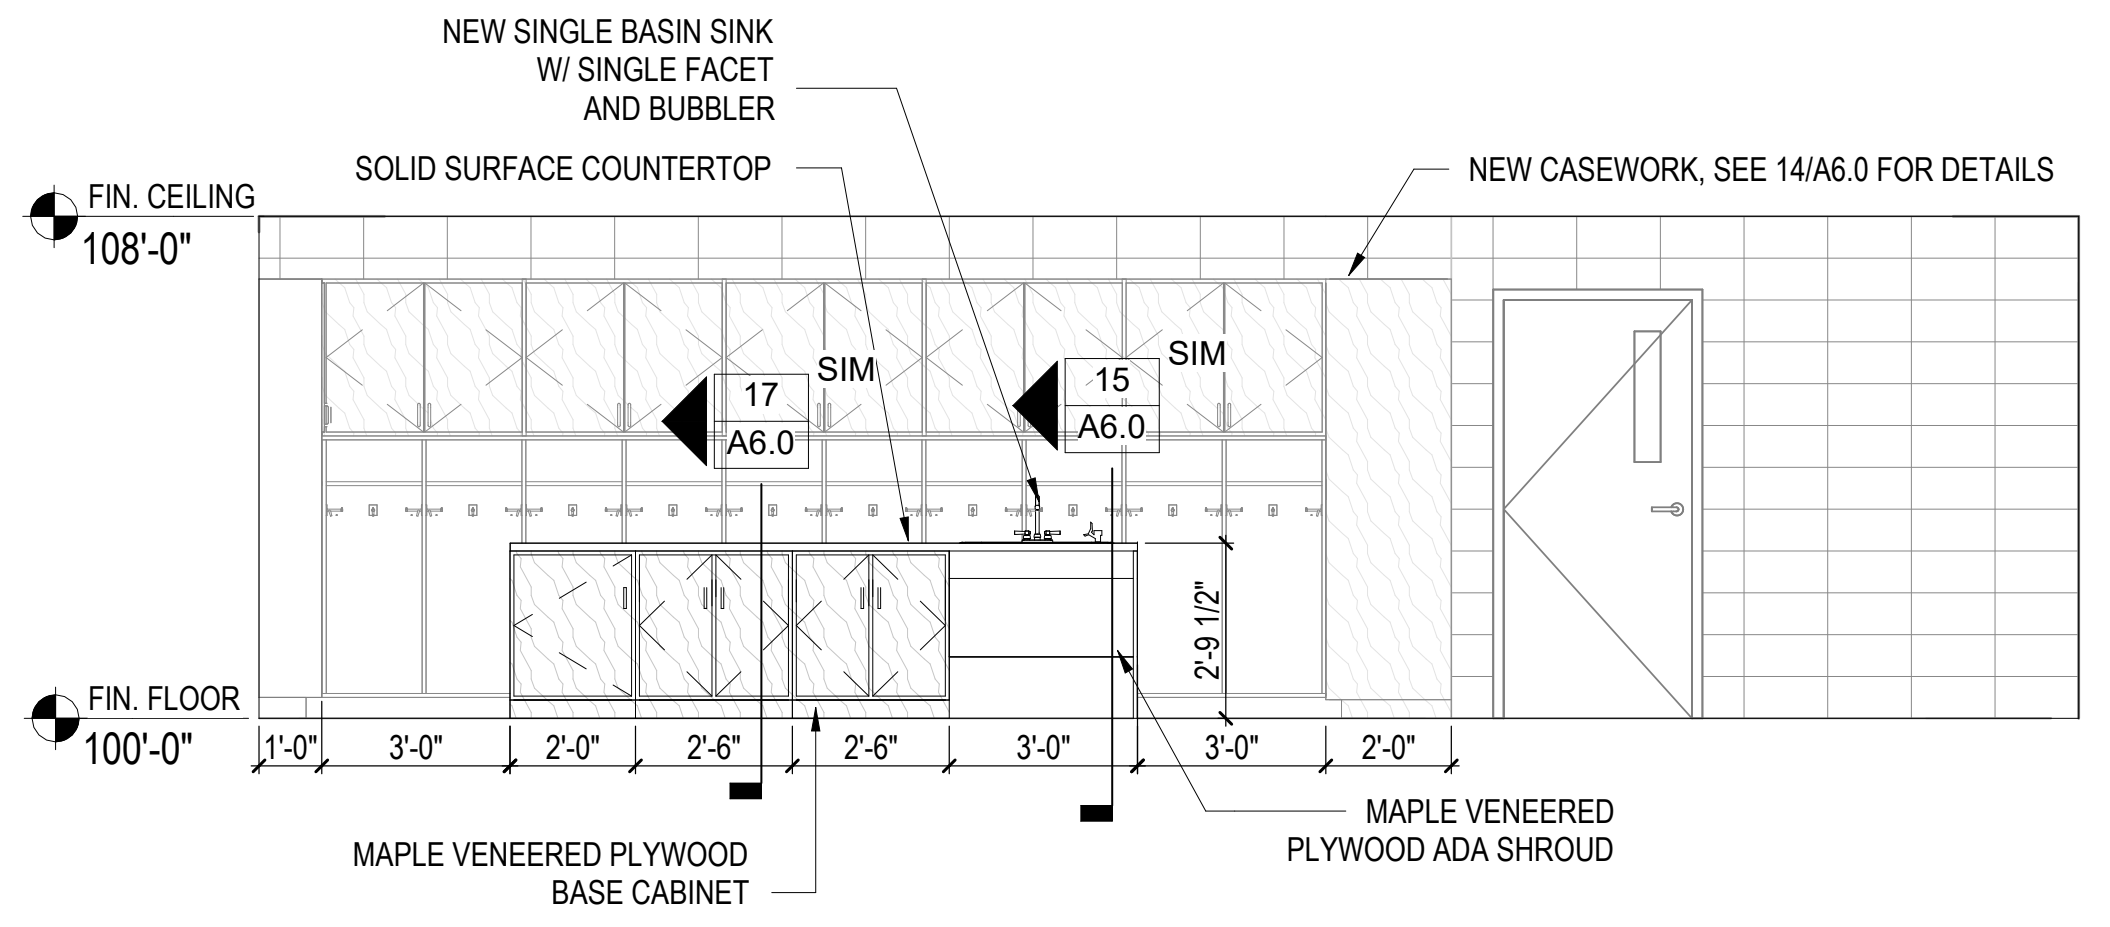
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
SOLID SURFACE COUNTERTOP
NEW CASEWORK, SEE 14/A6.0 FOR DETAILS
FIN. CEILING
108'-0"
17
A6.0
SIM
15
A6.0
SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
1'-0"
3'-0"
2'-0"
2'-6"
2'-6"
3'-0"
3'-0"
2'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
MAPLE VENEERED PLYWOOD ADA SHROUD

9 **Outbuilding Classroom (18) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

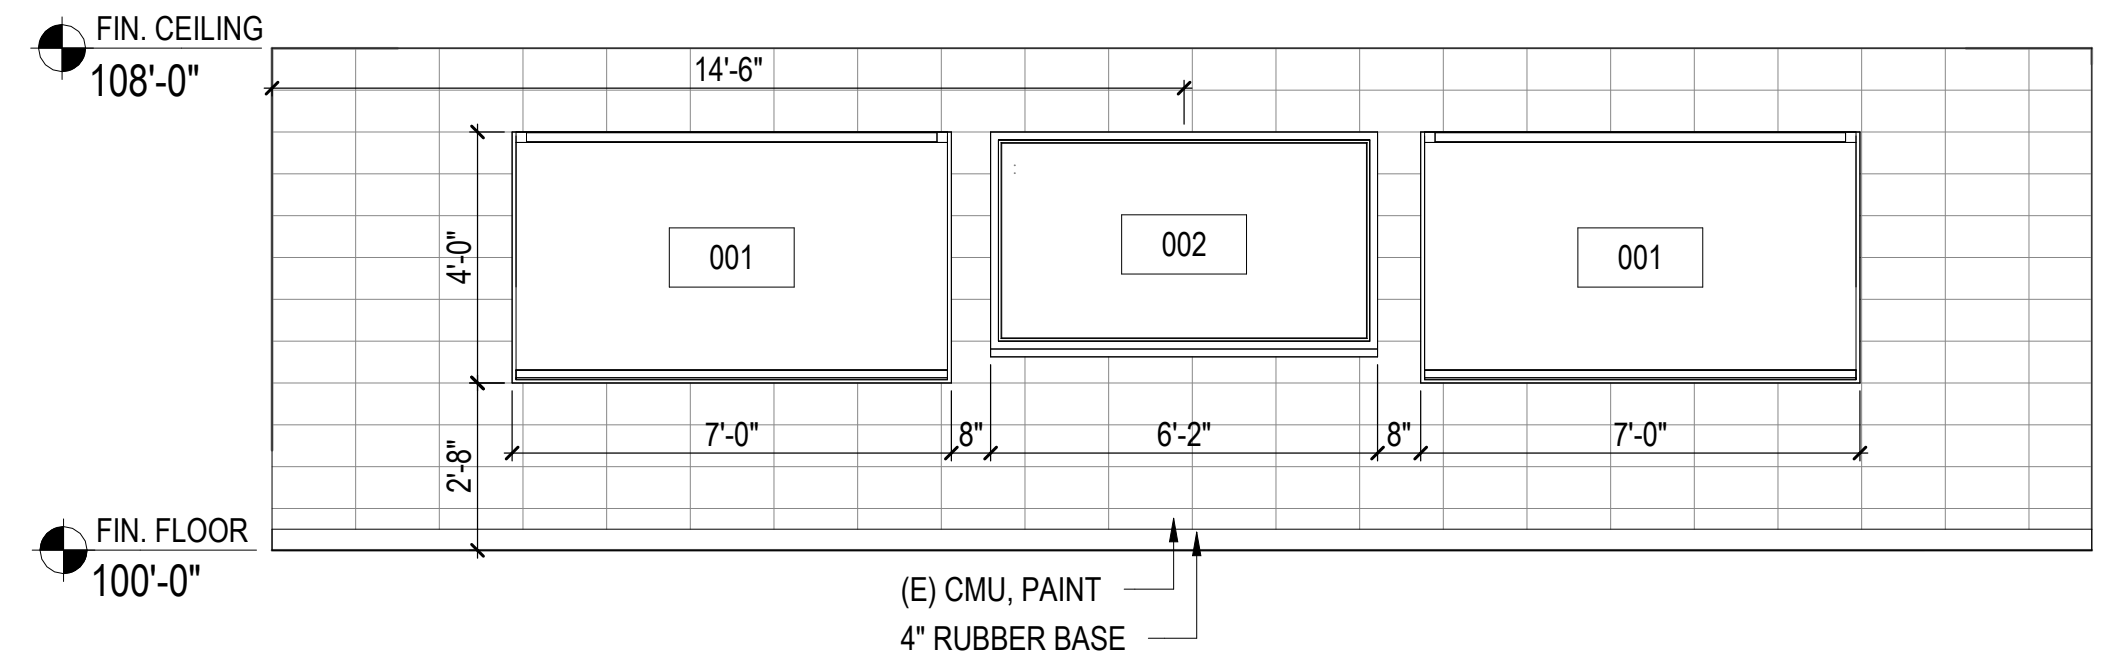
FIN. CEILING
108'-0"
14'-6"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
(E) CMU, PAINT
4" RUBBER BASE

10 **Outbuilding Classroom (18) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

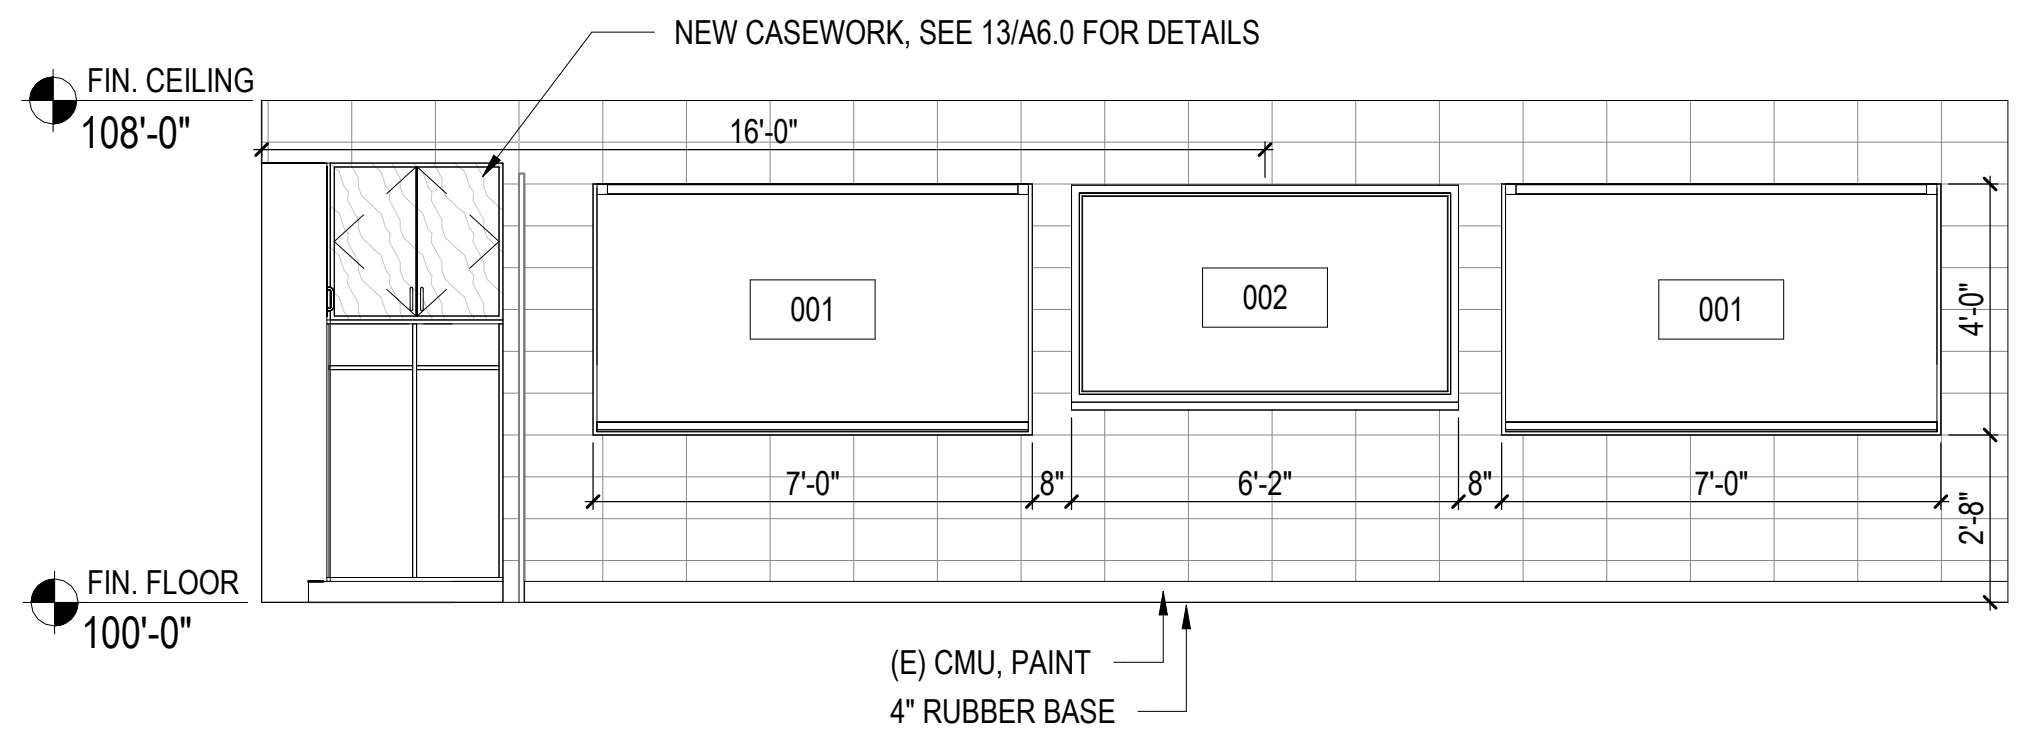
NEW CASEWORK, SEE 13/A6.0 FOR DETAILS
FIN. CEILING
108'-0"
16'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
(E) CMU, PAINT
4" RUBBER BASE

11 **Outbuilding Classroom (19) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

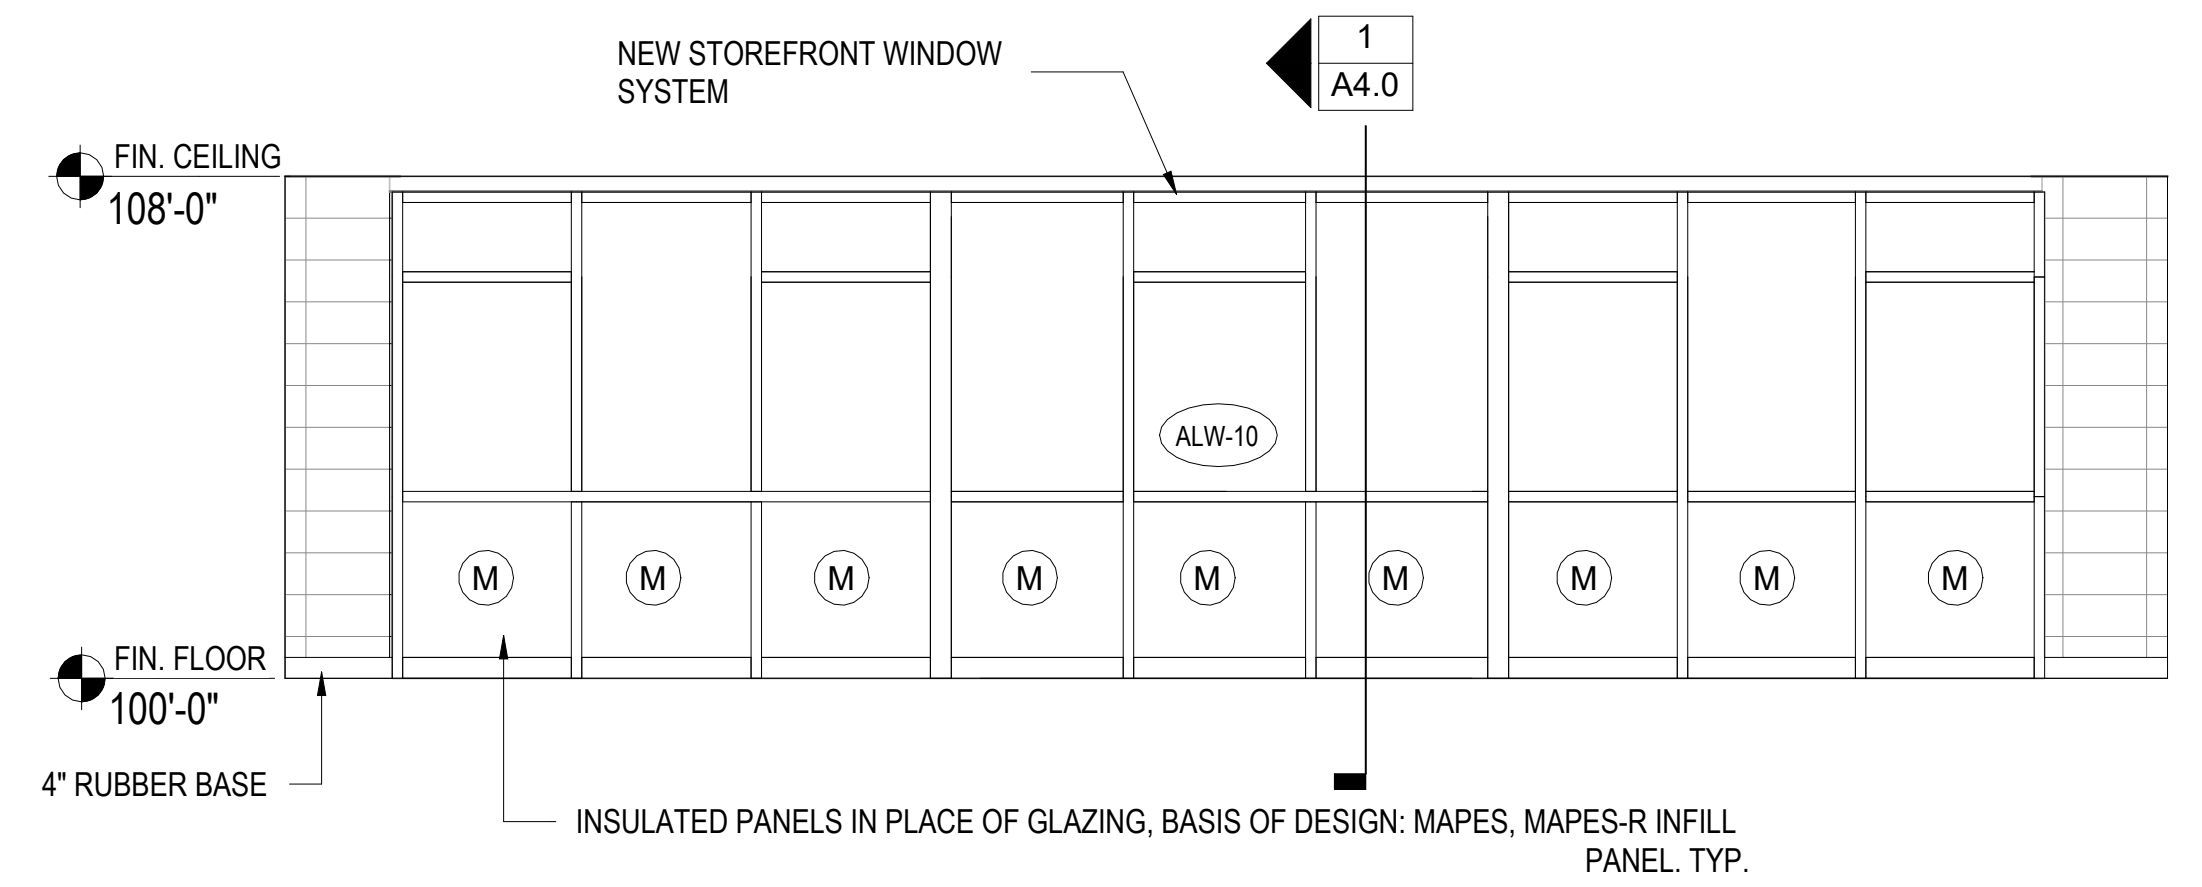
NEW STOREFRONT WINDOW SYSTEM
1
A4.0
FIN. CEILING
108'-0"
ALW-10
M
FIN. FLOOR
100'-0"
4" RUBBER BASE
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL. TYP.

12 **Outbuilding Classroom (19) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

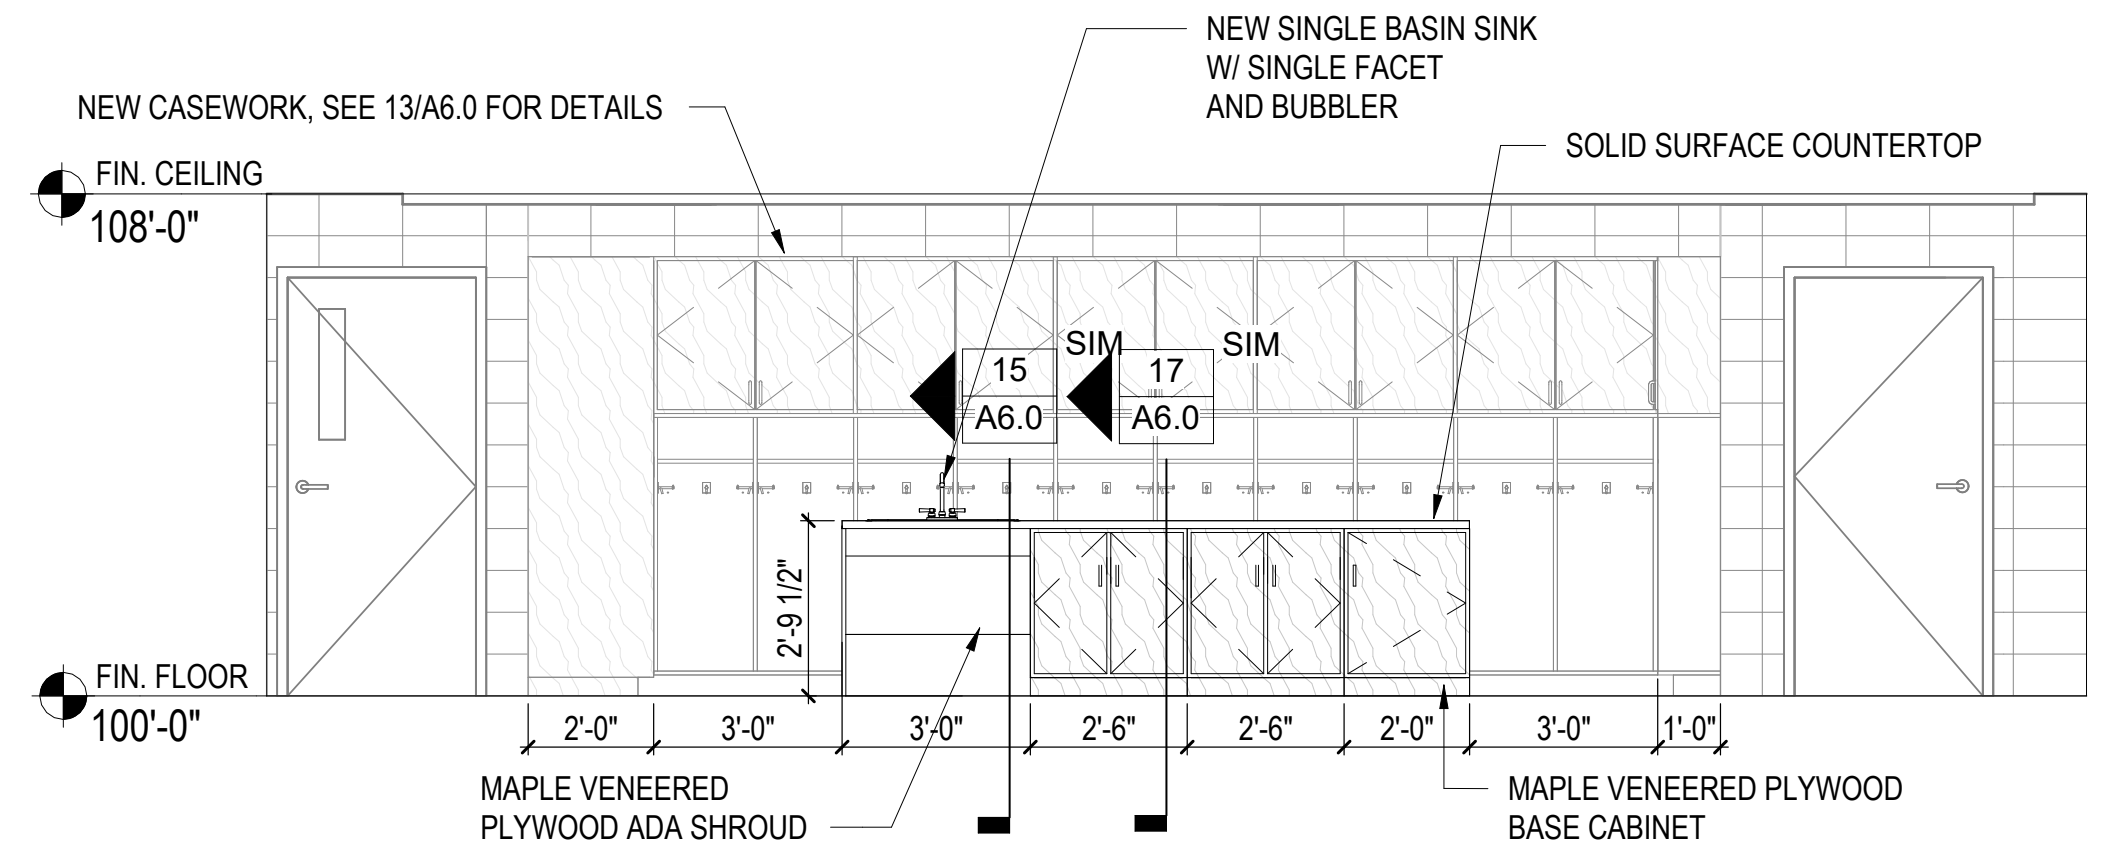
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
NEW CASEWORK, SEE 13/A6.0 FOR DETAILS
SOLID SURFACE COUNTERTOP
FIN. CEILING
108'-0"
15
A6.0
SIM
17
A6.0
SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
2'-0"
3'-0"
3'-0"
2'-6"
2'-6"
2'-0"
3'-0"
1'-0"
MAPLE VENEERED PLYWOOD ADA SHROUD
MAPLE VENEERED PLYWOOD BASE CABINET

13 **Outbuilding Classroom (19) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

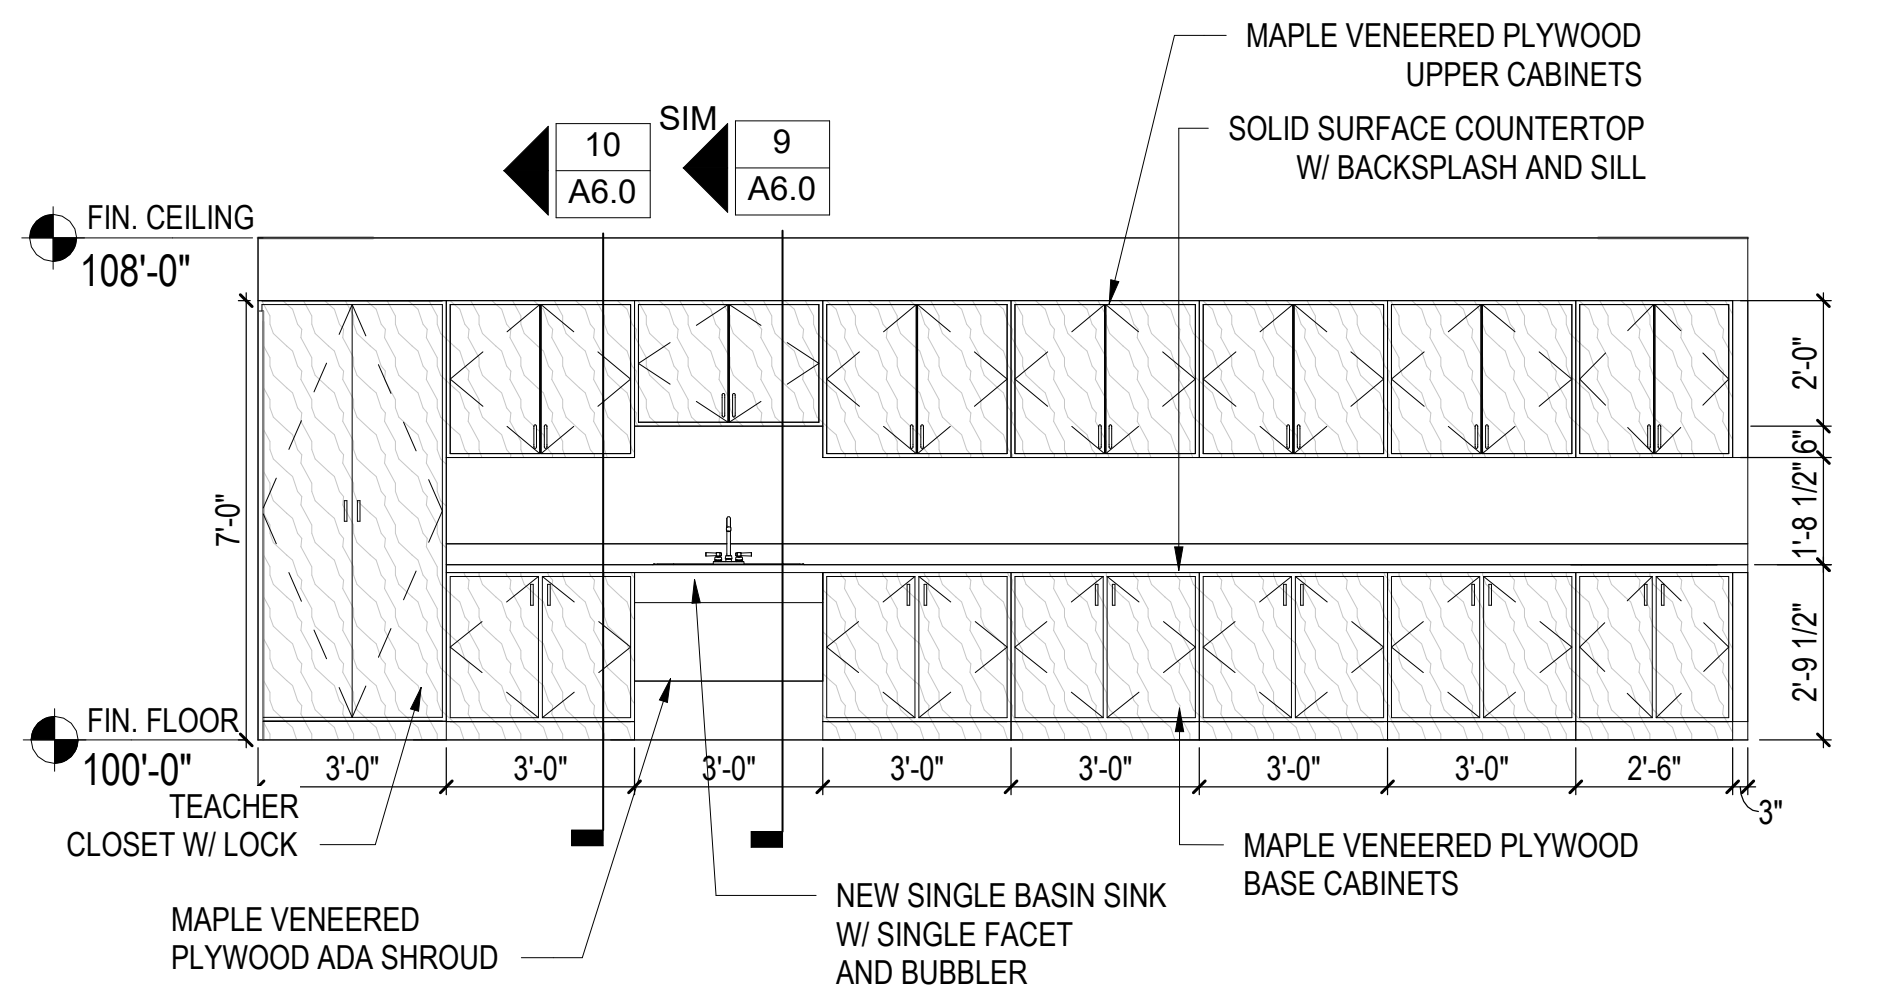
MAPLE VENEERED PLYWOOD UPPER CABINETS
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
10
A6.0
SIM
9
A6.0
FIN. CEILING
108'-0"
7'-0"
2'-0"
6"
1'-8 1/2"
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
2'-6"
3"
TEACHER CLOSET W/ LOCK
MAPLE VENEERED PLYWOOD ADA SHROUD
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
MAPLE VENEERED PLYWOOD BASE CABINETS

14 **Outbuilding Classroom (20) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

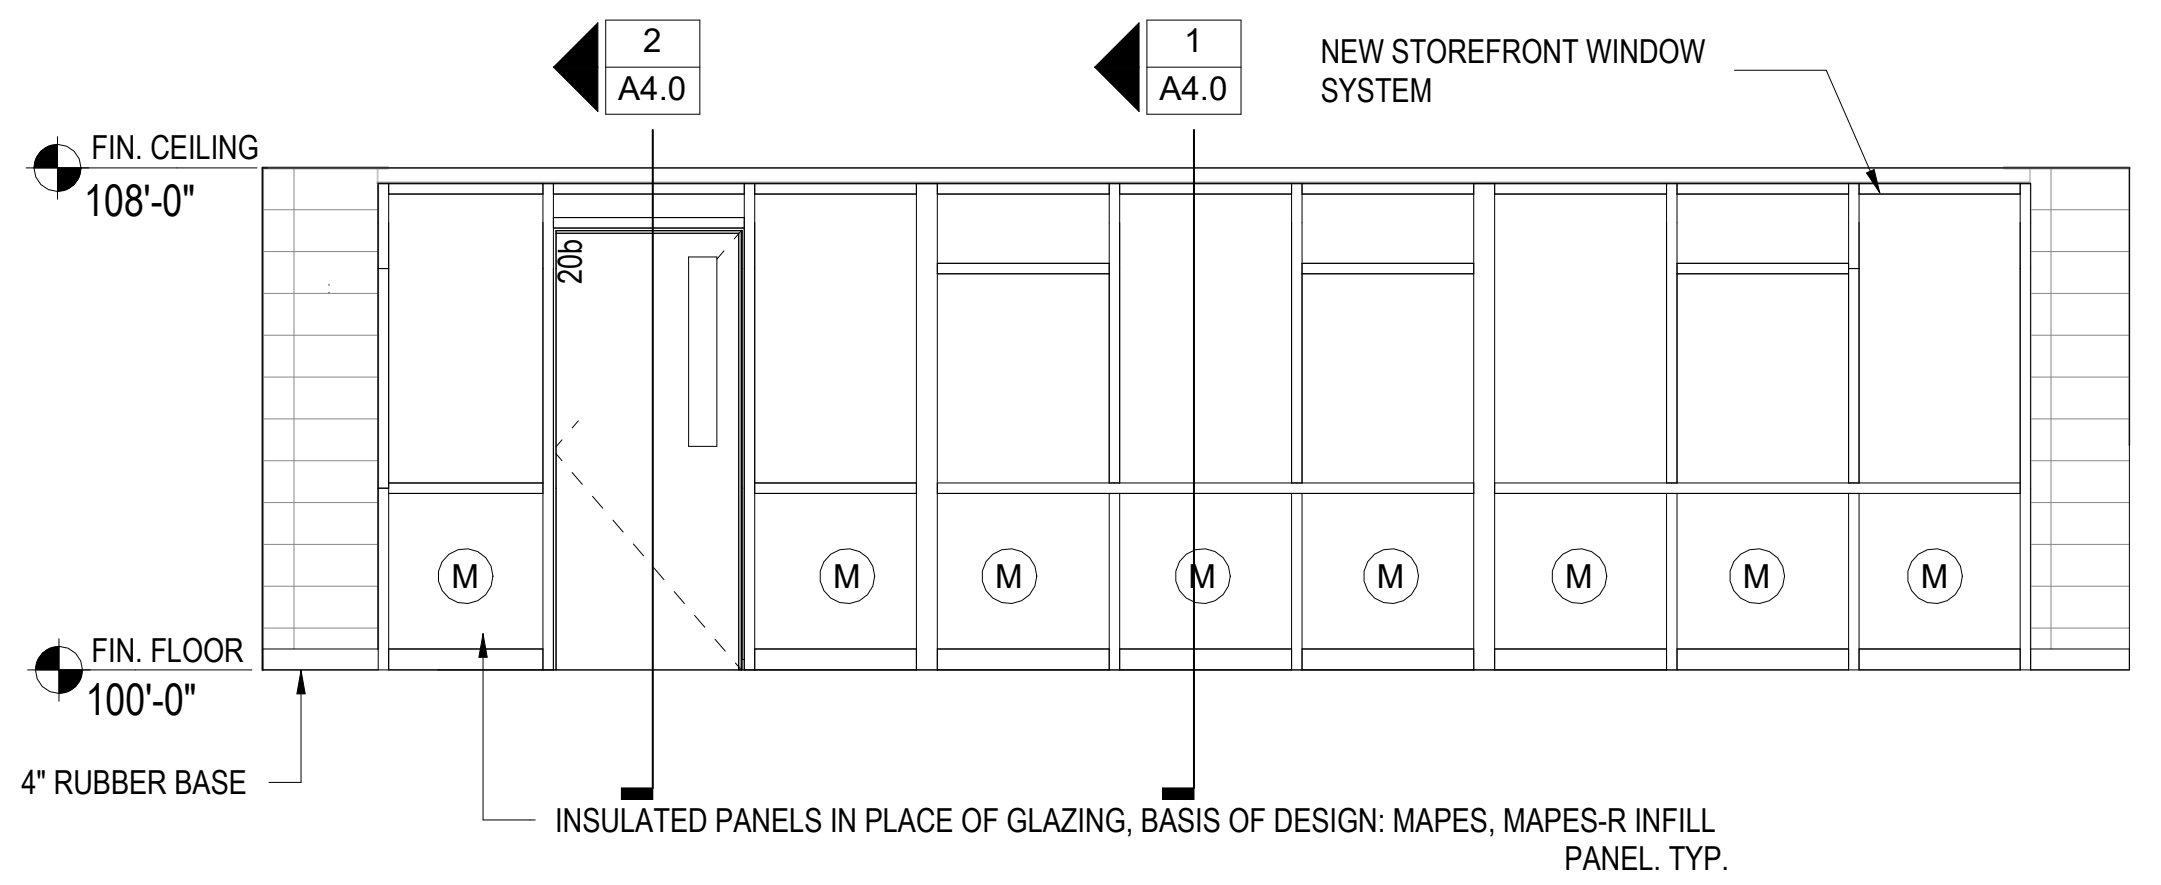
2
A4.0
1
A4.0
NEW STOREFRONT WINDOW SYSTEM
FIN. CEILING
108'-0"
M
FIN. FLOOR
100'-0"
4" RUBBER BASE
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL. TYP.

15 **Outbuilding Classroom (20) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

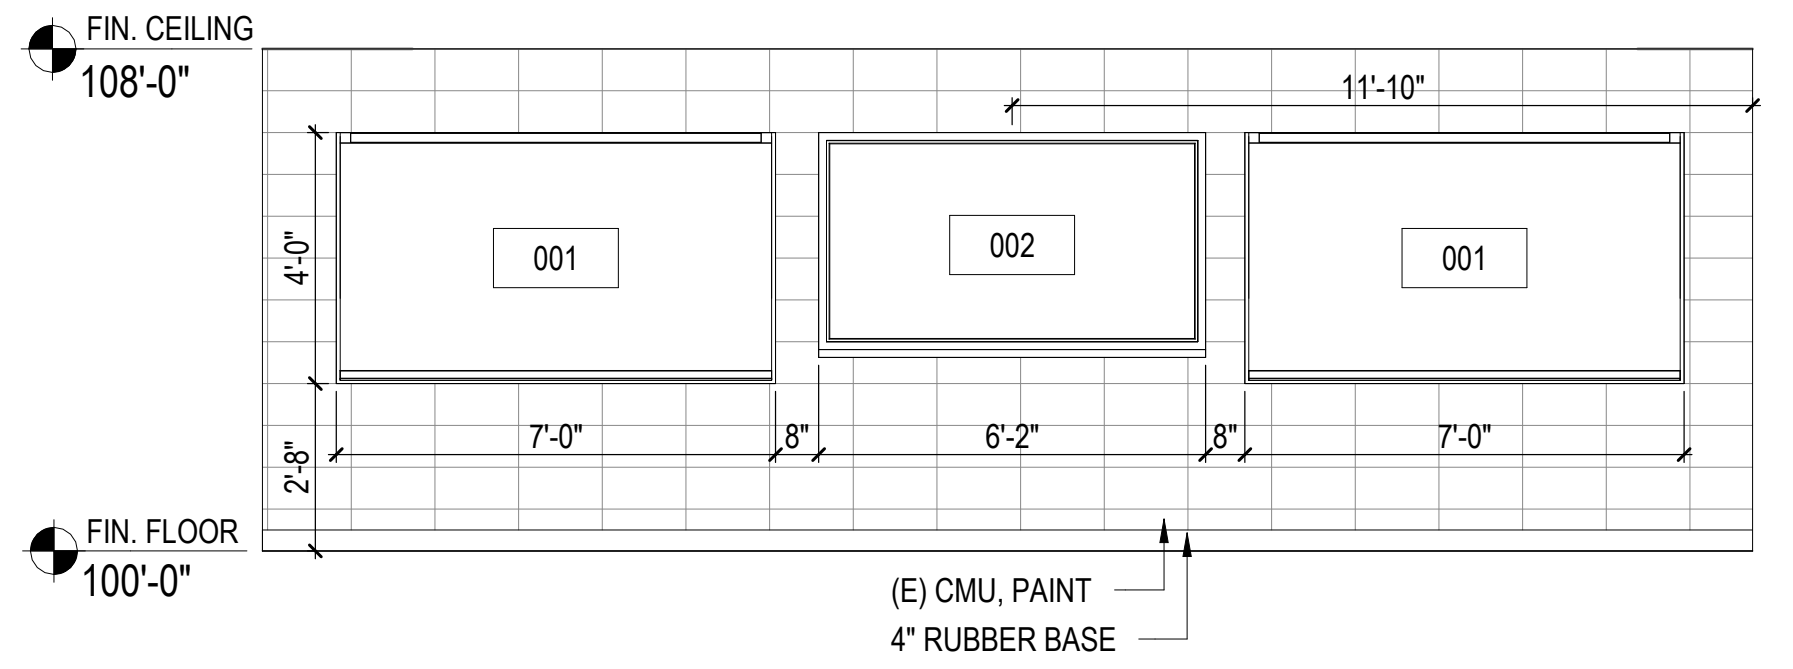
FIN. CEILING
108'-0"
11'-10"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
(E) CMU, PAINT
4" RUBBER BASE

16 **Outbuilding Classroom (20) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

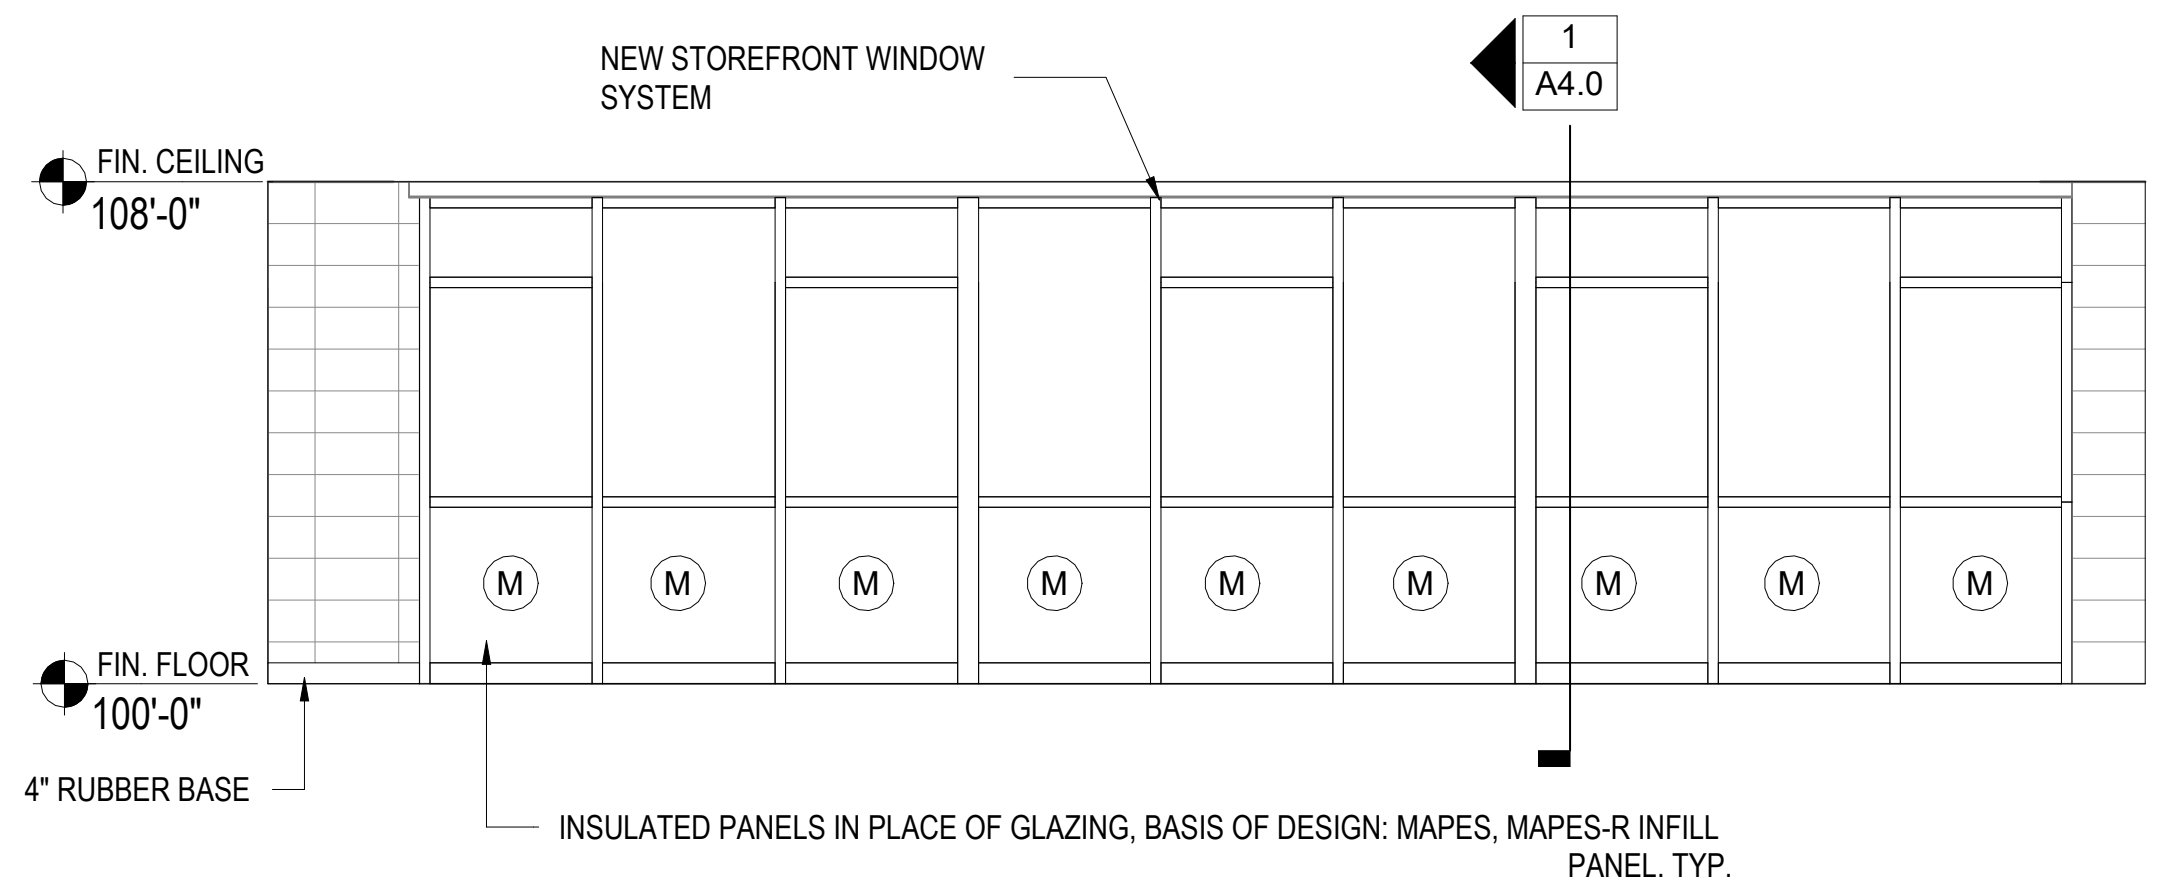
NEW STOREFRONT WINDOW SYSTEM
1
A4.0
FIN. CEILING
108'-0"
M
FIN. FLOOR
100'-0"
4" RUBBER BASE
INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL. TYP.

17 **Outbuilding Classroom (21) - East**
SCALE: 1/4" = 1'-0"
1 A1.0

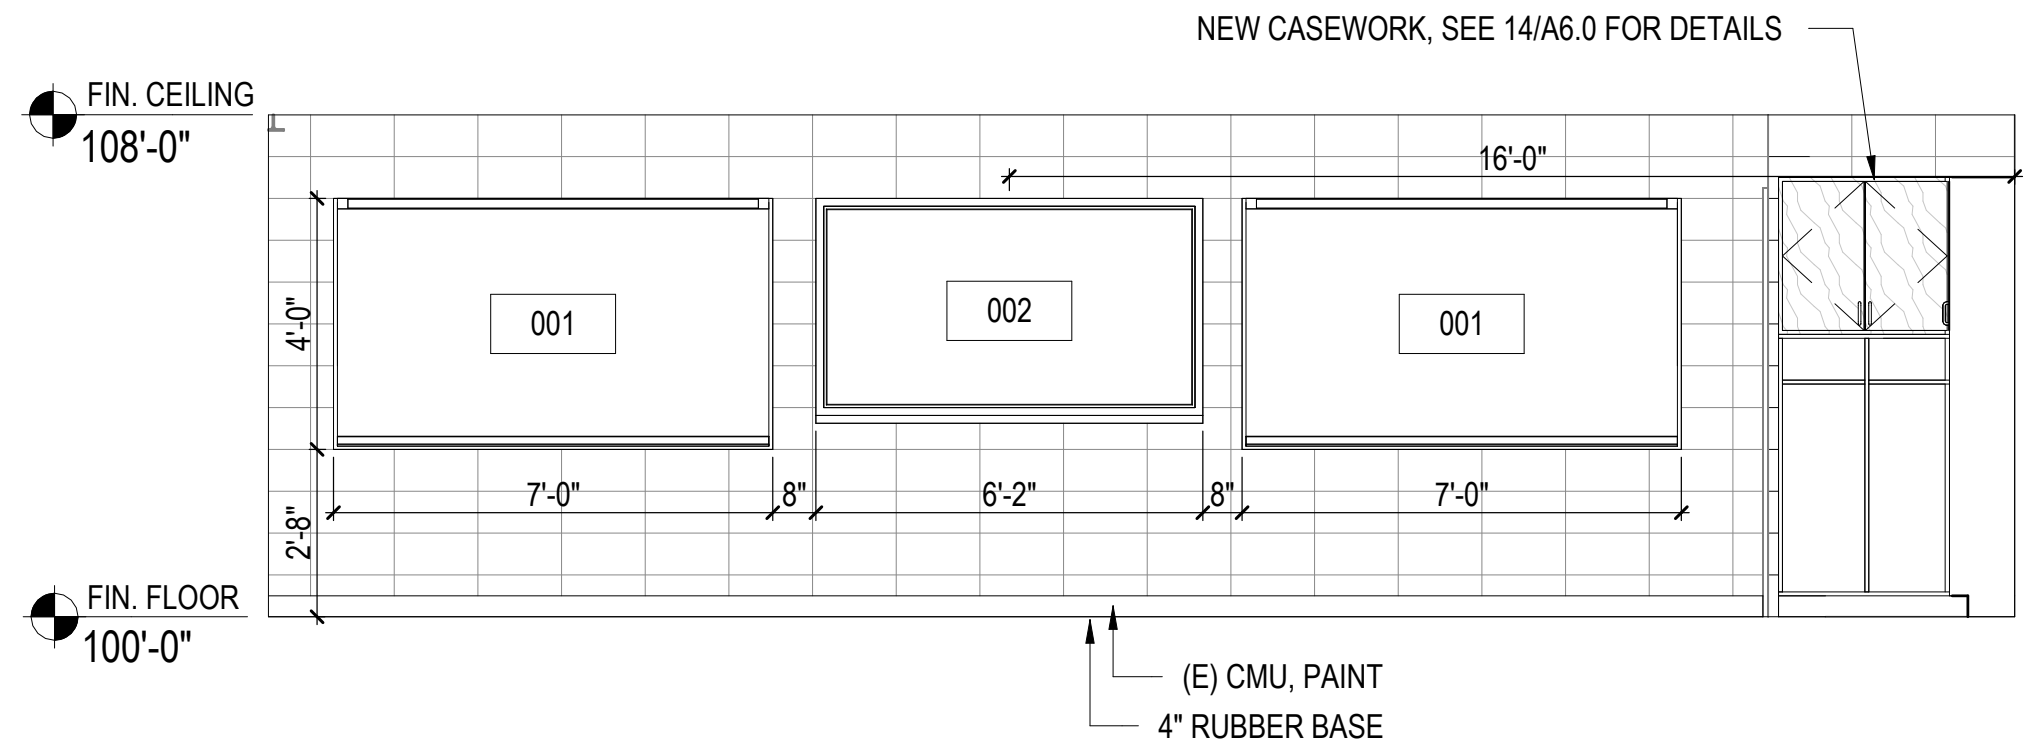
NEW CASEWORK, SEE 14/A6.0 FOR DETAILS
FIN. CEILING
108'-0"
16'-0"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
(E) CMU, PAINT
4" RUBBER BASE

18 **Outbuilding Classroom (21) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

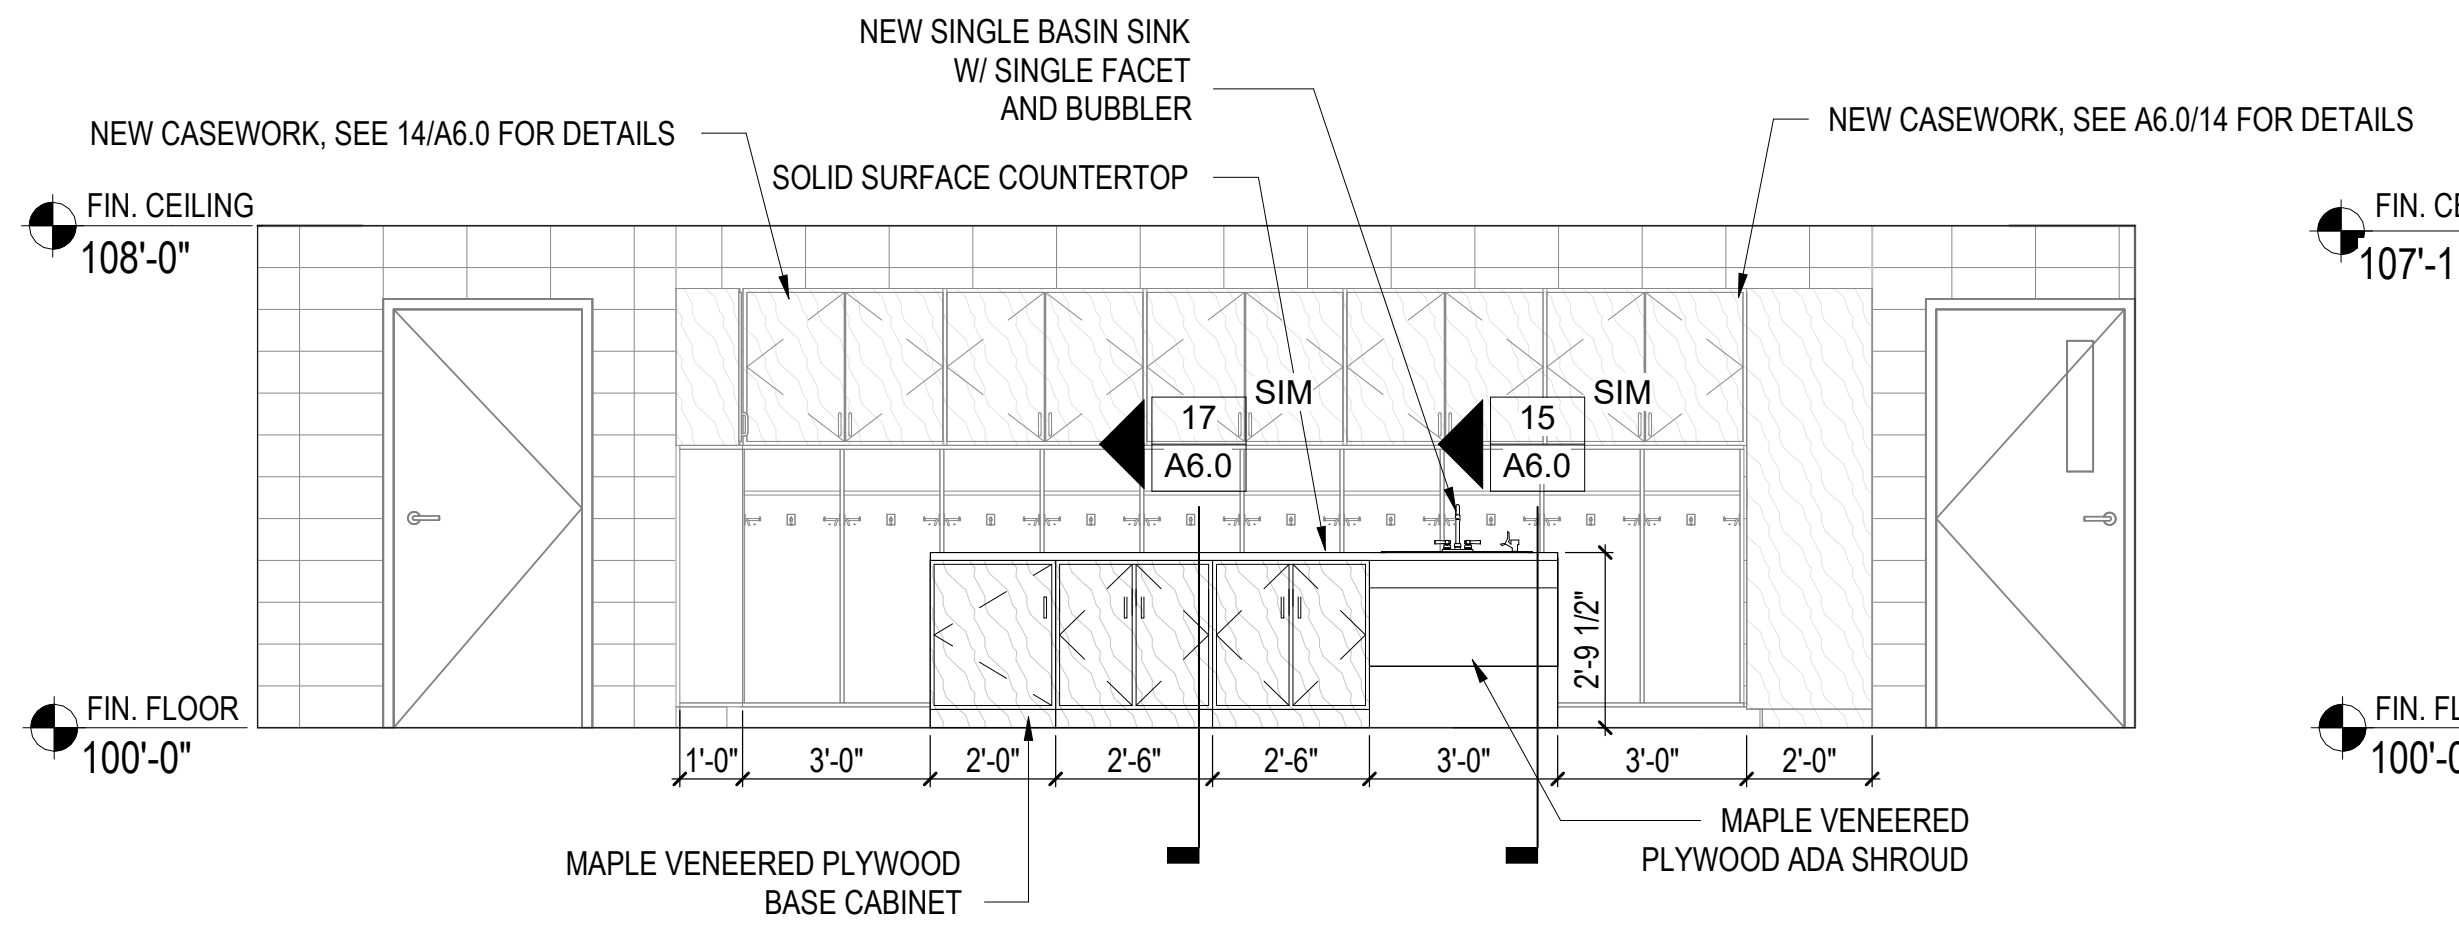
NEW SINGLE BASIN SINK W/ SINGLE FACET AND BUBBLER
NEW CASEWORK, SEE 14/A6.0 FOR DETAILS
SOLID SURFACE COUNTERTOP
NEW CASEWORK, SEE A6.0/14 FOR DETAILS
FIN. CEILING
108'-0"
17
A6.0
SIM
15
A6.0
SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
1'-0"
3'-0"
2'-0"
2'-6"
2'-6"
3'-0"
3'-0"
2'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
MAPLE VENEERED PLYWOOD ADA SHROUD

19 **Outbuilding Classroom (21) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

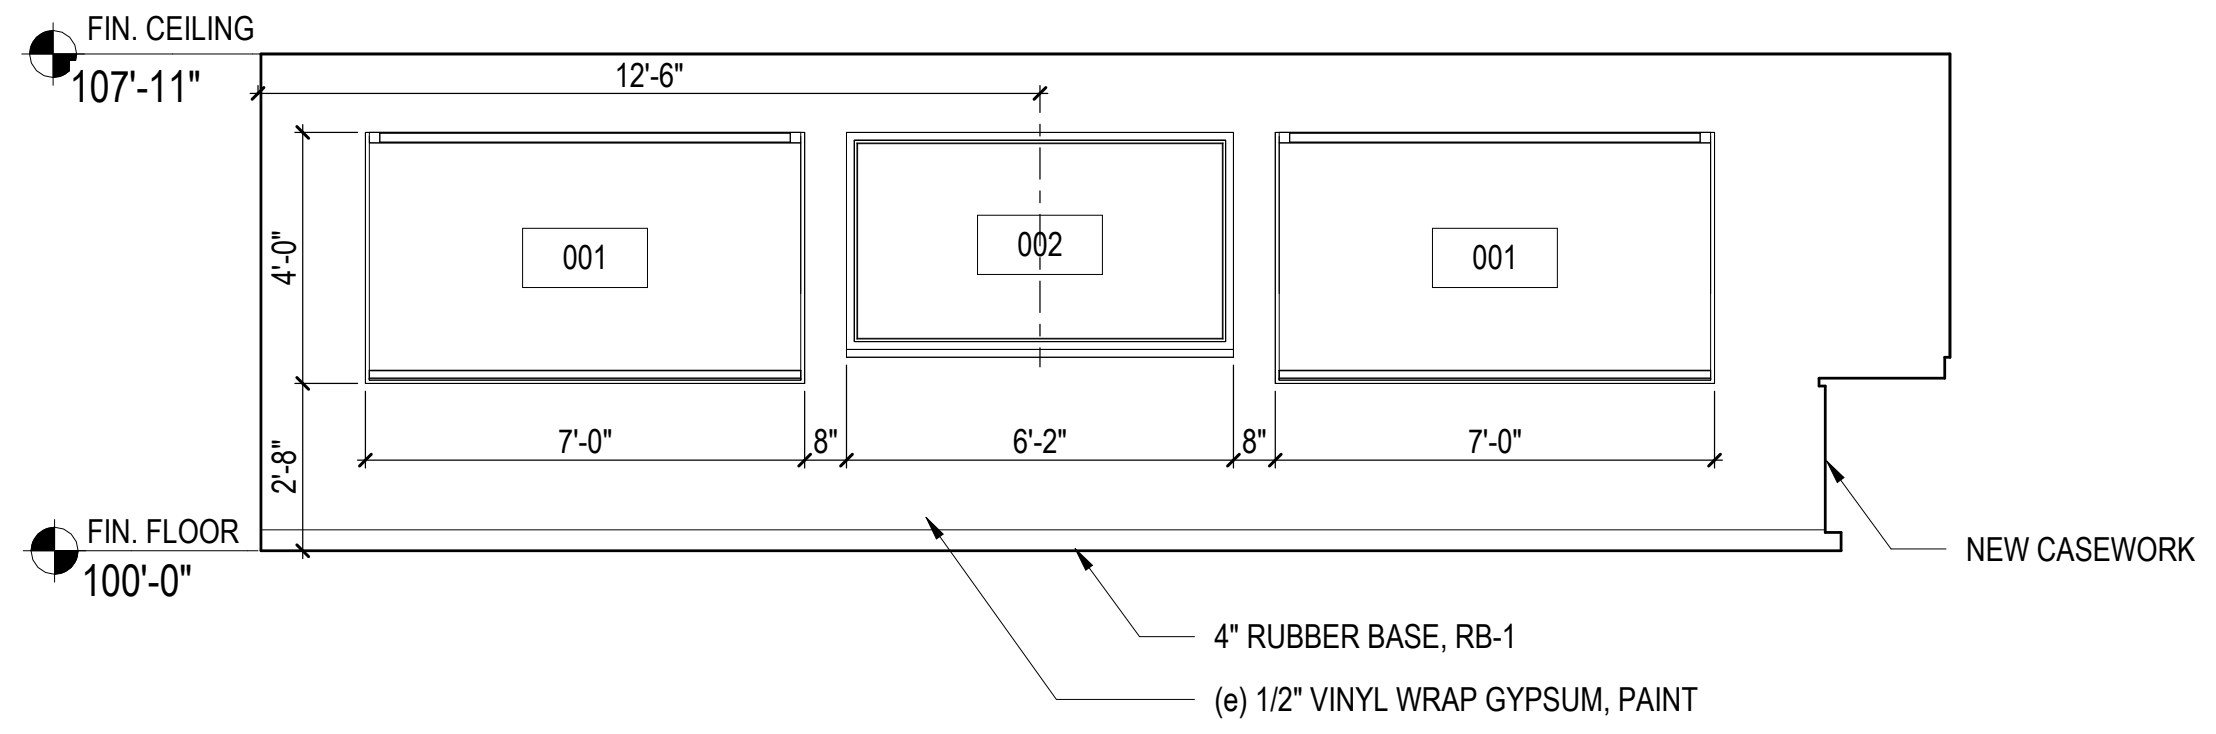
FIN. CEILING
107'-11"
12'-6"
001
002
001
4'-0"
2'-8"
7'-0"
8"
6'-2"
8"
7'-0"
FIN. FLOOR
100'-0"
NEW CASEWORK
4" RUBBER BASE, RB-1
(e) 1/2" VINYL WRAP GYPSUM, PAINT

20 **Modular Classroom (24) - South**
SCALE: 1/4" = 1'-0"
1 A1.0

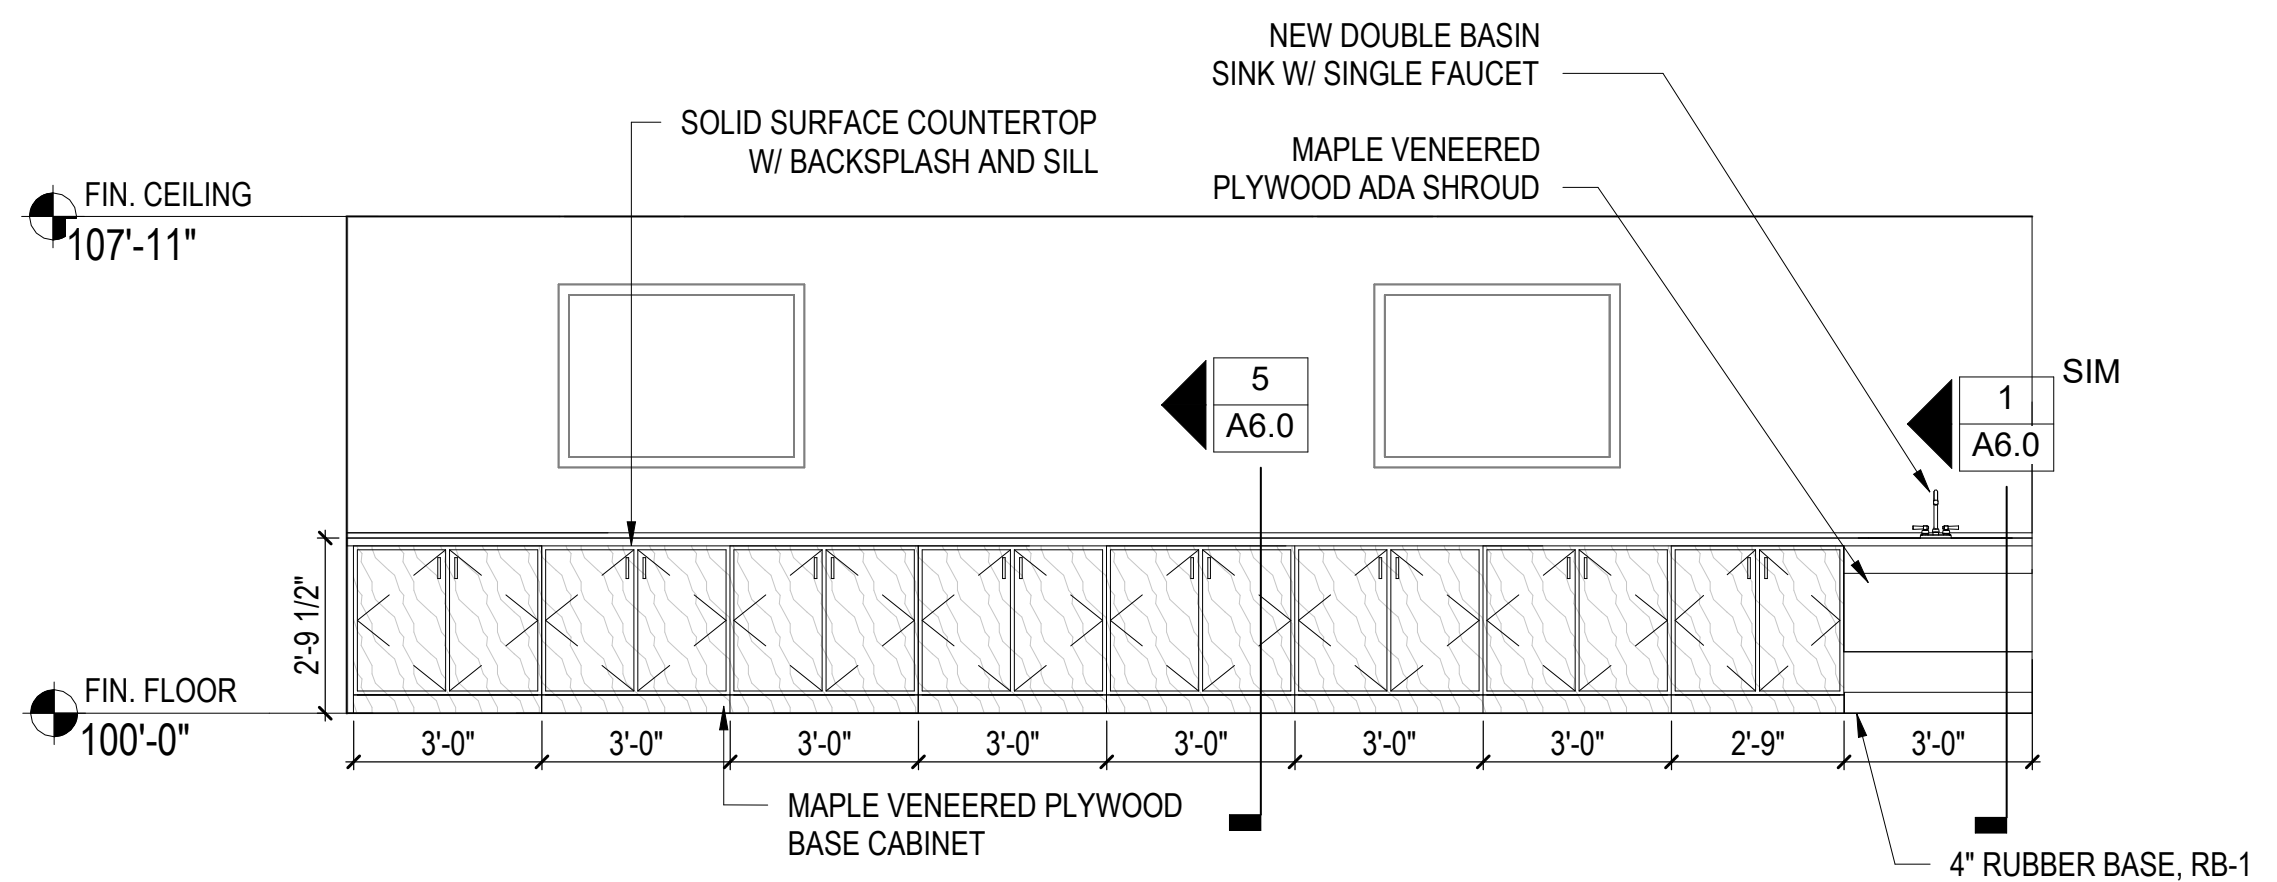
NEW DOUBLE BASIN SINK W/ SINGLE FAUCET
SOLID SURFACE COUNTERTOP W/ BACKSPLASH AND SILL
MAPLE VENEERED PLYWOOD ADA SHROUD
FIN. CEILING
107'-11"
5
A6.0
1
A6.0
SIM
2'-9 1/2"
FIN. FLOOR
100'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
3'-0"
2'-9"
3'-0"
MAPLE VENEERED PLYWOOD BASE CABINET
4" RUBBER BASE, RB-1

21 **Modular Classroom (24) - West**
SCALE: 1/4" = 1'-0"
1 A1.0

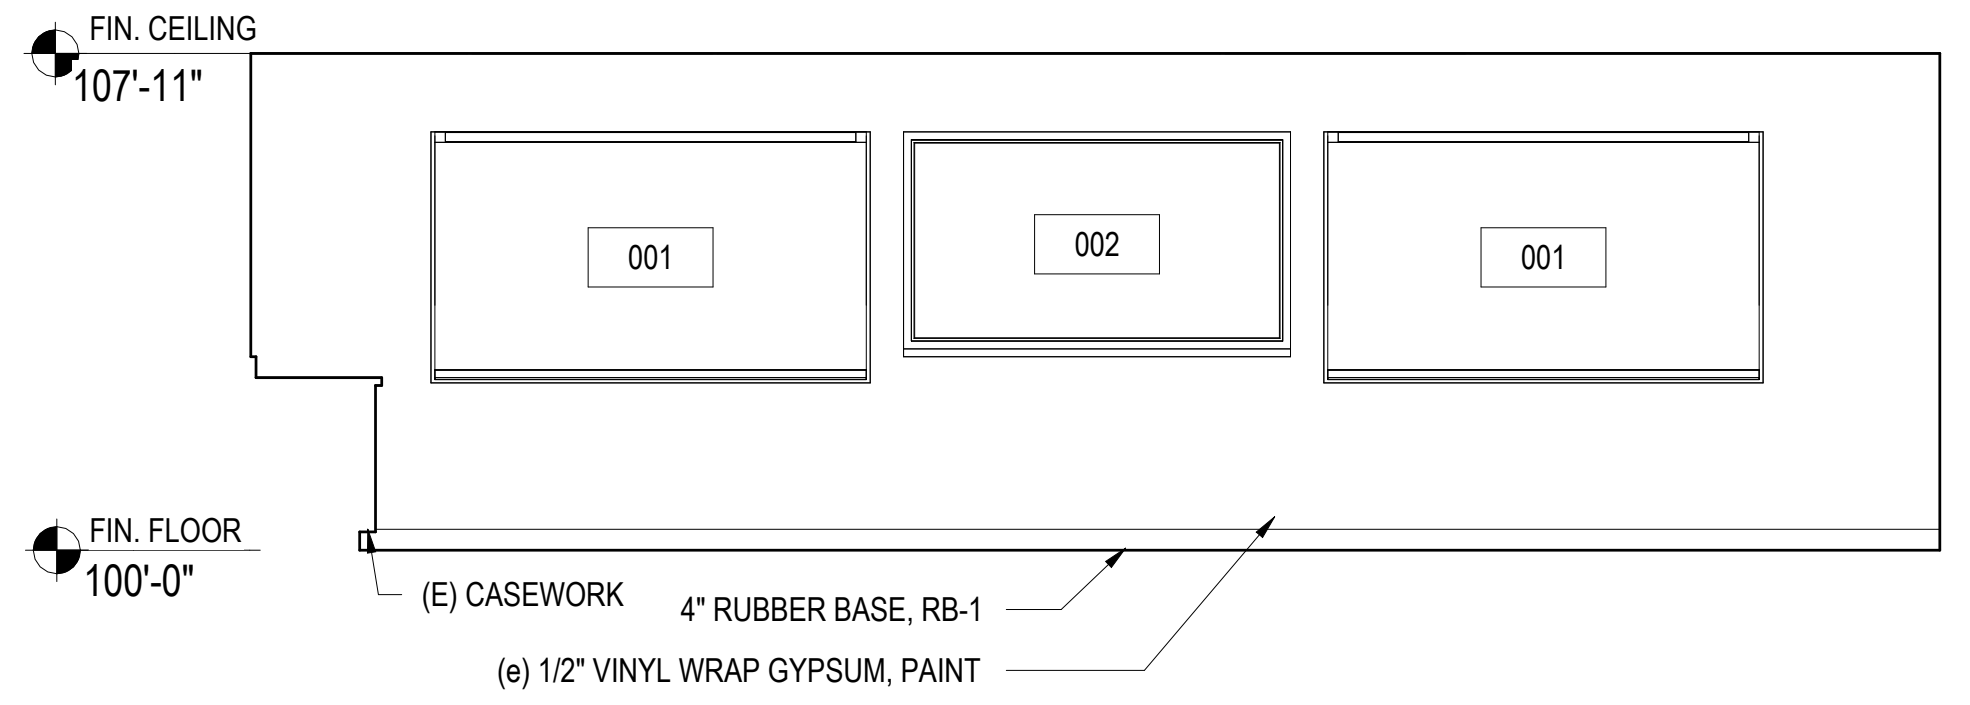
FIN. CEILING
107'-11"
001
002
001
FIN. FLOOR
100'-0"
(E) CASEWORK
4" RUBBER BASE, RB-1
(e) 1/2" VINYL WRAP GYPSUM, PAINT

22 **Modular Classroom (25) - North**
SCALE: 1/4" = 1'-0"
1 A1.0

9/25/2026 10:44:33 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Interior Elevations

A6.4

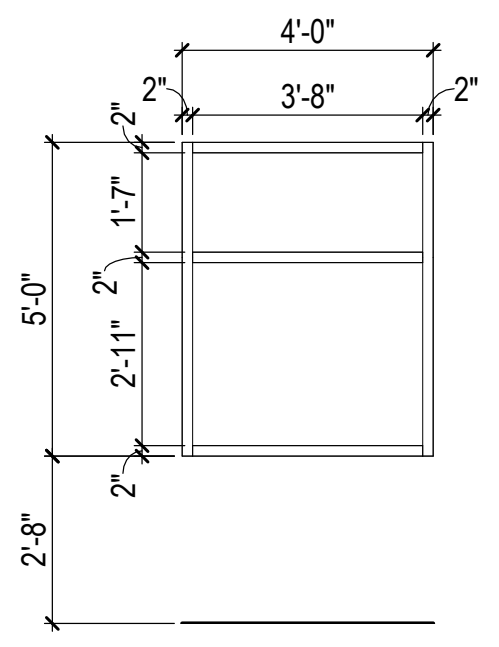
4'-0"
3'-8"
2"
1'-7"
2'-11"
5'-0"
2'-8"

ALW-1

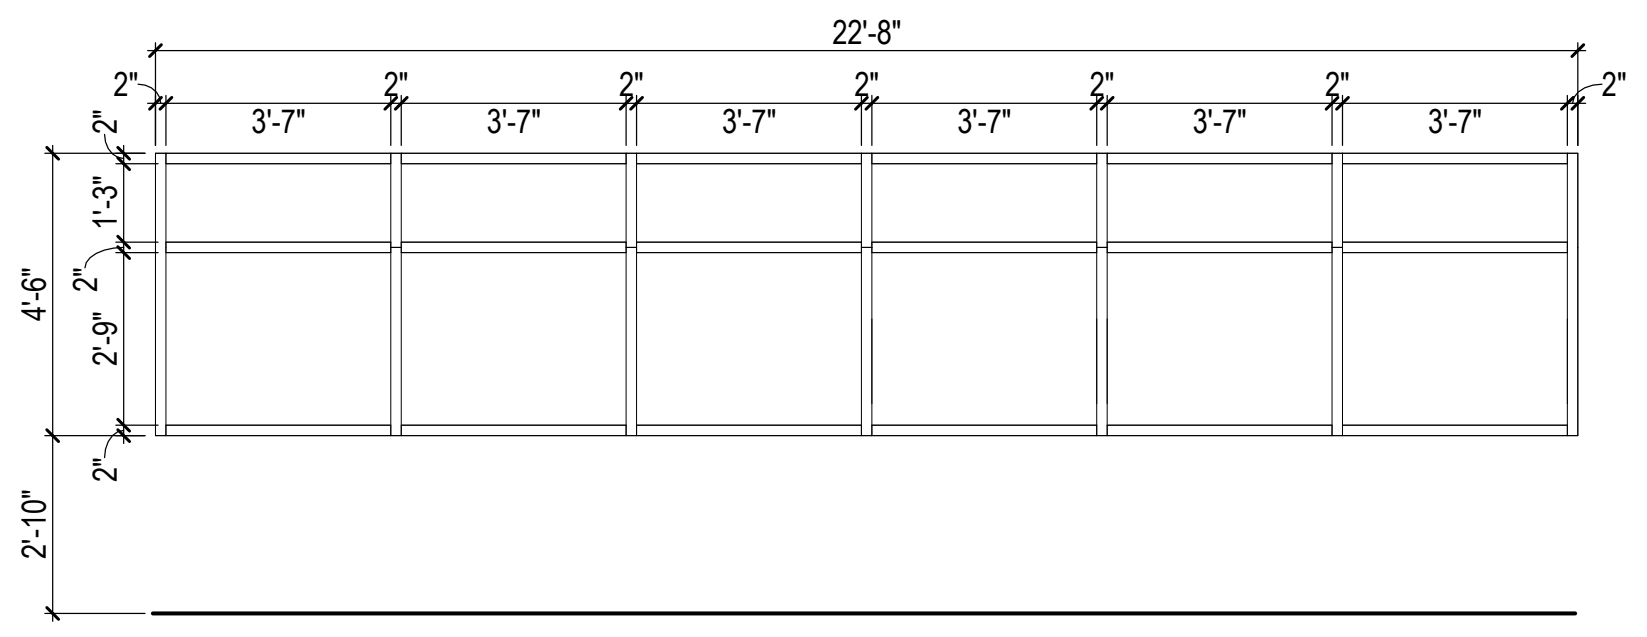
22'-8"
3'-7"
3'-7"
3'-7"
3'-7"
3'-7"
3'-7"
2"
1'-3"
2'-9"
4'-6"
2'-10"

ALW-2

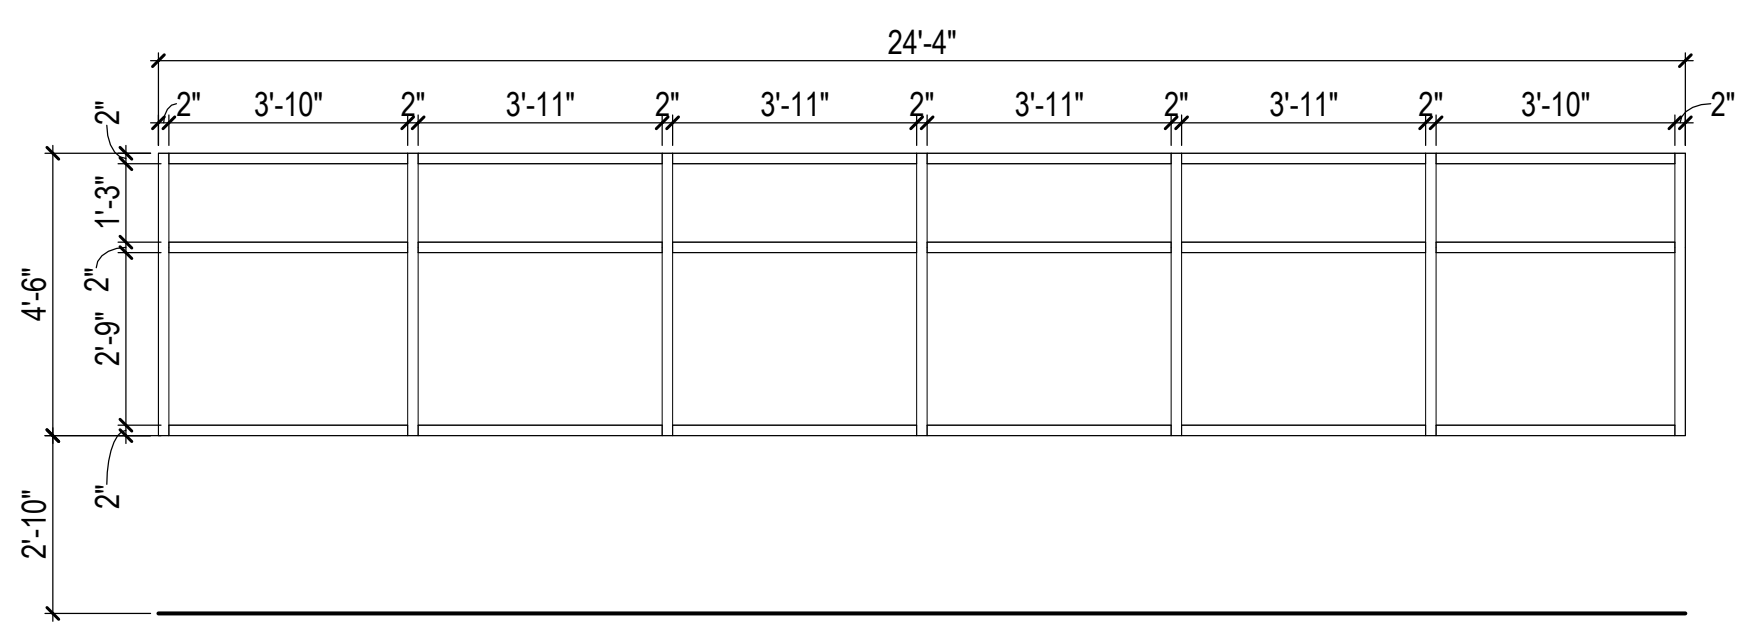
24'-4"
3'-10"
3'-11"
3'-11"
3'-11"
3'-11"
3'-10"
2"
1'-3"
2'-9"
4'-6"
2'-10"

ALW-3

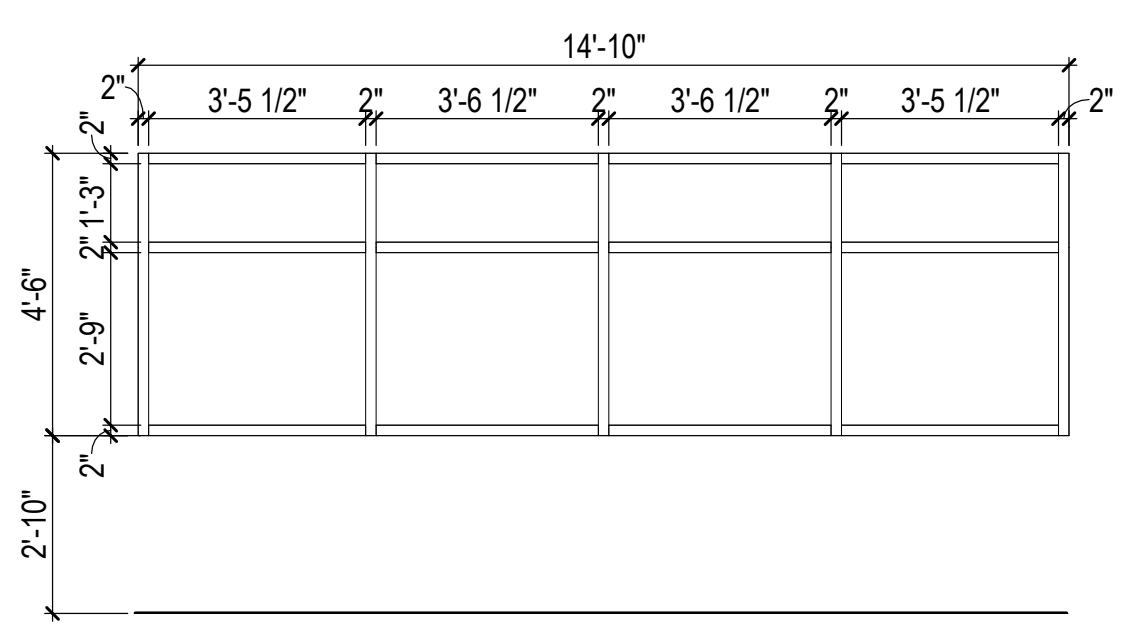
14'-10"
3'-5 1/2"
3'-6 1/2"
3'-6 1/2"
3'-5 1/2"
2"
1'-3"
2'-9"
4'-6"
2'-10"

ALW-4

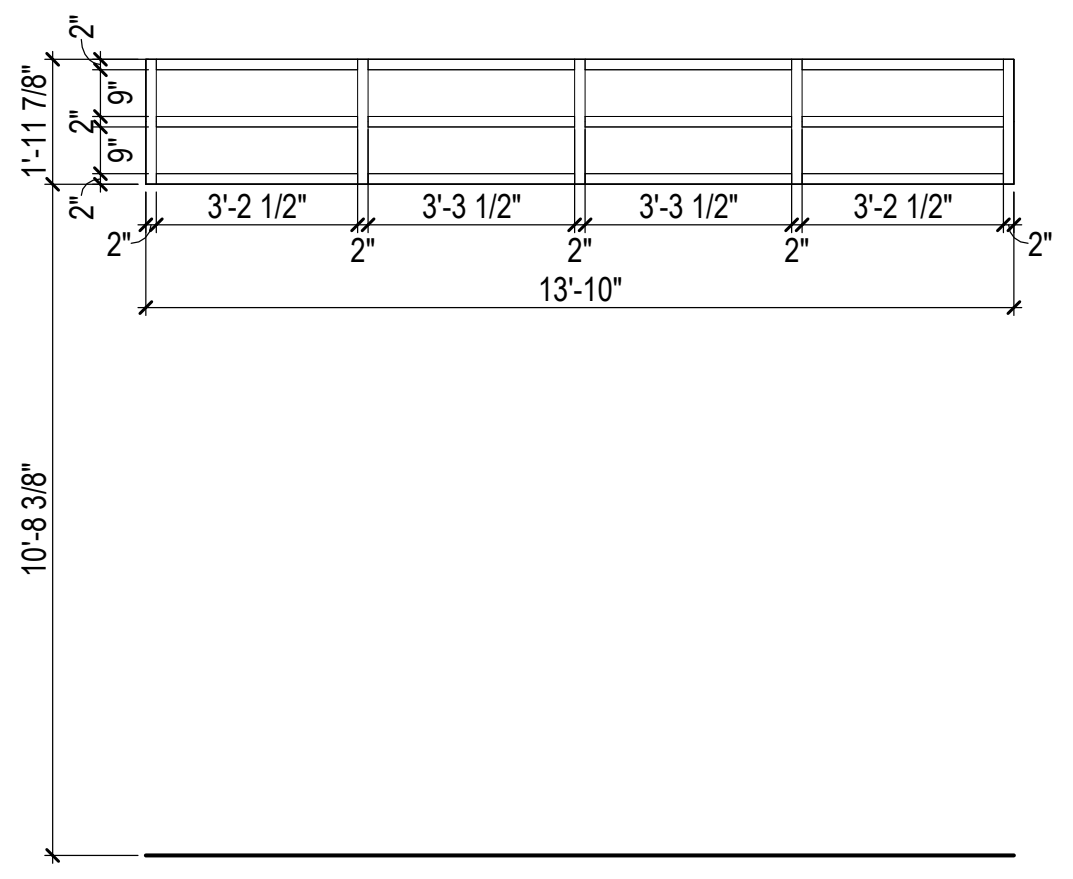
2"
9"
1'-11 7/8"
3'-2 1/2"
3'-3 1/2"
3'-3 1/2"
3'-2 1/2"
13'-10"
10'-8 3/8"

ALW-5

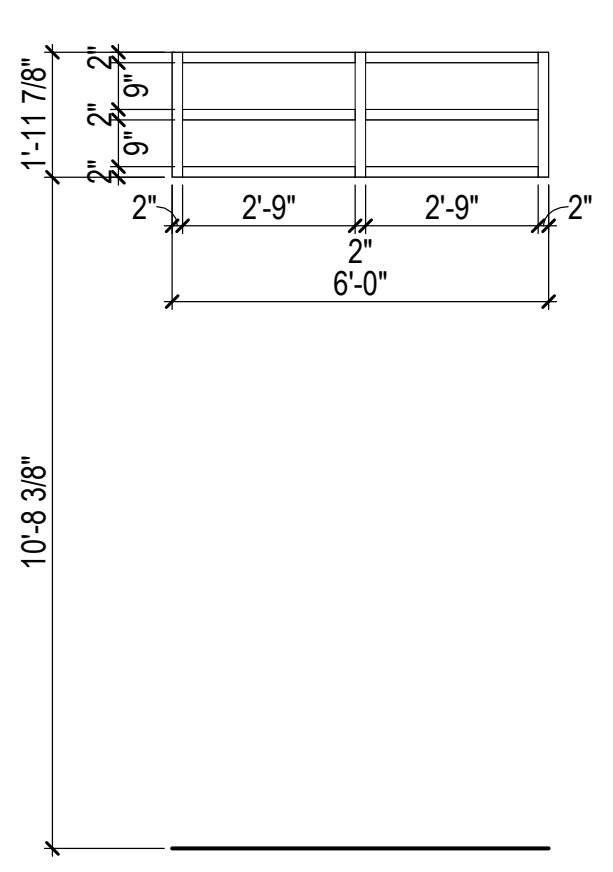
1'-11 7/8"
2"
9"
2'-9"
2'-9"
6'-0"
10'-8 3/8"

ALW-6

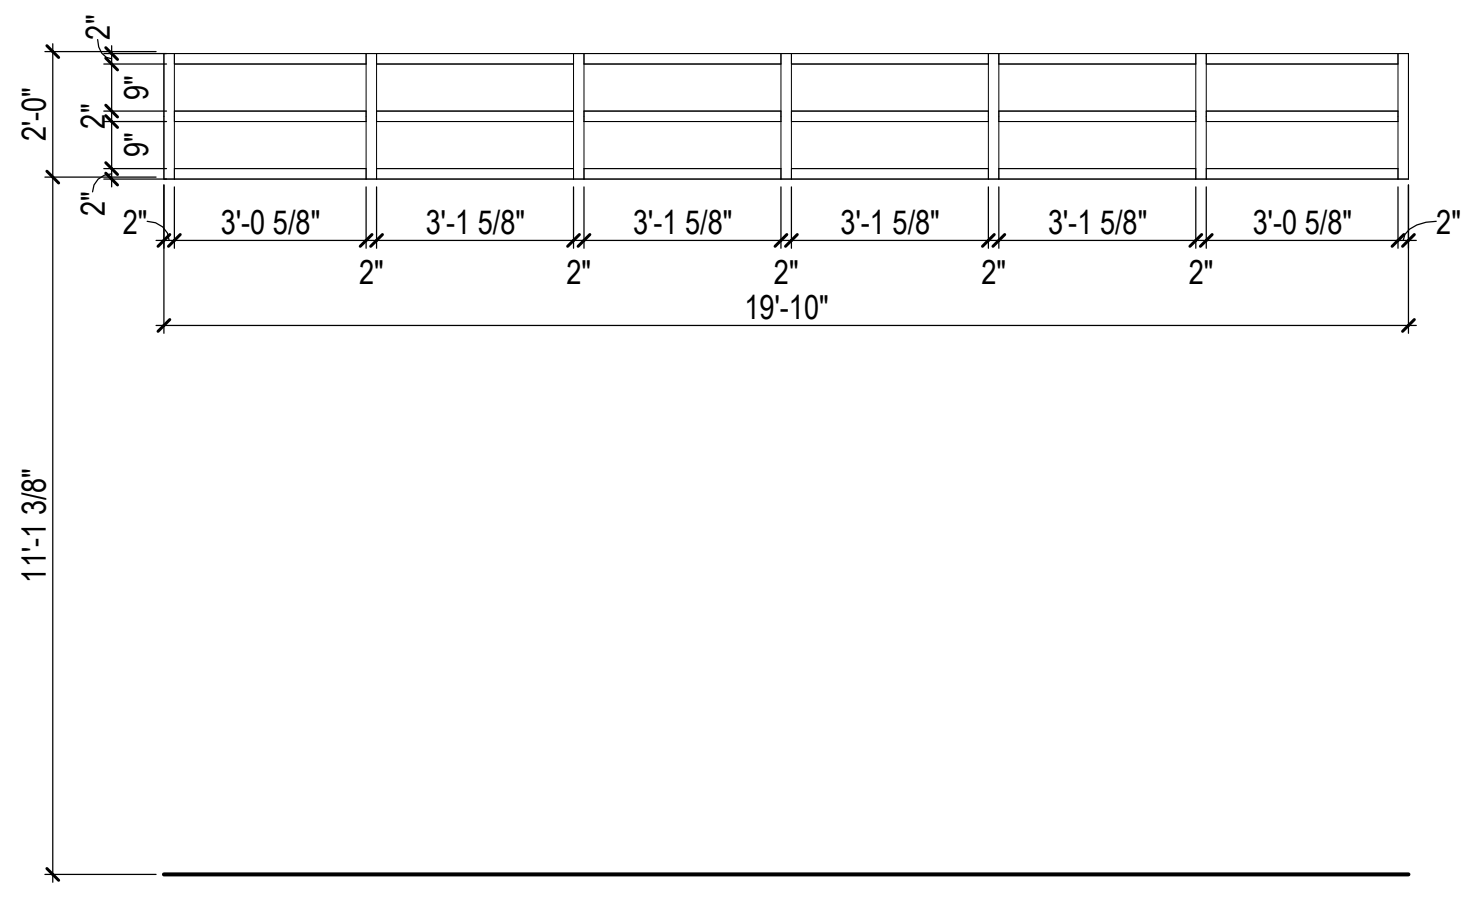
2'-0"
2"
9"
3'-0 5/8"
3'-1 5/8"
3'-1 5/8"
3'-1 5/8"
3'-1 5/8"
3'-0 5/8"
19'-10"
11'-1 3/8"

ALW-7

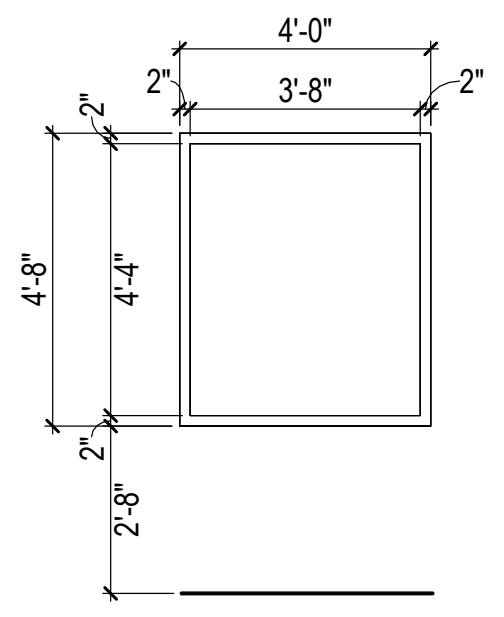
4'-0"
3'-8"
2"
4'-8"
4'-4"
2'-8"

ALW-8

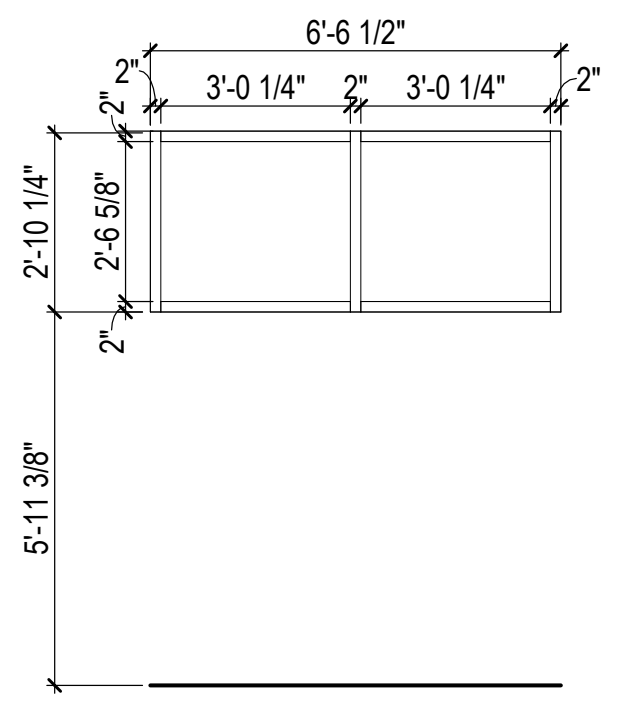
6'-6 1/2"
3'-0 1/4"
3'-0 1/4"
2"
2'-10 1/4"
2'-6 5/8"
5'-11 3/8"

ALW-9

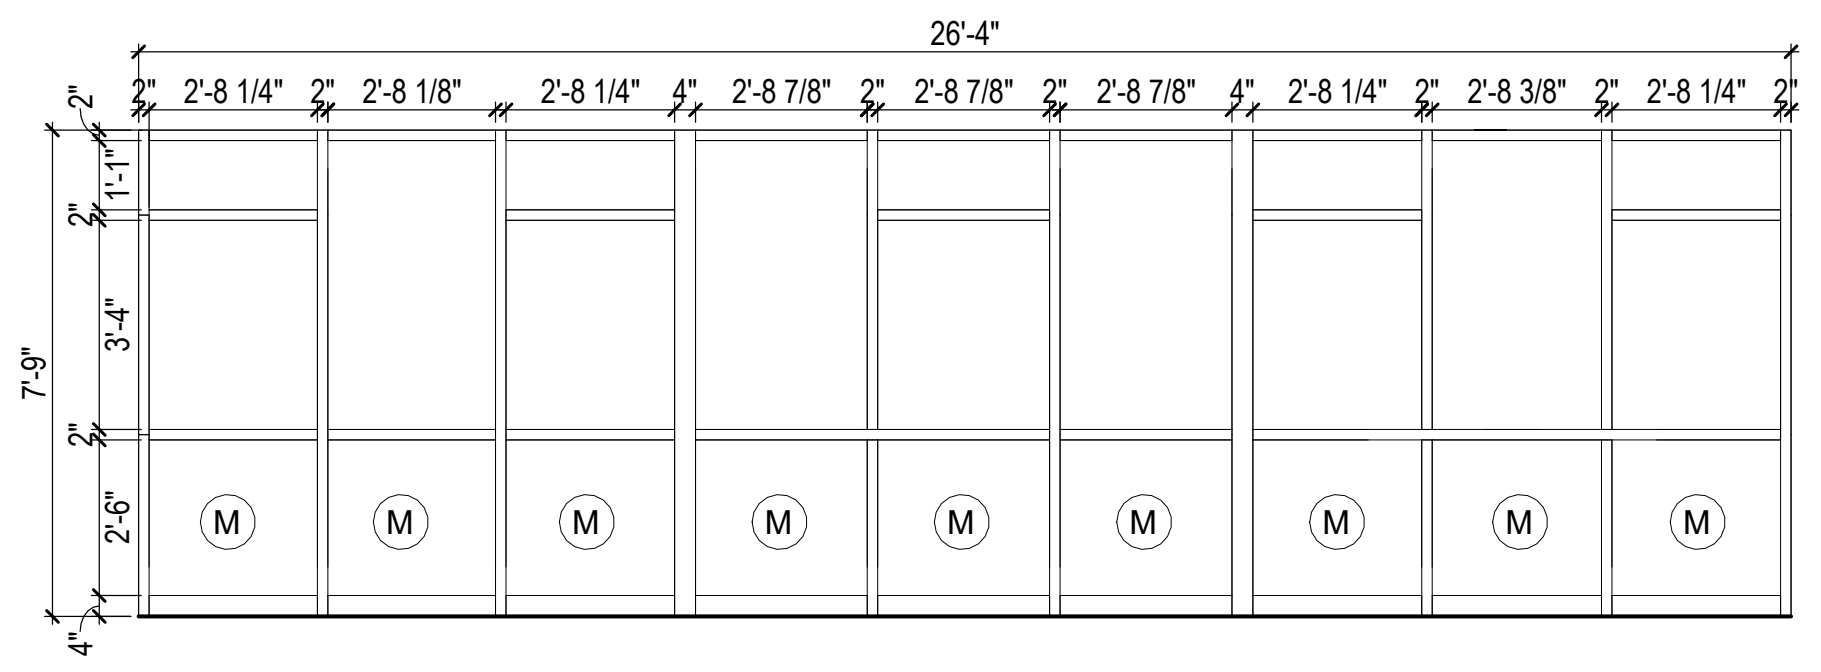
26'-4"
2'-8 1/4"
2'-8 1/8"
2'-8 1/4"
2'-8 7/8"
2'-8 7/8"
2'-8 7/8"
2'-8 1/4"
2'-8 3/8"
2'-8 1/4"
2"
4"
1'-1"
3'-4"
2'-6"
7'-9"
M

ALW-10

LEGEND

Ⓜ INSULATED PANELS IN PLACE OF GLAZING, BASIS OF DESIGN: MAPES, MAPES-R INFILL PANEL

MAXIMUM ASSEMBLY U-FACTOR FOR:
EXTERIOR STOREFRONT: U-0.36

BASIS OF DESIGN:
1. EXTERIOR STOREFRONT: KAWNEER 451 UT WITH INSULATED GLAZING, COLOR: CLEAR ANNODIZED

PROVIDE AND INSTALL 3M S800 SECURITY FILM AND CAULKING AT ENTRY DOORS AND ASSOCIATED SIDELITES. COORDINATE FINAL LOCATIONS WITH THE OWNER

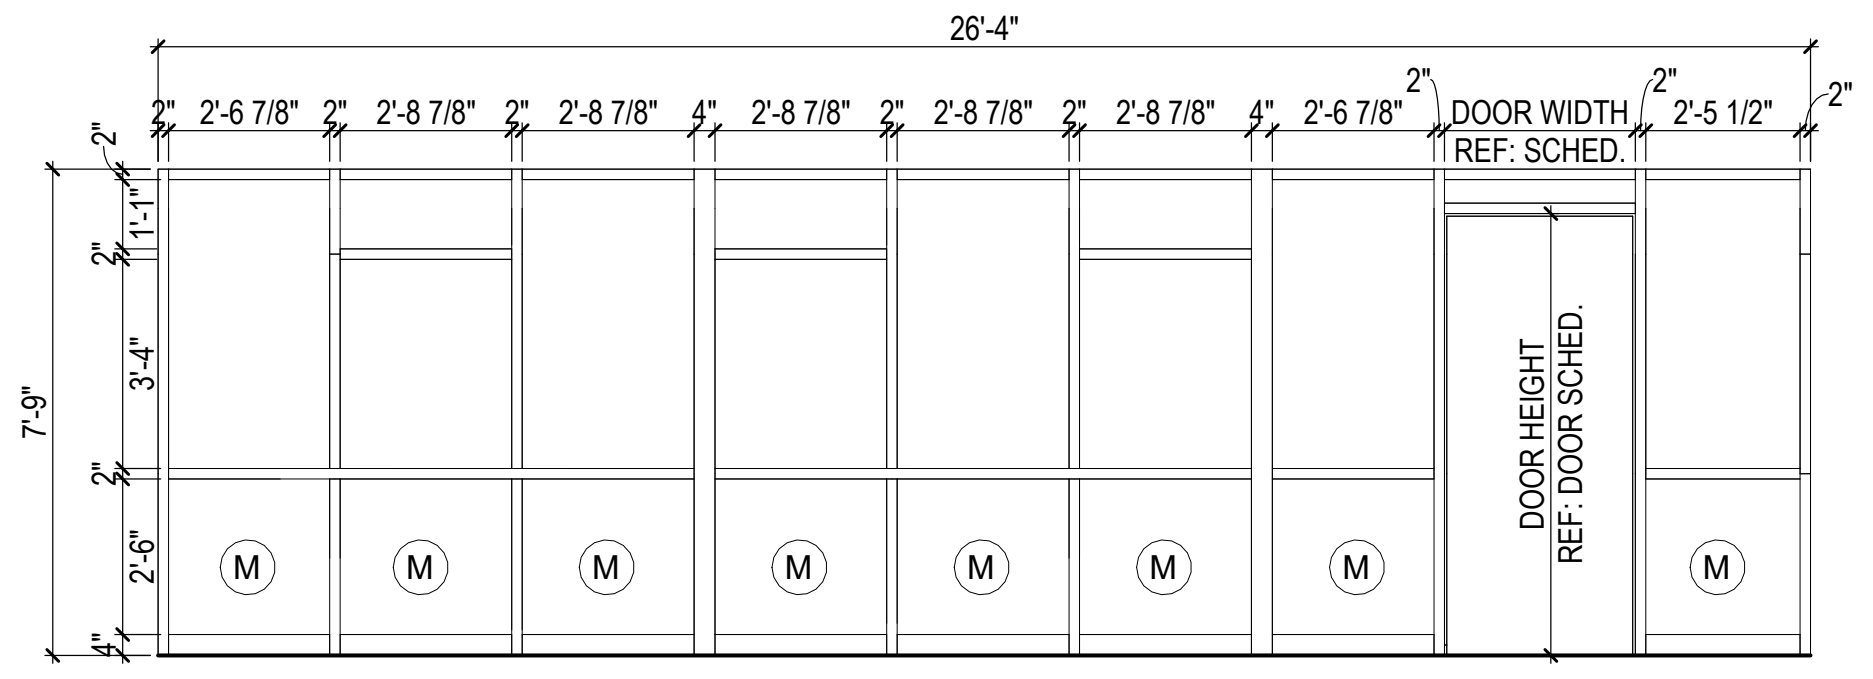
26'-4"
2'-6 7/8"
2'-8 7/8"
2'-8 7/8"
2'-8 7/8"
2'-8 7/8"
2'-8 7/8"
2'-6 7/8"
DOOR WIDTH REF: SCHED.
2'-5 1/2"
2"
4"
1'-1"
3'-4"
2'-6"
7'-9"
DOOR HEIGHT REF: DOOR SCHED.
M

ALW-11

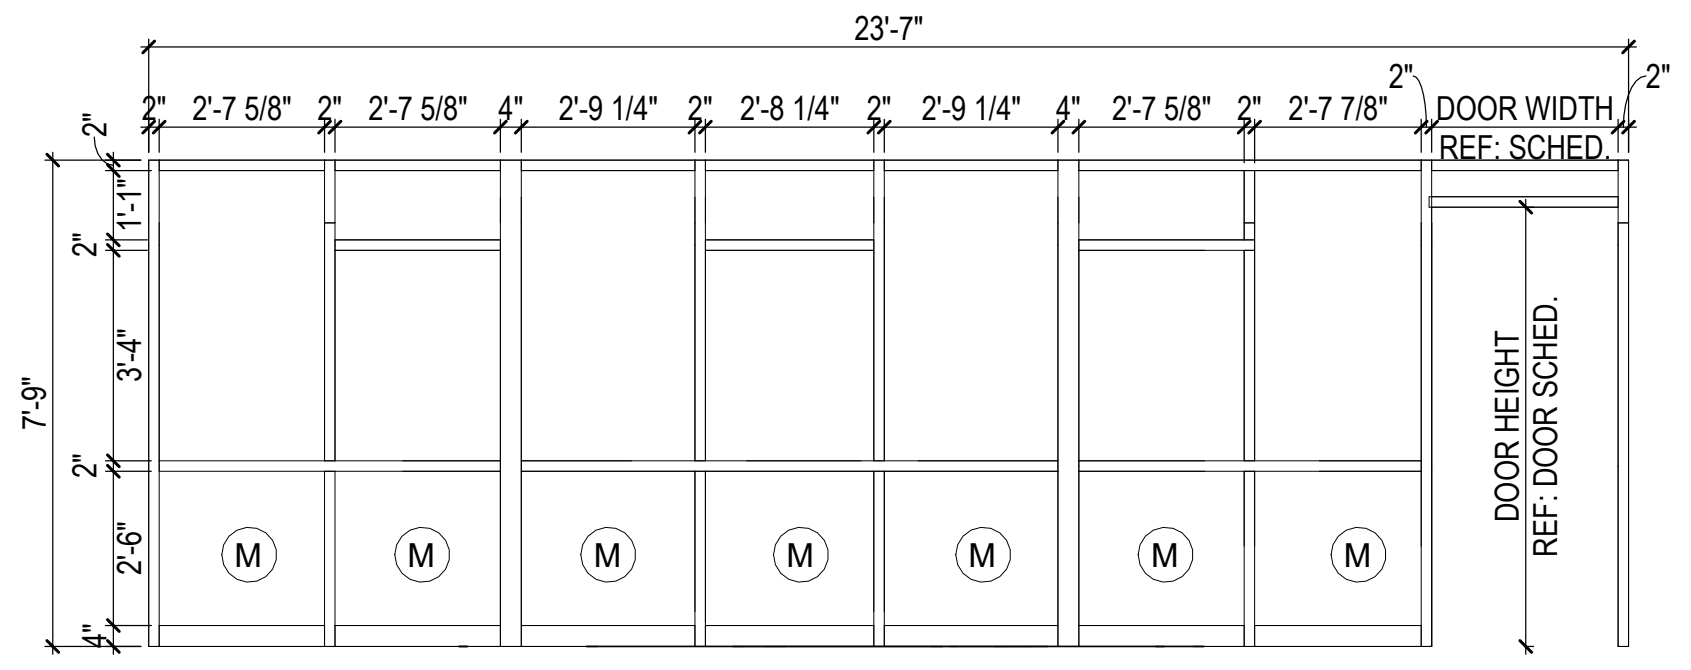
23'-7"
2'-7 5/8"
2'-7 5/8"
2'-9 1/4"
2'-8 1/4"
2'-9 1/4"
2'-7 5/8"
2'-7 7/8"
DOOR WIDTH REF: SCHED.
2"
4"
1'-1"
3'-4"
2'-6"
7'-9"
DOOR HEIGHT REF: DOOR SCHED.
M

ALW-12

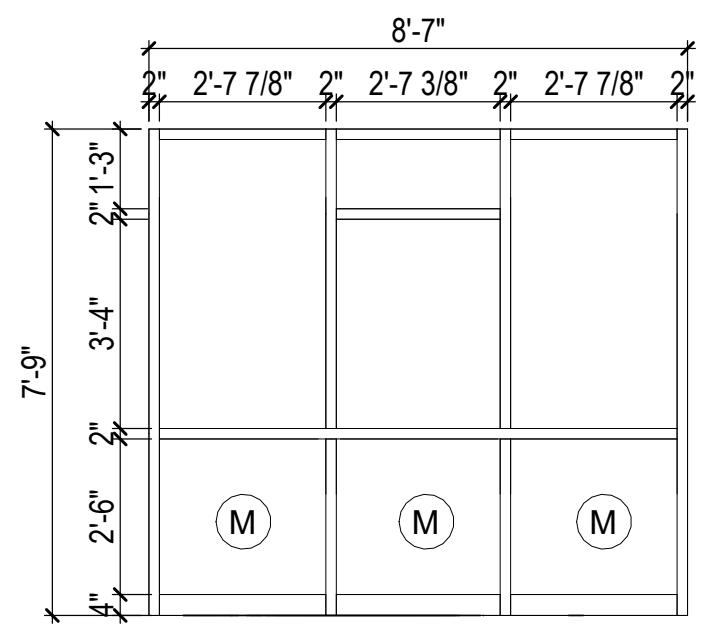
8'-7"
2'-7 7/8"
2'-7 3/8"
2'-7 7/8"
2"
1'-3"
3'-4"
2'-6"
4"
7'-9"
M

ALW-13

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:44:36 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Exterior Frame Types

A6.5

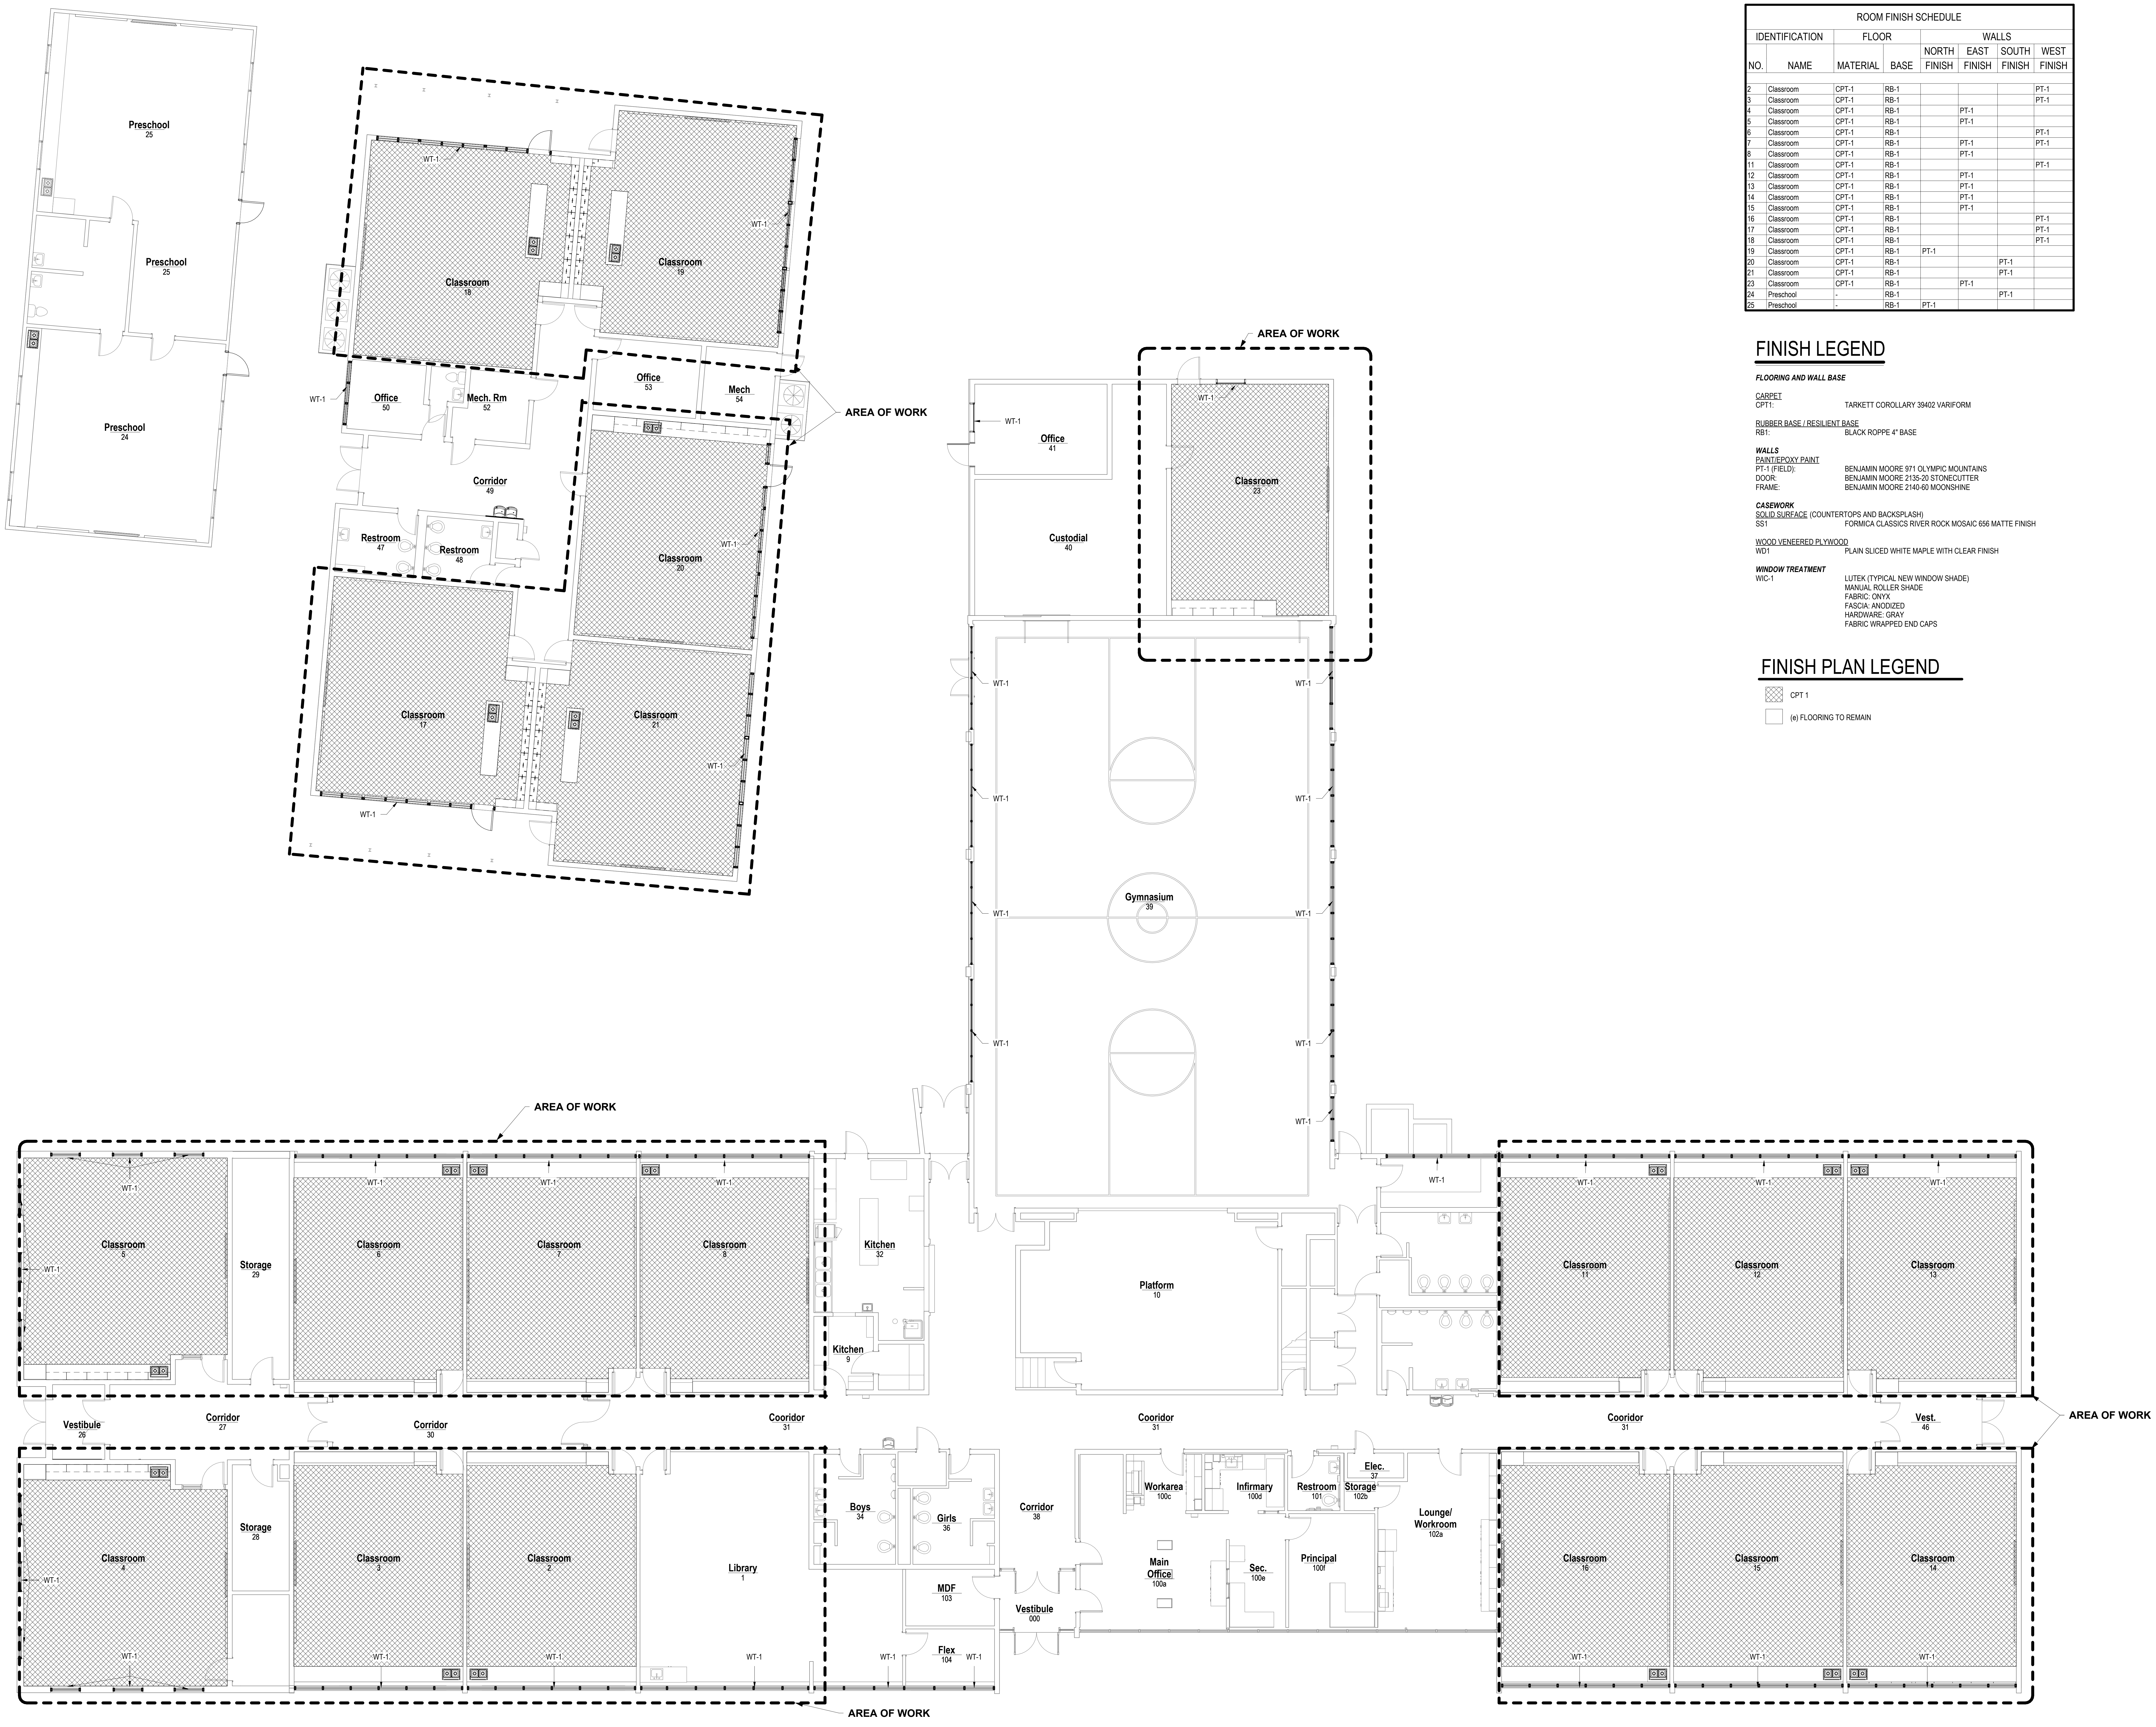
Preschool 25
Preschool 25
Preschool 24
Classroom 18
Classroom 19
WT-1
Office 50
Mech. Rm 52
Office 53
Mech 54
AREA OF WORK
Corridor 49
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
AREA OF WORK
Office 41
Custodial 40
Classroom 23
Gymnasium 39
AREA OF WORK
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Kitchen 32
Kitchen 9
Platform 10
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Cooridor 31
Cooridor 31
Cooridor 31
Vest. 46
AREA OF WORK
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Boys 34
Girls 36
Corridor 38
MDF 103
Flex 104
Vestibule 000
Workarea 100c
Infirmary 100d
Restroom 101
Elec. 37
Storage 102b
Main Office 100a
Sec. 100e
Principal 100f
Lounge/ Workroom 102a
Classroom 16
Classroom 15
Classroom 14
AREA OF WORK

ROOM FINISH SCHEDULE

IDENTIFICATION		FLOOR		WALLS			
				NORTH	EAST	SOUTH	WEST
NO.	NAME	MATERIAL	BASE	FINISH	FINISH	FINISH	FINISH
2	Classroom	CPT-1	RB-1				PT-1
3	Classroom	CPT-1	RB-1				PT-1
4	Classroom	CPT-1	RB-1		PT-1		
5	Classroom	CPT-1	RB-1		PT-1		
6	Classroom	CPT-1	RB-1				PT-1
7	Classroom	CPT-1	RB-1		PT-1		PT-1
8	Classroom	CPT-1	RB-1		PT-1		
11	Classroom	CPT-1	RB-1				PT-1
12	Classroom	CPT-1	RB-1		PT-1		
13	Classroom	CPT-1	RB-1		PT-1		
14	Classroom	CPT-1	RB-1		PT-1		
15	Classroom	CPT-1	RB-1		PT-1		
16	Classroom	CPT-1	RB-1				PT-1
17	Classroom	CPT-1	RB-1				PT-1
18	Classroom	CPT-1	RB-1				PT-1
19	Classroom	CPT-1	RB-1	PT-1			
20	Classroom	CPT-1	RB-1			PT-1	
21	Classroom	CPT-1	RB-1			PT-1	
23	Classroom	CPT-1	RB-1		PT-1		
24	Preschool	-	RB-1			PT-1	
25	Preschool	-	RB-1	PT-1			

FINISH LEGEND

FLOORING AND WALL BASE

CARPET

CPT1:	TARKETT COROLLARY 39402 VARIFORM

RUBBER BASE / RESILIENT BASE

RB1:	BLACK ROPPE 4" BASE

WALLS

PAINT/EPOXY PAINT

PT-1 (FIELD):	BENJAMIN MOORE 971 OLYMPIC MOUNTAINS
DOOR:	BENJAMIN MOORE 2135-20 STONECUTTER
FRAME:	BENJAMIN MOORE 2140-60 MOONSHINE

CASEWORK

SOLID SURFACE (COUNTERTOPS AND BACKSPLASH)

SS1	FORMICA CLASSICS RIVER ROCK MOSAIC 656 MATTE FINISH

WOOD VENEERED PLYWOOD

WD1	PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH

WINDOW TREATMENT

WIC-1	LUTEK (TYPICAL NEW WINDOW SHADE) MANUAL ROLLER SHADE FABRIC: ONYX FASCIA: ANODIZED HARDWARE: GRAY FABRIC WRAPPED END CAPS

FINISH PLAN LEGEND

▨	CPT 1
☐	(e) FLOORING TO REMAIN

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2025-033

September 25, 2026

Finish Plan

A9.0

C:\Users\Aroon\AppData\Local\Autodesk\Revit\Autodesk Revit 2026\CollaborationCache\YSPJ9STGNLYKN5MR\f5ee3ddc-d8c1-4fad-88c2-786048194f12\d7a66a95-bba2-4b0f-8a37-b8e73f1d1564.rvt
9/25/2026 10:44:40 AM

PLUMBING FIXTURE SCHEDULE

PLAN CODE	DESCRIPTION	MANUF.	MODEL	COLOR FINISH	FITTINGS	MANUF.	MODEL	COLOR FINISH	REMARKS
S-1	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	DRKAD252265L	STAINLESS STEEL	FAUCET BUBBLER	CHICAGO ELKAY	895-GN8AE3ABCP LK1141A	CHROME CHROME	NOTES: 1,2,3,5
S-2	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	DRKAD252265R	STAINLESS STEEL	FAUCET BUBBLER	CHICAGO ELKAY	895-GN8AE3ABCP LK1141A	CHROME CHROME	NOTES: 1,2,3,4
S-3	SINK (ACCESSIBLE) (1.5 GPM)	ELKAY	LRAD2918-6"	STAINLESS	FAUCET	CHICAGO	895-GN8AE3ABCP	CHROME	NOTES: 1,2,3
EWC-1	ELECTRIC WATER COOLER (ACCESSIBLE) (HIGH/LOW W/ BOTTLE FILL STATION)	ELKAY	EZSTL8WSVRSK	STAINLESS STEEL	CANE APRON	ELKAY	LKAPREZL	-	NOTE: 6 1/5 HP, 120/60/1

NOTES:

1. 17 GA. P-TRAP, ANGLE SUPPLIES WITH 1/4 TURN L.K. STOPS.
2. GRID STRAINER, INSULATION KIT ON SUPPLIES AND DRAIN.
3. 1.5 GPM FLOW RESTRICTOR.
4. BUBBLER TO BE ON RIGHT SIDE OF SINK, FAUCET CENTERED ON SINK.
5. BUBBLER TO BE ON LEFT SIDE OF SINK, FAUCET CENTERED ON SINK.
6. WITH CARRIER, COORDINATE WALL THICKNESS.

PLUMBING FIXTURE CONNECTION SCHEDULE

PLAN CODE	FIXTURE	PIPE SIZE (INCHES, MINIMUM)							REMARKS
		WASTE			COLD WATER		HOT WATER		
		TRAP & ARM	VERT. DRAIN	VENT (MIN.)	SUPPLY (MIN.)	CONNECTION (ACTUAL)	SUPPLY (MIN.)	CONNECTION (ACTUAL)	
S	SINK	1-1/2"	2"	1-1/2"	1/2"	1/2"	1/2"	1/2"	
EWC	ELEC. WATER COOLER	1-1/2"	2"	1-1/2"	1/2"	3/8"	-	-	

GENERAL LEGEND

ABBV.	SYMBOL	DESCRIPTION
G.C.		GENERAL CONTRACTOR
P.C.		PLUMBING CONTRACTOR
A.F.F.		ABOVE FINISHED FLOOR
B.F.F.		BELOW FINISHED FLOOR
(N)		NEW
(E)		EXISTING
	— — — — — — — —	EXISTING (DEMOLITION OR REMOVED)
	⊕	POINT OF CONNECTION - NEW TO EXISTING
	⊏————	PIPE CAP
	———⊣⊘⊢———	BALL VALVE
	————⊣◡	PIPE ELBOW DOWN
	————⊣○	PIPE ELBOW UP
	———⊣◡⊢———	TEE OFF BOTTOM OF PIPE
	———⊣○⊢———	TEE OFF TOP OF PIPE
	X XXX	X = SECTION/DETAIL NUMBER XXX = SHEET NUMBER WHERE SECTION/DETAIL IS DRAWN

PLUMBING LEGEND

ABBV.	SYMBOL	DESCRIPTION
WC		WATER CLOSET
UR		URINAL
L		LAVATORY
S		SINK
EWC		ELECTRIC WATER COOLER
DF		DRINKING FOUNTAIN
PP		PLUMBING CIRC. PUMP
PET		PLUMBING EXPANSION TANK
GWH		GAS WATER HEATER
GPM		GALLON PER MINUTE
CW	——— – ———	DOMESTIC COLD WATER
HW	——— – – ———	DOMESTIC HOT WATER
HWC	——— – – – ———	DOMESTIC HOT WATER CIRCULATING
W	—— —— —— —— ——	SANITARY WASTE BELOW FLOOR
V	– – – – – – – – – –	SANITARY VENT
WCO	——⊣◡⊢ OR ——⊣○⊢	WALL CLEANOUT

SHEET INDEX

SHEET NUMBER	PLUMBING SHEET TITLE	SHEET SCALE
P0.0	Plumbing Cover Sheet - General Notes, Schedules & Legend	None
PD1.0	First Floor - Demolition Plumbing Plan	1/8" = 1'-0"
P1.0	First Floor - Plumbing Plan	1/8" = 1'-0"

PLUMBING DEMOLITION GENERAL NOTES

1. COORDINATE DEMOLITION REQUIREMENTS WITH THE GENERAL CONTRACTOR.
2. COORDINATE EXTENT OF DEMOLITION WITH THE NEW CONSTRUCTION AS SHOWN IN THESE DOCUMENTS.
3. EXISTING PLUMBING PIPING, EQUIPMENT ETC IS SHOWN LIGHT.
4. ALL PLUMBING ITEMS INDICATED TO BE DEMOLISHED SHALL BE INSPECTED FOR SALVAGE BY THE OWNER. ALL NON-SALVAGEABLE ITEMS SHALL THEN BE IMMEDIATELY REMOVED FROM THE SITE BY THE PLUMBING CONTRACTOR.
5. ALL UNUSED HANGERS AND SUPPORTS SHALL BE REMOVED.
6. THE REMOVAL OR INSTALLATION OF FIXTURES, PIPES AND EQUIPMENT MAY REQUIRE THE REMOVAL OF EXISTING WALLS AND CEILINGS. THE PLUMBING CONTRACTOR AND GENERAL CONTRACTOR SHALL COORDINATE AND BE RESPONSIBLE FOR REPAIRING AND PAINTING THESE WALLS AND/OR CEILINGS SO THEY MATCH THE EXISTING WHERE NOT REPLACED UNDER THE ARCHITECTURAL DOCUMENTS. THE CONTRACTOR SHALL REVIEW THE PLUMBING DRAWINGS TO IDENTIFY THESE LOCATIONS PRIOR TO BID PRICING.
7. THE GENERAL CONTRACTOR SHALL MAKE REPAIRS TO ALL EXISTING BUILDING COMPONENTS THAT HAVE BEEN AFFECTED BY THE DEMOLITION OF PLUMBING SYSTEMS.

PLUMBING GENERAL NOTES

1. FIELD VERIFY EXACT LOCATION OF ALL CONNECTIONS PRIOR TO CONSTRUCTION.
2. ROUGH-IN AND FINAL CONNECT ALL FIXTURES, EQUIPMENT, ETC.
3. CONTRACTOR SHALL INSPECT SITE TO THOROUGHLY FAMILIARIZE HIMSELF WITH THE AREA OF WORK. ANY DISCREPANCES BETWEEN THESE DOCUMENTS AND ACTUAL CONDITIONS SHALL BE REPORTED TO THE ARCHITECT/ENGINEER FOR RESOLUTION PRIOR TO BID PRICING. NO EXTRAS WILL BE ALLOWED DUE TO LACK OF KNOWLEDGE OF EXISTING CONDITIONS.
4. COMPLY WITH ALL BUILDING AND HEALTH DEPARTMENT REGULATIONS FOR PLUMBING INSTALLATION. VERIFY ALL REQUIREMENTS PRIOR TO SUBMITTING BID OR COMMENCING WORK.
5. CONTRACTOR SHALL INSTALL PIPING IN ADHERENCE TO 2021 COLORADO PLUMBING CODE, 2021 COLORADO FUEL GAS CODE, 2021 COLORADO ENERGY CODE, AND LOCAL HEALTH CODES. TABLE C404.5.1, FROM THE IECC, IS INCLUDED ON THIS SHEET BELOW FOR EASE OF REFERENCE.
6. REFERENCE ARCHITECTURAL DRAWINGS FOR LOCATIONS OF ALL FIRE RATED WALLS. ALL PIPE PENETRATIONS THROUGH FIRE RATED WALLS SHALL BE SEALED IN ACCORDANCE WITH THE BUILDING CODE.
7. OFFSET ALL PIPING AS REQUIRED TO AVOID STRUCTURAL MEMBERS, CANTS, FLASHING, MECHANICAL, OR ELECTRICAL EQUIPMENT.
8. PROTECT ALL EXISTING EQUIPMENT INDICATED AS REMAINING IN PLACE OR BEING RELOCATED. REPLACE DAMAGED EQUIPMENT IMMEDIATELY WITH EXACT DUPLICATE AT NO ADDITIONAL COST TO THE OWNER.
9. PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR PROPERLY LOCATING AND PROTECTING ALL EXISTING PIPING AND UTILITIES FOR THE DURATION OF THE WORK. ANY DAMAGE CAUSED TO EXISTING PIPING OR UTILITIES SHALL BE REPAIRED IMMEDIATELY AT NO ADDITIONAL COST TO THE OWNER.
10. SUBMIT TO THE ARCHITECT/ENGINEER ELECTRONIC PDF FILES OF MECHANICAL SUBMITTALS FOR REVIEW OF ALL MAJOR EQUIPMENT AS LISTED ON DRAWING EQUIPMENT SCHEDULES, AS WELL AS PRODUCTS SHOWN IN SPECIFICATIONS. ENGINEER ASSUMED NO RESPONSIBILITY FOR EQUIPMENT OR INSTALLATION COORDINATION THAT HAS NOT BEEN SUBMITTED FOR REVIEW.
11. CONTRACTOR SHALL WARRANTY WORK, EQUIPMENT, FIXTURES, MATERIALS, AND PROPER OPERATION FOR A PERIOD OF ONE YEAR FROM THE DATE OF ACCEPTANCE OF BUILDING BY OWNER. THIS GUARANTEE SHALL NOT INCLUDE NORMAL MAINTENANCE REQUIRED BY THE OWNER AS DESCRIBED IN THE OPERATION AND MAINTENANCE MANUALS.
12. PROVIDE TWO SETS OF OPERATION AND MAINTENANCE (O&M) MANUALS FOR OWNER AT COMPLETION OF PROJECT TO THE ARCHITECT/ENGINEER FOR REVIEW. MANUALS TO INCLUDE INSTALLATION INSTRUCTIONS, REPLACEMENT PART LISTS, AND MAINTENANCE INFORMATION ON ALL MECHANICAL EQUIPMENT, FIXTURES, ETC. SUBMITTED.
13. CONTRACTOR SHALL MAINTAIN A COMPLETE AND ACCURATE SET OF RECORD DRAWINGS SHOWING ACTUAL INSTALLED LOCATIONS OF WORK. SUBMIT THESE DRAWINGS AS PART OF THE OPERATION AND MAINTENANCE MANUALS AT COMPLETION OF PROJECT.
14. NEW WATER PIPING SHALL DISINFECTED AS OUTLINED IN THE CURRENT ADOPTED PLUMBING CODE.

SPECIFICATION (PLUMBING)

PIPING:
A. WASTE, VENT, AND STORM PIPING ABOVE FINISHED FLOOR SHALL BE SERVICE WEIGHT CAST-IRON WITH NO-HUB FITTINGS.

B. WASTE, VENT, AND STORM PIPING BELOW FINISHED FLOOR/GRADE SHALL BE SCHEDULE 40 PVC "SOLID CORE" WITH SOLVENT WELDED FITTINGS.

C. WATER PIPING SHALL BE TYPE "L" COPPER, SOLDERED FITTINGS WITH LEAD FREE SOLDER AND FLUX.

INSULATION:
A. COLD WATER, HOT WATER AND HOT WATER RECIRCULATION INSULATION SHALL BE 1" THICK FIBERGLASS TYPE WITH ALL SERVICE JACKET WITH SELF SEAL LAP (ASJ-SSL).

B. PROVIDE PVC FITTING COVERS FOR ALL OF THE ABOVE MENTIONED SYSTEMS.

EQUIPMENT:
A. WALL CLEANOUT (WCO): CAST IRON BODY ADAPTABLE TO PIPE W/ CAST BRONZE OR CAST BRASS CLEANOUT PLUG. STAINLESS STEEL COVER INCLUDING SCREWS. JOSAM OR EQUAL.

VALVES:
A. BALL VALVES SHALL BE NSF 61 RATED AND EQUAL TO APOLLO #77CLF-100/200.

MISCELLANEOUS:
A. SAN-TEES, STOPS, SUPPLIES TO MATCH EXISTING.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2026

September 25, 2026

Plumbing Cover Sheet - General Notes, Schedules & Legend

P0.0

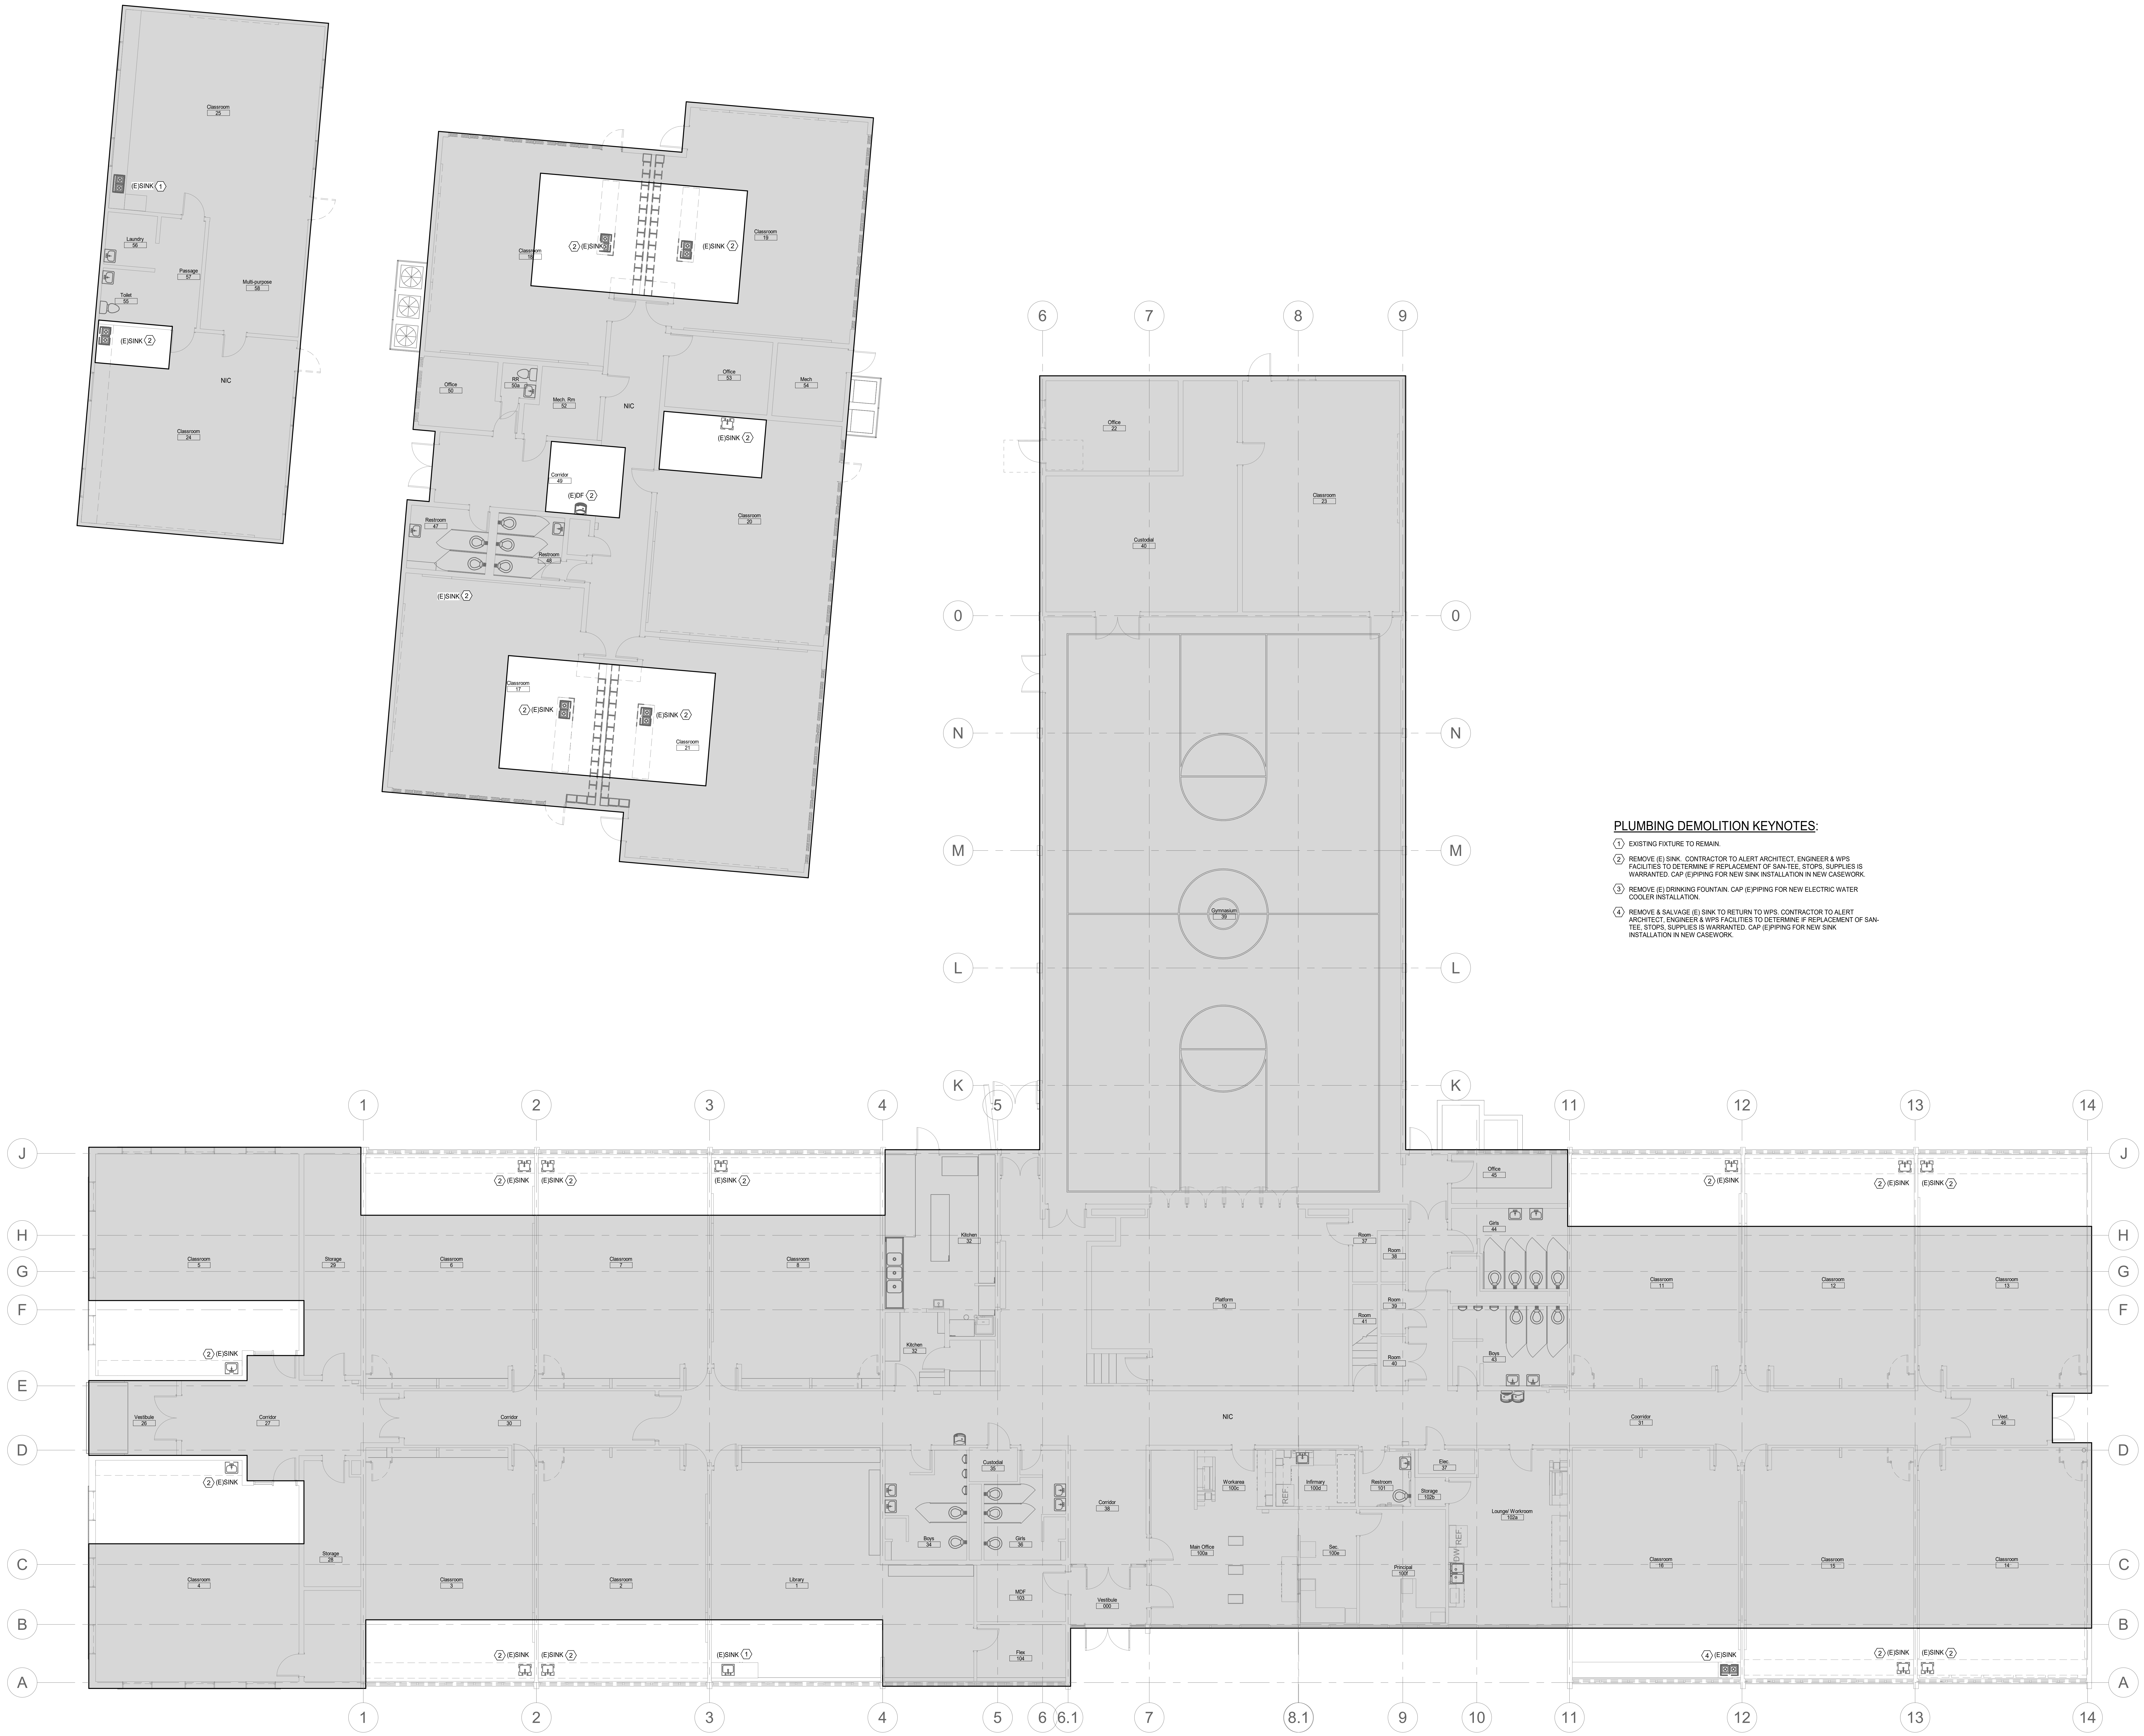
Classroom 25
(E)SINK ①
Laundry 56
Passage 57
Multi-purpose 58
Toilet 55
(E)SINK ②
NIC
Classroom 24
Classroom 18
Classroom 19
Office 50
Mech. Rm
Office 53
Mech 54
Corridor 49
(E)DF ②
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
Office 22
Custodial 40
Classroom 23
Gymnasium 39
Kitchen 32
Platform 10
Girls 44
Boys 43
Office 45
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Corridor 31
Vest. 46
Custodial 35
Boys 34
Girls 36
Corridor 38
Workarea 100c
Infirmary 100d
Restroom 101
Storage 102b
Lounge/Workroom 102a
Main Office 100a
Sec. 100e
Principal 100f
MDF 103
Vestibule 000
Flex 104
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Classroom 16
Classroom 15
Classroom 14
REF
DW
(E)SINK ④
A
B
C
D
E
F
G
H
J
K
L
M
N
0
1
2
3
4
5
6
6.1
7
8
8.1
9
10
11
12
13
14

First Floor - Demolition Plumbing Plan

SCALE: 1/8" = 1'-0"

PLUMBING DEMOLITION KEYNOTES:

1. EXISTING FIXTURE TO REMAIN.
2. REMOVE (E) SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEE, STOPS, SUPPLIES IS WARRANTED. CAP (E)PIPING FOR NEW SINK INSTALLATION IN NEW CASEWORK.
3. REMOVE (E) DRINKING FOUNTAIN. CAP (E)PIPING FOR NEW ELECTRIC WATER COOLER INSTALLATION.
4. REMOVE & SALVAGE (E) SINK TO RETURN TO WPS. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEE, STOPS, SUPPLIES IS WARRANTED. CAP (E)PIPING FOR NEW SINK INSTALLATION IN NEW CASEWORK.

Autodesk Docs://WPS 2026 Bond Projects - Fairview Renovations/25094 Fairview 2026 Bond PRojects-PLBG-R26.rvt
9/24/2026 4:04:58 PM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2026

September 25, 2026

First Floor - Demolition
Plumbing Plan

PD1.0

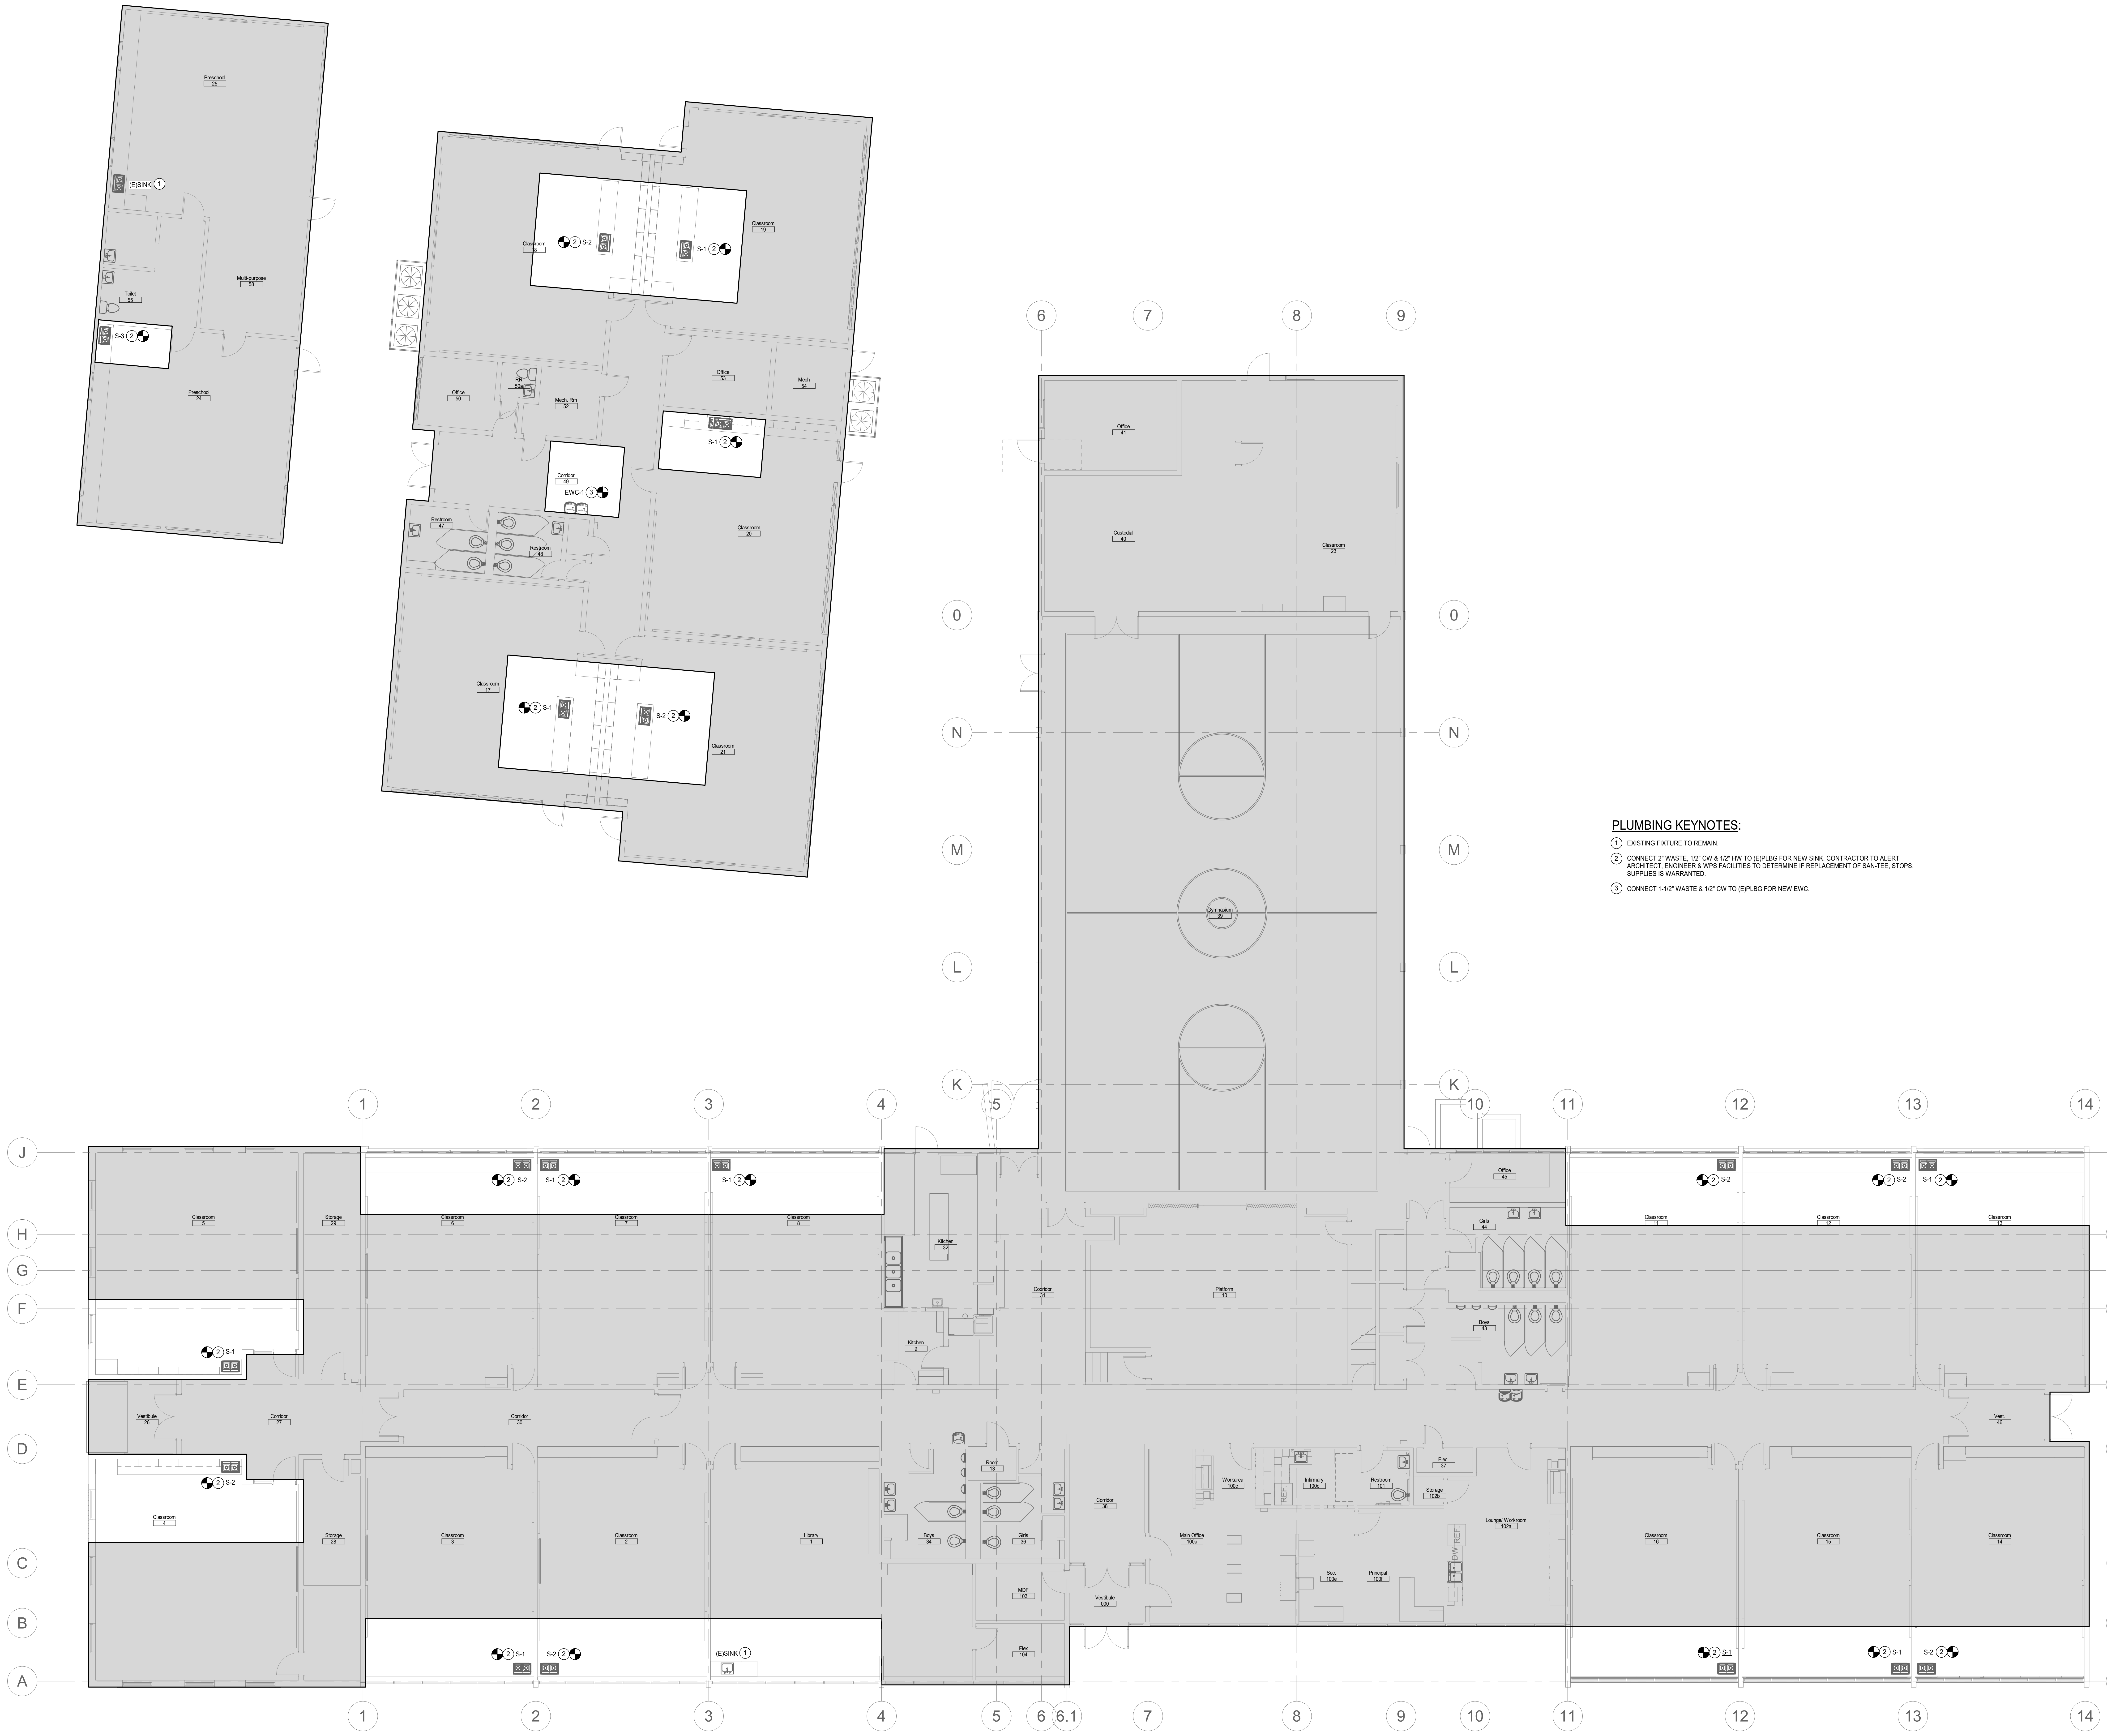
Preschool 25
(E)SINK 1
Toilet 55
Multi-purpose 58
S-3 2
Preschool 24
Classroom 18
S-2 2
S-1 2
Classroom 19
Office 50
Mech. Rm 52
Office 53
Mech 54
Corridor 49
EWC-1 3
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
Office 41
Custodial 40
Classroom 23
Gymnasium 39
Platform 10
Corridor 31
Kitchen 32
Kitchen 9
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Vestibule 26
Corridor 27
Corridor 30
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Boys 34
Girls 36
Room 13
MDF 103
Flex 104
Corridor 38
Vestibule 100
Main Office 100a
Workarea 100c
Infirmary 100d
Restroom 101
Sec. 100e
Principal 102
Elec. 37
Storage 102b
Lounge/ Workroom 102a
Office 45
Girls 44
Boys 43
Classroom 11
Classroom 12
Classroom 13
Vest. 46
Classroom 16
Classroom 15
Classroom 14
REF
DW
1 2 3 4 5 6 6.1 7 8 9 10 11 12 13 14
A B C D E F G H J K L M N 0

PLUMBING KEYNOTES:

① EXISTING FIXTURE TO REMAIN.

② CONNECT 2" WASTE, 1/2" CW & 1/2" HW TO (E)PLBG FOR NEW SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEE, STOPS, SUPPLIES IS WARRANTED.

③ CONNECT 1-1/2" WASTE & 1/2" CW TO (E)PLBG FOR NEW EWC.

First Floor - Plumbing Plan

SCALE: 1/8" = 1'-0"

Autodesk Docs://WPS 2026 Bond Projects - Fairview Renovations/25094 Fairview 2026 Bond PRojects-PLBG-R26.rvt
9/24/2026 4:05:02 PM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514

Westminster Public Schools

2026 Bond Projects
Fairview PK-8 Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.:2026

September 25, 2026

First Floor - Plumbing Plan

P1.0

POWER LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
⏀	SINGLE RECEPTACLE	├─PM─┤	PLUG MOLD (MULTI-OUTLET ASSEMBLY)
⏀	DUPLEX RECEPTACLE	├─WM─┤	WIREMOLD (SURFACE RACEWAY)
⏀	DOUBLE DUPLEX RECEPTACLE	────	CONDUIT CONCEALED
⏀	DUPLEX RECEPTACLE, HALF SWITCHED	─ ─ ─	CONDUIT EXPOSED
⏀ CLG	DUPLEX RECEPTACLE, CEILING MOUNTED	- - - - - -	CONDUIT, UNDERGROUND OR CONCEALED IN FLOOR AS ALLOWED PER SPECIFICATIONS
⊡	DUPLEX RECEPTACLE, FLOOR MOUNTED	─●	CONDUIT TURNING DOWN
⊞	DOUBLE DUPLEX RECEPTACLE, FLOOR MOUNTED	─○	CONDUIT TURNING UP
▼	SPECIAL RECEPTACLE	─]	CONDUIT CAPPED
▣	SPECIAL RECEPTACLE, FLOOR MOUNTED	─►►► A-1,3,5	BRANCH CIRCUIT HOME RUN, NUMBER OF ARROWS INDICATES NUMBER OF CIRCUITS, SUBSCRIPTS INDICATE PANEL & CIRCUITS
Ⓙ	JUNCTION BOX, WALL OR CEILING MOUNTED	┬┬	GROUND BAR
J	JUNCTION BOX, FLOOR MOUNTED	▨	MAIN SWITCHBOARD/DISTRIBUTION CENTER
Ⓜ	MOTOR	T	TRANSFORMER
☐	DISCONNECT SWITCH (NON-FUSED)	CT	CURRENT TRANSFORMER
☒	DISCONNECT SWITCH (FUSED)	Ⓣ	THERMOSTAT
~	VARIABLE SPEED DRIVE WITH DISCONNECT	GANN	GENERATOR ANNUNCIATOR PANEL
M	UTILITY METER	⏀ A-1	SHADING INDICATES EMERGENCY SYSTEM TEXT INDICATES PANEL AND CIRCUIT DESIGNATION
◢	ELECTRICAL PANELBOARD, CONTROL PANEL, OR OTHER CABINET AS NOTED		

ONE-LINE DIAGRAM LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
─/─	DISCONNECT SWITCH	A	PANELBOARD "A"
▭/─	DISCONNECT SWITCH, FUSED	PM	EM=ENERGY METER, PM=POWER METER, CM=CIRCUIT MONITOR
─⌒─	CIRCUIT BREAKER	─VS─	VOLTMETER TEST SWITCH
─▭─	FUSE	─AS─	AMMETER TEST SWITCH
⏚	GROUND	Ⓥ	VOLTMETER
T ##	STEP DOWN TRANSFORMER, ## INDICATES KVA	Ⓐ	AMMETER
TK ##	K-RATED STEP DOWN TRANSFORMER ## INDICATES KVA, # INDICATES K RATING	XXX	SEE FEEDER/MEC/TRANSFORMER SCHEDULES FOR FEEDER SIZE
⌒⌒	CURRENT TRANSFORMER	Ⓖ	ENGINE GENERATOR
⊰⊱	POTENTIAL TRANSFORMER	─┤├─	CONTACTOR/RELAY/CAPACITOR (AS NOTED)
OR	SERVICE ENTRANCE TRANSFORMER	/	TRANSFER SWITCH - ATS=AUTOMATIC, MTS=MANUAL
Ⓜ	METER	GFI	GROUND FAULT INTERRUPTER
⌐ ‐ ¬	EQUIPMENT ENCLOSURE	SPD	SURGE PROTECTIVE DEVICE
◁≡	SERVICE WEATHERHEAD	ST	SHUNT TRIP
─×─ ISCA	SHORT CIRCUIT CURRENT AVAILABLE	»	TERMINATIONS LB=LOAD BREAK, NLB=NO LOAD BREAK
◇K a	KIRK KEY INTERLOCK, SUBSCRIPT INDICATES INTERLOCKED GROUP	─« »─	DRAW-OUT DEVICE
◇E a	ELECTRICAL INTERLOCK, SUBSCRIPT INDICATES INTERLOCKED GROUP	─»─	PLUG-IN DEVICE
◇M	MECHANICAL INTERLOCK	EO	ELECTRICALLY OPERATED

TECHNOLOGY LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	
▭	WALL FIELD	
┬┬	TELECOM GROUND BAR	
⊠⊠⊠	WIRE BASKET TRAY	
‖‖‖	CABLE TRAY	
─J─J─J─	J-HOOK PATHWAY	
▶ #	FLOOR SPACE BOX DATA OUTLET(# = QTY OF CABLES)	
▶ #	POKE-THRU (# = QTY OF CABLES)	
▶ # XXX ZZ	DATA OUTLET (# = QTY OF CABLES; XXX = SEE BELOW ZZ = ELEVATION)	
	AV = AUDIO VISUAL	POS = POINT OF SALE
	BAS = BUILDING AUTOMATION SYSTEM	PRT = PRINTER
	CLK = CLOCK	RAD = RADIOLOGY NETWORK
	CP = CONTROL PANEL	RED = RED PHONE
	D = MEDICAL/SUPPLY DISPENSER	SCH = SCHEDULER
	DIS = DISPLAY	SEC = SECURITY
	DS = DIGITAL SIGNAGE	SR = SURFACE RUNWAY
	EEG = EEG NETWORK	T = TRANSLATION PHONE
	EP = EMERGENCY PHONE	TC = TIME CLOCK
	F = FACP	W = WALL PHONE
	INT = INTERCOM	WP = WEATHER PROOF
	MM = MULLION MOUNT	
	MFP = MULTI-FUNCTIONAL PRINTER	

SYMBOL	DESCRIPTION	
▶ # XXX	CEILING MOUNTED OUTLET (# = QTY OF CABLES; XXX= SEE BELOW)	
	AV = AUDIO VISUAL	SEC = SECURITY
	WAP=WIRELESS ACCESS POINT	PRJ = PROJECTOR
■ T XXX	DATA POWER POLE (XXX = SEE BELOW)	
	SEC = SECURITY	SR = SURFACE RACEWAY
├▷ ZZ	TELEVISION COAXIAL CABLE (ZZ = ELEVATION)	
⊕	CEILING MOUNTED TELEVISION COAXIAL OUTLET	
J	FLOOR JBOX	
Ⓙ XXX	POKE THRU; (XXX = SEE BELOW)	
	FF = FURNITURE FEED	AV = AUDIO VISUAL
─Ⓙ XXX ZZ	WALL MOUNTED JBOX (XXX = SEE BELOW; ZZ = ELEVATION)	
	FF = FURNITURE FEED	AV = AUDIO VISUAL
Ⓙ XXX	CEILING MOUNTED JBOX (XXX = SEE BELOW)	
	AV = AUDIO VISUAL	
PB YY	PULLBOX (YY = SIZE)	
─Ⓒ XXX	CLOCK OUTLET (XXX = SEE BELOW)	
	DS = DOUBLE SIDED	DIGITAL (PROVIDE 1 CAT 6 CONNECTION)
	A = ANALOG	
ⒸⓈ XXX	COMBINATION CLOCK/SPEAKER OUTLET (XXX = SEE BELOW)	
	A = ANALOG	D = DIGITAL
Ⓒ	CEILING MOUNTED CLOCK	
DAS	DISTRIBUTED ANTENNA SYSTEM	
WAP	WIRELESS ACCESS POINT ENCLOSURE	
☰	EQUIPMENT RACK	
▫	WIRE MANAGER	
▭	CABINET	
- -	HAND HOLE	

REFERENCE SYMBOLS LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
X	KEY NOTE REFERENCE	1	KITCHEN/OWNER/MEDICAL EQUIPMENT REFERENCE
LPA-#	TYPICAL CIRCUIT NUMBER	E	EXISTING TO REMAIN
TG#	TYPICAL LUMINAIRE TYPE	R	EXISTING TO BE REMOVED
X/X	TYPICAL ROOM REFERENCE (TOP = RM #, BOTTOM = FLR)	RL	EXISTING TO BE RELOCATED
UH	MECHANICAL EQUIPMENT REFERENCE	ER	EXISTING TO REMAIN - REPLACE DEVICE
LC1	LIGHTING CONTROL / EQUIPMENT REFERENCE	RR	EXISTING TO BE REMOVED AND REPLACED

ABBREVIATIONS LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
A	AMPERES	MCP	MOTOR CIRCUIT PROTECTOR
AC	ABOVE COUNTER, MOUNT HORIZONTALLY TO CENTERLINE OF DEVICE, +6" ABOVE COUNTER OR BACK SPLASH	MEC	SEE MECHANICAL EQUIPMENT SCHEDULE
AFF	ABOVE FINISHED FLOOR	MIN	MINIMUM
AFG	ABOVE FINISHED GRADE	MLO	MAIN LUGS ONLY
ANN	ANNUNCIATOR	MTS	MANUAL TRANSFER SWITCH
ARF	ABOVE RAISED FLOOR	NC	NORMALLY CLOSED
ASSD	AIR SAMPLING SMOKE DETECTION	NIC	NOT IN CONTRACT
ATS	AUTOMATIC TRANSFER SWITCH	NL	NIGHT LIGHT
BFG	BELOW FINISHED GRADE	NO	NORMALLY OPEN
C	CONDUIT	NTS	NOT TO SCALE
CATV	CABLE TELEVISION	OC	ON CENTER
CB	CIRCUIT BREAKER	OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
CCTV	CLOSED CIRCUIT TELEVISION	OFOI	OWNER FURNISHED, OWNER INSTALLED
(E)	EXISTING	OSWF	ON SITE WORK FORCE
EM	EMERGENCY	PB	PULL BOX
EMDC	EMERGENCY MAIN DISTRIBUTION CENTER	SB	STAND-BY
EP	EXPLOSION PROOF	SDC	SUB-DISTRIBUTION CENTER
EPO	EMERGENCY POWER OFF	TP	TAMPER PROOF
EVO	EMERGENCY VENTILATION ON/OFF	TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSER
EWC	ELECTRIC WATER COOLER	TYP	TYPICAL
FA	FIRE ALARM	UF	UNDER FLOOR
G	GROUND	UG	UNDER GROUND
GCP	GENERATOR CONTROL PANEL	UON	UNLESS OTHERWISE NOTED
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	UPS	UNINTERRUPTIBLE POWER SUPPLY
HOA	HAND OFF AUTOMATIC	V	VOLTS
IG	ISOLATED GROUND	VFD	VARIABLE FREQUENCY DRIVE
MAX	MAXIMUM	W/	WITH
MCB	MAIN CIRCUIT BREAKER	W/O	WITHOUT
MCC	MOTOR CONTROL CENTER	WP	WEATHER PROOF
MDC	MAIN DISTRIBUTION CENTER	XFMR	TRANSFORMER

AUDIO VISUAL LEGEND
(Not all symbols listed below are used on these drawings)

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
Ⓢ ##	CEILING MOUNTED SPEAKER (## = TYPE #)	Ⓙ XXX	FLOOR POKE THRU (XXX = SEE BELOW)
─Ⓢ	WALL MOUNTED SPEAKER		CTRL = CONTROL UNIT I/O = INPUT/OUTPUT PLATE
DIS (XX) "	DISPLAY (XX = SIZE OF SCREEN " = ELEVATION)	SSS	SOUND SHOWER SPEAKER
SCH "	SCHEDULER ; (" = ELEVATION)	PS ZZ	PARTITION SENSOR (ZZ = ELEVATION)
CTRL "	CONTROL UNIT ; (" = ELEVATION)	├▷ ZZ	TELEVISION COAXIAL CABLE (ZZ = ELEVATION)
I/O "	INPUT/OUTPUT PLATE ; (" = ELEVATION)	⊕	CEILING MOUNTED TELEVISION COAXIAL OUTLET
M "	MICROPHONE OUTLET ; (" = ELEVATION)	VC	VOLUME CONTROL
▭	PROJECTOR	HDMI	HIGH DEFINITION MULTIMEDIA INTERFACE
		Ⓜ ##	CEILING MOUNTED MICROPHONE (## = TYPE #)

POWER PLAN NOTES:

1. MAKE ALL FINAL ELECTRICAL CONNECTIONS TO EQUIPMENT REQUIRING ELECTRICAL CONNECTION. THIS SHALL INCLUDE BUT NOT BE LIMITED TO ALL MECHANICAL AND OTHER EQUIPMENT INCLUDED IN THIS PROJECT.
2. COORDINATE AND VERIFY EXACT MOUNTING LOCATIONS OF WALL AND FLOOR DEVICES WITH ARCHITECTURAL ELEVATIONS, AND ANY FURNITURE OR SPECIALTY EQUIPMENT SUPPLIER DRAWINGS PRIOR TO ROUGH-IN.
3. PROVIDE A DEDICATED NEUTRAL CONDUCTOR FOR EACH 120V CIRCUIT.
4. CIRCUITS MAY BE COMBINED INTO HOMERUNS OF UP TO SIX (6) CURRENT CARRYING CONDUCTORS, INCLUDING NEUTRALS, UNLESS OTHERWISE INDICATED. WHERE CIRCUITS ARE COMBINED WITHIN A SINGLE CONDUIT, PROVIDE STRIPING FOR FULL LENGTH OF NEUTRAL CONDUCTOR INSULATION TO MATCH THE COLOR CODE OF THE ASSOCIATED PHASE CONDUCTOR. SEE SPECIFICATION FOR COLOR CODES.
5. RECEPTACLES INDICATED TO BE MOUNTED ABOVE COUNTER ARE TO BE MOUNTED HORIZONTALLY 6" ABOVE COUNTER UNLESS OTHERWISE NOTED.

ONE-LINE DIAGRAM NOTES:

1. PANELBOARDS INDICATED ON ONE LINE DIAGRAMS DO NOT SHOW ALL BRANCH CIRCUITS. REFER TO PANELBOARD SCHEDULE(S).
2. EXISTING ONE-LINE DIAGRAM TAKEN FROM OWNER FURNISHED DRAWINGS. EXISTING INFORMATION SHOWN OTHER THAN LOCATIONS IMPACTED BY NEW WORK HAS NOT BEEN VERIFIED.

TECHNOLOGY PLAN NOTES:

1. PROVIDE J-HOOK TYPE CABLE SUPPORTS EVERY 4'-0" TO 5'-0" IN OPEN OR ACCESSIBLE CEILING SPACE AS REQUIRED TO SUPPORT CABLES IN ROUTE TO CABLE TRAY OR CONDUIT PATHWAY TO TELECOMMUNICATIONS ROOM. ROUTE CABLE SUPPORTS SUCH THAT CABLE VISIBILITY WILL BE MINIMIZED IN ANY OPEN CEILING AREAS.

ROUGH-IN AND PATHWAY NOTES:

1. PROVIDE 4-11/16" x 4-11/16” x 2-7/8” OUTLET BOX AND SINGLE GANG MUD RING FOR ALL TELE/DATA OUTLETS. ROUTE 1" CONDUIT FROM EACH OUTLET TO ABOVE ACCESSIBLE CEILING UNLESS OTHERWISE NOTED. PROVIDE INSULATED THROAT CONNECTOR ON CONDUIT END. KEEP ALL EXPOSED CONDUITS TIGHT TO STRUCTURE.
2. PROVIDE 4-11/16" x 4-11/16” x 2-7/8” OUTLET BOX AND TWO-GANG MUD RING FOR ALL AV DEVICE AND DISPLAY BACKBOX LOCATIONS UNLESS OTHERWISE NOTED. ROUTE 1-1/4” CONDUIT TO ABOVE ACCESSIBLE CEILING UNLESS OTHERWISE NOTED. PROVIDE INSULATED THROAT CONNECTOR ON CONDUIT END. KEEP ALL EXPOSED CONDUITS TIGHT TO STRUCTURE.
3. COORDINATE AND VERIFY EXACT MOUNTING LOCATIONS OF WALL, CEILING, AND FLOOR DEVICES WITH ARCHITECTURAL ELEVATIONS AND ANY FURNITURE OR SPECIALTY EQUIPMENT SUPPLIER DRAWINGS PRIOR TO ROUGH-IN.
4. CONDUIT DEDICATED FOR TECHNOLOGY SYSTEMS SHALL BE INSTALLED IN EMT UNLESS OTHERWISE NOTED. FLEX CONDUIT SHALL NOT BE USED WITHOUT PRIOR APPROVAL FROM THE ENGINEER OR OWNER.
5. CONDUIT DEDICATED FOR TECHNOLOGY SYSTEMS SHALL NOT EXCEED 100' OR CONTAIN MORE THAN 180 DEGREES OF TOTAL BENDS WITHOUT UTILIZING APPROPRIATELY SIZED PULL BOXES.
6. MINIMUM BEND RADII FOR 2" CONDUIT OR SMALLER SHALL BE 6 TIMES THE OUTSIDE DIAMETER OF THE CONDUIT. BEND RADII FOR CONDUIT LARGER THAN 2" SHALL BE 10 TIMES THE OUTSIDE DIAMETER OF THE CONDUIT. L-BENDS SHALL NOT BE USED.
7. ALL BACKBONE PATHWAYS SHALL BE EQUIPPED WITH A PULL CORD THAT HAS A MINIMUM TEST RATING OF 200lbs.
8. ALLOW FOR A MINIMUM OF 3” VERTICAL CLEAR SPACE ABOVE CONDUITS AND 12”VERTICAL CLEAR SPACE ABOVE CABLE TRAY.

GENERAL NOTES:

1. FOR REMODELING, WORK INCLUDED IS DENOTED IN BOLD. EXISTING CONDITIONS TO REMAIN ARE DENOTED LIGHTLY.
2. PROTECT STRUCTURE AND OWNER EQUIPMENT FROM DAMAGE. IMMEDIATELY REPLACE OR REPAIR, TO ORIGINAL CONDITION, DAMAGE CAUSED BY THE CONTRACTOR WHETHER EQUIPMENT APPEARS TO BE CURRENTLY IN USE OR NOT, UNLESS WRITTEN AUTHORIZATION FROM THE OWNER INDICATED OTHERWISE. PREPARE LISTING OF ALL EXISTING DAMAGED ITEMS AND SUBMIT TO OWNER PRIOR TO BEGINNING WORK.
3. INSTALL CONDUIT CONCEALED IN FINISHED AREAS UNLESS OTHERWISE NOTED. PAINT EXPOSED CONDUIT TO MATCH EXISTING FINISHES WITHIN THE SURROUNDING AREA.
4. DO NOT ROUTE CONDUIT WITHIN STRUCTURAL OR TOPPING SLABS OF FLOORS UNLESS SPECIFICALLY NOTED OTHERWISE AND WRITTEN APPROVAL IS OBTAINED FROM THE STRUCTURAL ENGINEER.
5. FIRE SEAL ALL FIRE RATED WALL AND FLOOR PENETRATIONS. REFER TO ARCHITECTURAL DRAWINGS FOR FIRE RATED WALLS.
6. EXISTING INFORMATION SHOWN ON THE DRAWINGS HAS BEEN TAKEN FROM OWNER FURNISHED DRAWINGS AND/OR LIMITED FIELD OBSERVATIONS. CATOR, RUMA & ASSOCIATES IS NOT RESPONSIBLE FOR THE ACCURACY OF ANY INFORMATION OR THE ADEQUACY, SAFETY AND CONFORMANCE TO CURRENT PREVAILING CODES OF ANY WORK SHOWN AS EXISTING ON THESE DRAWINGS.
7. PROVIDE SEPARATE INSULATED GROUNDING CONDUCTOR IN ALL FEEDER, HOMERUN AND BRANCH CIRCUITS.

DEMOLITION NOTES:

1. UNLESS NOTED OTHERWISE, BOLD ITEMS INDICATE EQUIPMENT, DEVICES, ETC. TO BE REMOVED. SEE SPECIFICATION SECTION 260500 FOR REMODEL/DEMOLITION DETAILED REQUIREMENTS.
2. DEMOLITION DRAWINGS MAY NOT SHOW EVERY ITEM TO BE DEMOLISHED. CONTRACTOR SHALL VISIT SITE TO DETERMINE AND COORDINATE THE EXACT EXTENT OF DEMOLITION TO FACILITATE ALL WORK INDICATED BY THE CONTRACT DOCUMENTS PRIOR TO QUOTATION. NO EXTRAS WILL BE ALLOWED FOR WORK REQUIRED TO ACHIEVE THE END RESULT AS INDICATED BY THE CONTRACT DOCUMENTS. REWORK EXISTING TERMINATIONS, CONNECTIONS, CONDUIT, WIRING, ETC. TO ACCEPT NEW WORK. MAINTAIN CIRCUIT CONTINUITY TO EXISTING CIRCUITS AND DEVICES TO REMAIN OR REMODEL/DEMOLITION DETAILED REQUIREMENTS TO BE RELOCATED. PRIOR TO COMMENCEMENT OF ANY DEMO WORK, CONFIRM EXISTING CONDITIONS AND NOTIFY ENGINEER OF ANY DISCREPANCIES FOR RESOLUTION.
3. ALL ITEMS IDENTIFIED TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY INCLUDING ALL WIRING AND EXPOSED CONDUIT AND CONDUIT SUPPORTS BACK TO POINT OF ORIGIN OR NEXT DEVICE TO REMAIN. REMOVED ITEMS SHALL BE TURNED OVER TO THE OWNER, UNLESS NOTED OTHERWISE, AND STORED IN THE AREA DESIGNATED BY THE OWNER. REMOVE FROM SITE AND LEGALLY DISPOSE OF ALL ITEMS THE OWNER CHOOSES NOT TO ACCEPT.
4. WHERE EXISTING CONDUITS ARE SHOWN TO BE REMOVED AND HAVE BEEN ROUTED IN CONCRETE FLOOR SLABS, CONCRETE WALLS OR CONCRETE CEILINGS, THEY SHALL BE CUT BACK FLUSH WITH CONCRETE. FILL WITH GROUT TO ACHIEVE A SMOOTH AND EVEN FINISH FLUSH WITH CONCRETE SURFACE AFTER CONDUCTORS HAVE BEEN REMOVED.
5. REUSE EXISTING CONDUIT WHERE CURRENT NEC AND LOCAL CODE REQUIREMENTS ARE MAINTAINED. PROVIDE NEW CONDUIT AND WIRE FOR NEW INSTALLATIONS AND EXTENSION OF EXISTING INSTALLATIONS. REUSE EXISTING CONDUIT IN PLACE, DO NOT REINSTALL EXISTING CONDUIT. PROVIDE LABELING PER SPECIFICATIONS FOR REUSED CONDUIT.
6. RELOCATED EQUIPMENT AND DEVICES ARE TO BE CLEANED OF ALL FOREIGN MATERIAL. REPLACE EQUIPMENT OR DEVICES WHICH ARE DEFECTIVE OR DAMAGED DURING RELOCATION.
7. WHERE EXISTING DEVICES, SWITCHES, MOTOR CONNECTIONS, ETC. ARE TO BE REMOVED FROM WALLS WHICH ARE REMAINING, WALLS SHALL BE PATCHED TO MATCH ORIGINAL FINISH. BLANK COVERPLATES OVER EXISTING BOXES ARE NOT ACCEPTABLE, UNLESS NOTED OTHERWISE.

GENERAL EQUIPMENT SCHEDULE

COMMON NOTES:

A. PRIOR TO WORK, VERIFY ELECTRICAL REQUIREMENTS (VOLTAGE, AMPERAGE, RECOMMENDED OCPD, CONDUCTORS, AND DISCONNECT) FOR EACH PIECE OF EQUIPMENT.
B. PRIOR TO WORK, VERIFY EXACT LOCATION FOR EACH PIECE OF EQUIPMENT WITH ARCHITECT AND/OR OWNER.

SPECIFIC REMARKS:

							FEEDERS			PROTECTION			
KEY	ITEM	HP	FLA	LOAD	EQ LOAD (VA)	VOLTAGE	WIRE	GROUND	CONDUIT	BREAKER	DISCONNECT	FUSE	REMARKS
EWC	ELECTRIC WATER COOLER/BOTTLE FILLER	0	0 A	240 VA	240 VA	120 V/ 1ph	2#12	#12G	3/4”	20 A			

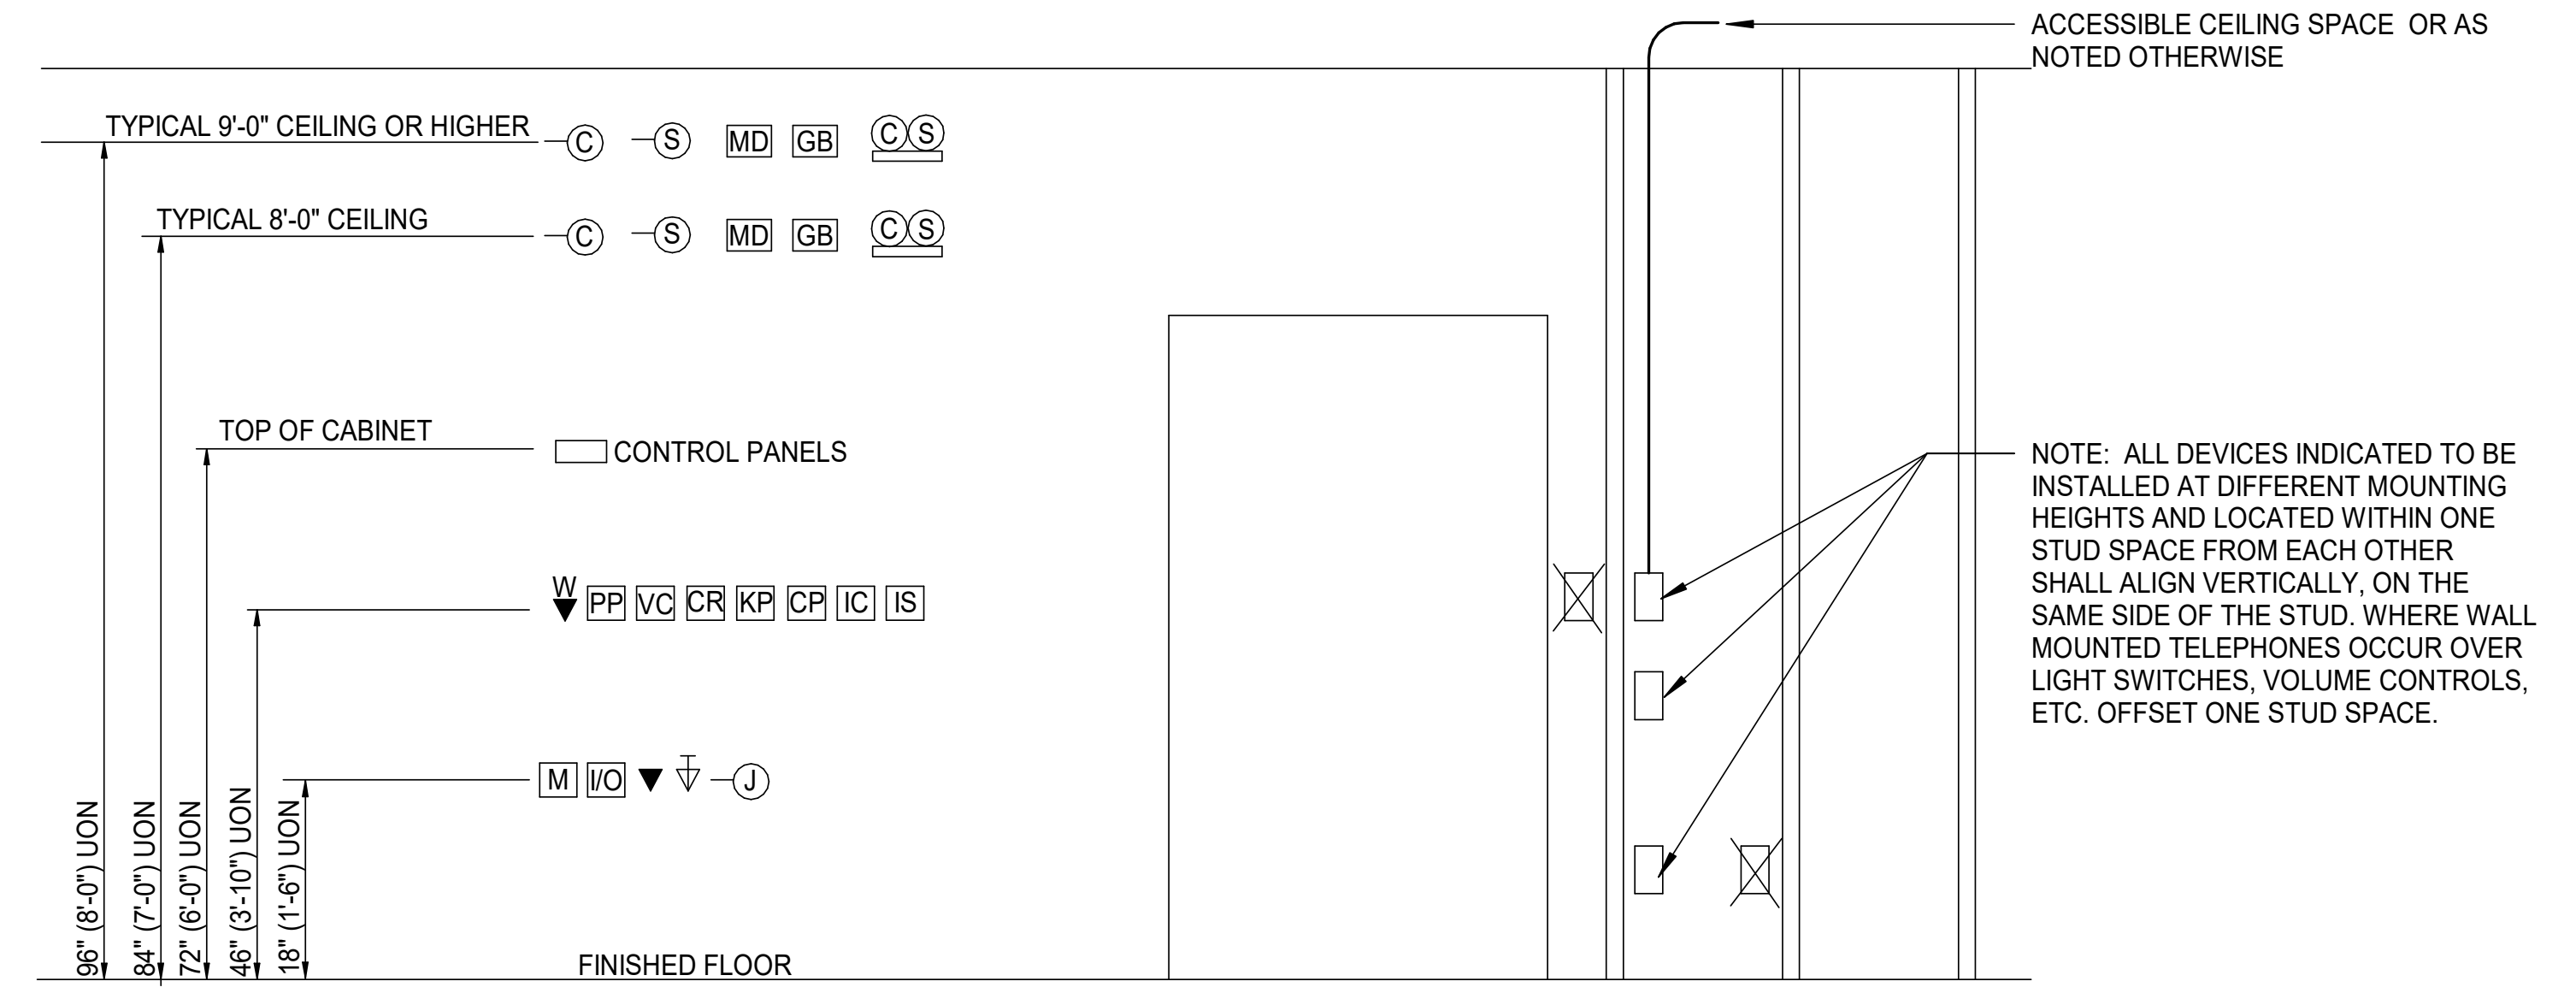

NOTE: ALL DEVICES INDICATED TO BE INSTALLED AT DIFFERENT MOUNTING HEIGHTS AND LOCATED WITHIN ONE STUD SPACE FROM EACH OTHER SHALL ALIGN VERTICALLY, ON THE SAME SIDE OF THE STUD. WHERE WALL MOUNTED TELEPHONES OCCUR OVER LIGHT SWITCHES, VOLUME CONTROLS, ETC. OFFSET ONE STUD SPACE.

TYPICAL LOW VOLTAGE DEVICE MOUNTING HEIGHTS

NO SCALE

NOTES:
1. HEIGHTS SHOWN ARE TYPICAL TO CENTERLINE OF BOX UNLESS OTHERWISE NOTED.
2. WHERE EVER DEVICES ARE INDICATED TO BE ABOVE DOORS, DEVICE SHALL BE CENTERED BETWEEN TOP OF DOOR TRIM AND CEILING LINE.
3. MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS SHALL GOVERN OVER THOSE SHOWN ABOVE. VERIFY MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS. DEVICES AND COVER PLATES SHALL NOT COVER/OVERLAP EDGES OF WAINSCOTING, TILE OR OTHER SPECIALTY WALL FINISHES.

NOTES:
4. DEVICE MOUNTING HEIGHTS SHALL BE PER MOST CURRENT VERSION OF GOVERNING CODE AND STANDARDS NEC, IBC, NFPA, ADA, ETC. WHERE DISCREPANCIES BECOME EVIDENT, CONSULT THE ARCHITECT AND ENGINEER OF RECORD.
5. WHERE DEVICES ARE INSTALLED ABOVE COUNTER, THE DEVICES SHALL BE INSTALLED AT 46" MAXIMUM (COUNTERS/SHELVES 0-20 INCHES WIDE) AND 44" MAXIMUM (COUNTER/SHELVES 20-25 INCHES WIDE) ABOVE FINISHED FLOOR TO DEVICE CENTER.
6. LOW VOLTAGE DEVICES SHALL NOT BE INSTALLED BELOW 15" AFF PER ADA STANDARDS.

TTM-003

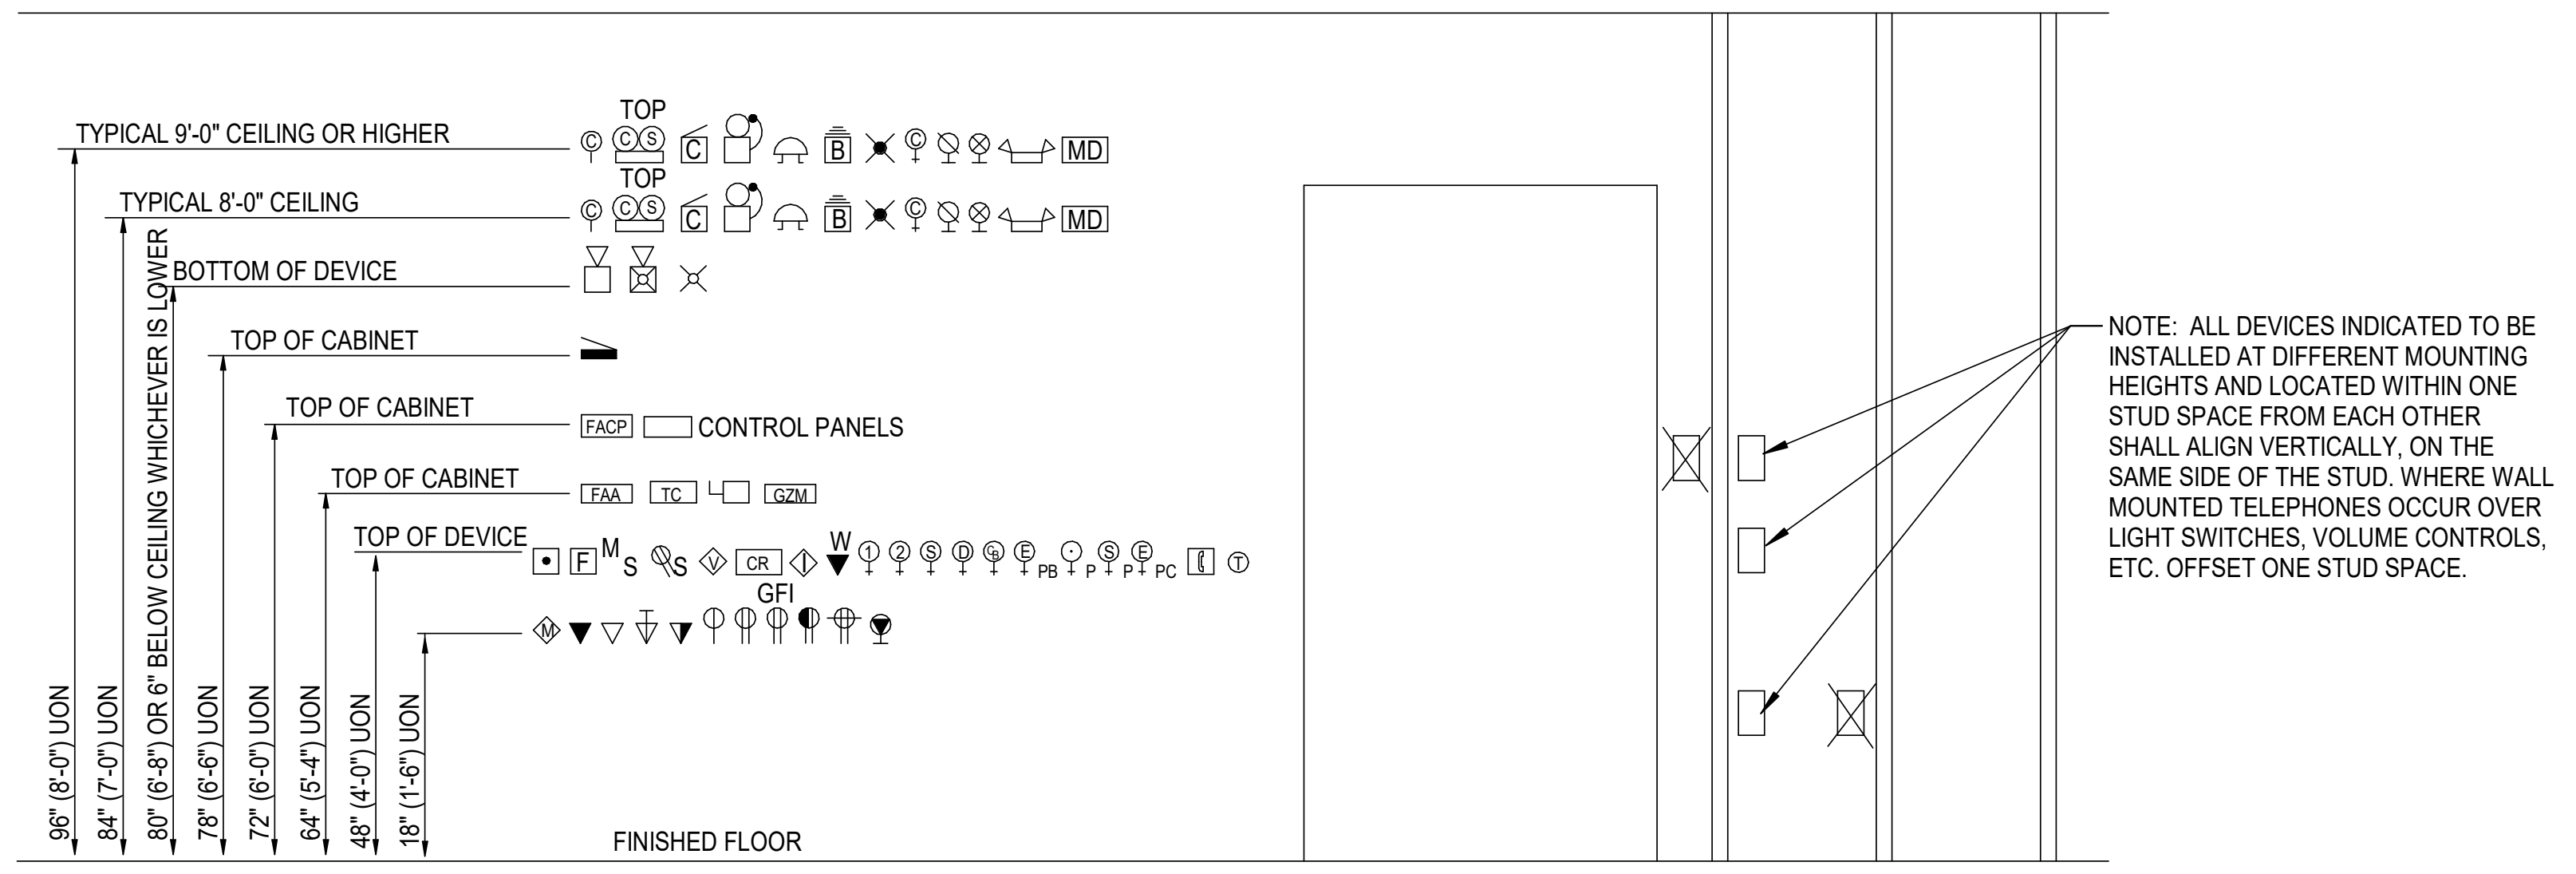

NOTE: ALL DEVICES INDICATED TO BE INSTALLED AT DIFFERENT MOUNTING HEIGHTS AND LOCATED WITHIN ONE STUD SPACE FROM EACH OTHER SHALL ALIGN VERTICALLY, ON THE SAME SIDE OF THE STUD. WHERE WALL MOUNTED TELEPHONES OCCUR OVER LIGHT SWITCHES, VOLUME CONTROLS, ETC. OFFSET ONE STUD SPACE.

TYPICAL DEVICE MOUNTING HEIGHTS

NO SCALE

NOTES:
1. HEIGHTS SHOWN ARE TYPICAL TO CENTERLINE OF BOX UNLESS NOTED OTHERWISE.
2. WHERE EVER DEVICES ARE INDICATED TO BE ABOVE DOORS, DEVICE SHALL BE CENTERED BETWEEN TOP OF DOOR TRIM AND CEILING LINE.
3. MOUNTING HEIGHTS SHOWN ON ARCHITECTURAL ELEVATIONS SHALL GOVERN OVER THOSE SHOWN ABOVE.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA
& ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

ELECTRICAL LEGENDS, NOTES & DETAILS

E0.01

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:38 AM

FAULT CURRENT CALCULATIONS *(UTILIZES THE BUSSMAN CALCULATION METHOD AND TABLES)*

CONTRACTOR IS RESPONSIBLE FOR ACTUAL FEEDER DISTANCES AND FIELD CONDITIONS IN PROJECT BID AND SCOPE.

Description	Voltage	Ph	Length (FT)	# of Run(s)	Conductor "C" value	Available Fault Current (ISC)
At Utility Co						26,000
MDC-1	208	3	15	4	22736	25,105
M1	208	3	145	1	19703	9,897
M2	208	3	49	1	16483	15,490
M3	208	3	88	1	19703	12,990
B	208	3	135	1	7293	5,160
C	208	3	90	1	7293	4,910
SDP	208	3	90	1	15082	11,177
EM	208	3	55	1	1557	2,609
MPP	208	3	53	1	1557	1,501
MLP	208	3	82	1	22185	14,169
PA	208	3	175	1	5906	3,154
A	208	3	70	1	5906	5,912
STAGE	208	3	50	1	5906	7,093
AA-N1	208	3	115	1	2425	1,868

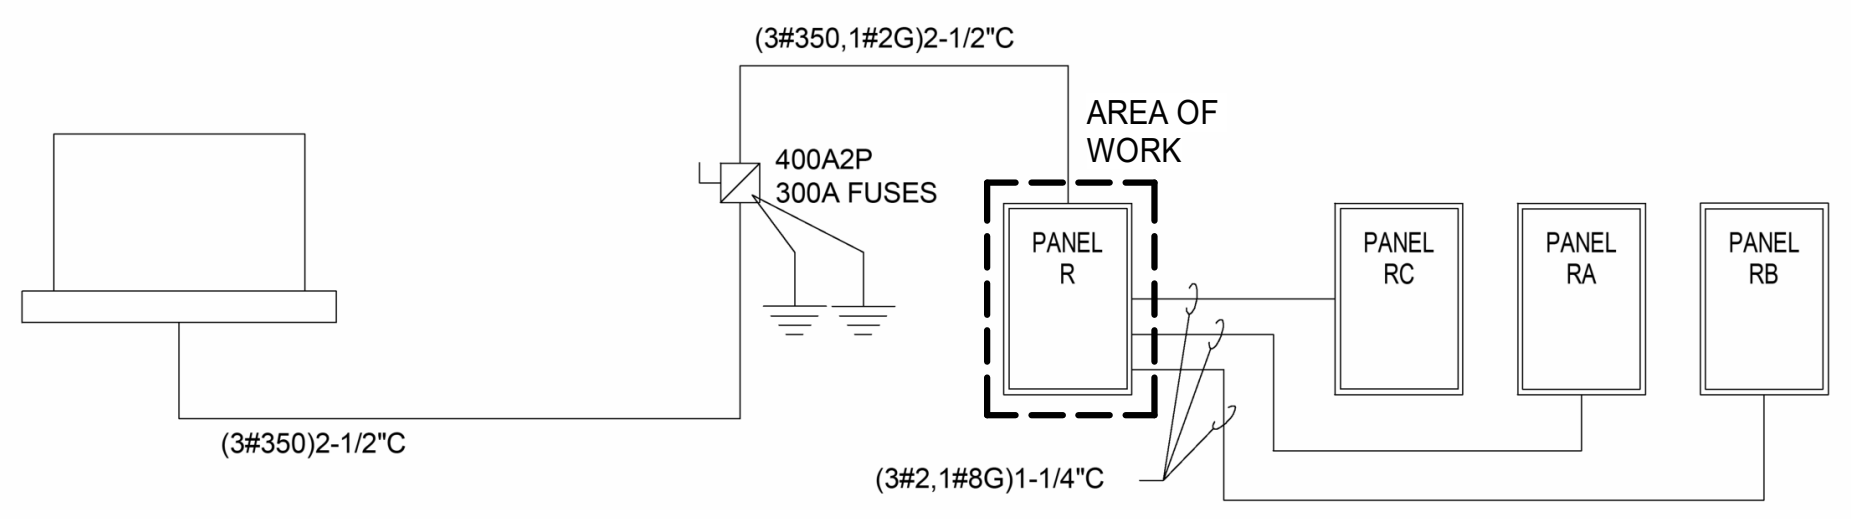
(3#350,1#2G)2-1/2"C
AREA OF WORK
400A2P
300A FUSES
PANEL R
PANEL RC
PANEL RA
PANEL RB
(3#350)2-1/2"C
(3#2,1#8G)1-1/4"C

EXISTING ELECTRICAL ONE-LINE DIAGRAM - COTTAGE BUILDING

SCALE: NONE

FOR REFERENCE ONLY

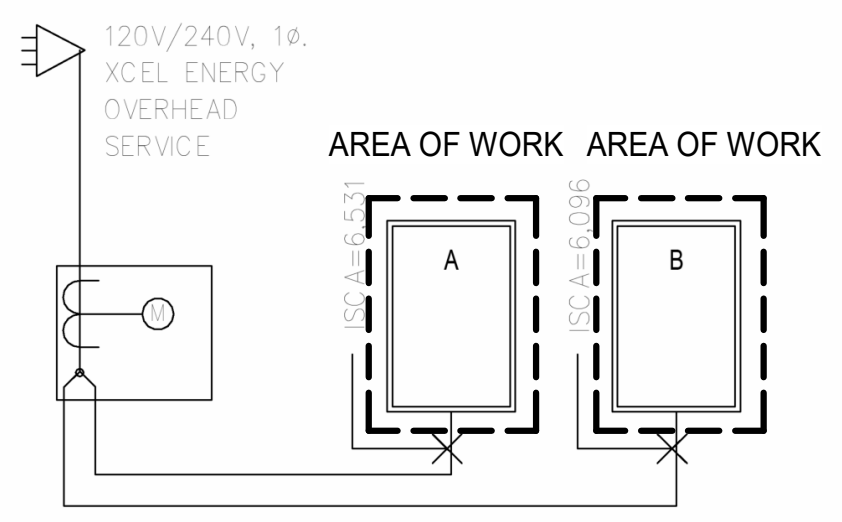
120V/240V, 1ø.
XCEL ENERGY
OVERHEAD
SERVICE
AREA OF WORK
AREA OF WORK
ISC A=6,531
ISC A=6,096
A
B
M

ELECTRICAL ONE-LINE DIAGRAM
(PRESCHOOL MODULAR)

FOR REFERENCE ONLY

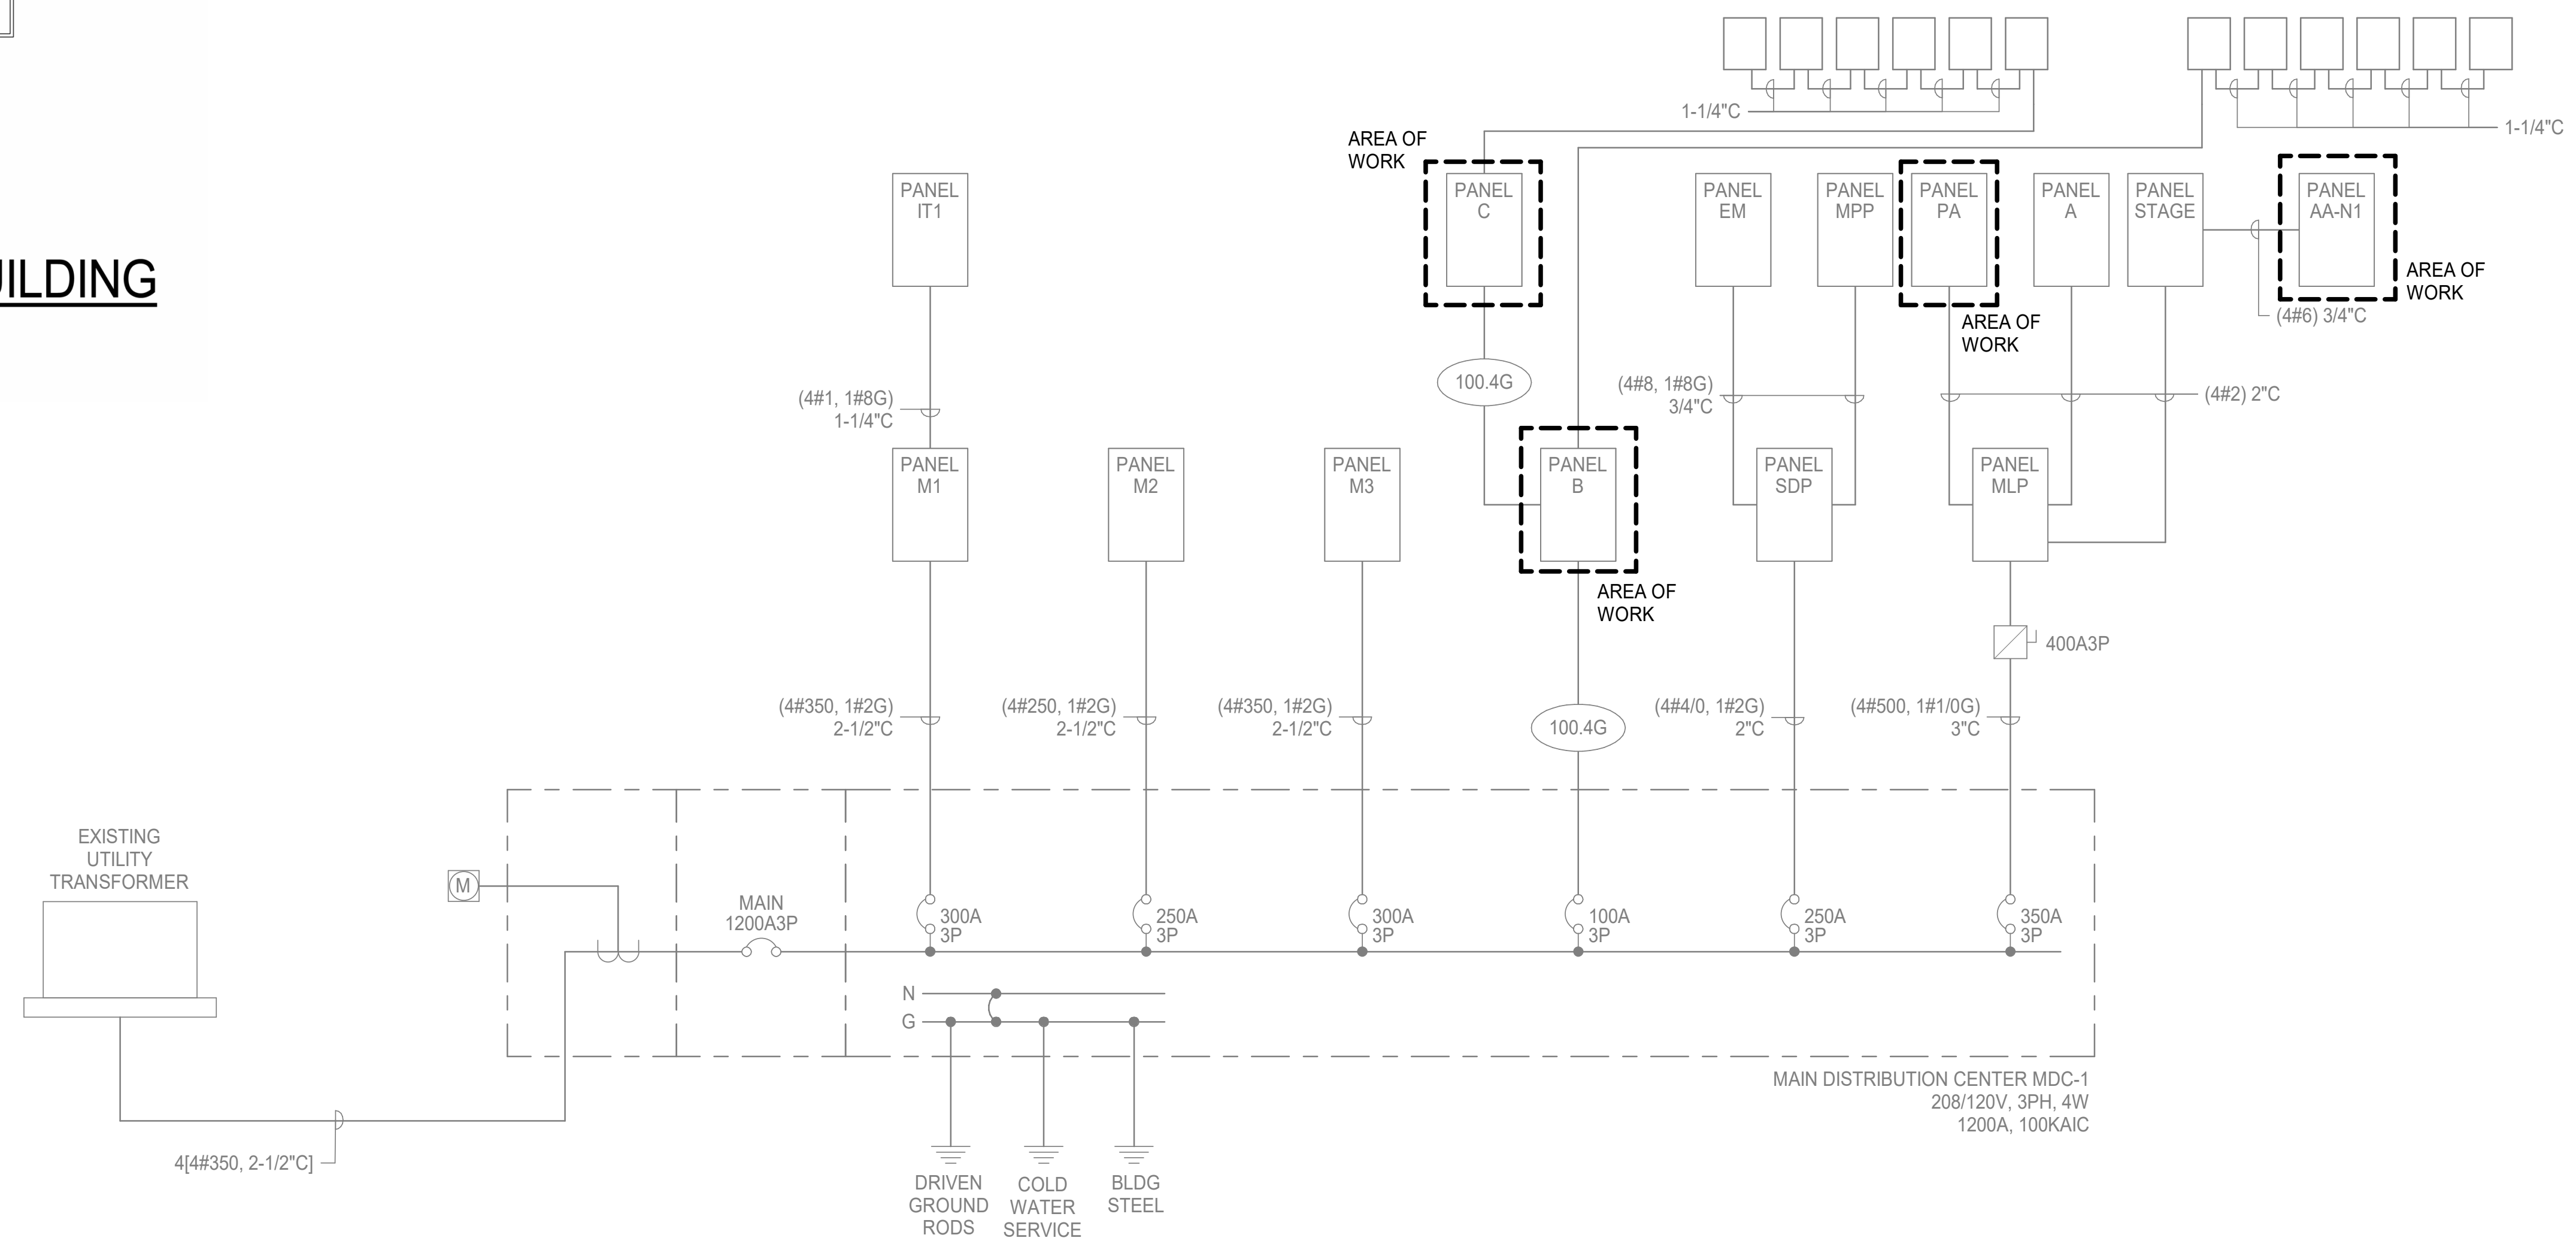
1-1/4"C
1-1/4"C
AREA OF WORK
PANEL IT1
PANEL C
PANEL EM
PANEL MPP
PANEL PA
PANEL A
PANEL STAGE
PANEL AA-N1
AREA OF WORK
AREA OF WORK
(4#6) 3/4"C
100.4G
(4#1, 1#8G) 1-1/4"C
(4#8, 1#8G) 3/4"C
(4#2) 2"C
PANEL M1
PANEL M2
PANEL M3
PANEL B
PANEL SDP
PANEL MLP
AREA OF WORK
400A3P
(4#350, 1#2G) 2-1/2"C
(4#250, 1#2G) 2-1/2"C
(4#350, 1#2G) 2-1/2"C
100.4G
(4#4/0, 1#2G) 2"C
(4#500, 1#1/0G) 3"C
EXISTING UTILITY TRANSFORMER
M
MAIN 1200A3P
300A 3P
250A 3P
300A 3P
100A 3P
250A 3P
350A 3P
N
G
MAIN DISTRIBUTION CENTER MDC-1
208/120V, 3PH, 4W
1200A, 100KAIC
4[4#350, 2-1/2"C]
DRIVEN GROUND RODS
COLD WATER SERVICE
BLDG STEEL

ELECTRICAL ONE-LINE DIAGRAM

SCALE: NONE

FOR REFERENCE ONLY

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:47 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA
& ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations
7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

ELECTRICAL ONE-LINE
DIAGRAM

E0.02

KEYNOTES

E1	REMOVE EXISTING ABOVE-COUNTER RECEPTACLE WHERE REQUIRED TO ACCOMMODATE NEW CASEWORK. MAINTAIN EXISTING CIRCUIT FOR RECONNECTION.
E3	DISCONNECT AND REMOVE EXISTING PLUGMOLD AND ASSOCIATED DEVICES. PRESERVE EXISTING BRANCH CIRCUIT FOR RECONNECTION TO NEW RECEPTACLES. FIELD VERIFY EXISTING CIRCUIT AND PROVIDE CIRCUIT TRACING AS REQUIRED.

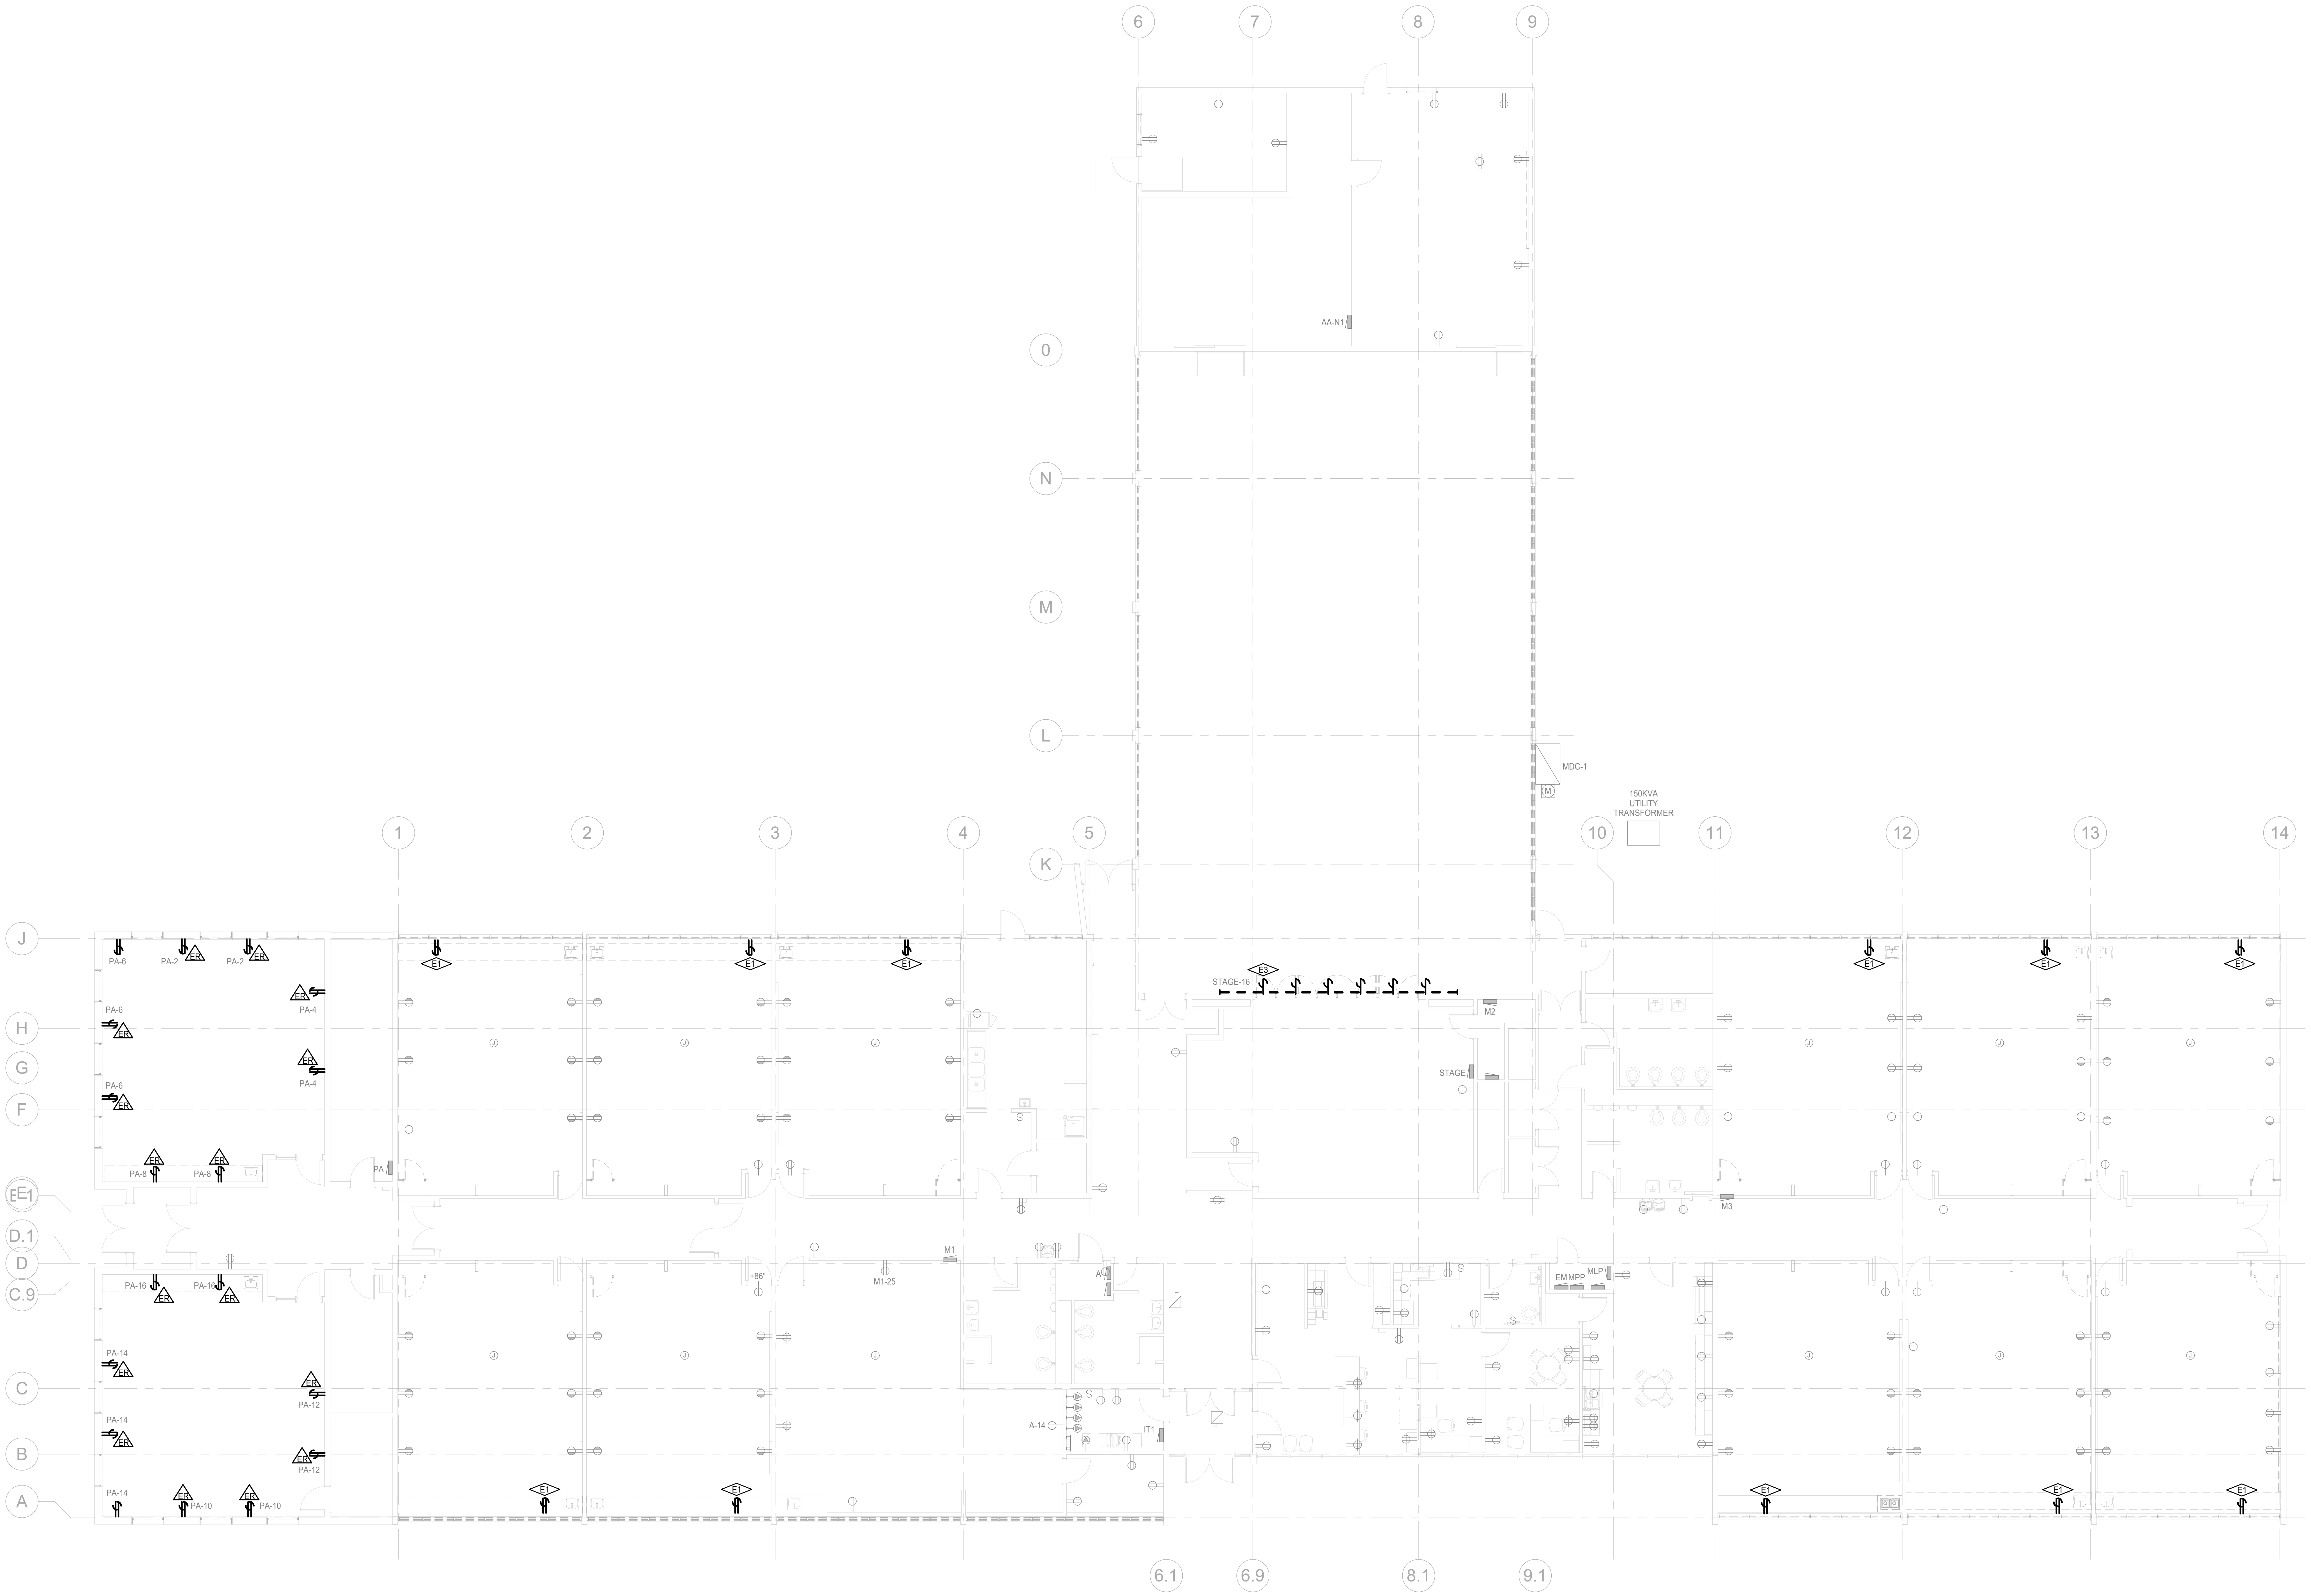
6
7
8
9
0
N
M
L
K
1
2
3
4
5
10
11
12
13
14
J
H
G
F
E1
D.1
D
C.9
C
B
A
6.1
6.9
8.1
9.1
AA-N1
MDC-1
M
150KVA UTILITY TRANSFORMER
STAGE-16
E3
E1
M2
STAGE
M3
M1
M1-25
+66"
A-14
IT1
EMMPP
MLP
S
PA
PA-6
PA-2
PA-4
PA-8
PA-16
PA-14
PA-12
PA-10
ER

FIRST FLOOR POWER DEMOLITION PLAN

SCALE: 1/8" = 1'-0"

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:48 AM

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA
& ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

FIRST FLOOR ELECTICAL
DEMOLITION PLAN

ED1.0

KEYNOTES

E2	PROVIDE NEW RECEPTACLE IN CABINET FILLER PANEL. CONNECT TO EXISTING CIRCUIT SERVING REMOVED RECEPTACLE. COORDINATE FINAL MOUNTING LOCATION WITH CASEWORK.
E4	PROVIDE NEW RECEPTACLES. REUSE EXISTING BRANCH CIRCUIT PRESERVED DURING DEMOLITION. EXTEND EXISTING CIRCUIT AS REQUIRED TO SERVE NEW RECEPTACLES.
E5	PROVIDE POWER PACK(S) FOR CONTROL OF CONTROLLED RECEPTACLES. CONNECT TO EXISTING OCCUPANCY SENSOR FOR AUTOMATIC CONTROL.
E6	TIE CONTROLLED RECEPTACLES INTO EXISTING ROOM POWER PACK. CONNECT TO EXISTING OCCUPANCY SENSOR FOR AUTOMATIC CONTROL.
E7	CONNECT NEW ELECTRIC WATER COOLER TO EXISTING BRANCH CIRCUIT. PROVIDE READILY ACCESSIBLE GFCI DEVICE AT LOCATION SHOWN.

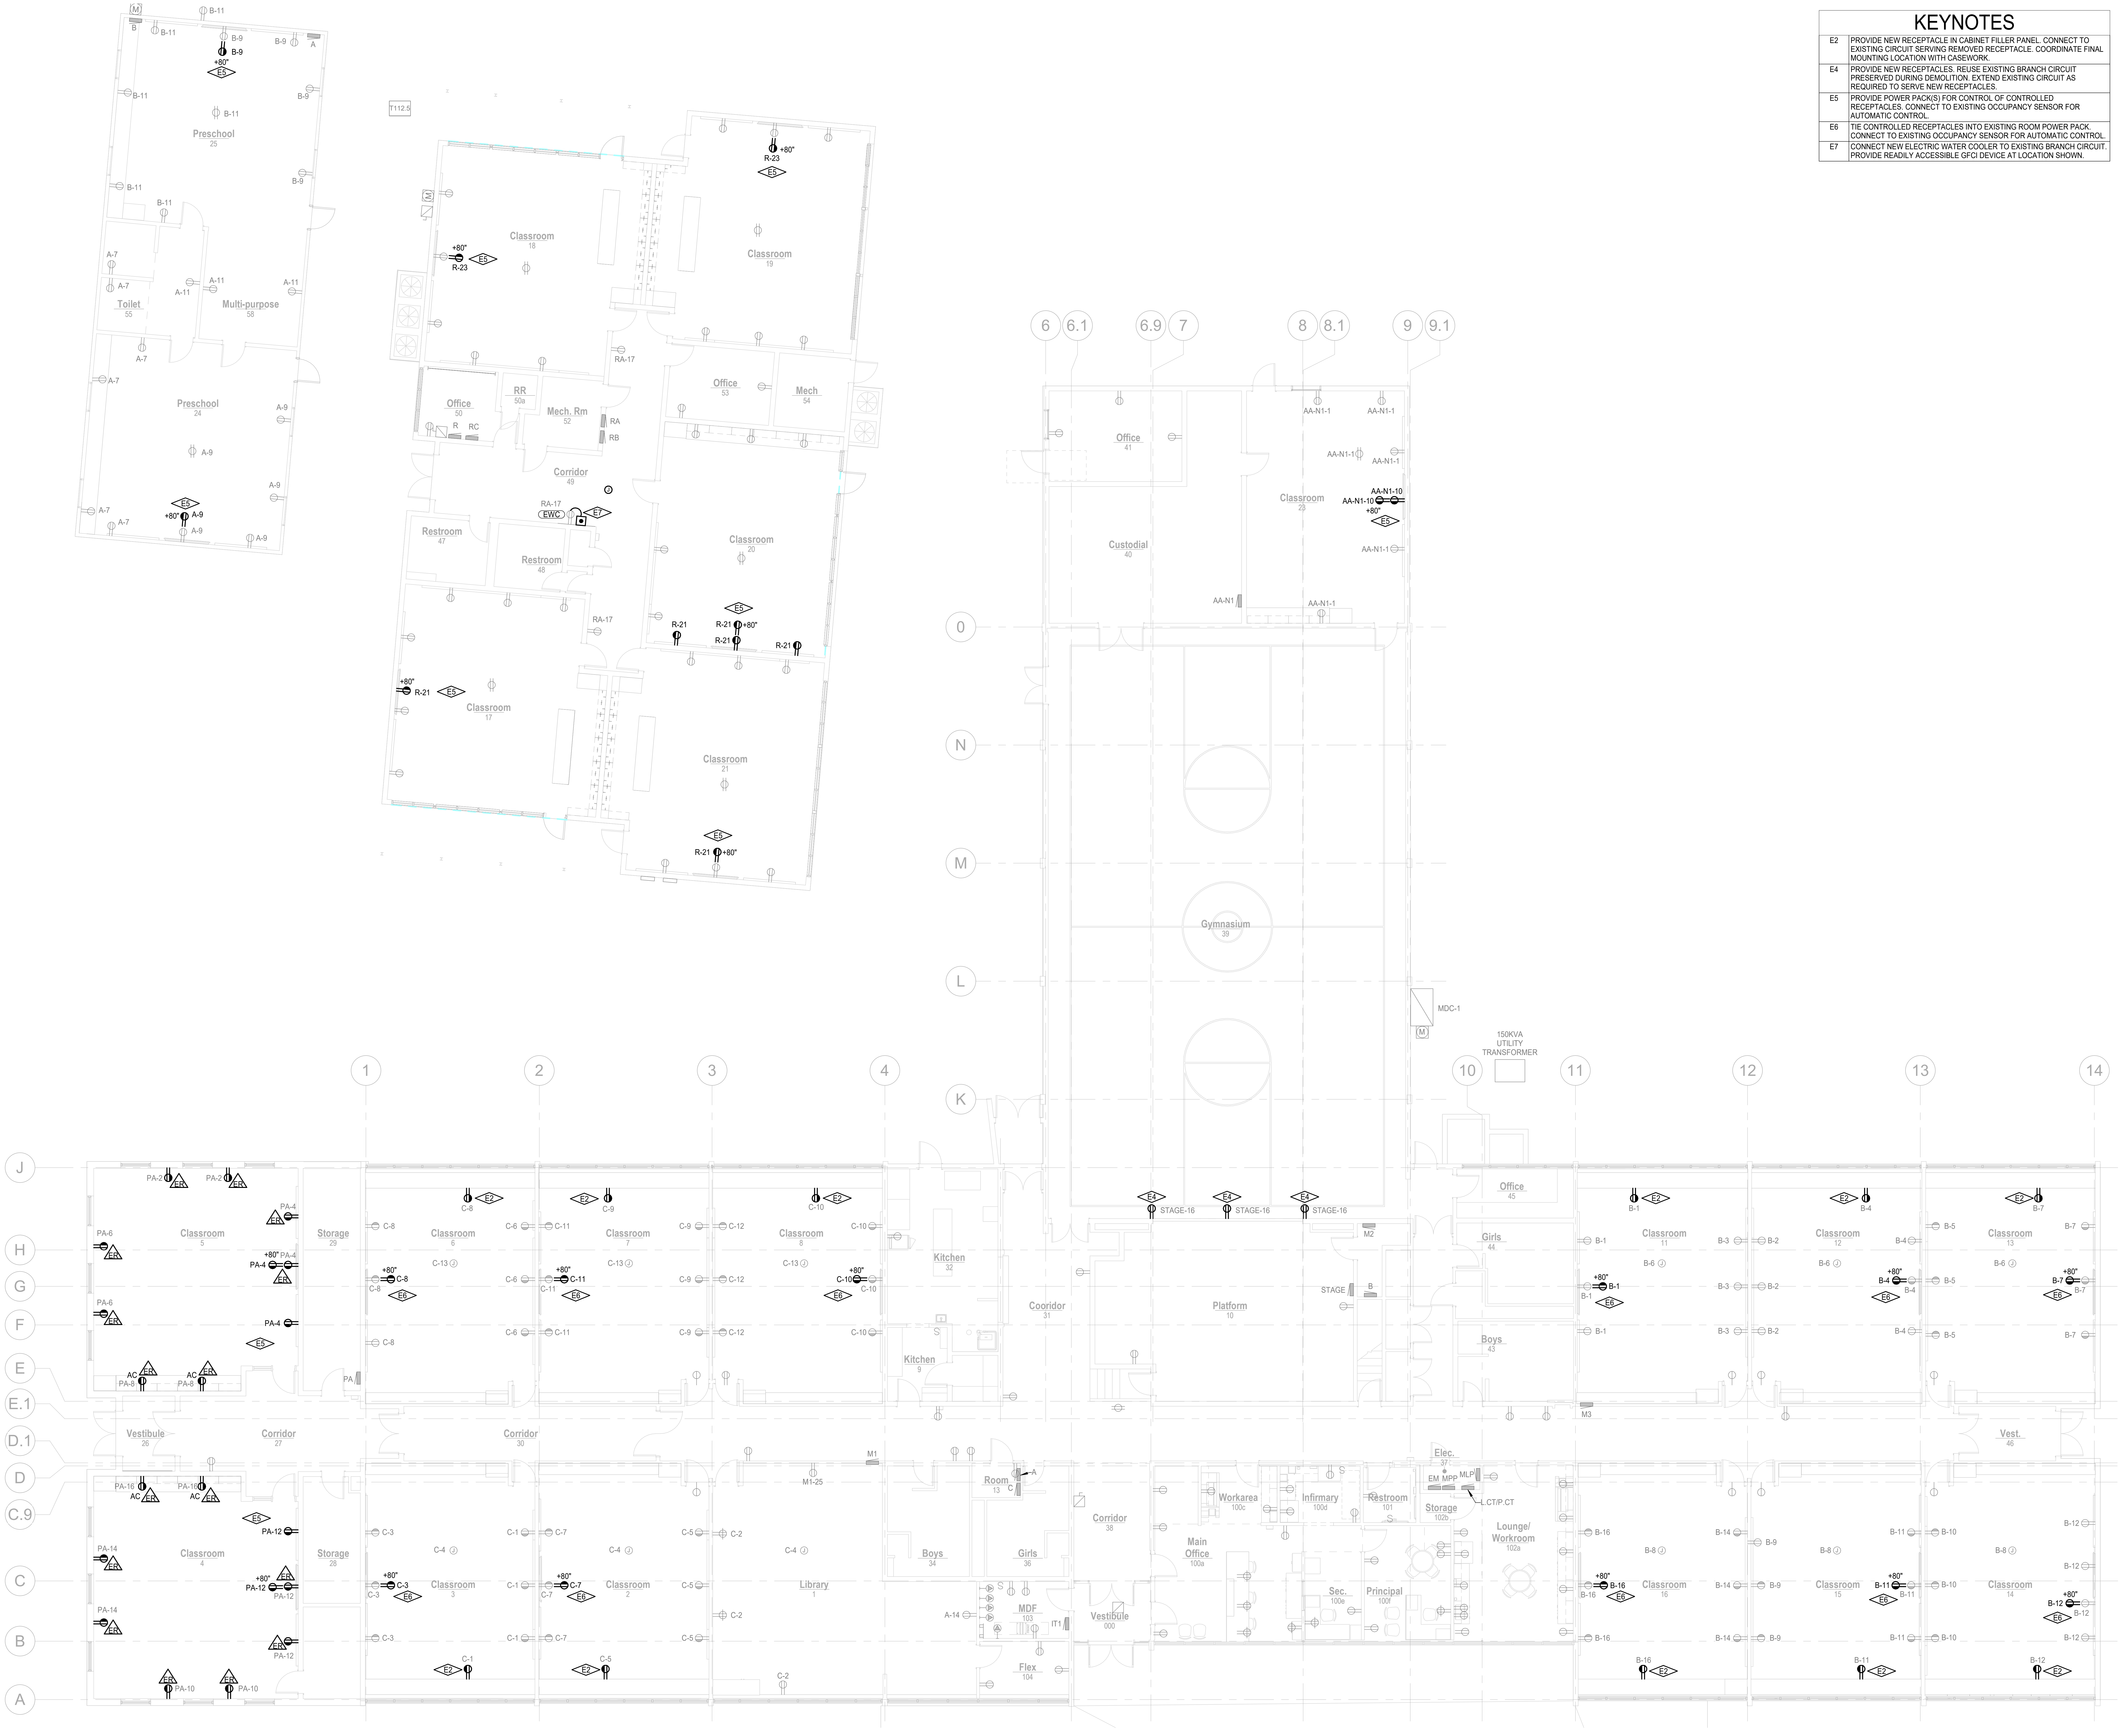
Preschool 25
Toilet 55
Multi-purpose 58
Preschool 24
Classroom 18
Classroom 19
Office 50
RR 50a
Mech. Rm 52
Office 53
Mech 54
Corridor 49
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
EWC
6
6.1
6.9
7
8
8.1
9
9.1
Office 41
Custodial 40
Classroom 23
0
N
M
L
K
Gymnasium 39
MDC-1
150KVA UTILITY TRANSFORMER
1
2
3
4
10
11
12
13
14
J
H
G
F
E
E.1
D.1
D
C.9
C
B
A
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Kitchen 32
Kitchen 9
Corridor 31
Platform 10
STAGE-16
Office 45
Girls 44
Boys 43
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Vest. 46
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
Boys 34
Girls 36
Room 13
MDF 103
Flex 104
Corridor 38
Vestibule 000
Main Office 100a
Workarea 100c
Infirmary 100d
Restroom 101
Storage 102b
Elec. 37
Lounge/Workroom 102a
Sec. 100e
Principal 100f
CT/P CT
Classroom 16
Classroom 15
Classroom 14

FIRST FLOOR POWER PLAN

SCALE: 1/8" = 1'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA
& ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

FIRST FLOOR ELECTRICAL PLAN

E1.0

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:49 AM

KEYNOTES

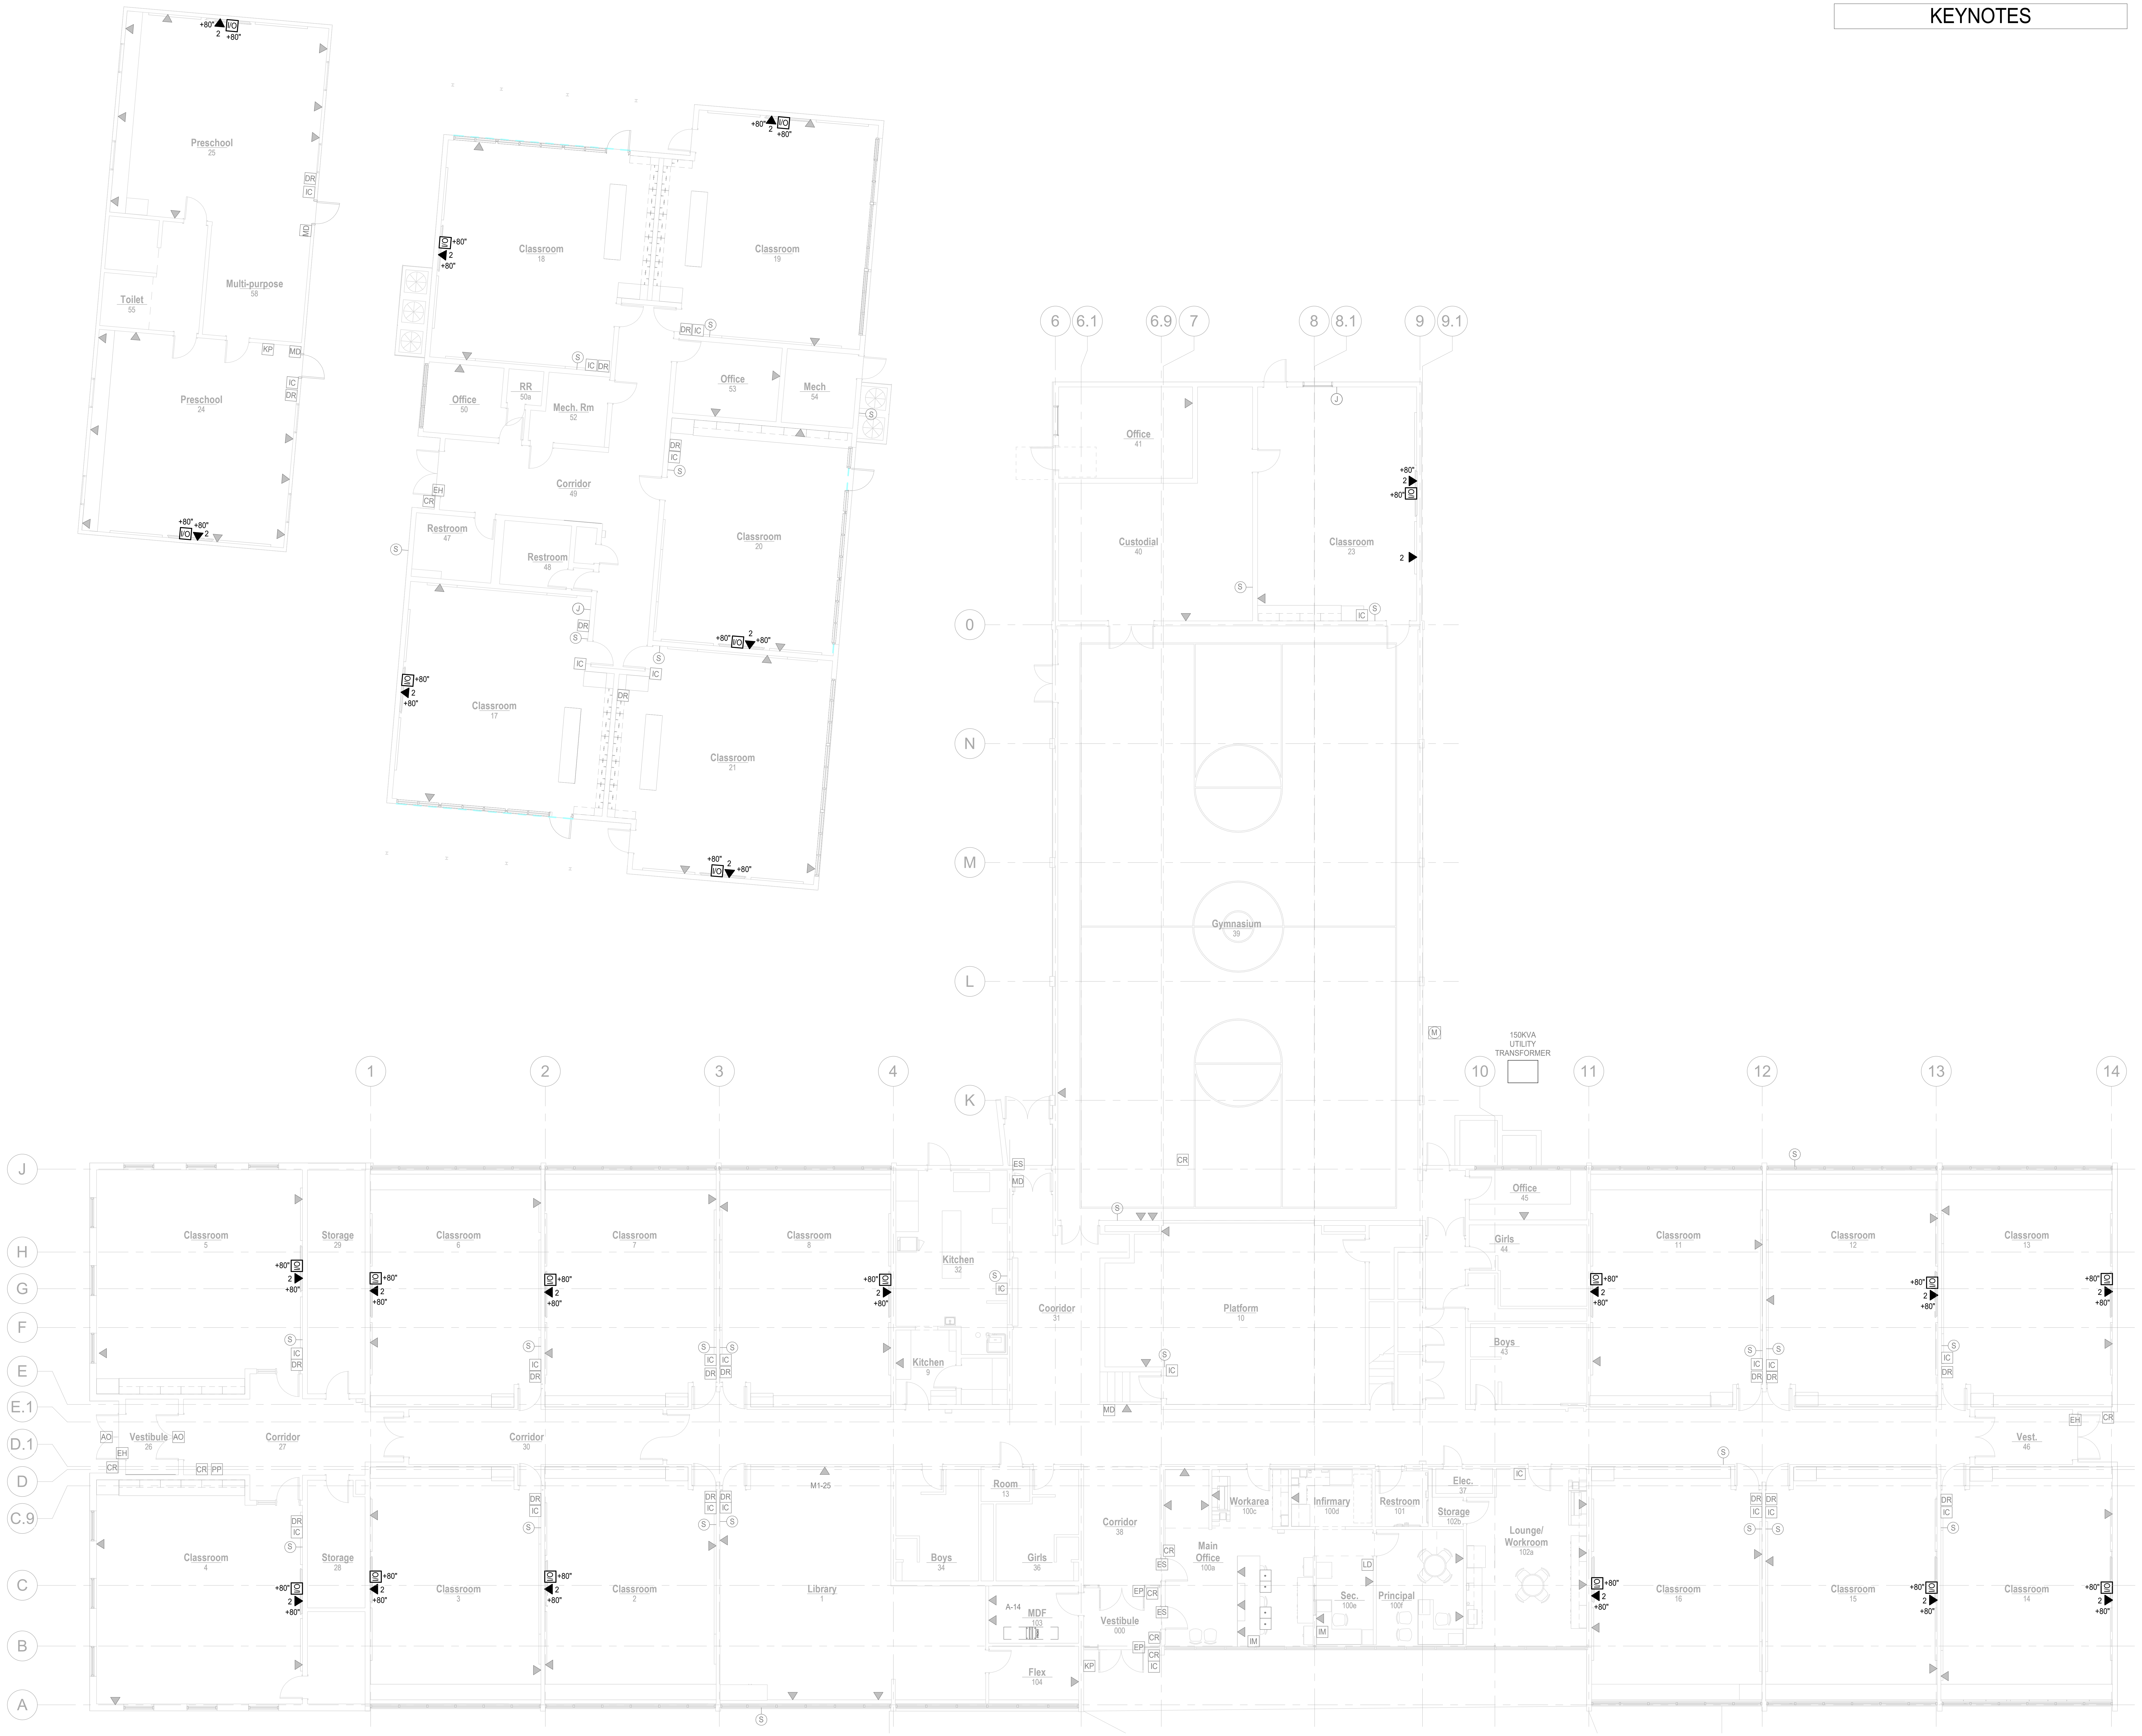
Preschool 25
Toilet 55
Multi-purpose 58
Preschool 24
Classroom 18
Classroom 19
Office 50
RR 50a
Mech. Rm 52
Office 53
Mech 54
Corridor 49
Restroom 47
Restroom 48
Classroom 20
Classroom 17
Classroom 21
6
6.1
6.9
7
8
8.1
9
9.1
Office 41
Custodial 40
Classroom 23
Gymnasium 39
O
N
M
L
K
J
H
G
F
E
E.1
D.1
D
C.9
C
B
A
1
2
3
4
10
11
12
13
14
150KVA UTILITY TRANSFORMER
Classroom 5
Storage 29
Classroom 6
Classroom 7
Classroom 8
Kitchen 32
Kitchen 9
Corridor 31
Platform 10
Office 45
Girls 44
Boys 43
Classroom 11
Classroom 12
Classroom 13
Vestibule 26
Corridor 27
Corridor 30
Vest. 46
Classroom 4
Storage 28
Classroom 3
Classroom 2
Library 1
M1-25
Room 13
Boys 34
Girls 36
MDF 103
A-14
Flex 104
Corridor 38
Vestibule 000
Main Office 100a
Workarea 100c
Infirmary 100d
Restroom 101
Storage 102b
Elec. 37
Lounge/ Workroom 102a
Sec. 100e
Principal 100f
Classroom 16
Classroom 15
Classroom 14
+80"
2
IC
DR
MD
KP
EH
CR
ES
EP
AO
PP
LD
IM
S
J
M

FIRST FLOOR TECHNOLOGY PLAN

SCALE: 1/8" = 1'-0"

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:51 AM

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA & ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations

7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

FIRST FLOOR TECHNOLOGY PLAN

E2.0

Switchboard MDC-1
EXISTING

Location: EXTERIOR
Supply From: UTILITY XFMR
Mounting: SURFACE
Volts: 120/208 Wye
Phases: 3
Wires: 4
A.I.C. Rating: 100,000 A
Mains Type: MCB
Bus Rating: 1200 A
MCB Rating: 1200 A

Circuit Notes:

Load	Type	A	B	C	Note
PANEL M1	G	35567 VA	35567 VA	35567 VA	
PANEL M2	G	24167 VA	24167 VA	24167 VA	
PANEL M3	G	28833 VA	28833 VA	28833 VA	
PANEL B	Spare; R; L	8370 VA	6885 VA	6165 VA	
PANEL SDP	G	24033 VA	24033 VA	24033 VA	
PANEL MLP	Spare; C; R; G...	15080 VA	14652 VA	14974 VA	
		136050 VA	134137 VA	133739 VA	
Refer to one-line diagram for space, spare, and circuit breaker quantities.		1134 A	1118 A	1114 A	
		1	0	2	
		% A-B	% B-C	% C-A	

Load Type		Connected Load	Demand Factor	Demand Load	Switchboard Totals	
L	Lighting	14450 VA	125.00%	18063 VA	**Power Factor:**	
R	Receptacle	28440 VA	67.58%	19220 VA		
M	Motor	16560 VA	102.90%	17040 VA	**Total Connected Load:**	403926 VA
C	Continuous	3000 VA	125.00%	3750 VA	**Total Connected Current:**	1121 A
G	General	341476 VA	100.00%	341476 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	399549 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	1109 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

Panel AA-N1
EXISTING

Location: Custodial 40
Supply From: STAGE
Mounting: Surface
Enclosure: Type 1
Voltage: 120/208 Wye
Phase: 3
Wire: 4
A.I.C. Rating: 10,000
Mains Type: MLO
Bus Rating: 100 A

Circuit Notes:
1) PROVIDE NEW CIRCUIT BREAKER IN EXISTING SPACE.

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
	1	R-P.C. ROOM	R	20 A	1	1080 VA	250 VA					1	20 A	L	L-CUST CLOSET	2	
	3	L-P.C. ROOM	L	20 A	1			250 VA	0 VA			1	20 A	--	EXISTING LOAD	4	
	5	AIR HANDLER	M	20 A	1					1920 VA	0 VA	1	20 A	--	EXISTING LOAD	6	
	7	FAN CUST CLOSET	M	20 A	1	1176 VA	0 VA					1	20 A	--	EXISTING LOAD	8	
	9	R-CUST CLOSET	R	20 A	1			720 VA	360 VA			**1**	**20 A**	**R**	**R-CLASS 23**	**10**	**1**
	11	L/R-SPEACH ROOM	R; L	20 A	1					970 VA	--	1	--	--	SPACE	12	
	13	HEATER ROOM 22	C	20 A	2	1500 VA	--					1	--	--	SPACE	14	
	15							1500 VA	--			1	--	--	SPACE	16	
	17	SPACE	--	--	1					--	--	1	--	--	SPACE	18	
	19	SPACE	--	--	1	--	--					1	--	--	SPACE	20	
	21	SPACE	--	--	1			--	--			1	--	--	SPACE	22	
	23	SPACE	--	--	1					--	--	1	--	--	SPACE	24	

	A	B	C
Total Load:	4006 VA	2830 VA	2890 VA
Total Amps:	33 A	24 A	24 A
Phase Balance:	42 % A-B	2 % B-C	38 % C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	750 VA	125.00%	938 VA	**Power Factor:**	1
R	Receptacle	2880 VA	100.00%	2880 VA		
M	Motor	3096 VA	115.50%	3576 VA	**Total Connected Load:**	9726 VA
C	Continuous	3000 VA	125.00%	3750 VA	**Total Connected Current:**	27 A
G	General	0 VA	0.00%	0 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	11144 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	31 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

PANEL A
EXISTING PRESCHOOL

Location: Preschool 25
Supply From:
Mounting: SURFACE
Enclosure: Type 1
Voltage: 120/208 Single
Phase: 1
Wire: 3
A.I.C. Rating: 10,000
Mains Type: MCB
Bus Rating: 125 A
MCB Rating: 125 A

Circuit Notes:
1) NEW LOAD ON EXISTING CIRCUIT BREAKER

Note	Circuit	Load	Type	Trip	Poles	A		B		Poles	Trip	Type	Load	Circuit	Note
	1	SPACE	--	--	1	--	--			1	--	--	SPACE	2	
	3	SPACE	--	--	1			--	--	1	--	--	SPACE	4	
	5	EXT. LIGHTS	L	20 A	1	250 VA	--			1	--	--	SPACE	6	
	7	#1 REC.	R	20 A	1			1080 VA	--	1	--	--	SPACE	8	
1	9	#2 REC.	R	20 A	1	1080 VA	7000 VA			2	90 A	M	HVAC	10	
	11	#3 REC.	R	20 A	1			540 VA	7000 VA					12	
	13	SPACE	--	--	1	--	0 VA			2	125 A	--	SERVICE DISCONNECT	14	
	15	SPACE	--	--	1			--	0 VA					16	

	A	B
Total Load:	8330 VA	8620 VA
Total Amps:	80 A	83 A
Phase Balance:	3 % A-B	% B-C

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	250 VA	125.00%	313 VA	**Power Factor:**	1
R	Receptacle	2700 VA	100.00%	2700 VA		
M	Motor	14000 VA	125.00%	17500 VA	**Total Connected Load:**	16950 VA
C	Continuous	0 VA	0.00%	0 VA	**Total Connected Current:**	81 A
G	General	0 VA	0.00%	0 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	20513 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	99 A
O	Other	0 VA	0.00%	0 VA		

PANEL B
EXISTING PRESCHOOL

Location: Preschool 25
Supply From:
Mounting: SURFACE
Enclosure: Type 1
Voltage: 120/208 Single
Phase: 1
Wire: 3
A.I.C. Rating: 10,000
Mains Type: MCB
Bus Rating: 125 A
MCB Rating: 125 A

Circuit Notes:
1) NEW LOAD ON EXISTING CIRCUIT BREAKER

Note	Circuit	Load	Type	Trip	Poles	A		B		Poles	Trip	Type	Load	Circuit	Note
	1	SPACE	--	--	1	--	--			1	--	--	SPACE	2	
	3	SPACE	--	--	1			--	--	1	--	--	SPACE	4	
	5	#1 LIGHTS	L	20 A	1	250 VA	500 VA			1	20 A	C	HEAT TAPE	6	
	7	W/H	G	20 A	1			1500 VA	250 VA	1	20 A	L	#2 LIGHTS	8	
1	9	#1 REC.	R	20 A	1	900 VA	7000 VA			2	90 A	M	HVAC	10	
	11	#2 REC.	R	20 A	1			1080 VA	7000 VA					12	
	13	SPACE	--	--	1	--	0 VA			2	125 A	--	SERVICE DISCONNECT	14	
	15	SPACE	--	--	1			--	0 VA					16	

	A	B
Total Load:	8650 VA	9830 VA
Total Amps:	83 A	93 A
Phase Balance:	12 % A-B	% B-C

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	500 VA	125.00%	625 VA	**Power Factor:**	1
R	Receptacle	1980 VA	100.00%	1980 VA		
M	Motor	14000 VA	125.00%	17500 VA	**Total Connected Load:**	18480 VA
C	Continuous	500 VA	125.00%	625 VA	**Total Connected Current:**	89 A
G	General	1500 VA	100.00%	1500 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	22230 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	107 A
O	Other	0 VA	0.00%	0 VA		

PANEL C
EXISTING

Location: Room 13
Supply From: B
Mounting: SURFACE
Enclosure: NEMA 1
Voltage: 120/208 Wye
Phase: 3
Wire: 4
A.I.C. Rating: 10,000
Mains Type: MLO
Bus Rating: 100 A

Circuit Notes:
1. NEW LOAD ON EXISTING CIRCUIT BREAKER.

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
	1	R-CLSRM 333	R	20 A	1	720 VA	900 VA					1	20 A	R	R-LIBRARY 335	2	
1	3	R-CLSRM 333	R	20 A	1			720 VA	1125 VA			1	20 A	L	L-CLSRM 333/334/335	4	
	5	R-CLSRM 334	R	20 A	1					720 VA	540 VA	1	20 A	R	R-CLSRM 337	6	
1	7	R-CLSRM 334	R	20 A	1	720 VA	900 VA					1	20 A	R	R-CLSRM 337	8	**1**
	9	R-CLSRM 338	R	20 A	1			720 VA	900 VA			1	20 A	R	R-CLSRM 341	10	**1**
1	11	R-CLSRM 338	R	20 A	1					720 VA	540 VA	1	20 A	R	R-CLSRM 341	12	
	13	L-CLSRM 337/338/341	L	20 A	1	1125 VA	0 VA					1	20 A	--	SPARE	14	
	15	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	16	
	17	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	18	
	19	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	20	
	21	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	22	
	23	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	24	
	25	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	26	
	27	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	28	
	29	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	30	
	31	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	32	
	33	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	34	
	35	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	36	
	37	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	38	
	39	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	40	
	41	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	42	

	A	B	C
Total Load:	4365 VA	3465 VA	2520 VA
Total Amps:	38 A	30 A	21 A
Phase Balance:	25 % A-B	43 % B-C	79 % C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	2250 VA	125.00%	2813 VA	**Power Factor:**	1
R	Receptacle	8100 VA	100.00%	8100 VA		
M	Motor	0 VA	0.00%	0 VA	**Total Connected Load:**	10350 VA
C	Continuous	0 VA	0.00%	0 VA	**Total Connected Current:**	29 A
G	General	0 VA	0.00%	0 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	10913 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	30 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

Panel STAGE
EXISTING

Location: Platform 10
Supply From: MLP
Mounting: SURFACE
Enclosure: NEMA 1
Voltage: 120/208 Wye
Phase: 3
Wire: 4
A.I.C. Rating: EXISTING
Mains Type: MLO
Bus Rating: 100 A

Circuit Notes:

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
	1	R-GYM	R	20 A	1	720 VA	0 VA					1	20 A	--	SPARE	2	
	3	R-GYM	R	20 A	1			720 VA	500 VA			1	20 A	G	EXISTING LOAD	4	
	5	SERVER	G	20 A	1					500 VA	300 VA	1	20 A	L	L-STAGE	6	
	7	L-O.H. SPOT LIGHTS...	L	20 A	1	500 VA	0 VA					1	20 A	--	SPARE	8	
	9	L-O.H. SPOT LIGHTS...	L	20 A	1			500 VA	300 VA			1	20 A	L	L-EGRESS STAGE	10	
	11	L-O.H. SPOT LIGHTS...	L	20 A	1					500 VA	300 VA	1	20 A	L	L-SPOT LIGHTS STAGE	12	
	13	L-SPOT LIGHTS STAGE	L	20 A	1	500 VA	1176 VA					1	20 A	G	STAGE LIFT	14	
	15	L-SPOT LIGHTS STAGE	L	20 A	1			500 VA	720 VA			1	20 A	R	R-FRONT STAGE	16	
	17	L-SPOT LIGHTS STAGE	L	20 A	1					500 VA	500 VA	1	20 A	G	"FCU" ROOM 10	18	
	19	L-NW CORR PE OFF	L	20 A	1	350 VA	720 VA					1	20 A	R	R-CORR/ AMP	20	
	21	L-BOILER RM	L	20 A	1			350 VA	500 VA			1	20 A	G	EXISTING LOAD	22	
	23	L-BATHROOM	L	20 A	1					200 VA	500 VA	1	20 A	L	L-STAGE	24	
	25	SPARE	--	50 A	3	0 VA	4006 VA					3	50 A	Spare; C; R; M; L	PANEL AA-N1	26	
	27							0 VA	2830 VA							28	
	29									0 VA	2890 VA					30	
	31	SPACE	--	--	1	--	500 VA					1	20 A	L	L-GYM	32	
	33	SPACE	--	--	1			--	500 VA			1	20 A	L	L-GYM	34	
	35	SPACE	--	--	1					--	500 VA	1	20 A	L	L-GYM	36	
	37	SPACE	--	--	1	--	500 VA					1	20 A	L	L-GYM/CNTRL	38	
	39	SPACE	--	--	1			--	500 VA			1	20 A	L	L-GYM	40	
	41	SPACE	--	--	1					--	500 VA	1	20 A	L	L-GYM	42	

	A	B	C
Total Load:	8972 VA	7920 VA	7190 VA
Total Amps:	76 A	67 A	60 A
Phase Balance:	13 % A-B	12 % B-C	26 % C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	9050 VA	125.00%	11313 VA	**Power Factor:**	1
R	Receptacle	5760 VA	100.00%	5760 VA		
M	Motor	3096 VA	115.50%	3576 VA	**Total Connected Load:**	24082 VA
C	Continuous	3000 VA	125.00%	3750 VA	**Total Connected Current:**	67 A
G	General	3176 VA	100.00%	3176 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	27575 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	77 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

Panel MLP
EXISTING

Location: Elec. 37
Supply From: MDC-1
Mounting: Surface
Enclosure: Type 1
Voltage: 120/208 Wye
Phase: 3
Wire: 4
A.I.C. Rating: 22,000
Mains Type: MLO
Bus Rating: 225 A

Circuit Notes:

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
	1	SPACE	--	--	1	--	--					1	--	--	SPACE	2	
	3	SPACE	--	--	1			--	--			1	--	--	SPACE	4	
	5	SPACE	--	--	1					--	--	1	--	--	SPACE	6	
	7	SPACE	--	--	1	--	--					1	--	--	SPACE	8	
	9	R-WORK RM N WALL	R	20 A	1			720 VA	--			1	--	--	SPACE	10	
	11	AC TEACH LOUNGE	M	20 A	1					1176 VA	--	1	--	--	SPACE	12	
	13	FCU RM 8 & 9	M	20 A	1	1176 VA	--					1	--	--	SPACE	14	
	15	FCU RM 10 & 11	M	20 A	1			1176 VA	--			1	--	--	SPACE	16	
	17	FCU RM 12 & 13	M	20 A	1					1176 VA	--	1	--	--	SPACE	18	
	19	FCU RM 5 & 6	M	20 A	1	1176 VA	--					1	--	--	SPACE	20	
	21	FCU RM 3 & 4	M	20 A	1			1176 VA	--			1	--	--	SPACE	22	
	23	FCU RM 1 & 2	M	20 A	1					1176 VA	--	1	--	--	SPACE	24	
	25	SPARE	--	40 A	3	0 VA	0 VA					3	100 A	--	SPARE	26	
	27							0 VA	0 VA							28	
	29									0 VA	0 VA					30	
	31	PANEL A	Spare	100 A	3	0 VA	3756 VA					3	100 A	Spare; R; G; M; L	PANEL PA	32	
	33							0 VA	3660 VA							34	
	35									0 VA	4256 VA					36	
	37	PANEL STAGE	Spare; C; R; G; M; L	100 A	3	8972 VA	0 VA					3	100 A	--	SPARE	38	
	39							7920 VA	0 VA							40	
	41									7190 VA	0 VA					42	

	A	B	C
Total Load:	15080 VA	14652 VA	14974 VA
Total Amps:	126 A	122 A	125 A
Phase Balance:	3 % A-B	3 % B-C	1 % C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	9950 VA	125.00%	12438 VA	**Power Factor:**	1
R	Receptacle	11520 VA	93.40%	10760 VA		
M	Motor	16560 VA	102.90%	17040 VA	**Total Connected Load:**	44706 VA
C	Continuous	3000 VA	125.00%	3750 VA	**Total Connected Current:**	124 A
G	General	3676 VA	100.00%	3676 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	47664 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	132 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

PANEL B

Location:
Supply From: MDC-1
Mounting: SURFACE
Enclosure: NEMA 1
Voltage: 120/208 Wye
Phases: 3
Wires: 4
A.I.C. Rating: 10,000 A
Mains Type: MLO
Mains Rating: 100 A

Circuit Notes:
1. NEW LOAD ON EXISTING CIRCUIT BREAKER.

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
1	1	R-CLSRM 355	R	20 A	1	900 VA	540 VA					1	20 A	R	R-CLSRM 354	2	
	3	R-CLSRM 355	R	20 A	1			540 VA	900 VA			1	20 A	R	R-CLSRM 354	4	**1**
	5	R-CLSRM 353	R	20 A	1					540 VA	1125 VA	1	20 A	L	L-CLSRM 355/354/353	6	
1	7	R-CLSRM 353	R	20 A	1	900 VA	1125 VA					1	20 A	L	L-CLSRM 350/351/352	8	
	9	R-CLSRM 351	R	20 A	1			540 VA	540 VA			1	20 A	R	R-CLSRM 352	10	
1	11	R-CLSRM 351	R	20 A	1					900 VA	1080 VA	1	20 A	R	R-CLSRM 352	12	**1**
	13	SPARE	--	20 A	1	0 VA	540 VA					1	20 A	R	R-CLSRM 350	14	
	15	SPARE	--	20 A	1			0 VA	900 VA			1	20 A	R	R-CLSRM 350	16	**1**
	17	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	18	
	19	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	20	
	21	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	22	
	23	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	24	
	25	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	26	
	27	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	28	
	29	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	30	
	31	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	32	
	33	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	34	
	35	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	36	
	37	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	38	
	39	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	40	
	41	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	42	

		A	B	C
THIS SECTION TOTAL:	**Total Load:**	4005 VA	3420 VA	3645 VA
	Total Amps:	34 A	29 A	31 A
PANEL C LOAD CONNECTED TO FEED THROUGH LUGS:	**Total Load:**	4365 VA	3465 VA	2520 VA
	Total Amps:	38 A	30 A	21 A
PANEL GRAND TOTALS:	**Total Load:**	8370 VA	6885 VA	6165 VA
	Total Amps:	71 A	58 A	51 A
	Phase Balance:	21 % A-B	13 %B-C	38 %C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	4500 VA	125.00%	5625 VA	**Power Factor:**	
R	Receptacle	16920 VA	79.55%	13460 VA		
M	Motor	0 VA	0.00%	0 VA	**Total Connected Load:**	21420 VA
C	Continuous	0 VA	0.00%	0 VA	**Total Connected Current:**	59 A
G	General	0 VA	0.00%	0 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	19085 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	53 A
O	Other	0 VA	0.00%	0 VA		

PANEL PA
EXISTING

Location: Storage 29
Supply From: MLP
Mounting: SURFACE
Enclosure: Type 1
Voltage: 120/208 Wye
Phase: 3
Wire: 4
A.I.C. Rating: 10,000
Mains Type: MLO
Bus Rating: 100 A

Circuit Notes:
1) NEW LOAD ADDED TO EXISTING CIRCUIT BREAKER.

Note	Circ...	Load	Type	Trip	Po...	A		B		C		Po...	Trip	Type	Load	Circ...	Note
	1	LIGHTS	L	20 A	1	300 VA	360 VA					1	20 A	R	R-CLASS 5	2	
	3	LIGHTS	L	20 A	1			300 VA	720 VA			1	20 A	R	R-CLASS 5	4	1
	5	LIGHTS: COMPUTER...	L	20 A	1					300 VA	360 VA	1	20 A	R	R-CLASS 5	6	
	7	R-CORR, STORAGE	R	20 A	1	720 VA	360 VA					1	20 A	R	R-CLASS 5	8	
	9	R-CORR, STORAGE	R	20 A	1			720 VA	360 VA			1	20 A	R	R-CLASS 4	10	
	11	SUMP PUMP: SOUTH	M	20 A	1					1176 VA	720 VA	1	20 A	R	R-CLASS 4	12	1
	13	ROOF TOP "EF"/HEATER	M	20 A	1	1656 VA	360 VA					1	20 A	R	R-CLASS 4	14	
	15	"FCU": RM 5	M	20 A	1			1200 VA	360 VA			1	20 A	R	R-CLASS 4	16	
	17	"FCU": RM 4	M	20 A	1					1200 VA	500 VA	1	20 A	G	SUMP PUMP CONTROL	18	
	19	SPARE	--	20 A	1	0 VA	0 VA					1	20 A	--	SPARE	20	
	21	SPARE	--	20 A	1			0 VA	0 VA			1	20 A	--	SPARE	22	
	23	SPARE	--	20 A	1					0 VA	0 VA	1	20 A	--	SPARE	24	
	25	SPARE	--	20 A	1	0 VA	--					1	--	--	SPACE	26	
	27	SPARE	--	20 A	1			0 VA	--			1	--	--	SPACE	28	
	29	SPACE	--	--	1					--	--	1	--	--	SPACE	30	
	31	SPACE	--	--	1	--	--					1	--	--	SPACE	32	
	33	SPACE	--	--	1			--	--			1	--	--	SPACE	34	
	35	SPACE	--	--	1					--	--	1	--	--	SPACE	36	
	37	SPACE	--	--	1	--	--					1	--	--	SPACE	38	
	39	SPACE	--	--	1			--	--			1	--	--	SPACE	40	
	41	SPACE	--	--	1					--	--	1	--	--	SPACE	42	

	A	B	C
Total Load:	3756 VA	3660 VA	4256 VA
Total Amps:	31 A	31 A	36 A
Phase Balance:	3 % A-B	17 % B-C	13 % C-A

Load Type		Connected Load	Demand Factor	Demand Load	Panel Totals	
L	Lighting	900 VA	125.00%	1125 VA	**Power Factor:**	1
R	Receptacle	5040 VA	100.00%	5040 VA		
M	Motor	5232 VA	107.91%	5646 VA	**Total Connected Load:**	11672 VA
C	Continuous	0 VA	0.00%	0 VA	**Total Connected Current:**	32 A
G	General	500 VA	100.00%	500 VA		
K	Kitchen	0 VA	0.00%	0 VA	**Total Demand Load:**	12311 VA
E	Existing	0 VA	0.00%	0 VA	**Total Demand Current:**	34 A
O	Other	0 VA	0.00%	0 VA		

General Notes:

EXISTING ***PANEL R***

400 A M.L.O.
400 A BUS
VOLTAGE 120 / 208 V
PHASE 1 PH
WIRE 3 W
MFR :
MTG. : SURFACE
22000 AMPERE SHORT CIRCUIT RATING (FULLY RATED)

Panel Notes:
1. EXISTING LOAD ACCOUNTED FOR WITH UTILITY PEAK DEMAND.
2. PROVIDE CIRCUIT BREAKER IN SPACE TO MATCH EXISTING.
3. EXISTING LOAD TO ACCOUNT FOR PEAK DEMAND RECORDED 05/2020 34kW AT 125%.

NOTE	DESCRIPTION	LTG	RECEPT	MOTORS	OTHER	GENERAL	TOTAL	BREAKER AMP / P	CCT	PH	CCT	BREAKER AMP / P	TOTAL	GENERAL	OTHER	MOTORS	RECEPT	LTG	DESCRIPTION	NOTE
1	CU-1						0	45 /	1	A	2	45 /	0						CU-4	1
	"						0	/ 2	3	B	4	/ 2	0						"	
1	CU-2						0	45 /	5	A	6	45 /	0						CU-5	1
	"						0	/ 2	7	B	8	/ 2	0						"	
1	CU-3						0	45 /	9	A	10	20 / 1	0						F-5 FURNACE	1
	"						0	/ 2	11	B	12	20 / 1	0						F-4 FURNACE	1
1	F-1 FURNACE						0	20 / 1	13	A	14	/	0						SPACE	
1	F-2 FURNACE						0	20 / 1	15	B	16	30 /	0						CUH-6	1
1	F-3 FURNACE						0	20 / 1	17	A	18	/ 2	0						"	
1	DOOR HOLD OPENS						0	20 / 1	19	B	20	20 /	0						UH-3	1
2	**TEACH WALL 17,20,21**		**1080**				**1080**	**20 / 1**	21	A	22	/ 2	0						"	
2	**TEACH WALL 18,19**		**360**				**360**	**20 / 1**	23	B	24	20 /	0						UH-4	1
	SPACE						0	/	25	A	26	/ 2	0						"	
	SPACE						0	/	27	B	28	20 /	0						RCP-1	1
1	PANEL RA						0	100 /	29	A	30	/ 2	0						"	
	"						0	/ 2	31	B	32	/	0						SPACE	
1	PANEL RB						0	100 /	33	A	34	/	0						SPACE	
	"						0	/ 2	35	B	36	/	0						SPACE	
1	PANEL RC						0	100 /	37	A	38	/	0						SPACE	
	"						0	/ 2	39	B	40	20 / 1	0						EXTERIOR RECEPTS.	1
3	UTILITY PEAK DEMAND					16667	16667	/	41	A	42	/	0						UTILITY PEAK DEMAND	
"	"					16667	16667	/	43	B	44	/	0						"	
"	"					16667	16667	/	45	A	46	/	0						"	

PHASE LOADING SUMMARY

LOAD TYPE (VA)	PH A	PH B
LIGHTING	0.0	0.0
RECEPTACLES	1080.0	360.0
MOTORS	0.0	0.0
OTHER	0.0	0.0
GENERAL	33334.0	16667.0
TOTAL	34414.0	17027.0
PHASE BALANCE	A-B	
	102%	

PANEL LOADING SUMMARY

LOAD TYPE	CONNECTED LOAD KVA		NEC CALCULATED DEMAND LOAD			POWER FACTOR	DEMAND LOAD KW	
LIGHTING	0.0	KVA	x 125% =	0.0	KVA	x 95% =	0.0	KW
RECEPTACLES								
FIRST 10 KVA	1.4	KVA	x 100% =	1.4	KVA	x 100% =	1.4	KW
REMAINDER	0.0	KVA	x 50% =	0.0	KVA	x 100% =	0.0	KW
MOTORS								
LARGEST	0.0	KVA	x 125% =	0.0	KVA	x 90% =	0.0	KW
REMAINDER	0.0	KVA	x 100% =	0.0	KVA	x 90% =	0.0	KW
OTHER	0.0	KVA	x 125% =	0.0	KVA	x 100% =	0.0	KW
GENERAL	50.0	KVA	x 100% =	50.0	KVA	x 100% =	50.0	KW
TOTAL	51.4	KVA		51.4	KVA		0.0	KW

PANEL
CONNECTED PF=
0%

CONNECTED
AMPACITY =
247.3

NEC DEMAND
AMPACITY =
247.3

GENERAL NOTES:
' PROVIDE NEW UPDATED PANEL DIRECTORIES FOR PANELS THAT ARE INCLUDED IN THIS PROJECT.
' PROVIDE TYPED DESCRIPTIONS OF NEW CIRCUITS BEING INSTALLED. INDICATE NEW SPARES IN PENCIL.

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

CATOR | RUMA
& ASSOCIATES, CO.
896 Tabor Street, Lakewood, CO 80401
(303) 232-6200 ▪ www.catorruma.com

Rev. #	Description	Rev. Date
	Revision Schedule	

Westminster Public Schools

2025 Bond Projects
Fairview PK-8
Renovations
7826 Fairview Ave.
Denver, CO 80221

DAO No.: 2025-028

September 25, 2026

ELECTRICAL PANEL
SCHEDULES

E3.0

P:\WPS\2025-423 Fairview Elementary Micro Panel Replacement\Cad
9/24/2026 8:25:51 AM