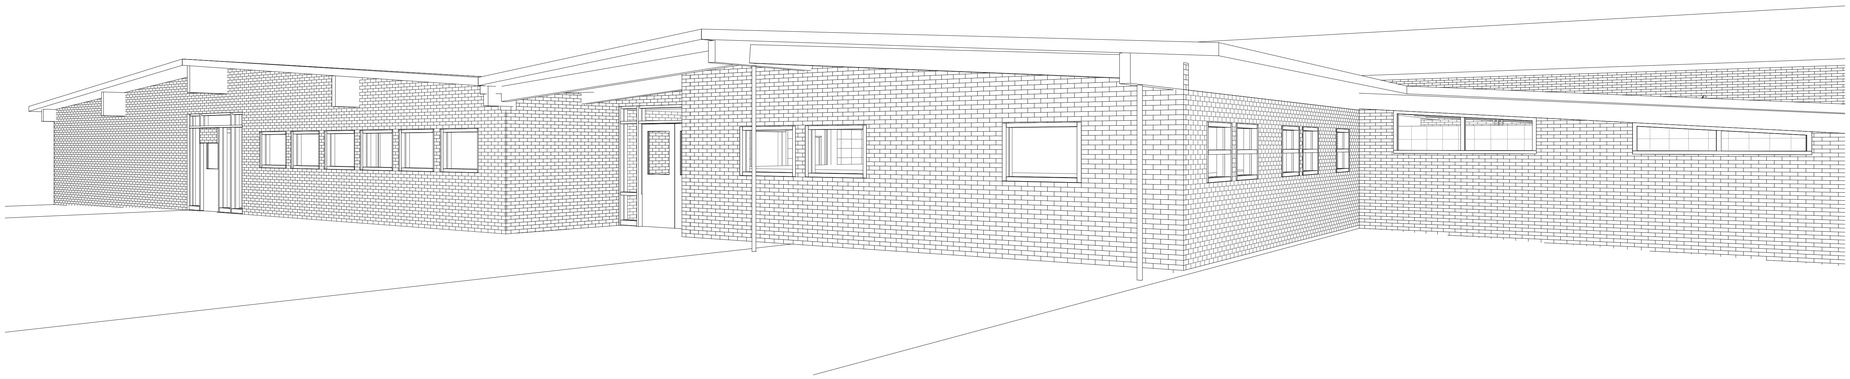
# Westminster Public Schools

## 2026 Bond Projects
## Tennyson Knolls Preparatory School Renovations
## 6330 Tennyson St, Arvada, CO 80003
## DAO No.: 2025-033
## Construction Documents
## September 25, 2026



**Exterior Perspective from Southwest**

## DRAWING INDEX


GENERAL

| | |
|---|---|
| Cover | Cover Sheet |
| G0.0 | Standard Symbols, Abbreviations, General Notes & Building Code Data |

ARCHITECTURE

| | |
|---|---|
| AD1.0 | First Floor Demolition Plan |
| AD2.0 | Exterior Demolition Elevations |
| A1.0 | First Floor Plan |
| A2.0 | Exterior Elevations |
| A6.0 | Casework Sections/Details |
| A6.01 | Interior Elevations |
| A6.02 | Interior Elevations |

PLUMBING

| | |
|---|---|
| P0.0 | Plumbing Cover Sheet |
| PD1.0 | First Floor Demolition Plumbing Plan |
| P1.0 | First Floor Plumbing Plans |



DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

**OWNER:**
WESTMINSTER PUBLIC SCHOOLS
7002 RALEIGH STREET
WESTMINSTER, CO 80030
CONTACT: DON CIANCIO
PHONE #: 720.542.5100

**ARCHITECT:**
DAO ARCHITECTURE
7230 MEADE ST
WESTMINSTER, CO 80030
CONTACT: DAN ORECCHIO
PHONE #: 720.273.0431

**PLUMBING ENGINEERS:**
THE BALLARD GROUP
2525 SOUTH WADSWORTH BLVD. STE. 200
LAKEWOOD, CO 80227
CONTACT: NATE RUST
PHONE: 303.988.4514


**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

DAO No.: 2025-033

September 25, 2026

CONSTRUCTION DOCUMENTS

# Cover


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:21 PM


## MATERIALS SYMBOLS

### EARTHWORKS



EARTH NON-COMPACTED | EARTH COMPACT/FILL | GRAVEL/POROUS FILL

### CONCRETE



CONCRETE | PRECAST CONCRETE | SAND/MORTAR/PLASTER

### METAL



ALUMINUM | BRASS/BRONZE | STEEL

### MASONRY



CONCRETE BLOCK | COMMON/FACE BLOCK | FIRE BRICK

### STONE



BLUESTONE/SLATE/ SOAPSTONE/FLAGGING | LIMESTONE | RUBBLE

### WOOD



FINISH | ROUGH | SHIM | PLYWOOD

### GLASS




GLASS | STRUCTURAL | GLASS BLOCK

### INSULATION



BATT/LOOSE FILL | RIGID | SPRAY/FOAM

### FINISHES




ACOUSTICAL TILE | CARPET AND PAD | CERAMIC TILE | GYPSUM WALLBOARD




TECTUM

### PARTITION INDICATIONS



CAST-IN-PLACE CONCRETE | CONCRETE MASONRY | METAL STUD | WOOD STUD

### ELEVATION INDICATIONS



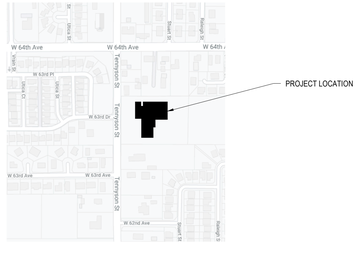
BRICK | CERAMIC/ PORCELAIN TILE | CONCRETE/ PLASTER/GPDW | CONCRETE MASONRY UNIT



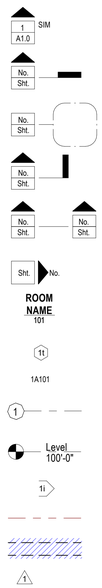
SHEET METAL | SHINGLES/SIDING

## VICINITY MAP

N.T.S.




## REFERENCE SYMBOLS




DETAIL OR SECTION NUMBER

SHEET ON WHICH IT IS FOUND

SECTION REFERENCE

DETAIL REFERENCE

WALL SECTION REFERENCE

BUILDING SECTION REFERENCE

ELEVATION REFERENCE

ROOM IDENTIFIER

WINDOW/OPENING IDENTIFIER

DOOR/OPENING IDENTIFIER

EXISTING GRID LINE

ELEVATION REFERENCE

WALL TYPE REFERENCE

MATCH LINE

DEMOLITION INDICATOR

REVISION INDICATOR

## GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT AND OWNER IN ORDER TO MODIFY PLANS ACCORDINGLY .
2. ALL DISCIPLINES SHALL BE RESPONSIBLE FOR THEIR SCOPE OF WORK . THIS WORK IS TO BE SCHEDULED AND COMPLETED WITH THE GENERAL CONTRACTOR'S FULL KNOWLEDGE.
3. ALL HOT WORK ACTIVITIES (I.E. USING HEAT GUNS, SOLDERING, BRAZING, WELDING, GRINDING, METAL CUTTING, ETC.) OR OTHER ACTIVITIES INVOLVING FLAMES OR SPARKS SHALL BE PRECEDED BY OBTAINING AN APPROVED HOT WORK PERMIT. (IF HOT WORK REQUIRED)
4. THE PROJECT STAGING AREA / CONSTRUCTION ACTIVITIES SHALL NOT CAUSE THE OBSTRUCTION OF PATHS OF EGRESS INSIDE THE BUILDING, BLOCK EXIT DISCHARGE FROM THE BUILDING, OR IMPEDE EMERGENCY VEHICLE ACCESS TO THE BUILDING. CORRIDORS MAY NOT BE USED AS STAGING AREAS OR AS AREAS FOR DEBRIS COLLECTION.
5. ALL NECESSARY MEASURES SHALL BE TAKEN TO PREVENT THE NUISANCE ACTUATION OF ANY NEARBY SMOKE OR DUCT DETECTORS BY CONSTRUCTION ACTIVITIES THAT CREATE DUST OR FUMES INSIDE THE BUILDING.
6. THE CONTRACTOR SHALL NOT HANDLE OR DISABLE ANY FIRE SYSTEMS DEVICES ONLY BUILDING FIRE SYSTEMS PERSONNEL MAY HANDLE OR DISABLE EXISTING FIRE SYSTEMS. ANY OUTAGES REQUIRED FOR THE EXISTING FIRE SYSTEMS SHALL BE PERFORMED ACCORDING TO THE BUILDING PROCEDURES.
7. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.

## PROJECT DESCRIPTION

THE SCOPE OF THIS PROJECT ENTAILS THE REPLACEMENT OF EXISTING CASEWORK THROUGHOUT CLASSROOMS WITHIN THE BUILDING. THE EXTERIOR MASONRY WILL BE REPAIRED AS REQUIRED THROUGHOUT THE BUILDING, AND WILL BE STAINED.

ELECTRICAL AND TECHNOLOGY SYSTEMS WILL BE MODIFIED AS REQUIRED FOR THE NEW CASEWORK INSTALLATION.

NO CIVIL, LANDSCAPE, STRUCTURAL, MECHANICAL, OR FIRE ALARM SCOPE IS ANTICIPATED AS PART OF THIS PROJECT.

## APPLICABLE BUILDING CODES

All new work shall comply with the requirements of the codes and standards adopted by the State of Colorado. The primary Applicable Codes and Standards are:

The 2021 International Code Series:
- The 2021 International Existing Building Code (IEBC)
- The 2021 International Building Code (IBC)
- The 2021 International Fire Code (IFC)
- The 2021 International Mechanical Code (IMC)
- The 2021 International Energy Conservation Code (IECC)

The 2024 Colorado Plumbing Code (CPC)
The 2021 Colorado Fuel Gas Code (CFGC)
The 2023 National Electrical Code
The 2017 ICC A117.1, Accessible and Usable Buildings and Facilities
The 2023 Colorado Model Electric Ready and Solar Ready Code

## STANDARD ABBREVIATIONS

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| A/E | ARCHITECT/ENGINEER | CONN | CONNECTION | GALV | GALVANIZED | MO | MASONRY OPENING | SLA | SLATE |
| AB | ANCHOR BOLT | CONSTR | CONSTRUCTION | GB | GRAB BAR | MOD | MODULE | SLP | SLOPE |
| ABBR | ABBREVIATE | CONT | CONTINUOUS | GDRL | GUARD RAIL | MTD | MOUNTED | SLS | SUB-FLOOR LEVELING SYSTEM |
| ABV | ABOVE | CONTR | CONTRACTOR | GENL | GENERAL | MTG | MEETING | SLV | SLEEVE |
| AC | AIR CONDITIONING | COORD | COORDINATE | GENL CONTR | GENERAL CONTRACTOR | MTL | METAL | SM | SHEET METAL |
| ACID RES | ACID RESISTANT | CORR | CORRIDOR | GFI | GROUND FAULT INTERRUPTER | MTR | MORTAR | SMLS | SEAMLESS |
| ACOUS | ACOUSTICAL | COV PL | COVER PLATE | GL | GLASS | MULL | MULLION | SP | SPACING |
| ACOUS INSUL | ACOUSTICAL INSULATION | CPRS | COMPRESSIBLE | GL BLK | GLASS BLOCK | MULT | MULTIPLE | SPCL | SPECIAL |
| ACOUS PNL | ACOUSTICAL PANEL | CPT | CARPET | GLU LAM | GLUE LAMINATED | MVBL | MOVABLE | SPEC | SPECIFICATION |
| ACOUS PLAS | ACOUSTICAL PLASTER | CRCMF | CIRCUMFERENCE | GLZ | GLAZING | N | NORTH | SPKLR | SPRINKLER |
| ACOUS TILE | ACOUSTICAL TILE | CRS | COLD ROLLED STEEL | GLZ CMU | GLAZED CONCRETE MASONRY UNIT | N/A | NOT APPLICABLE | SPKR | SPEAKER |
| ACT | ACTUAL | CSG | CASING | GND | GROUND | NEG | NEGATIVE | SPRT | SUPPORT |
| AD | AREA DRAIN | CSK | COUNTERSUNK | GPDW | GYPSUM DRY WALL | NF | NEAR FACE | SQFT | SQUARE FOOT |
| ADC | AUTOMATIC DOOR CLOSER | CSMT | CASEMENT | GR BM | GRADE BEAM | NIC | NOT IN CONTRACT | SQ | SQUARE |
| ADDL | ADDITIONAL | CSWK | CASEWORK | GR | GRADE | NO | NUMBER | SQIN | SQUARE INCH |
| ADDM | ADDENDUM | CT | CERAMIC TILE | GRTG | GRATING | NOM | NOMINAL | SQYD | SQUARE YARD |
| ADJ | ADJUSTABLE | C TV | CABLE TELEVISION | GUT | GUTTER | NS | NEAR SIDE | SSK | SERVICE SINK |
| ADJC | ADJACENT | CUB | CUBICLE | GYP | GYPSUM | NTS | NOT TO SCALE | SS | STAINLESS STEEL |
| AF | ACCESS FLOOR | CUR | CURRENT | GYP PLAS | GYPSUM PLASTER | O/O | OUT TO OUT | SSM | SOLID SURFACING MATERIAL |
| AFF | ABOVE FINISHED FLOOR | CW | COLD WATER | H | HIGH | OA | OVERALL | ST | STAIN |
| AFG | ABOVE FINISHED GRADE | DBL GLZ | DOUBLE GLAZING | H&CW | HOT & COLD WATER | OC | ON CENTER | ST | STREET |
| AFS | ABOVE FINISHED SLAB | DEPT | DEPARTMENT | HB | HOSE BIBB | OD | OUTSIDE DIAMETER | STAG | STAGGERED |
| AGGR | AGGREGATE | DET | DETAIL | HC | HOLLOW CORE | OD | OVERFLOW DRAIN | STC | SOUND TRANSMISSION CLASS |
| AHR | ANCHOR | DF | DRINKING FOUNTAIN | HC | HANDICAP | OF | OUTSIDE FACE | STD | STANDARD |
| AHU | AIR HANDLING UNIT | DF | DRAPERY FABRIC | HCMU | HOLLOW CONCRETE MASONRY UNIT | OFCI | OWNER FURNISHED CONTRACTOR INSTALL | STIR | STIRRUP |
| ALD | ALUMINUM DOOR | DFR | DOOR FRAME | HD | HEAVY DUTY | OFF | OFFICE | STL JST | STEEL JOIST |
| ALM | ALARM | DH | DOUBLE HUNG | HDJT | HEAD JOINT | OFOI | OWNER FURNISHED OWNER INSTALLED | STL PL | STEEL PLATE |
| ALT | ALTERNATE | DIA | DIAMETER | HDBD | HARDBOARD | OH | OVERHEAD | STL | STEEL |
| ALUM | ALUMINUM | DIM | DIMENSION | HDR | HEADER | OHD | OVERHEAD DOOR | STN | STONE |
| AMB | AMBIENT | DIST | DISTANCE | HDWD | HARDWOOD | OPER | OPERABLE | STOR | STORAGE |
| AMPL | AMPLIFIER | DIV | DIVIDER | HGT | HEIGHT | OPNG | OPENING | STRUCT | STRUCTURAL |
| AMT | AMOUNT | DIW | DEIONIZED WATER | HLB | HORIZONTAL LOUVER BLINDS | OPP | OPPOSITE | STRUCT STL | STRUCTURAL STEEL |
| ANN | ANNUNCIATOR | DJ | DOUBLE JOIST | HM | HOLLOW METAL | OPT | OPTIONAL | SUPPL | SUPPLEMENT |
| ANOD | ANODIZED | DL | DRAPERY LINER | HMD | HOLLOW METAL DOOR | ORIG | ORIGINAL | SURF | SURFACE |
| ANT | ANTENNA | DMPF | DAMPPROOFING | HMF | HOLLOW METAL FRAME | OVHD | OVERHEAD | SUSP | SUSPENDED |
| AP | ACCESS PANEL | DN | DOWN | HNDRL | HAND RAIL | OXY | OXYGEN | SUSP CLG | SUSPENDED CEILING |
| APPX | APPENDIX | DO | DITTO | HO | HOLD-OPEN | OZ | OUNCE | SVB | SHEET VINYL BASE |
| ARCH | ARCHITECT(URAL) | DR | DOOR | HORIZ | HORIZONTAL | P/C | PRECAST | SVF | SHEET VINYL FLOOR |
| ASB | ASBESTOS | DR CLSR | DOOR CLOSURE | HR | HOUR | PAR | PARALLEL | SYM | SYMBOL |
| ASC | ABOVE SUSPENDED CEILING | DS | DOWNSPOUT | HS | HIGH STRENGTH | PARG | PARGING | SYMM | SYMMETRICAL |
| ASPH | ASPHALT | DST | DOOR STOP | HSB | HIGH STRENGTH BOLT | PB | PANIC BAR | SYST | SYSTEM |
| ASYM | ASYMMETRICAL | DT | DRAIN TILE | HTG | HEATING | PBD | PARTICLE BOARD | T&B | TOP & BOTTOM |
| AV | AUDIO VISUAL | DUPL | DUPLICATE | HVAC | HEATING, VENTILATION, AIR CONDITIONING | PC | PORTLAND CEMENT | T&G | TONGUE & GROOVE |
| AVE | AVENUE | DVTL | DOVETAIL | HW | HOT WATER | PCPLAS | PORTLAND CEMENT PLASTER | T | TABLE |
| AWC | ACOUSTICAL WALL COVERING | DW | DISHWASHER | HYD | HYDRANT | PED | PEDESTAL | TB | TACKBOARD |
| AWP | ACOUSTICAL WALL PANEL | DWG | DRAWING | ID | INSIDE DIAMETER | PERF | PERFORATED | TB-xx | TEST BORING-xx (E.G. TB-1) |
| B&B | BALLED AND BURLAPPED | DWL | DOWEL | IF | INSIDE FACE | PERIM | PERIMETER | TC | TOP OF CURB |
| BAF | BAFFLE | DWR | DRAWER | INCAND | INCANDESCENT | PERM | PERMANENT | TD | TRENCH DRAIN |
| BAL | BALANCE | DWTR | DUMBWAITER | INL | INLET | PERP | PERPENDICULAR | TE | TRANSITION EDGE |
| BB | BULLETIN BOARD | E | EAST | INSTL | INSTALLATION | PF | PANEL FABRIC | TECH | TECHNICAL |
| BC | BOTTOM OF CURB | EA | EACH | INSUL | INSULATION | PFP | PRE-FINISHED PANELS | TEMP | TEMPORARY |
| BD | BOARD | EF | EACH FACE | INTR | INTERIOR | PGBD | PEGBOARD | TER | TERRAZZO |
| BEV | BEVEL | EJ | EXPANSION JOINT | INV | INVERT | PH | PHASE | THK | THICK |
| BF | BOTH FACES | EL | ELEVATION | INV EL | INVERT ELEVATION | PL | PLASTIC LAMINATE | THRES | THRESHOLD |
| BFF | BELOW FINISH FLOOR | ELEC | ELECTRICAL | JAN | JANITOR | PLAM | PLASTIC LAMINATE | THRU | THROUGH |
| BFP | BACKFLOW PREVENTER | ELEV | ELEVATOR | JC | JANITOR'S CLOSET | PLAS | PLASTER | TKBD | TACKBOARD |
| BITUM | BITUMINOUS | EMER | EMERGENCY | JST | JOIST | PLAT | PLATFORM | TLT | TOILET |
| BJT | BED JOINT | EMER SHR | EMERGENCY SHOWER | JT | JOINT | PLBG | PLUMBING | TMPD | TEMPERED |
| BL | BASE LINE | ENAM | ENAMEL | KB | KNEE BRACE | PLYWD | PLYWOOD | TMPD GL | TEMPERED GLASS |
| BLDG | BUILDING | ENCL | ENCLOSURE | KO | KNOCKOUT | POL | POLISHED | TNL | TUNNEL |
| BLK | BLOCK | ENGR | ENGINEER | KOP | KNOCKOUT PANEL | POLY | POLYSTYRENE | TO | TOP OF |
| BLKG | BLOCKING | ENTR | ENTRANCE | KPL | KICK PLATE | POLYISO | POLYISOCYANURATE | TOF | TOP OF FLANGE |
| BLKHD | BULKHEAD | EO | ELECTRICAL OUTLET | KWY | KEYWAY | POS | POSITIVE | TOFF | TOP OF FINISH FLOOR |
| BLST | BALLAST | EP | ELECTRICAL PANEL | L | LEFT | PR | PAIR | TOJ | TOP OF JOIST |
| BM | BEAM | EPS | EXPANDED POLYSTYRENE | LAB | LABORATORY | PREFAB | PREFABRICATED | TOL | TOLERANCE |
| BO | BOTTOM OF | EPX | EPOXY FLOOR | LAT | LAY-IN ACOUSTICAL TILE | PRELIM | PRELIMINARY | TOS | TOP OF STEEL |
| BOC | BACK OF CURB | EQL SP | EQUALLY SPACED | LAV | LAVATORY | PRKG | PARKING | TOT | TOTAL |
| BOW | BOTTOM OF WALL | EQ | EQUAL | LB | POUND | PROJ | PROJECT | TOW | TOP OF WALL |
| BP | BASE PLATE | EQUIP | EQUIPMENT | LBR | LUMBER | PS | PROJECTION SCREEN | TRNBKL | TURNBUCKLE |
| BRCG | BRACING | EQUIV | EQUIVALENT | LCMU | LIGHTWEIGHT CONCRETE MASONRY UNIT | PT | PAINT | TS | TUBE STEEL |
| BRDG JST | BRIDGING JOIST | ERECT | ERECTION | LD BRG | LOAD BEARING | PT | PORCELAIN TILE | TV | TELEVISION |
| BRG | BEARING | ESCAL | ESCALATOR | LDG | LANDING | PTN | PARTITION | TYP | TYPICAL |
| BRG PL | BEARING PLATE | ESMT | EASEMENT | LF | LINEAR FOOT | PVC | POLYVINYL CHLORIDE | UF | UPHOLSTERY FABRIC |
| BRK | BRICK | EST | ESTIMATE | LG | LENGTH | PVG | PAVING | UFD | UNDER FLOOR DUCT |
| BRKT | BRACKET | EW | EACH WAY | LH | LEFT HAND | PVMT | PAVEMENT | UG | UNDERGROUND |
| BRS | BRASS | EXC | EXCAVATE | LHR | LEFT HAND REVERSE | PWR | POWER | UL | UNDERWRITERS LABORATORY |
| BRZ | BRONZE | EXG | EXISTING | LIN | LINOLEUM | QT | QUARRY TILE | ULT | ULTIMATE |
| BS | BOTH SIDES | EXH HD | EXHAUST HOOD | LIQ | LIQUID | QTY | QUANTITY | UNEX | UNEXCAVATED |
| BSMT | BASEMENT | EXH FN | EXHAUST FAN | LKR | LOCKER | QUAL | QUALITY | UNFIN | UNFINISHED |
| BTM | BOTTOM | EXP | EXPANSION | LKR RM | LOCKER ROOM | R | RISER | UNO | UNLESS NOTED OTHERWISE |
| BUR | BUILT-UP ROOF | EXSP | EXPOSED | LL | LIVE LOAD | RAD | RADIUS | UPS | UNITERRUPTIBLE POWER SUPPLY |
| BW | BOTH WAYS | EXST | EXISTING | LNTL | LINTEL | RB | RUBBER BASE | UR | URINAL |
| BOW | BOTTOM OF WALL | EXST GR | EXISTING GRADE | LOC | LOCATION | RBR | RUBBER | UTIL | UTILITY |
| C/C | CENTER TO CENTER | EXT | EXTERIOR | LONG | LONGITUDINAL | RC | REINFORCED CONCRETE | V | VOLT |
| C&G | CURB AND GUTTER | EXTN | EXTENSION | LRG | LARGE | RCP | REINFORCED CONCRETE PIPE | VAC | VACUUM |
| CAB | CABINET | EIFS | EXTERIOR INSULATION & FINISH SYSTEM | LS | LUMP SUM | RD | ROOF DRAIN | VAV | VARIABLE AIR VOLUME |
| CARP | CARPET | F BRK | FIRE BRICK | LT | LIGHT | REC | RECESSED | VB | VAPOR BARRIER |
| CAV | CAVITY | F/F | FACE TO FACE | LT WT | LIGHTWEIGHT | RECD | RECEIVED | VB | VINYL BASE |
| CB | CATCH BASIN | FBD | FIBERBOARD | LTG | LIGHTING | RECPT | RECEPTACLE | VCT | VINYL COMPOSITION TILE |
| CCTV | CLOSED CIRCUIT TELEVISION | FC | FIRE COATED | LVL | LEVEL | RECT | RECTANGULAR | VDB | VISUAL DISPLAY BOARD |
| CEM | CEMENT | FD | FLOOR DRAIN | LVR | LOUVER | REF | REFERENCE | VERT | VERTICAL |
| CEM PLAS | CEMENT PLASTER | FDN | FOUNDATION | LW PLAS | LIGHTWEIGHT PLASTER | REINF | REINFORCEMENT | VEST | VESTIBULE |
| CER | CERAMIC | FEC | FIRE EXTINGUISHER CABINET | LWC | LIGHTWEIGHT CONCRETE | REM | REMOVABLE | VIB | VIBRATION |
| CER TILE | CERAMIC TILE | FF | FACTORY FINISH | M | METER | REQD | REQUIRED | VNR | VENEER |
| C FLG | COUNTER FLASHING | FFE | FINISH FLOOR ELEVATION | MAINT | MAINTENANCE | RESIL | RESILIENT | VOL | VOLUME |
| CH BD | CHALKBOARD | FGL | FIBERGLASS | MARB | MARBLE | RFM | RECESSED FLOOR MAT | VR | VAPOR RETARDER |
| CG | CORNER GUARD | FIN GR | FINISH GRADE | MAS | MASONRY | RFG | ROOFING | VT | VINYL TILE |
| CHANL | CHANNEL | FIN FL | FINISH FLOOR | MATL | MATERIAL | RH | RIGHT HAND | VWC | VINYL WALL COVERING |
| CHFR | CHAMFER | FIN | FINISH | MAX | MAXIMUM | RHR | RIGHT HAND REVERSE | W/ | WITH |
| CHK | CHECK | FL | FLOWLINE | MB | MARKERBOARD | RND | ROUND | W/B | WALL TO WALL |
| CI | CAST IRON | FLDG | FOLDING | MBR | MEMBER | RO | ROUGH OPENING | W/O | WITHOUT |
| CIP | CAST IN PLACE | FLG | FLANGE | MC | METAL CLAD | RST | RUBBER STAIR TREAD | W | WEST |
| CIR | CIRCLE | FLR | FLOOR | MDF | MEDIUM DENSITY FIBERBOARD | RT | RUBBER TILE | WC | WATER CLOSET |
| CJ | CONTROL JOINT | FLR SK | FLOOR SINK | MDO | MEDIUM DENSITY OVERLOAD | RV | ROOF VENT | WC | WALL COVERING |
| CL | CENTER LINE | FLR PL | FLOOR PLATE | ME | MATCH EXISTING | RVS | REVERSE | WCPT | WALL CARPET |
| CLG | CEILING | FLR FIN | FLOOR FINISH | ME | MISCELLANEOUS EQUIPMENT | S | SOUTH | WD | WOOD |
| CLG DIFF | CEILING DIFFUSER | FLT GL | FLOAT GLASS | MECH | MECHANICAL | S | SEATING | WDD | WOOD DOOR |
| CLG HT | CEILING HEIGHT | FLOUR | FLUORESCENT | MED | MEDIUM | SALV | SALVAGE | WDW | WINDOW |
| CLL | CONTRACT LIMIT LINE | FOC | FACE OF CONCRETE | MEMB | MEMBRANE | SB | SPLASH BLOCK | WF | WOOD FLOORING |
| CLOS | CLOSET | FOM | FACE OF MASONRY | MEZZ | MEZZANINE | SC | SOLID CORE | WF | WIDE FLANGE |
| CLR | CLEAR | FOS | FACE OF STUD | MFG | MANUFACTURING | SCH | SCHEDULE | WGL | WIRE GLASS |
| CLSR | CLOSURE | FPL | FIREPLACE | MFR | MANUFACTURER | SCMU | SOLID CONCRETE MASONRY UNIT | WH | WALL HUNG |
| CMPST | COMPOSITE | FPRF | FIREPROOFING | MH | MANHOLE | SCRN | SCREEN | WHSE | WAREHOUSE |
| CMU | CONCRETE MASONRY UNIT | FRM | FRAME | MIL | MILLIMETER | SD | STORM DRAIN | WL | WIND LOAD |
| CNR | CORNER | FRNT | FRONT | MIN | MINIMUM | SECT | SECTION | WLD | WELDED |
| CNTR | COUNTER | FS | FULL SIZE | MIR | MIRROR | SF | SYSTEMS FURNITURE | WR | WATER RESISTANT |
| CO | CLEANOUT | FSP | FIRE STANDPIPE | MISC | MISCELLANEOUS | SGL | SINGLE | WS | WEATHERSTRIPPING |
| COL | COLUMN | FSTNR | FASTENER | MK | MARK | SHR | SHOWER | WSCT | WAINSCOT |
| COMM | COMMERCIAL | FTG | FOOTING | MKRBD | MARKERBOARD | SHTHG | SHEATHING | WT | WEIGHT |
| COMPL | COMPLETE | FURR | FURRING | ML | MATCH LINE | SHVL | SHELVES | WTR | WATER |
| CONC | CONCRETE | FUT | FUTURE | MLC | METAL LABORATORY CASEWORK | SIM | SIMILAR | WTRPRF | WATERPROOFING |
| CONC FL | CONCRETE FLOOR | FXTR | FIXTURE | MLDG | MOLDING | SJ | SLIP JOINT | WWM | WELDED WIRE MESH |
| CONF | CONFERENCE | GA | GYPSUM ASSOCIATION | MLWK | MILLWORK | SK | SINK | X SECT | CROSS SECTION |

## CODE REVIEW

This project entails replacing electrical micro-panels, light fixtures, drinking fountains, and installation of power for voice lift systems at the existing Tennyson Knolls Preparatory Academy in Denver, CO (unincorporated Adams County).
This building is an existing E Occupancy building and will remain an E occupancy.

**2021 IEBC**

**Chapter 3 – Provisions for All Compliance Methods**
302 - General Provisions
- 302.4 New and replacement materials - Except as otherwise required or permitted by this code, materials permitted by the applicable code for new construction shall be used.

306 – Accessibility for Existing Buildings
- 306.1 Scope - The provisions of Sections 306.1 through 306.7.16 apply to maintenance and *repair*, *change of occupancy*, *additions* and *alterations* to *existing buildings*, including those identified as *historic buildings*.
- 306.7 Alterations - A *facility* that is altered shall comply with the applicable provisions in chapter 11 of the *International Building Code*, ICC A117.1 and the provisions of Sections 306.7.1 through 306.7.16, *unless technically infeasible*. Where compliance with this section is *technically infeasible*, the *alteration* shall provide access to the maximum extent technically feasible.
  - 306.7.1 Alterations affecting an Area of Primary Function - Where an *alteration* affects the accessibility to, or contains an area of *primary function*, the route to the *primary function* area shall be accessible. The accessible route to the *primary function* area shall include toilet *facilities* and drinking fountains serving the area of *primary function*.

**Chapter 5 - Prescriptive Compliance Method**
503 - Alterations
- 503.1 General - *Alterations* to any building or structure shall comply with the requirements of the *International Building Code* for new construction. *Alterations* shall be such that the *existing building* or structure is not less complying with the provisions of the *International Building Code* than the *existing building* or structure was prior to the *alteration*.

**2021 IBC**

**Chapter 3 – Use and Occupancy Classification**
305 - Educational: Group E - Educational Group E occupancy includes, among others, the use of a building or structure, or a portion thereof, by six or more persons at any one time for educational purposes through the 12th grade.

**Chapter 5 – General Building Heights and Areas**
Building height and area are existing conditions that will not be altered by this project's scope.

**Chapter 6 - Types of Construction**
602 - Construction Classification
- 602.3 - Type IIIB - The existing building is assumed to be type IIIB, as the exterior walls are of noncombustible materials, and the interior building elements are of any material permitted by the IBC.

**Chapter 9 - Fire Protection Systems**
903 - Automatic Fire Sprinklers
- 903.2 – Where Required - Automatic sprinklers will not be required as the building is an existing structure. [The existing building is un-sprinklered]

**Chapter 10 – Means of Egress**
Means of Egress are existing conditions that will not be altered by this project's scope.

**Chapter 11 – Accessibility**
1110 – Other Features and Facilities
- 1110.3 Sinks - Where sinks are provided, at least 5 percent but not less than one provided in accessible spaces shall be accessible.
- 1110.10 Storage - Where fixed or built-in storage elements such as cabinets, coat hooks, shelves, medicine cabinets, lockers, closets and drawers are provided in required accessible spaces, at least 5 percent, but not less than one of each type shall be accessible.

**Chapter 13 – Energy Efficiency**
Energy efficiency features are existing and are not being altered by the scope of this project.

**Chapter 29 – Plumbing Systems**
See table 2902.1.

**SPECIAL INSPECTIONS:**
The following Special Inspections will be required:
1. Fire-Resistant Penetrations and Joints (1705.18)

Table 2902.1

| Classification | Occupancy | Description | Water Closets | | Lavatories | | Bathtubs/ Showers | Drinking Fountains | Other |
|---|---|---|---|---|---|---|---|---|---|
| | | | Male | Female | Male | Female | | | |
| Educational | E | Educational facilities | 1/50 | 1/50 | 1/50 | 1/50 | N/A | 1/100 | # Service Sink |
| | | | 474/50 =9.5 | 474/50 =9.5 | 474/50 =9.5 | 474/50 =9.5 | | 948/100 =9.5 | 1 Service Sink |
| | | Total Required | **Existing** | **Existing** | **Existing** | **Existing** | N/A | **Existing** | **Existing** |
| | | Total Provided | **Existing** | **Existing** | **Existing** | **Existing** | N/A | **Existing** | **Existing** |


DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com


| Rev. # | Description | Rev. Date |
|---|---|---|
| Revision Schedule | | |

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

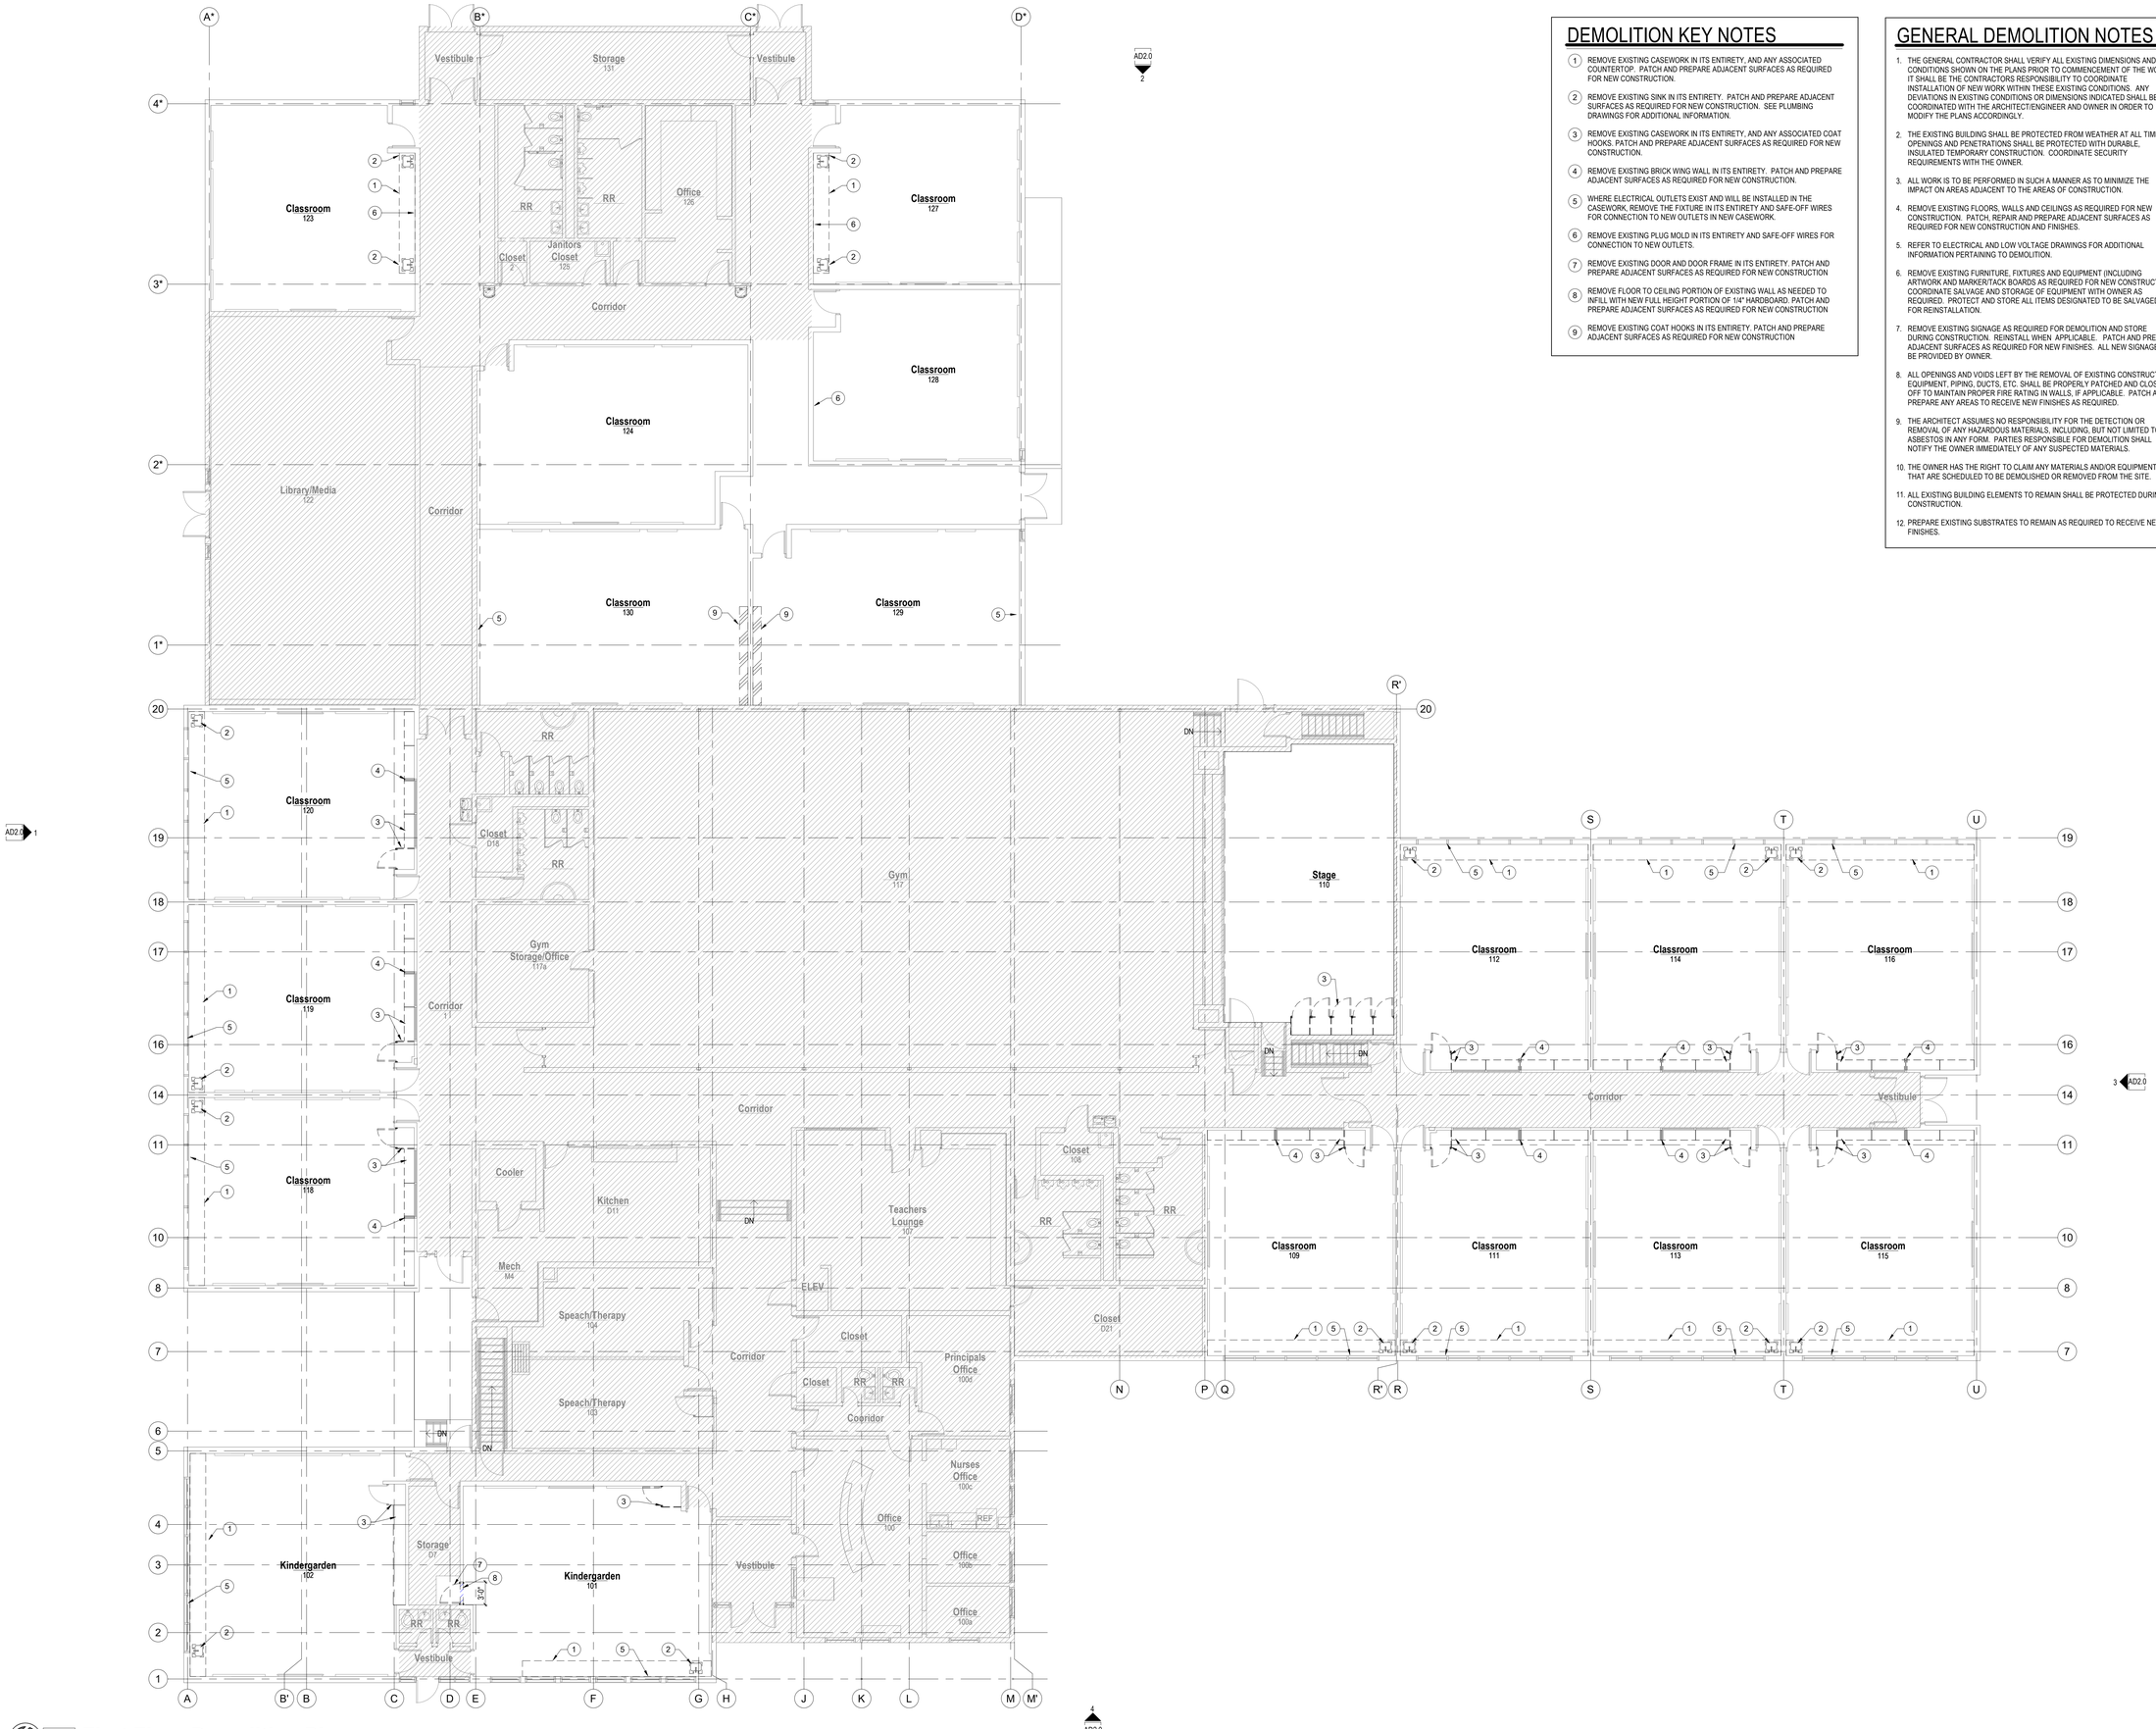
DAO No.: 2025-033

September 25, 2026

Standard Symbols, Abbreviations, General Notes & Building Code Data

**G0.0**


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:22 PM




## DEMOLITION KEY NOTES

1. REMOVE EXISTING CASEWORK IN ITS ENTIRETY, AND ANY ASSOCIATED COUNTERTOP. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
2. REMOVE EXISTING SINK IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
3. REMOVE EXISTING CASEWORK IN ITS ENTIRETY, AND ANY ASSOCIATED COAT HOOKS. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
4. REMOVE EXISTING BRICK WING WALL IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION.
5. WHERE ELECTRICAL OUTLETS EXIST AND WILL BE INSTALLED IN THE CASEWORK, REMOVE THE FIXTURE IN ITS ENTIRETY AND SAFE-OFF WIRES FOR CONNECTION TO NEW OUTLETS IN NEW CASEWORK.
6. REMOVE EXISTING PLUG MOLD IN ITS ENTIRETY AND SAFE-OFF WIRES FOR CONNECTION TO NEW OUTLETS.
7. REMOVE EXISTING DOOR AND DOOR FRAME IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
8. REMOVE FLOOR TO CEILING PORTION OF EXISTING WALL AS NEEDED TO INFILL WITH NEW FULL HEIGHT PORTION OF 1/4" HARDBOARD. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION
9. REMOVE EXISTING COAT HOOKS IN ITS ENTIRETY. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION

## GENERAL DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON THE PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT/ENGINEER AND OWNER IN ORDER TO MODIFY THE PLANS ACCORDINGLY.
2. THE EXISTING BUILDING SHALL BE PROTECTED FROM WEATHER AT ALL TIMES. OPENINGS AND PENETRATIONS SHALL BE PROTECTED WITH DURABLE, INSULATED TEMPORARY CONSTRUCTION. COORDINATE SECURITY REQUIREMENTS WITH THE OWNER.
3. ALL WORK IS TO BE PERFORMED IN SUCH A MANNER AS TO MINIMIZE THE IMPACT ON AREAS ADJACENT TO THE AREAS OF CONSTRUCTION.
4. REMOVE EXISTING FLOORS, WALLS AND CEILINGS AS REQUIRED FOR NEW CONSTRUCTION. PATCH, REPAIR AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW CONSTRUCTION AND FINISHES.
5. REFER TO ELECTRICAL AND LOW VOLTAGE DRAWINGS FOR ADDITIONAL INFORMATION PERTAINING TO DEMOLITION.
6. REMOVE EXISTING FURNITURE, FIXTURES AND EQUIPMENT (INCLUDING ARTWORK AND MARKER/TACK BOARDS AS REQUIRED FOR NEW CONSTRUCTION. COORDINATE SALVAGE AND STORAGE OF EQUIPMENT WITH OWNER AS REQUIRED. PROTECT AND STORE ALL ITEMS DESIGNATED TO BE SALVAGED FOR REINSTALLATION.
7. REMOVE EXISTING SIGNAGE AS REQUIRED FOR DEMOLITION AND STORE DURING CONSTRUCTION. REINSTALL WHEN APPLICABLE. PATCH AND PREPARE ADJACENT SURFACES AS REQUIRED FOR NEW FINISHES. ALL NEW SIGNAGE TO BE PROVIDED BY OWNER.
8. ALL OPENINGS AND VOIDS LEFT BY THE REMOVAL OF EXISTING CONSTRUCTION, EQUIPMENT, PIPING, DUCTS, ETC. SHALL BE PROPERLY PATCHED AND CLOSED OFF TO MAINTAIN PROPER FIRE RATING IN WALLS, IF APPLICABLE. PATCH AND PREPARE ANY AREAS TO RECEIVE NEW FINISHES AS REQUIRED.
9. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.
10. THE OWNER HAS THE RIGHT TO CLAIM ANY MATERIALS AND/OR EQUIPMENT THAT ARE SCHEDULED TO BE DEMOLISHED OR REMOVED FROM THE SITE.
11. ALL EXISTING BUILDING ELEMENTS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION.
12. PREPARE EXISTING SUBSTRATES TO REMAIN AS REQUIRED TO RECEIVE NEW FINISHES.

## 1 First Floor Demolition Plan

SCALE: 1/8" = 1'-0"


DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com


**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

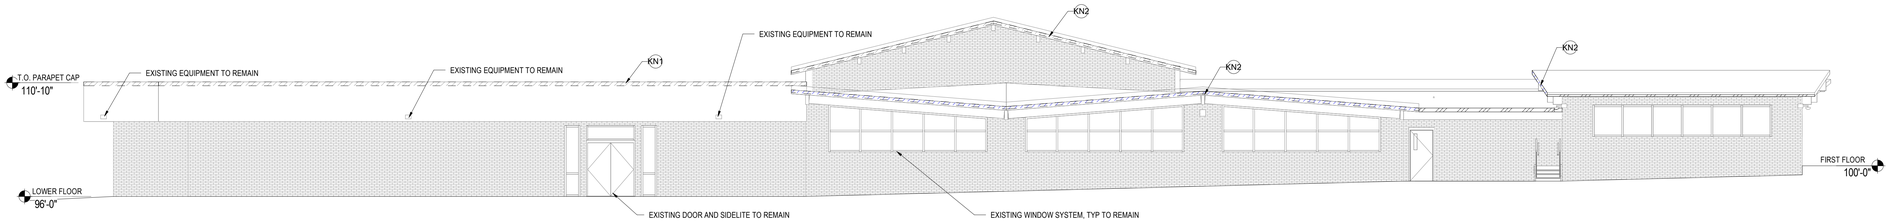
DAO No.:2025-033

September 25, 2026

First Floor Demolition Plan

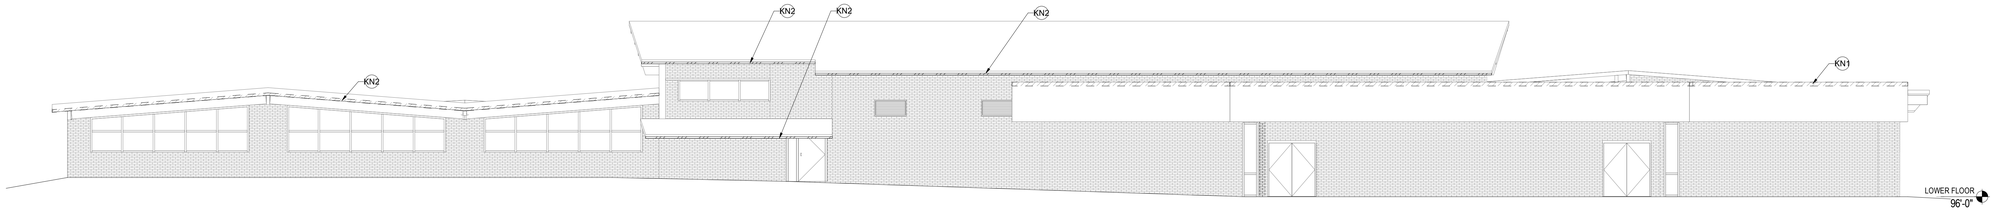
# AD1.0


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:23 PM



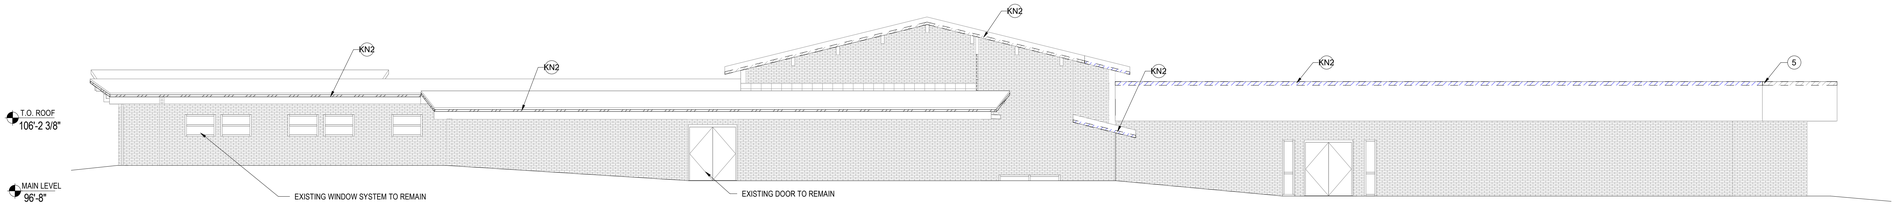

## 1 Exterior Demolition Elevation - North

SCALE: 1/8" = 1'-0"



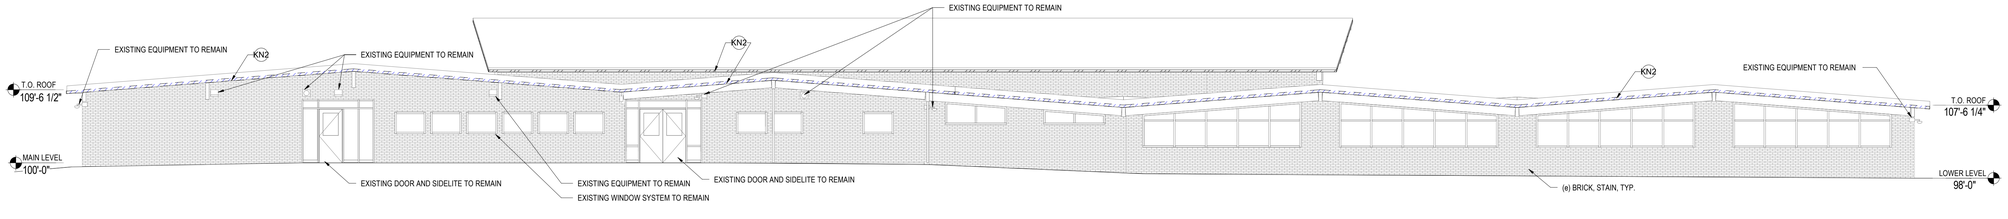

## 2 Exterior Demolition Elevation - East

SCALE: 1/8" = 1'-0"




## 3 Exterior Demolition Elevation - South

SCALE: 1/8" = 1'-0"




## 4 Exterior Demolition Elevation - West

SCALE: 1/8" = 1'-0"

## GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS SHOWN ON PLANS PRIOR TO COMMENCEMENT OF THE WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE INSTALLATION OF NEW WORK WITHIN THESE EXISTING CONDITIONS. ANY DEVIATIONS IN EXISTING CONDITIONS OR DIMENSIONS INDICATED SHALL BE COORDINATED WITH THE ARCHITECT AND OWNER IN ORDER TO MODIFY PLANS ACCORDINGLY.
2. ALL DISCIPLINES SHALL BE RESPONSIBLE FOR THEIR SCOPE OF WORK. THIS WORK IS TO BE SCHEDULED AND COMPLETED WITH THE GENERAL CONTRACTOR'S FULL KNOWLEDGE.
3. ALL HOT WORK ACTIVITIES (I.E. USING HEAT GUNS, SOLDERING, BRAZING, WELDING, GRINDING, METAL CUTTING, ETC.) OR OTHER ACTIVITIES INVOLVING FLAMES OR SPARKS SHALL BE PRECEDED BY OBTAINING AN APPROVED HOT WORK PERMIT. (IF HOT WORK REQUIRED)
4. THE PROJECT STAGING AREA / CONSTRUCTION ACTIVITIES SHALL NOT CAUSE THE OBSTRUCTION OF PATHS OF EGRESS INSIDE THE BUILDING, BLOCK EXIT DISCHARGE FROM THE BUILDING, OR IMPEDE EMERGENCY VEHICLE ACCESS TO THE BUILDING. CORRIDORS MAY NOT BE USED AS STAGING AREAS OR AS AREAS FOR DEBRIS COLLECTION.
5. ALL NECESSARY MEASURES SHALL BE TAKEN TO PREVENT THE NUISANCE ACTUATION OF ANY NEARBY SMOKE OR DUCT DETECTORS BY CONSTRUCTION ACTIVITIES THAT CREATE DUST OR FUMES INSIDE THE BUILDING.
6. THE CONTRACTOR SHALL NOT HANDLE OR DISABLE ANY FIRE SYSTEMS DEVICES. ONLY BUILDING FIRE SYSTEMS PERSONNEL MAY HANDLE OR DISABLE EXISTING FIRE SYSTEMS. ANY OUTAGES REQUIRED FOR THE EXISTING FIRE SYSTEMS SHALL BE PERFORMED ACCORDING TO THE BUILDING PROCEDURES.
7. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE DETECTION OR REMOVAL OF ANY HAZARDOUS MATERIALS, INCLUDING, BUT NOT LIMITED TO, ASBESTOS IN ANY FORM. PARTIES RESPONSIBLE FOR DEMOLITION SHALL NOTIFY THE OWNER IMMEDIATELY OF ANY SUSPECTED MATERIALS.

## Note

1. ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

## EXTERIOR DEMOLITION KEY NOTES

(1) REMOVE EXISTING PARAPTET CAP, ALL OTHER ELEMENTS TO REMAIN. SEE 5/AD2.0 FOR ADDITIONAL INFORMATION

KN2 DEMO CAP FLASHING

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

| Rev. # | Description | Rev. Date |
|---|---|---|
| Revision Schedule | | |

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

DAO No.: 2025-033

September 25, 2026

Exterior Demolition Elevations

# AD2.0

Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:25 PM




## 1 First Floor Plan

SCALE: 1/8" = 1'-0"

## GENERAL PLAN NOTES

1. DRAWINGS & SPECIFICATIONS ARE COMPLIMENTARY COMPONENTS OF THE CONTRACT DOCUMENTS, REVIEW ALL DRAWINGS AND SPECIFICATIONS FOR THE COMPLETE SCOPE OF WORK. NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION IF INCONSISTENCIES, CONTRADICTIONS OR OMISSIONS ARE DISCOVERED.
2. DO NOT SCALE DRAWINGS, IF DIMENSIONAL INFORMATION IS REQUIRED & NOT FOUND, NOTIFY ARCHITECT IMMEDIATELY FOR CLARIFICATION.
3. ALL DIMENSIONS ARE TO COLUMN CENTERLINES OR FACE OF FINISHED WALLS OR SURFACES UNLESS NOTED OTHERWISE.
4. REFER TO DEMOLITION DRAWINGS FOR WORK REQUIRED IN ADVANCE OF CONSTRUCTION AND COORDINATE ACCORDINGLY.
5. REFER TO ELECTRICAL AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
6. REPLACE CEILING TILES WHERE DAMAGED OR WHERE HOLES REMAIN FROM PREVIOUSLY INSTALLED LIGHT FIXTURES. REPLACEMENT CEILING TILES SHOULD BE OF LIKE AGE AND APPEARANCE. COORDINATE WITH OWNER FOR THE USE OF ATTIC STOCK, AND/OR FOR THE RELOCATION AND REUSE OF EXISTING CEILING TILES FROM ELSEWHERE IN THE BUILDING.
7. TOUCH UP PAINT ON CEILING GRID WHERE DAMAGE IS PRESENT WITH COLOR MATCHED PAINT.
8. WHERE PORTIONS OF WALLS ARE REMOVED AND REPLACED AS REQUIRED FOR THE INTALLATION OF DRINKING FOUNTAINS, PROVIDE IN WALL BLOCKING AS REQUIRED FOR THE INSTALLATION OF THE FOUNTAIN AND METAL SURROUND.

## KEY NOTES

1. MAPLE-VENEERED PLYWOOD BASE CABINETS WITH SOLID SURFACE COUNTERTOP
2. SINGLE BASIN ADA SINK WITH BUBBLER. RE: PLUMBING
3. FULL-HEIGHT WOOD-VENEERED CABINET WITH DOOR LOCK
4. MAPLE-VENEERED PLYWOOD SHELF WITH COAT HOOKS BELOW
5. MAPLE-VENEERED PLYWOOD UPPER CABINETS
6. INSTALL NEW DUAL OUTLET IN CABINET FILLER PANEL. EXTEND EXISTING CIRCUITING AS REQUIRED
7. INSTALL NEW DUAL OUTLET IN EXISTING IN-WALL J-BOX. EXTEND CIRCUITING AS REQUIRED.
8. INFILL EXISTING WALL OPENING WITH MATCHING WALL ASSEMBLY. SEE 10/A6.0 FOR ADDITIONAL INFORMATION
9. FULL-HEIGHT WOOD-VENEERED STORAGE CABINET WITH DOOR LOCK

## LEGEND

EXTENTS OF AREA WITH LIMITED TO NO ARCHITECTURAL SCOPE

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

| Rev. # | Description | Rev. Date |
|---|---|---|
| | Revision Schedule | |

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

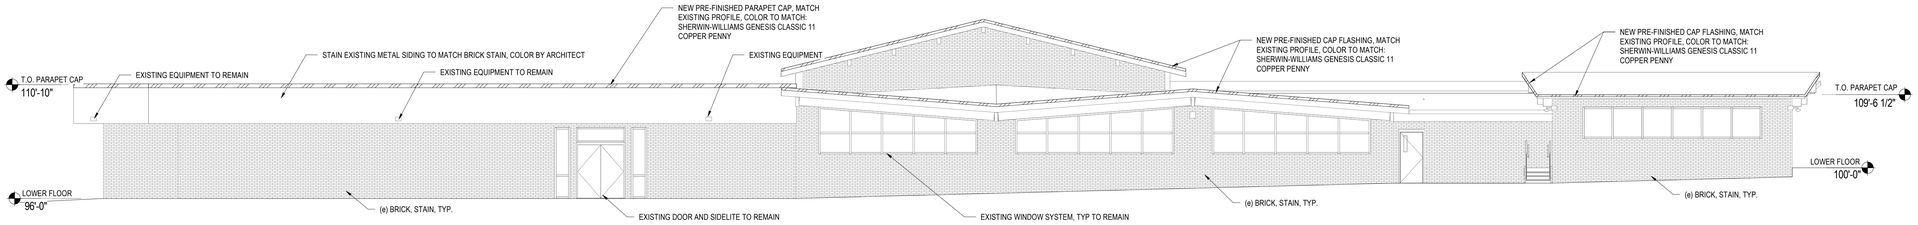
DAO No.: 2025-033

September 25, 2026

First Floor Plan

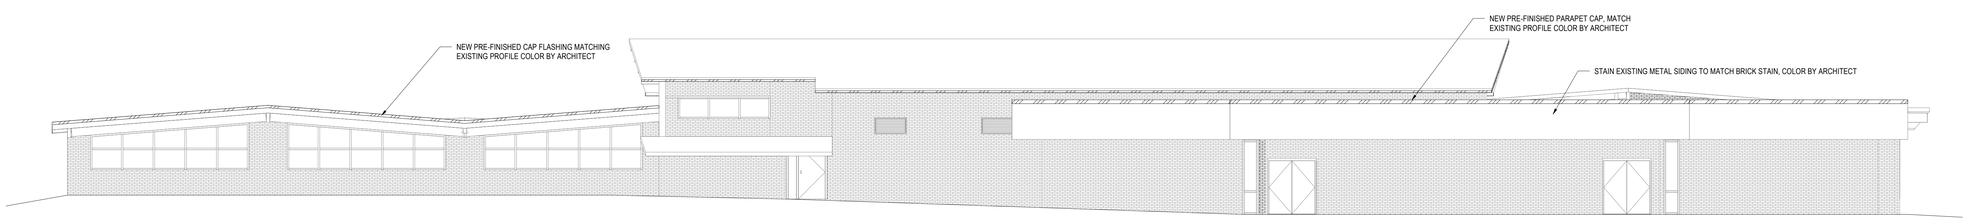
# A1.0

Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:26 PM



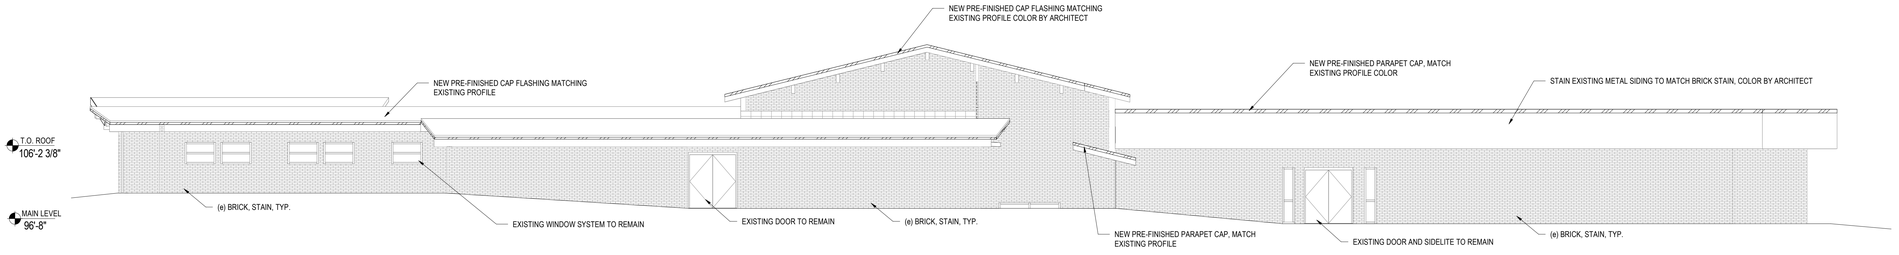

## 1 Exterior Elevation - North

SCALE: 1/8" = 1'-0"



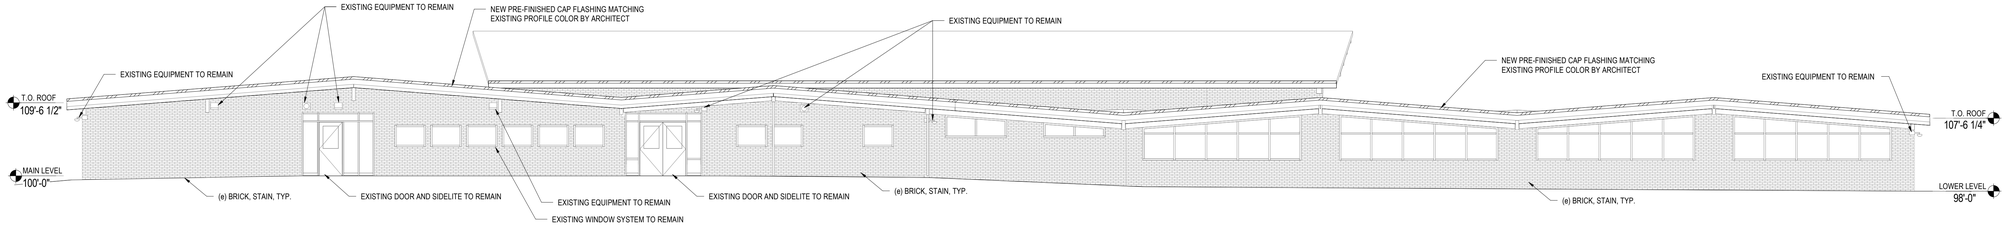

## 2 Exterior Elevation - East

SCALE: 1/8" = 1'-0"




## 3 Exterior Elevation - South

SCALE: 1/8" = 1'-0"




## 4 Exterior Elevation - West

SCALE: 1/8" = 1'-0"

## Note

1. ALL SIGNAGE AND EQUIPMENT TO BE REMOVED AS NEEDED FOR STAINING OF BRICK. RE-INSTALL AS REQUIRED

2. ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING (COLOR BY ARCHITECT)

3. EXTERIOR BRICK TO BE RE-POINTED AT 2' ABOVE FINISHED FLOOR THROUGHOUT THE PERIMETER OF THE BUILDING

## BASIS OF DESIGN LEGEND

EXISTING BRICK

ALL BRICK TO BE STAINED, BASIS OF DESIGN: BRICK IMAGING, COLOR SELECTED BY ARCHITECT

NEW CAP FLASHING AND PARAPET CAPS, PRE-FINISHED TO MATCH. PAINT COLOR SELECTED BY T=ARCHITECT. COLOR: COPPER PENNY

BRICK REPAIR SCOPE GENERAL NOTES:

1. CONTRACTOR TO FIELD VERIFY EXTENTS OF ALL CRACKED AND/OR DAMAGED BRICK. CONFIRM OWNER FOR DIRECTION ON REPAIR AND REPLACEMENT.
2. CONTRACTOR TO PROVIDE NOT-TO-EXCEED PRICING FOR BRICK RE-POINTING AND REPAIR IN AREAS INDICATED ON THE DRAWINGS ESTIMATE IS BUILDING PERIMETER X2' HIGH. CONTRACTOR TO PROVIDE UNIT PRICING FOR ADDITIONAL AREAS OF REPAIR. AND/OR TO CREDIT AREAS INDICATED THAT ARE FOUND TO NOT NEED REPAIR.

DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

| Rev. # | Description | Rev. Date |
|---|---|---|
| | Revision Schedule | |

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

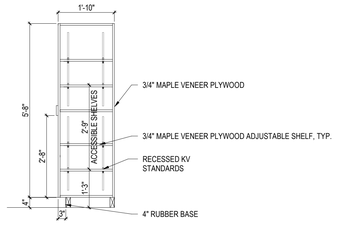
DAO No.: 2025-033

September 25, 2026

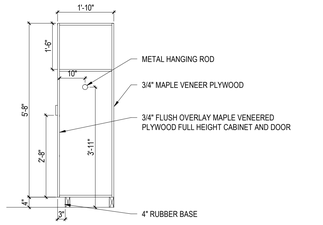
Exterior Elevations

# A2.0


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:28 PM





## 1 Teacher's Cabinet - Left
SCALE: 1/2" = 1'-0"



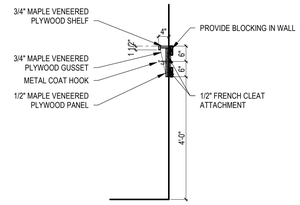

## 2 Teacher's Cabinet - Right
SCALE: 1/2" = 1'-0"



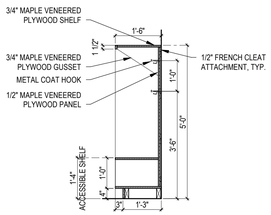

## 3 Sink Base Cabinet Only
SCALE: 1/2" = 1'-0"





## 4 Base Cabinet Only
SCALE: 1/2" = 1'-0"



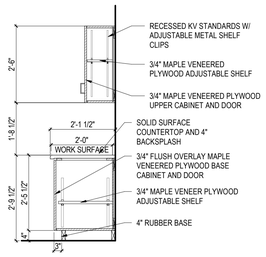

## 5 Backpack Storage Section
SCALE: 1/2" = 1'-0"



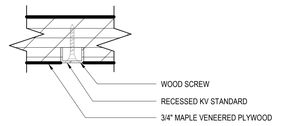

## 6 Classroom Shelf
SCALE: 1/2" = 1'-0"




## 8 Sink with Upper
SCALE: 1/2" = 1'-0"




## 9 Base with Uppers
SCALE: 1/2" = 1'-0"




## 7 Typ. Recessed KV Standard
SCALE: 12" = 1'-0"

## CASEWORK GENERAL NOTES

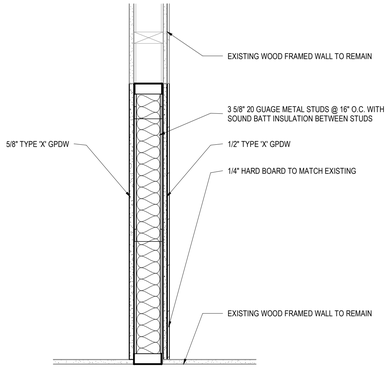
1. ALL CASEWORK SHALL BE CONSTRUCTED TO MEET THE FOLLOWING AWI CONSTRUCTION GRADES:
   WOOD VENEERED PLYWOOD CASEWORK
   -GRADE = CUSTOM
   -SOLID SURFACE COUNTERTOPS AND BACKSPLASH

2. TYPICAL MATERIALS:
   -HEAVY DUTY DRAWER SLIDES
   -FIVE KNUCKLE HINGES
   -WIRE PULLS
   -METAL SHELF CLIPS ON RECESSED K.V. STANDARDS

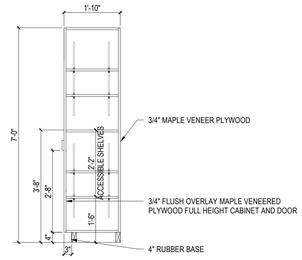
3. FINISHES AS BELOW:
   -CASEWORK: PLAIN SLICED WHITE MAPLE WITH CLEAR FINISH
   -COUNTERTOPS: SOLID SURFACE FORMICA CLASSICS RIVER ROCK MOSAIC 656 MATTE FINISH

4. RECESS ALL KV STANDARDS PER DETAIL 7 ON SHEET A6.0

5. BOTH SIDES OF TEACHERS CABINET SHALL BE LOCKABLE. LOCKS SHOULD BE COMPATIBLE WITH DISTRICT STANDARD (BEST 1CP7WC1626 CORES)




## 10 Door Infill
SCALE: 1 1/2" = 1'-0"




## 11 Storage Cabinet
SCALE: 1/2" = 1'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

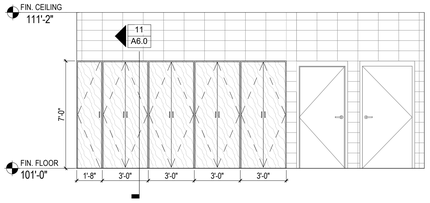
DAO No.:2025-033

September 25, 2026

Casework Sections/Details

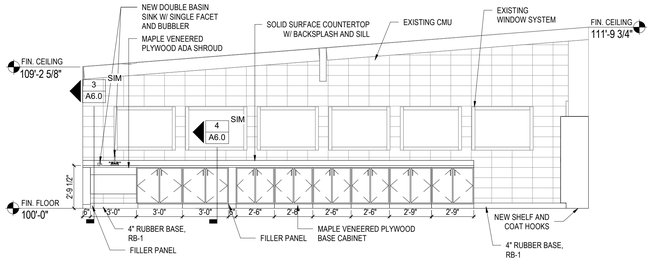
# A6.0

Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:28 PM



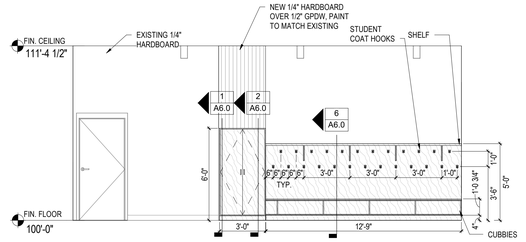

## 1 Stage (110) - West

1 A1.0 SCALE: 1/4" = 1'-0"



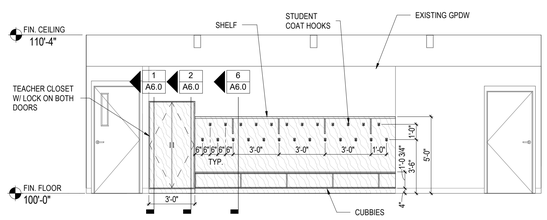

## 2 Kindergarden (101) - West

1 A1.0 SCALE: 1/4" = 1'-0"



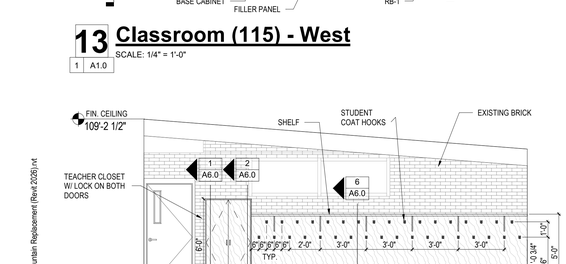

## 3 Kindergarden (101) - North

1 A1.0 SCALE: 1/4" = 1'-0"



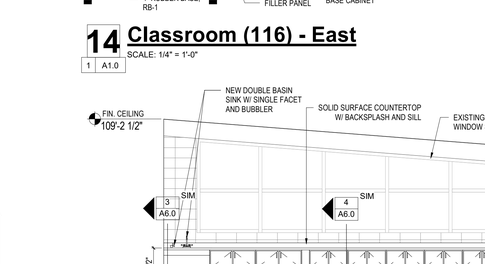

## 4 Kindergarden (102) - East

1 A1.0 SCALE: 1/4" = 1'-0"



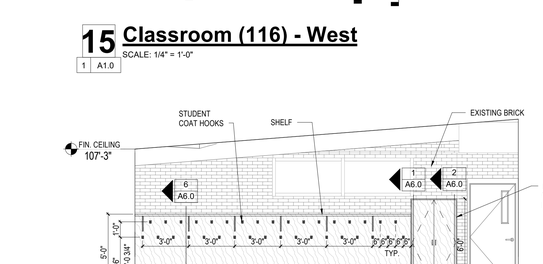

## 5 Kindergarden (102) - West

1 A1.0 SCALE: 1/4" = 1'-0"



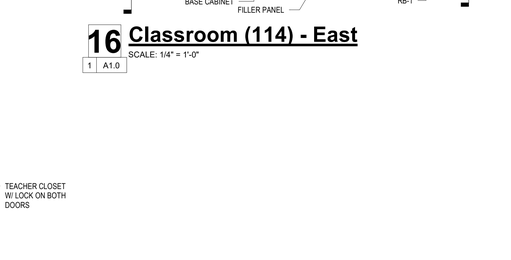

## 6 Classroom (109) -East

1 A1.0 SCALE: 1/4" = 1'-0"



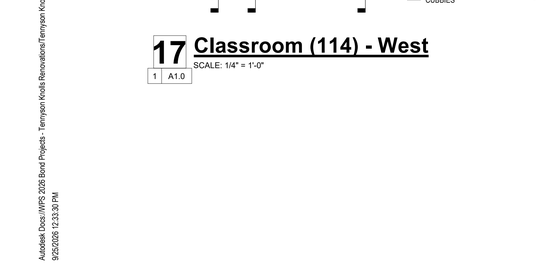

## 7 Classroom (109) - West

1 A1.0 SCALE: 1/4" = 1'-0"



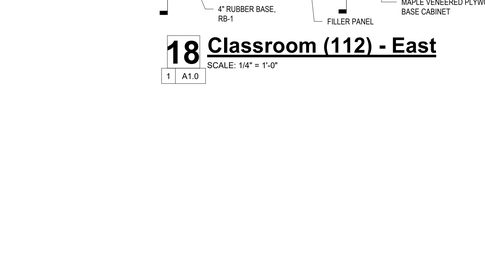

## 8 Classroom (111) - East

1 A1.0 SCALE: 1/4" = 1'-0"



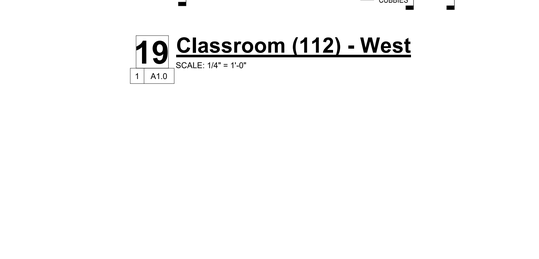

## 9 Classroom (111) - West

1 A1.0 SCALE: 1/4" = 1'-0"




## 10 Classroom (113) - East

1 A1.0 SCALE: 1/4" = 1'-0"




## 11 Classroom (113) - West

1 A1.0 SCALE: 1/4" = 1'-0"




## 12 Classroom (115) - East

1 A1.0 SCALE: 1/4" = 1'-0"




## 13 Classroom (115) - West

1 A1.0 SCALE: 1/4" = 1'-0"




## 14 Classroom (116) - East

1 A1.0 SCALE: 1/4" = 1'-0"




## 15 Classroom (116) - West

1 A1.0 SCALE: 1/4" = 1'-0"




## 16 Classroom (114) - East

1 A1.0 SCALE: 1/4" = 1'-0"




## 17 Classroom (114) - West

1 A1.0 SCALE: 1/4" = 1'-0"




## 18 Classroom (112) - East

1 A1.0 SCALE: 1/4" = 1'-0"




## 19 Classroom (112) - West

1 A1.0 SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

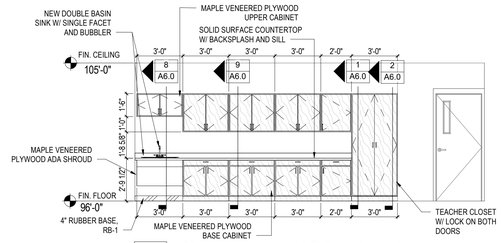
DAO No.:2025-033

September 25, 2026

Interior Elevations

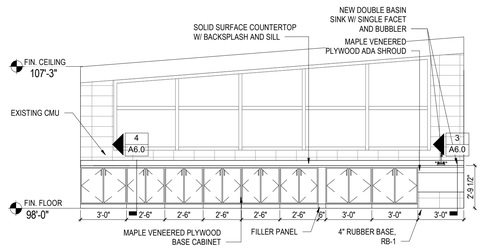
**A6.01**

Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:30 PM



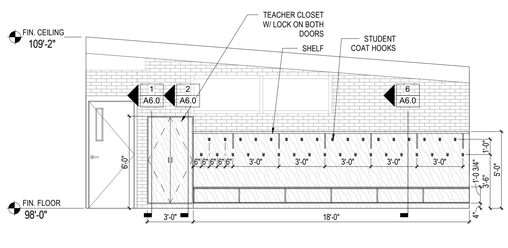

## 1 Classroom (128) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



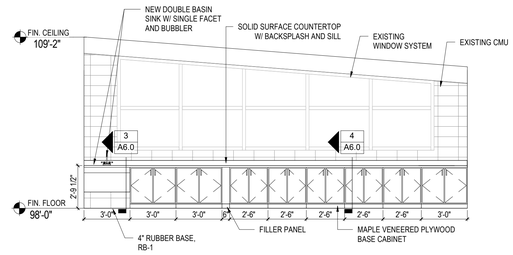

## 2 Classroom (118) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



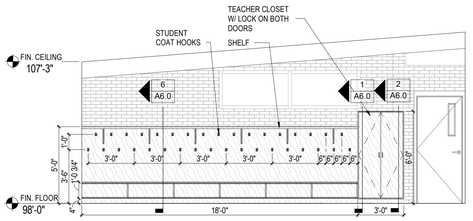

## 3 Classroom (118) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



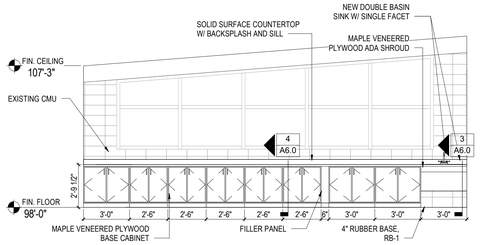

## 4 Classroom (119) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



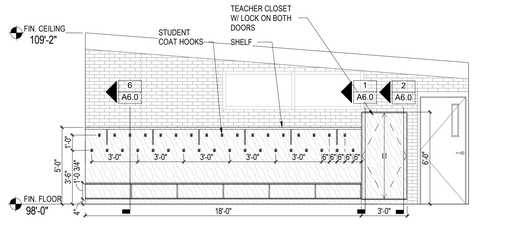

## 5 Classroom (119) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



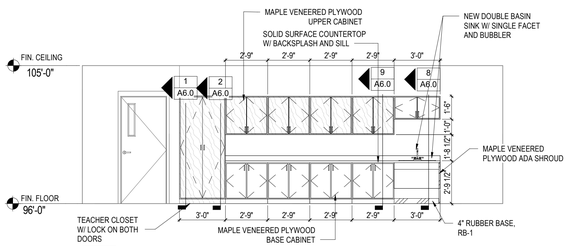

## 6 Classroom (120) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



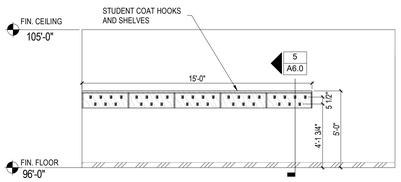

## 7 Classroom (120) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



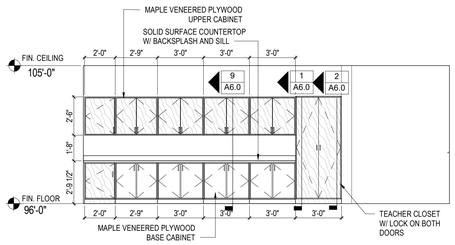

## 8 Classroom (123) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



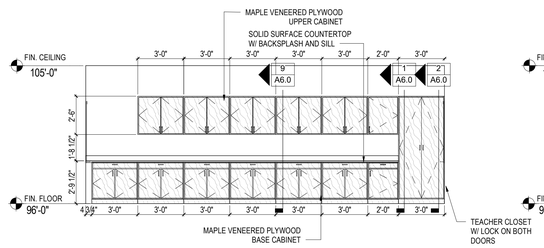

## 9 Classroom (124) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



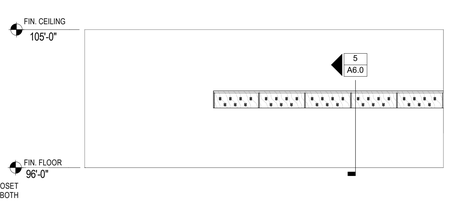

## 10 Classroom (124) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



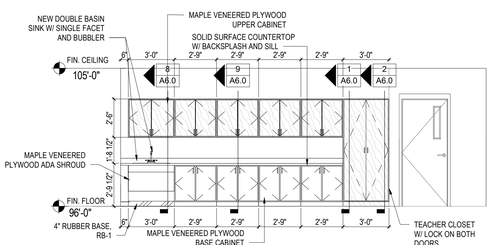

## 11 Classroom (130) - North

1 | A1.0 SCALE: 1/4" = 1'-0"



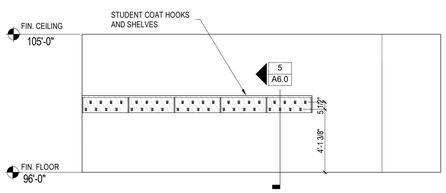

## 12 Classroom (130) - South

1 | A1.0 SCALE: 1/4" = 1'-0"



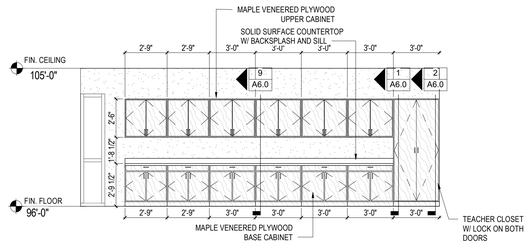

## 13 Classroom (127) - North

1 | A1.0 SCALE: 1/4" = 1'-0"




## 14 Classroom (129) - North

1 | A1.0 SCALE: 1/4" = 1'-0"




## 15 Classroom (129) - South

1 | A1.0 SCALE: 1/4" = 1'-0"

DAO ARCHITECTURE
7230 Meade St.
Westminster, CO 80030
Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

DAO No.:2025-033

September 25, 2026

Interior Elevations

# A6.02

Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/Tennyson Knolls - Drinking Fountain Replacement (Revit 2026).rvt
9/25/2026 12:33:32 PM

# PLUMBING FIXTURE SCHEDULE

| PLAN CODE | DESCRIPTION | MANUF. | MODEL | COLOR FINISH | FITTINGS | MANUF. | MODEL | COLOR FINISH | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| S-1 | SINK (ACCESSIBLE) (1.5 GPM) | ELKAY | DRKAD252265L | STAINLESS STEEL | FAUCET BUBBLER | CHICAGO ELKAY | 895-GN8AE3ABCP LK1141A | CHROME CHROME | NOTES: 1,2,3,5 |
| S-2 | SINK (ACCESSIBLE) (1.5 GPM) | ELKAY | DRKAD252265R | STAINLESS STEEL | FAUCET BUBBLER | CHICAGO ELKAY | 895-GN8AE3ABCP LK1141A | CHROME CHROME | NOTES: 1,2,3,4 |
| S-3 | SINK (ACCESSIBLE) (1.5 GPM) | ELKAY | LRAD2918-6* | STAINLESS STEEL | FAUCET | CHICAGO | 895-GN8AE3ABCP | CHROME | NOTES: 1,2,3 |

NOTES:
1. 17 GA. P-TRAP, ANGLE SUPPLIES WITH 1/4 TURN L.K. STOPS.
2. GRID STRAINER, INSULATION KIT ON SUPPLIES AND DRAIN.
3. 1.5 GPM FLOW RESTRICTOR.
4. BUBBLER TO BE ON RIGHT SIDE OF SINK, FAUCET CENTERED ON SINK.
5. BUBBLER TO BE ON LEFT SIDE OF SINK, FAUCET CENTERED ON SINK.

# PLUMBING FIXTURE CONNECTION SCHEDULE

| PLAN CODE | FIXTURE | PIPE SIZE (INCHES, MINIMUM) | | | | | | | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| | | WASTE | | | COLD WATER | | HOT WATER | | |
| | | TRAP & ARM | VERT. DRAIN | VENT (MIN.) | SUPPLY (MIN.) | CONNECTION (ACTUAL) | SUPPLY (MIN.) | CONNECTION (ACTUAL) | |
| S | SINK | 1-1/2" | 2" | 1-1/2" | 1/2" | 1/2" | 1/2" | 1/2" | |

# GENERAL LEGEND

| ABBV. | SYMBOL | DESCRIPTION |
|---|---|---|
| G.C. | | GENERAL CONTRACTOR |
| P.C. | | PLUMBING CONTRACTOR |
| A.F.F. | | ABOVE FINISHED FLOOR |
| B.F.F. | | BELOW FINISHED FLOOR |
| (N) | | NEW |
| (E) | | EXISTING |
| | | EXISTING (DEMOLITION OR REMOVED) |
| | | POINT OF CONNECTION - NEW TO EXISTING |
| | | PIPE CAP |
| | | BALL VALVE |
| | | PIPE ELBOW DOWN |
| | | PIPE ELBOW UP |
| | | TEE OFF BOTTOM OF PIPE |
| | | TEE OFF TOP OF PIPE |
| | X / XXX | X = SECTION/DETAIL NUMBER XXX = SHEET NUMBER WHERE SECTION/DETAIL IS DRAWN |

# PLUMBING LEGEND

| ABBV. | SYMBOL | DESCRIPTION |
|---|---|---|
| WC | | WATER CLOSET |
| UR | | URINAL |
| L | | LAVATORY |
| S | | SINK |
| EWC | | ELECTRIC WATER COOLER |
| DF | | DRINKING FOUNTAIN |
| PP | | PLUMBING CIRC. PUMP |
| PET | | PLUMBING EXPANSION TANK |
| GWH | | GAS WATER HEATER |
| GPM | | GALLON PER MINUTE |
| CW | | DOMESTIC COLD WATER |
| HW | | DOMESTIC HOT WATER |
| HWC | | DOMESTIC HOT WATER CIRCULATING |
| W | | SANITARY WASTE BELOW FLOOR |
| V | | SANITARY VENT |
| WCO | OR | WALL CLEANOUT |

# SHEET INDEX

| SHEET NUMBER | PLUMBING SHEET TITLE | SHEET SCALE |
|---|---|---|
| P0.0 | Plumbing Cover Sheet | None |
| P1.0 | First Floor Plumbing Plan | 1/8" = 1'-0" |
| P01.0 | First Floor Demolition Plumbing Plan | 1/8" = 1'-0" |

## PLUMBING DEMOLITION GENERAL NOTES

1. COORDINATE DEMOLITION REQUIREMENTS WITH THE GENERAL CONTRACTOR.
2. COORDINATE EXTENT OF DEMOLITION WITH THE NEW CONSTRUCTION AS SHOWN IN THESE DOCUMENTS.
3. EXISTING PLUMBING PIPING, EQUIPMENT ETC IS SHOWN LIGHT.
4. ALL PLUMBING ITEMS INDICATED TO BE DEMOLISHED SHALL BE INSPECTED FOR SALVAGE BY THE OWNER. ALL NON-SALVAGEABLE ITEMS SHALL THEN BE IMMEDIATELY REMOVED FROM THE SITE BY THE PLUMBING CONTRACTOR.
5. ALL UNUSED HANGERS AND SUPPORTS SHALL BE REMOVED.
6. THE REMOVAL OR INSTALLATION OF FIXTURES, PIPES AND EQUIPMENT MAY REQUIRE THE REMOVAL OF EXISTING WALLS AND CEILINGS. THE PLUMBING CONTRACTOR AND GENERAL CONTRACTOR SHALL COORDINATE AND BE RESPONSIBLE FOR REPAIRING AND PAINTING THESE WALLS AND/OR CEILINGS SO THEY MATCH THE EXISTING WHERE NOT REPLACED UNDER THE ARCHITECTURAL DOCUMENTS. THE CONTRACTOR SHALL REVIEW THE PLUMBING DRAWINGS TO IDENTIFY THESE LOCATIONS PRIOR TO BID PRICING.
7. THE GENERAL CONTRACTOR SHALL MAKE REPAIRS TO ALL EXISTING BUILDING COMPONENTS THAT HAVE BEEN AFFECTED BY THE DEMOLITION OF PLUMBING SYSTEMS.

## PLUMBING GENERAL NOTES

1. FIELD VERIFY EXACT LOCATION OF ALL CONNECTIONS PRIOR TO CONSTRUCTION.
2. ROUGH-IN AND FINAL CONNECT ALL FIXTURES, EQUIPMENT, ETC.
3. CONTRACTOR SHALL INSPECT SITE TO THOROUGHLY FAMILIARIZE HIMSELF WITH THE AREA OF WORK. ANY DISCREPANCES BETWEEN THESE DOCUMENTS AND ACTUAL CONDITIONS SHALL BE REPORTED TO THE ARCHITECT/ENGINEER FOR RESOLUTION PRIOR TO BID PRICING. NO EXTRAS WILL BE ALLOWED DUE TO LACK OF KNOWLEDGE OF EXISTING CONDITIONS.
4. COMPLY WITH ALL BUILDING AND HEALTH DEPARTMENT REGULATIONS FOR PLUMBING INSTALLATION. VERIFY ALL REQUIREMENTS PRIOR TO SUBMITTING BID OR COMMENCING WORK.
5. CONTRACTOR SHALL INSTALL PIPING IN ADHERENCE TO 2021 COLORADO PLUMBING CODE, 2021 COLORADO FUEL GAS CODE, 2021 COLORADO ENERGY CODE, AND LOCAL HEALTH CODES. TABLE C404.5.1, FROM THE IECC, IS INCLUDED ON THIS SHEET BELOW FOR EASE OF REFERENCE.
6. PROVIDE BALL VALVES ON ALL BRANCH LINES FOR BUILDING ISOLATION WHETHER SHOWN OR NOT.
7. REFERENCE ARCHITECTURAL DRAWINGS FOR LOCATIONS OF ALL FIRE RATED WALLS. ALL PIPE PENETRATIONS THROUGH FIRE RATED WALLS SHALL BE SEALED IN ACCORDANCE WITH THE BUILDING CODE.
8. OFFSET ALL PIPING AS REQUIRED TO AVOID STRUCTURAL MEMBERS, CANTS, FLASHING, MECHANICAL, OR ELECTRICAL EQUIPMENT.
9. PROTECT ALL EXISTING EQUIPMENT INDICATED AS REMAINING IN PLACE OR BEING RELOCATED. REPLACE DAMAGED EQUIPMENT IMMEDIATELY WITH EXACT DUPLICATE AT NO ADDITIONAL COST TO THE OWNER.
10. PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR PROPERLY LOCATING AND PROTECTING ALL EXISTING PIPING AND UTILITIES FOR THE DURATION OF THE WORK. ANY DAMAGE CAUSED TO EXISTING PIPING OR UTILITIES SHALL BE REPAIRED IMMEDIATELY AT NO ADDITIONAL COST TO THE OWNER.
11. SUBMIT TO THE ARCHITECT/ENGINEER ELECTRONIC PDF FILES OF MECHANICAL SUBMITTALS FOR REVIEW OF ALL MAJOR EQUIPMENT AS LISTED ON DRAWING EQUIPMENT SCHEDULES, AS WELL AS PRODUCTS SHOWN IN SPECIFICATIONS. ENGINEER ASSUMED NO RESPONSIBILITY FOR EQUIPMENT OR INSTALLATION COORDINATION THAT HAS NOT BEEN SUBMITTED FOR REVIEW.
12. CONTRACTOR SHALL WARRANTY WORK, EQUIPMENT, FIXTURES, MATERIALS, AND PROPER OPERATION FOR A PERIOD OF ONE YEAR FROM THE DATE OF ACCEPTANCE OF BUILDING BY OWNER. THIS GUARANTEE SHALL NOT INCLUDE NORMAL MAINTENANCE REQUIRED BY THE OWNER AS DESCRIBED IN THE OPERATION AND MAINTENANCE MANUALS.
13. PROVIDE TWO SETS OF OPERATION AND MAINTENANCE (O&M) MANUALS FOR OWNER AT COMPLETION OF PROJECT TO THE ARCHITECT/ENGINEER FOR REVIEW. MANUALS TO INCLUDE INSTALLATION INSTRUCTIONS, REPLACEMENT PART LISTS, AND MAINTENANCE INFORMATION ON ALL MECHANICAL EQUIPMENT, FIXTURES, ETC. SUBMITTED.
14. CONTRACTOR SHALL MAINTAIN A COMPLETE AND ACCURATE SET OF RECORD DRAWINGS SHOWING ACTUAL INSTALLED LOCATIONS OF WORK. SUBMIT THESE DRAWINGS AS PART OF THE OPERATION AND MAINTENANCE MANUALS AT COMPLETION OF PROJECT.
15. NEW WATER PIPING SHALL DISINFECTED AS OUTLINED IN THE CURRENT ADOPTED PLUMBING CODE.

## SPECIFICATION (PLUMBING)

PIPING:
A. WASTE, VENT, AND STORM PIPING ABOVE FINISHED FLOOR SHALL BE SERVICE WEIGHT CAST-IRON WITH NO-HUB FITTINGS.

B. WASTE, VENT, AND STORM PIPING BELOW FINISHED FLOOR/GRADE SHALL BE SCHEDULE 40 PVC "SOLID CORE" WITH SOLVENT WELDED FITTINGS.

C. WATER PIPING SHALL BE TYPE "L" COPPER, SOLDERED FITTINGS WITH LEAD FREE SOLDER AND FLUX.

INSULATION:
A. COLD WATER, HOT WATER AND HOT WATER RECIRCULATION INSULATION SHALL BE 1" THICK FIBERGLASS TYPE WITH ALL SERVICE JACKET WITH SELF SEAL LAP (ASJ-SSL).

B. PROVIDE PVC FITTING COVERS FOR ALL OF THE ABOVE MENTIONED SYSTEMS.

EQUIPMENT:
A. WALL CLEANOUT (WCO): CAST IRON BODY ADAPTABLE TO PIPE W/ CAST BRONZE OR CAST BRASS CLEANOUT PLUG. STAINLESS STEEL COVER INCLUDING SCREWS. JOSAM OR EQUAL.

VALVES:
A. BALL VALVES SHALL BE NSF 61 RATED AND EQUAL TO APOLLO #77CLF-100/200.

MISCELLANEOUS:
A. SAN-TEES, STOPS, SUPPLIES TO MATCH EXISTING.


DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514


**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

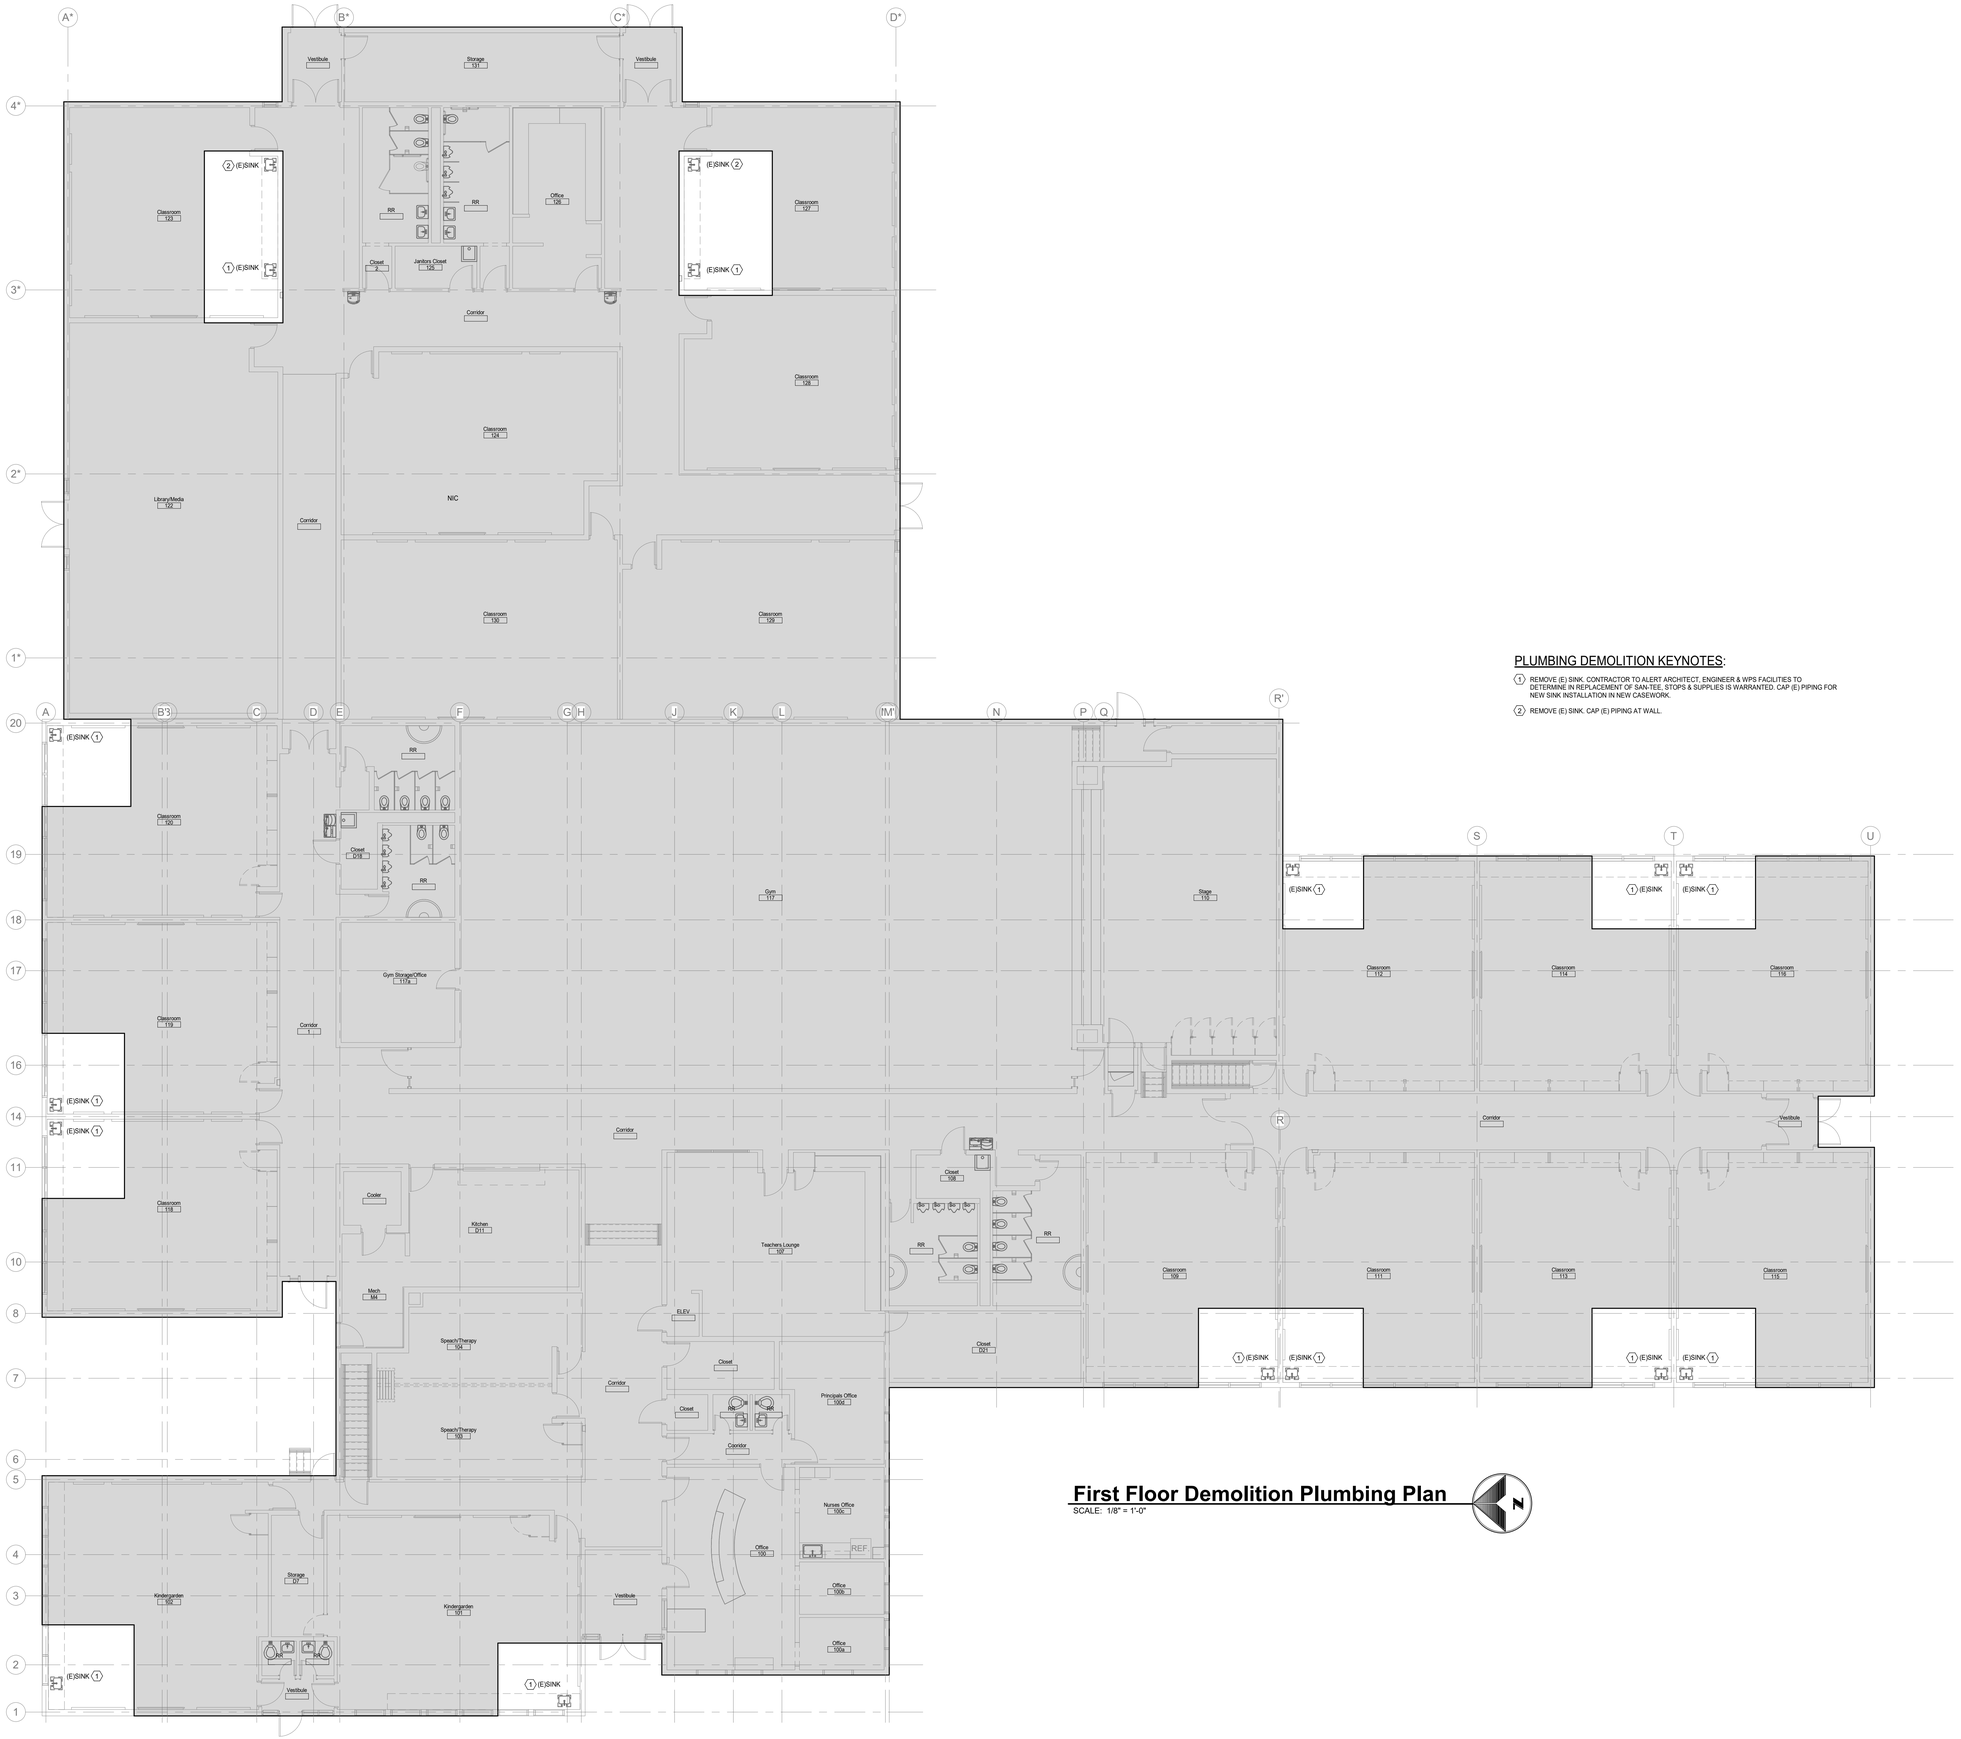
DAO No.:2025-025

September 25, 2026

Plumbing Cover Sheet

**P0.0**


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/25094 Tennyson Knolls Bond Projects PLBS-R26.rvt
9/24/2026 3:58:41 PM




## PLUMBING DEMOLITION KEYNOTES:

1. REMOVE (E) SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IN REPLACEMENT OF SAN-TEE, STOPS & SUPPLIES IS WARRANTED. CAP (E) PIPING FOR NEW SINK INSTALLATION IN NEW CASEWORK.
2. REMOVE (E) SINK. CAP (E) PIPING AT WALL.

## First Floor Demolition Plumbing Plan

SCALE: 1/8" = 1'-0"


DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514


**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

DAO No.:2025-025

September 25, 2026

First Floor Demolition Plumbing Plan

# PD1.0


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/25034 Tennyson Knolls Bond Projects-PLBG-R26.rvt
9/24/2026 3:58:45 PM




## PLUMBING KEYNOTES:

1. CONNECT 2" WASTE, 1/2" CW & 1/2" HW TO (E) PLBG FOR NEW SINK. CONTRACTOR TO ALERT ARCHITECT, ENGINEER & WPS FACILITIES TO DETERMINE IF REPLACEMENT OF SAN-TEE, STOPS & SUPPLIES IS WARRANTED.

## First Floor Plumbing Plan

SCALE: 1/8" = 1'-0"


DAO ARCHITECTURE

7230 Meade St.
Westminster, CO 80030

Phone: 720.273.0431
Email: dan@daoarch.com
Web: www.daoarch.com

The Ballard Group, Inc.
Mechanical Consulting Engineers
2525 S. Wadsworth Blvd, Suite 200
Lakewood, CO 80227
(303) 988-4514


**Westminster Public Schools**

**2026 Bond Projects**
**Tennyson Knolls Preparatory School Renovations**

6330 Tennyson St,
Arvada, CO 80003

DAO No.:2025-025

September 25, 2026

First Floor Plumbing Plan

# P1.0


Autodesk Docs://WPS 2026 Bond Projects - Tennyson Knolls Renovations/25094 Tennyson Knolls Bond Projects-PLBG-R26.rvt
9/4/2026 3:58:48 PM