Appendix D: Scope of Work & Supporting Information

Scope of Work

Phase 1 (Pre-Design/Concept Design, Schematic Design, and Design Development):

- Consultant will perform professional services as identified in SC5.1 agreement.
- Consultant team will review and evaluate potential project methods and project sites, including the use of the previously completed 2015 Raw Water Irrigation System Master Plan (Appendix F) and 2017 Newton & Athens Raw Water Schematic Design (Appendix G), resulting in two site options for further investigation. Site evaluation will include the consideration of:
    - Floodplain. Much of the NBC campus area is not only within the floodplain but also High Hazard and Conveyance Zones. As such, it is anticipated that this will be factored into the project site selection and potentially further design phases.
    - Existing and future development (including buildings, utilities, landscape features, rights-of-ways, etc.).
    - Necessary site size to accommodate irrigation storage via pond or vessel, assuming a maximum of (3) days of water storage.
- Consultant to design for both existing-state irrigation needs and future-state irrigation needs (using the 2021 Campus Master Plan for future-state).
- Presentation materials and graphics will be prepared by consultant at each phase for review by the Design Review Board.
- The two site options will be developed through Concept Design. At the conclusion of Concept Design, CU will select a preferred concept for the consultant to carry forward through the remaining design phases.
- Schematic Design and Design Development may include a solution with a phased approach to incorporating raw water irrigation across the NBC site.
- At the end of Design Development, the consultant will prepare a cost estimate of the approved design.

Phase 2 (Construction Documents, Bidding, Contract Administration, and Post Construction):

- Consultant will perform professional services as identified in SC5.1 agreement.


Supporting Information (site studies, maps, and 2021 Campus Master Plan included on following pages)

Campus Map




NBC Existing Conditions


- 49 acres
- ~1200 beds
- Athletic & Rec fields
- Surface parking
- Boulder Creek
- Creek pathway

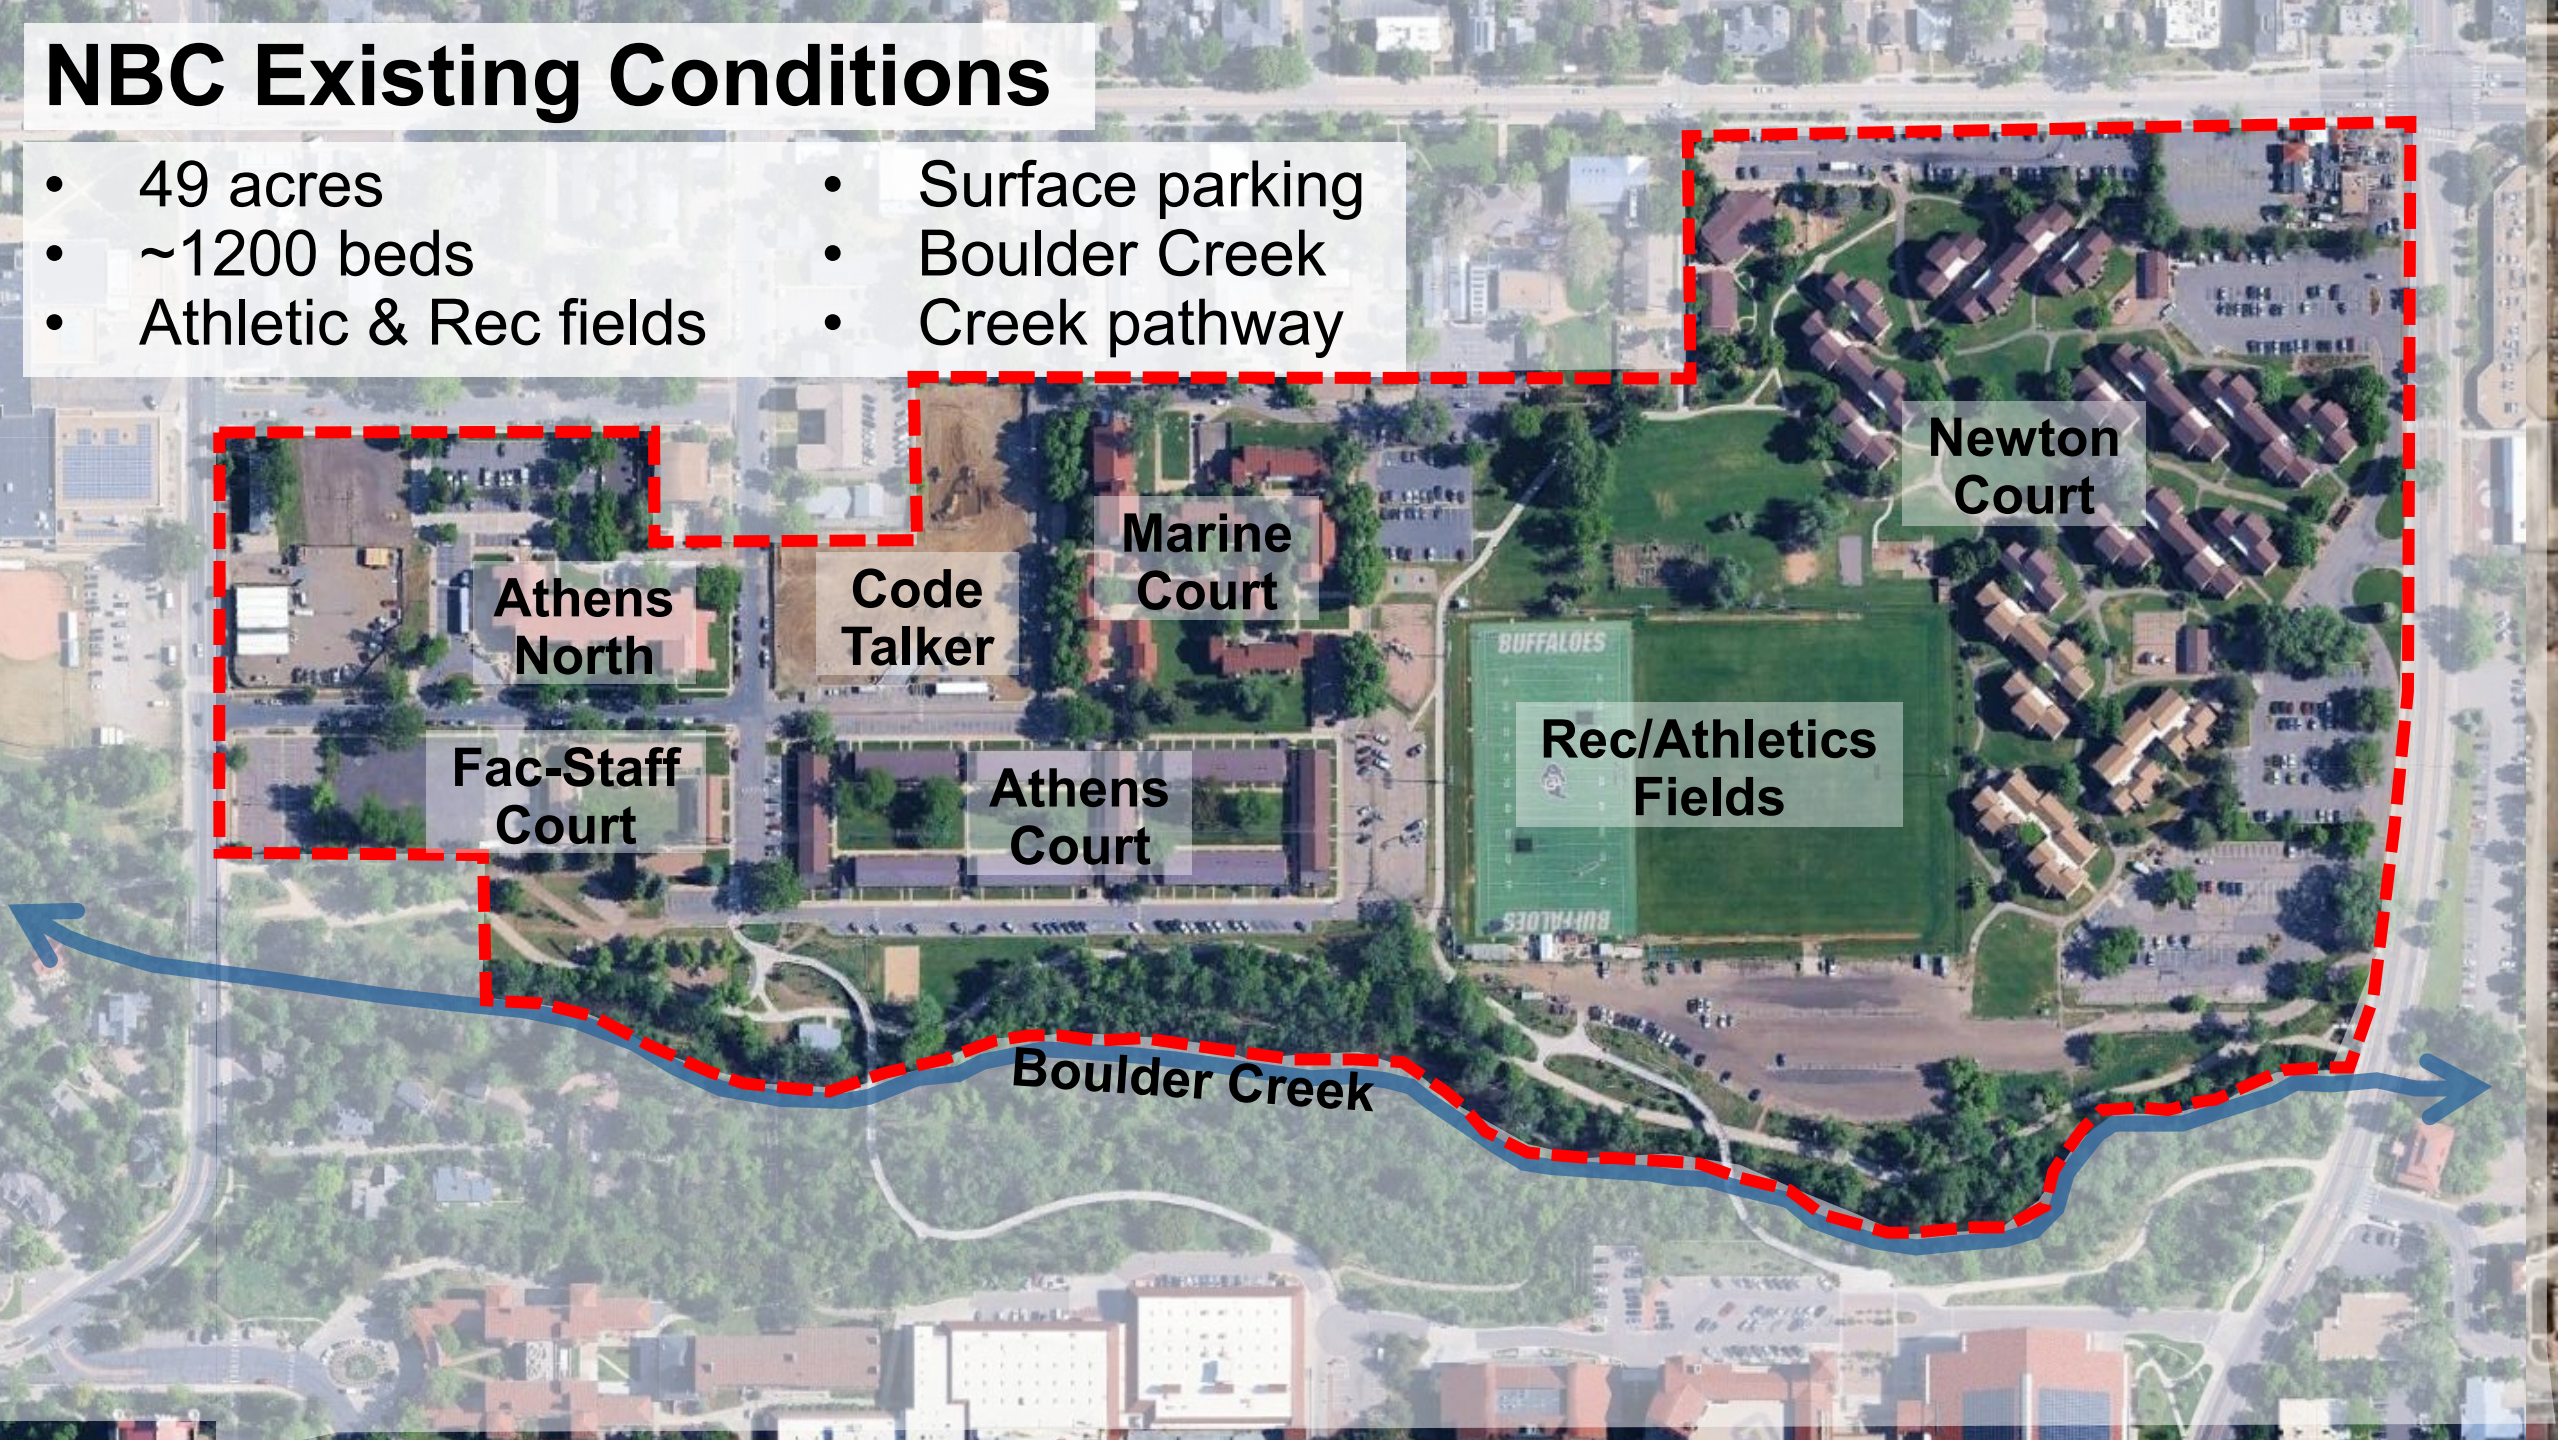


Neighboring Context

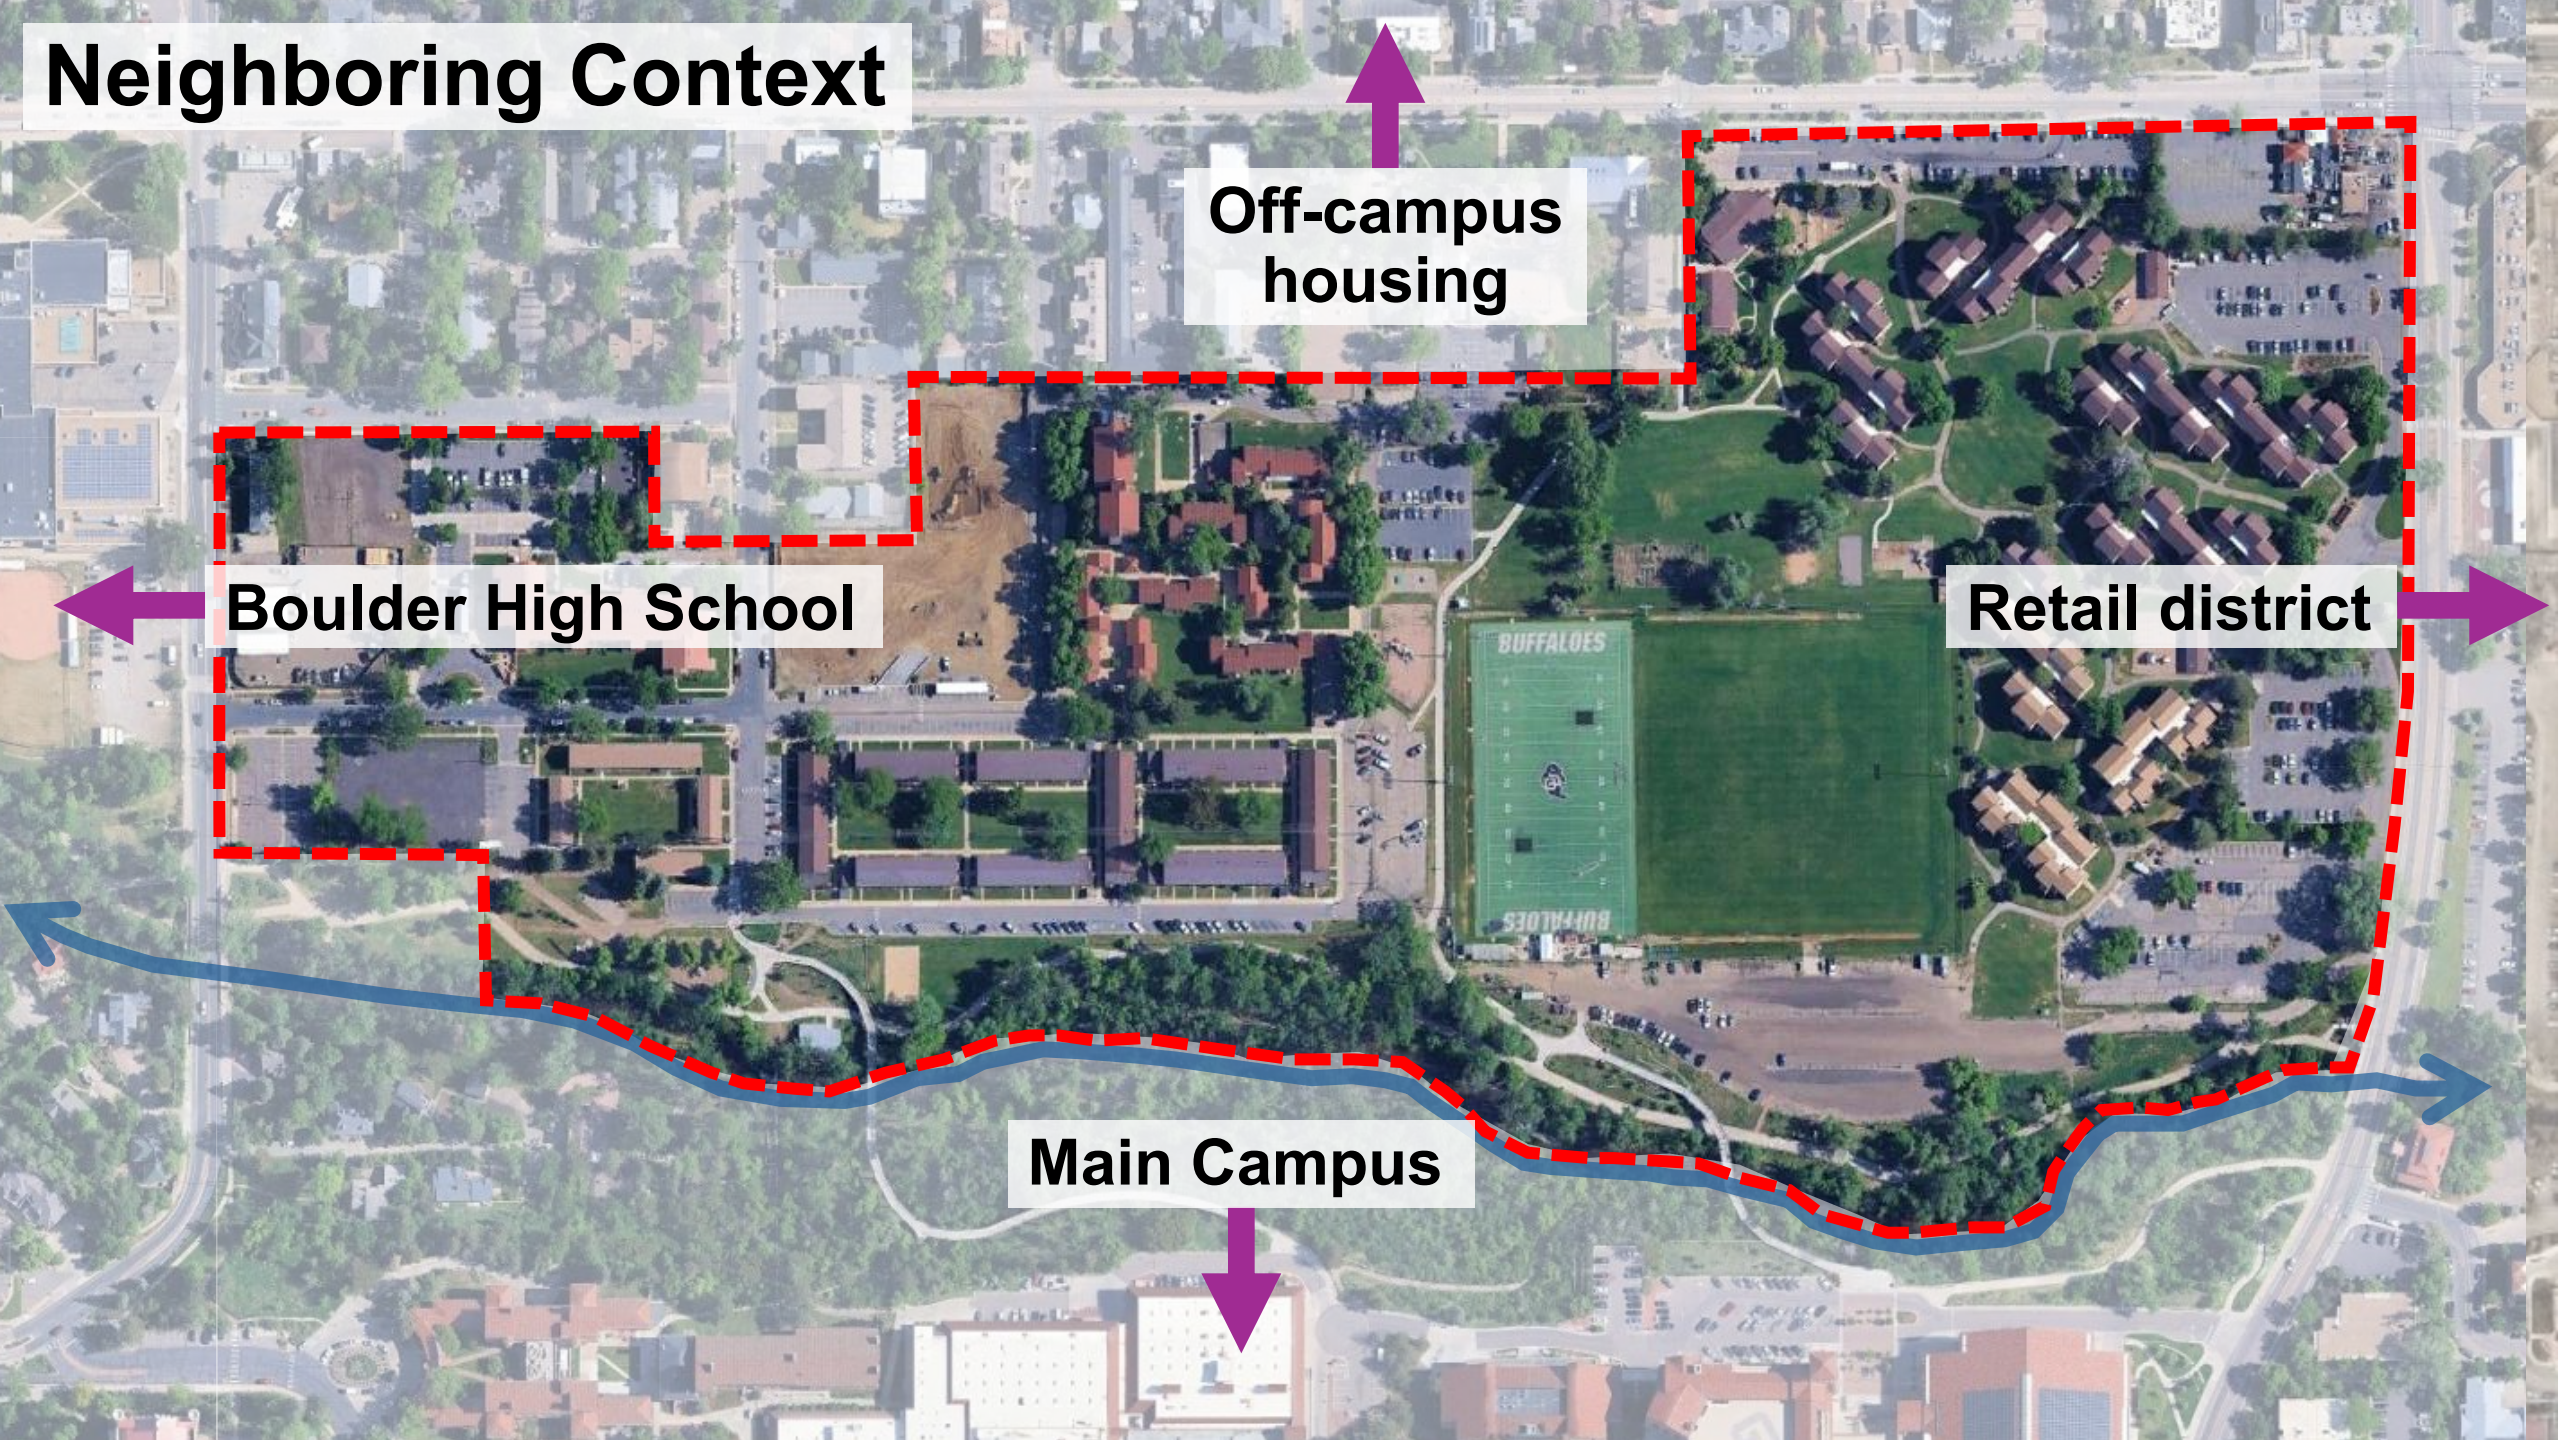


Circulation

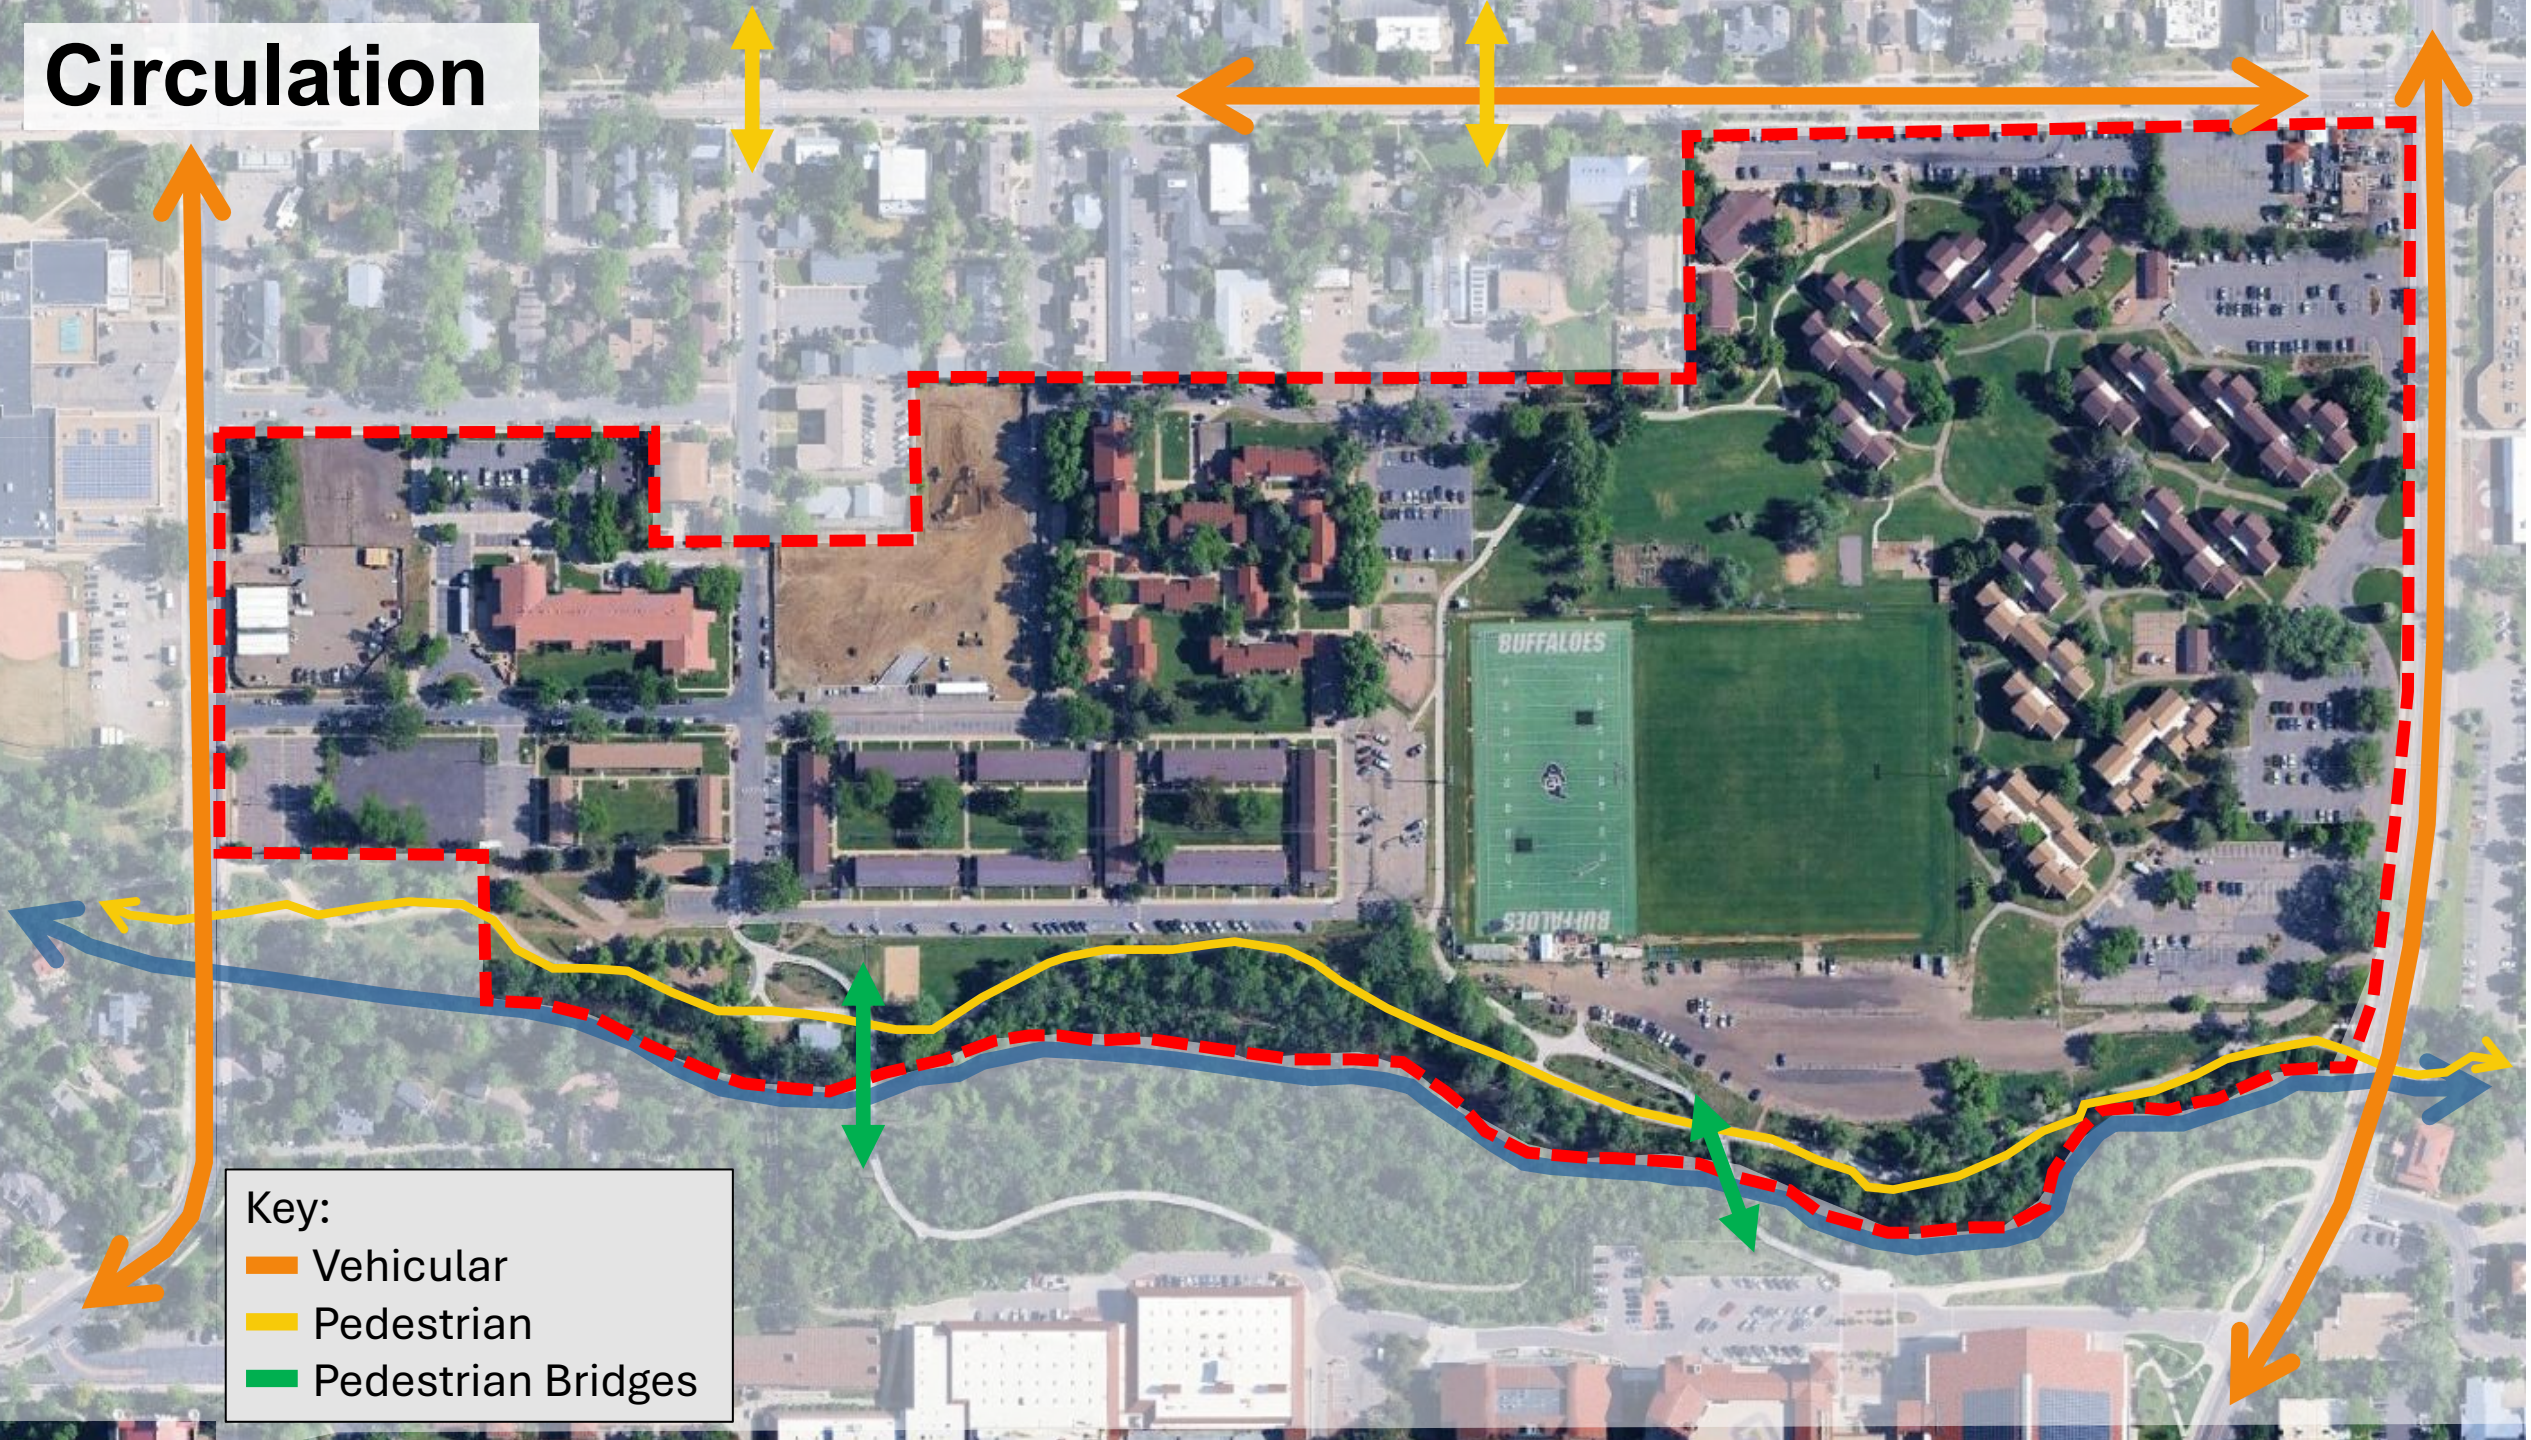

Raw Water Ditches

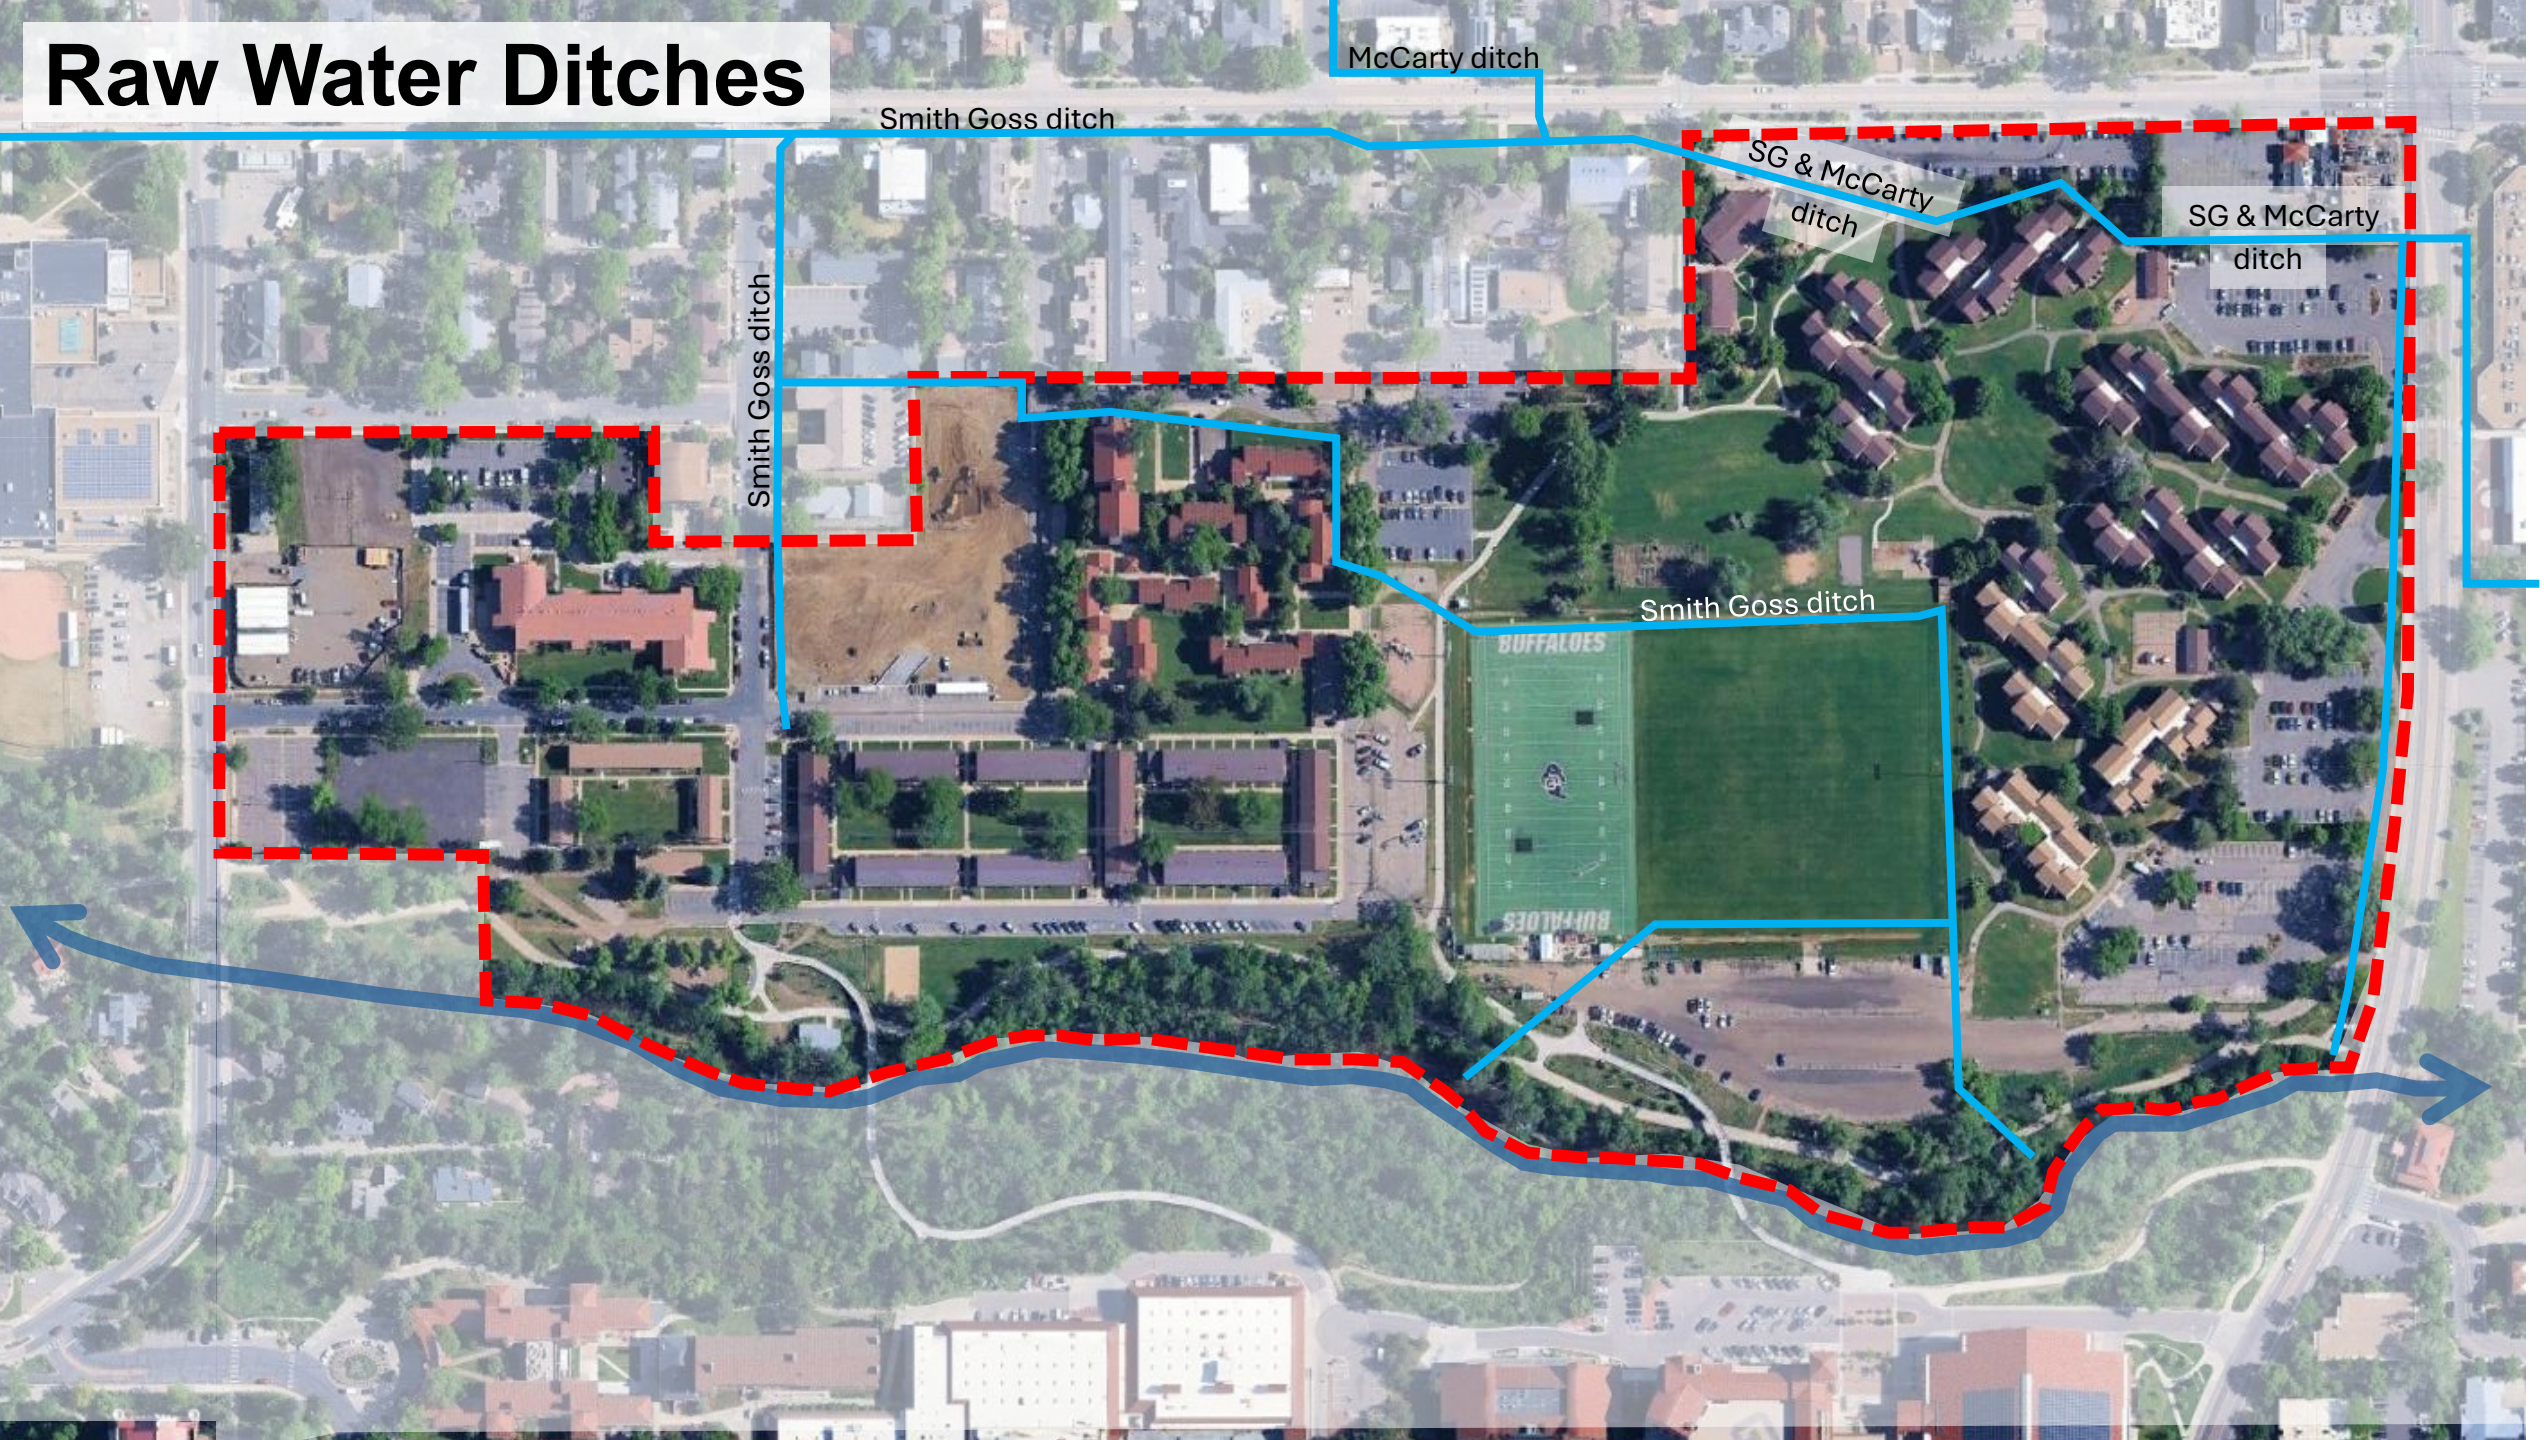


Floodplain

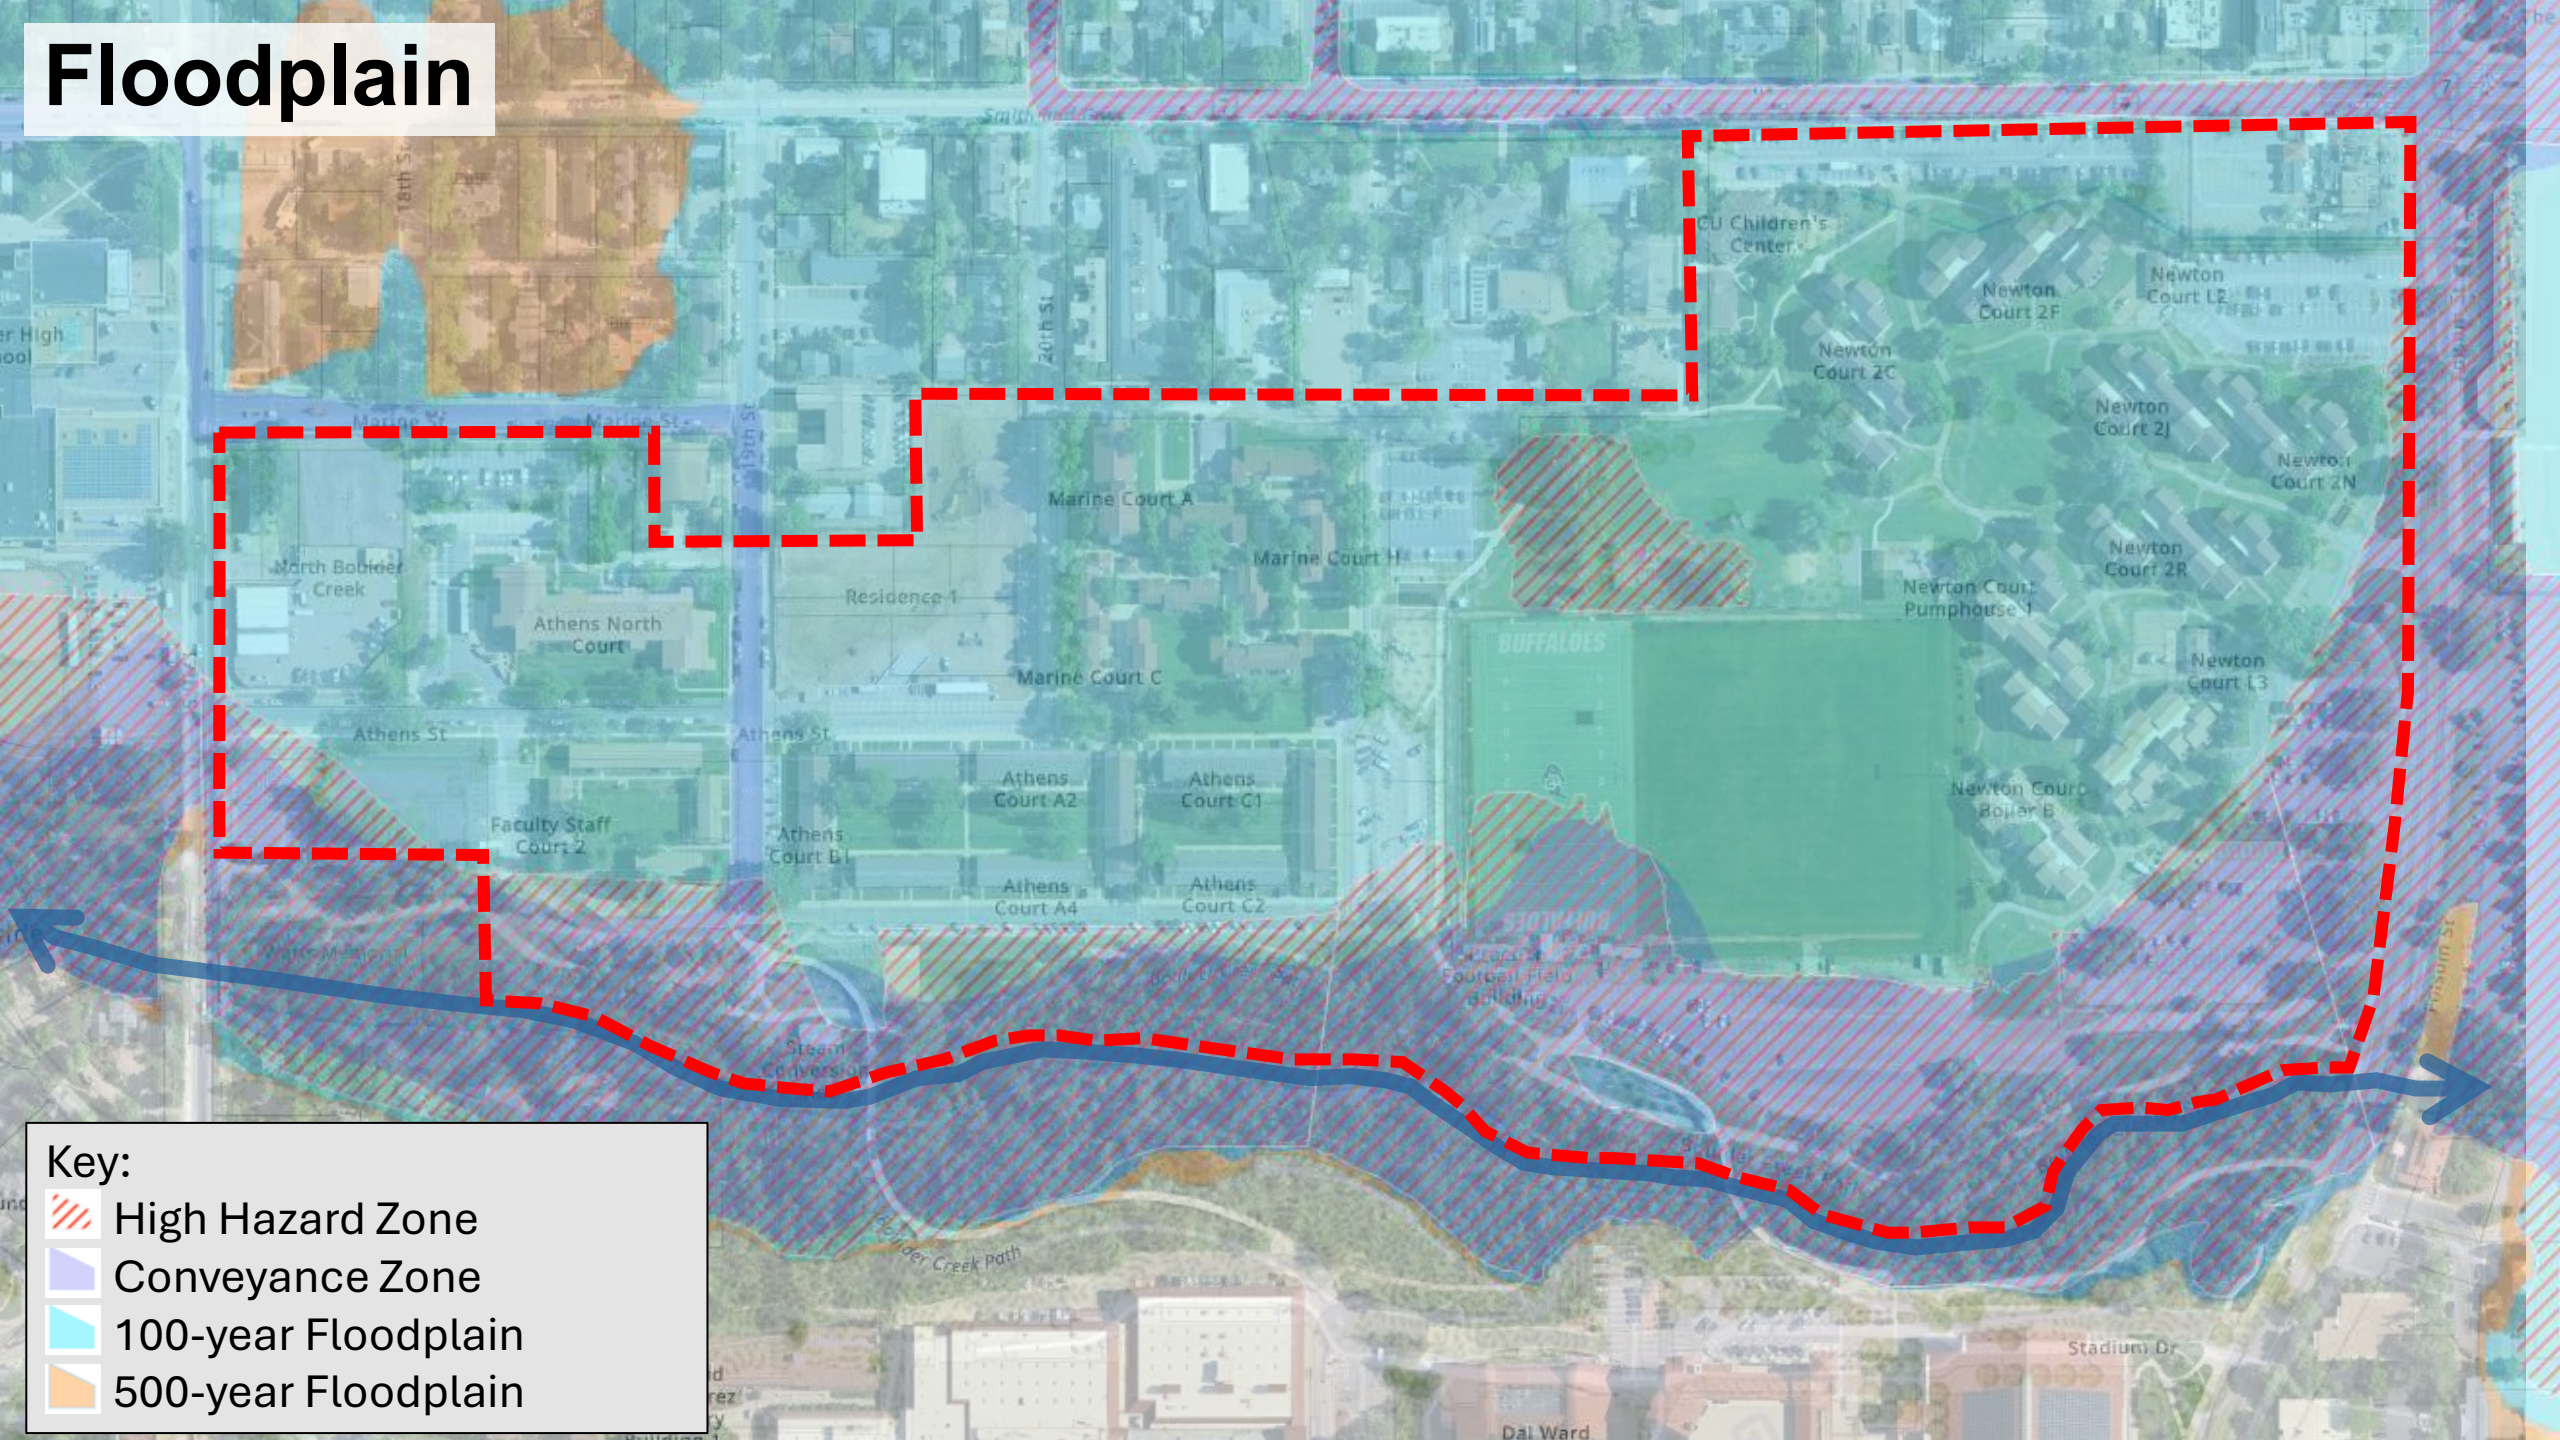
Key:
High Hazard Zone
Conveyance Zone
100-year Floodplain
500-year Floodplain
Marine Court A
Marine Court H
Marine Court C
Residence 1
Athens North Court
Athens Court A2
Athens Court C1
Athens Court B1
Athens Court A4
Athens Court C2
Faculty Staff Court 2
Athens St
19th St
20th St
CU Children's Center
Newton Court 2F
Newton Court L2
Newton Court 2C
Newton Court 2J
Newton Court 2N
Newton Court 2R
Newton Court Pumphouse 1
Newton Court L3
Newton Court Boiler B
BUFFALOES
Folsom St
Stadium Dr
Boulder Creek Path
Dal Ward

2021 Campus Master Plan - NBC Framework

- 49 acres
- 3500-3900 beds
- Athletic & Rec fields
- Structured parking
- Connections to Boulder Creek & path

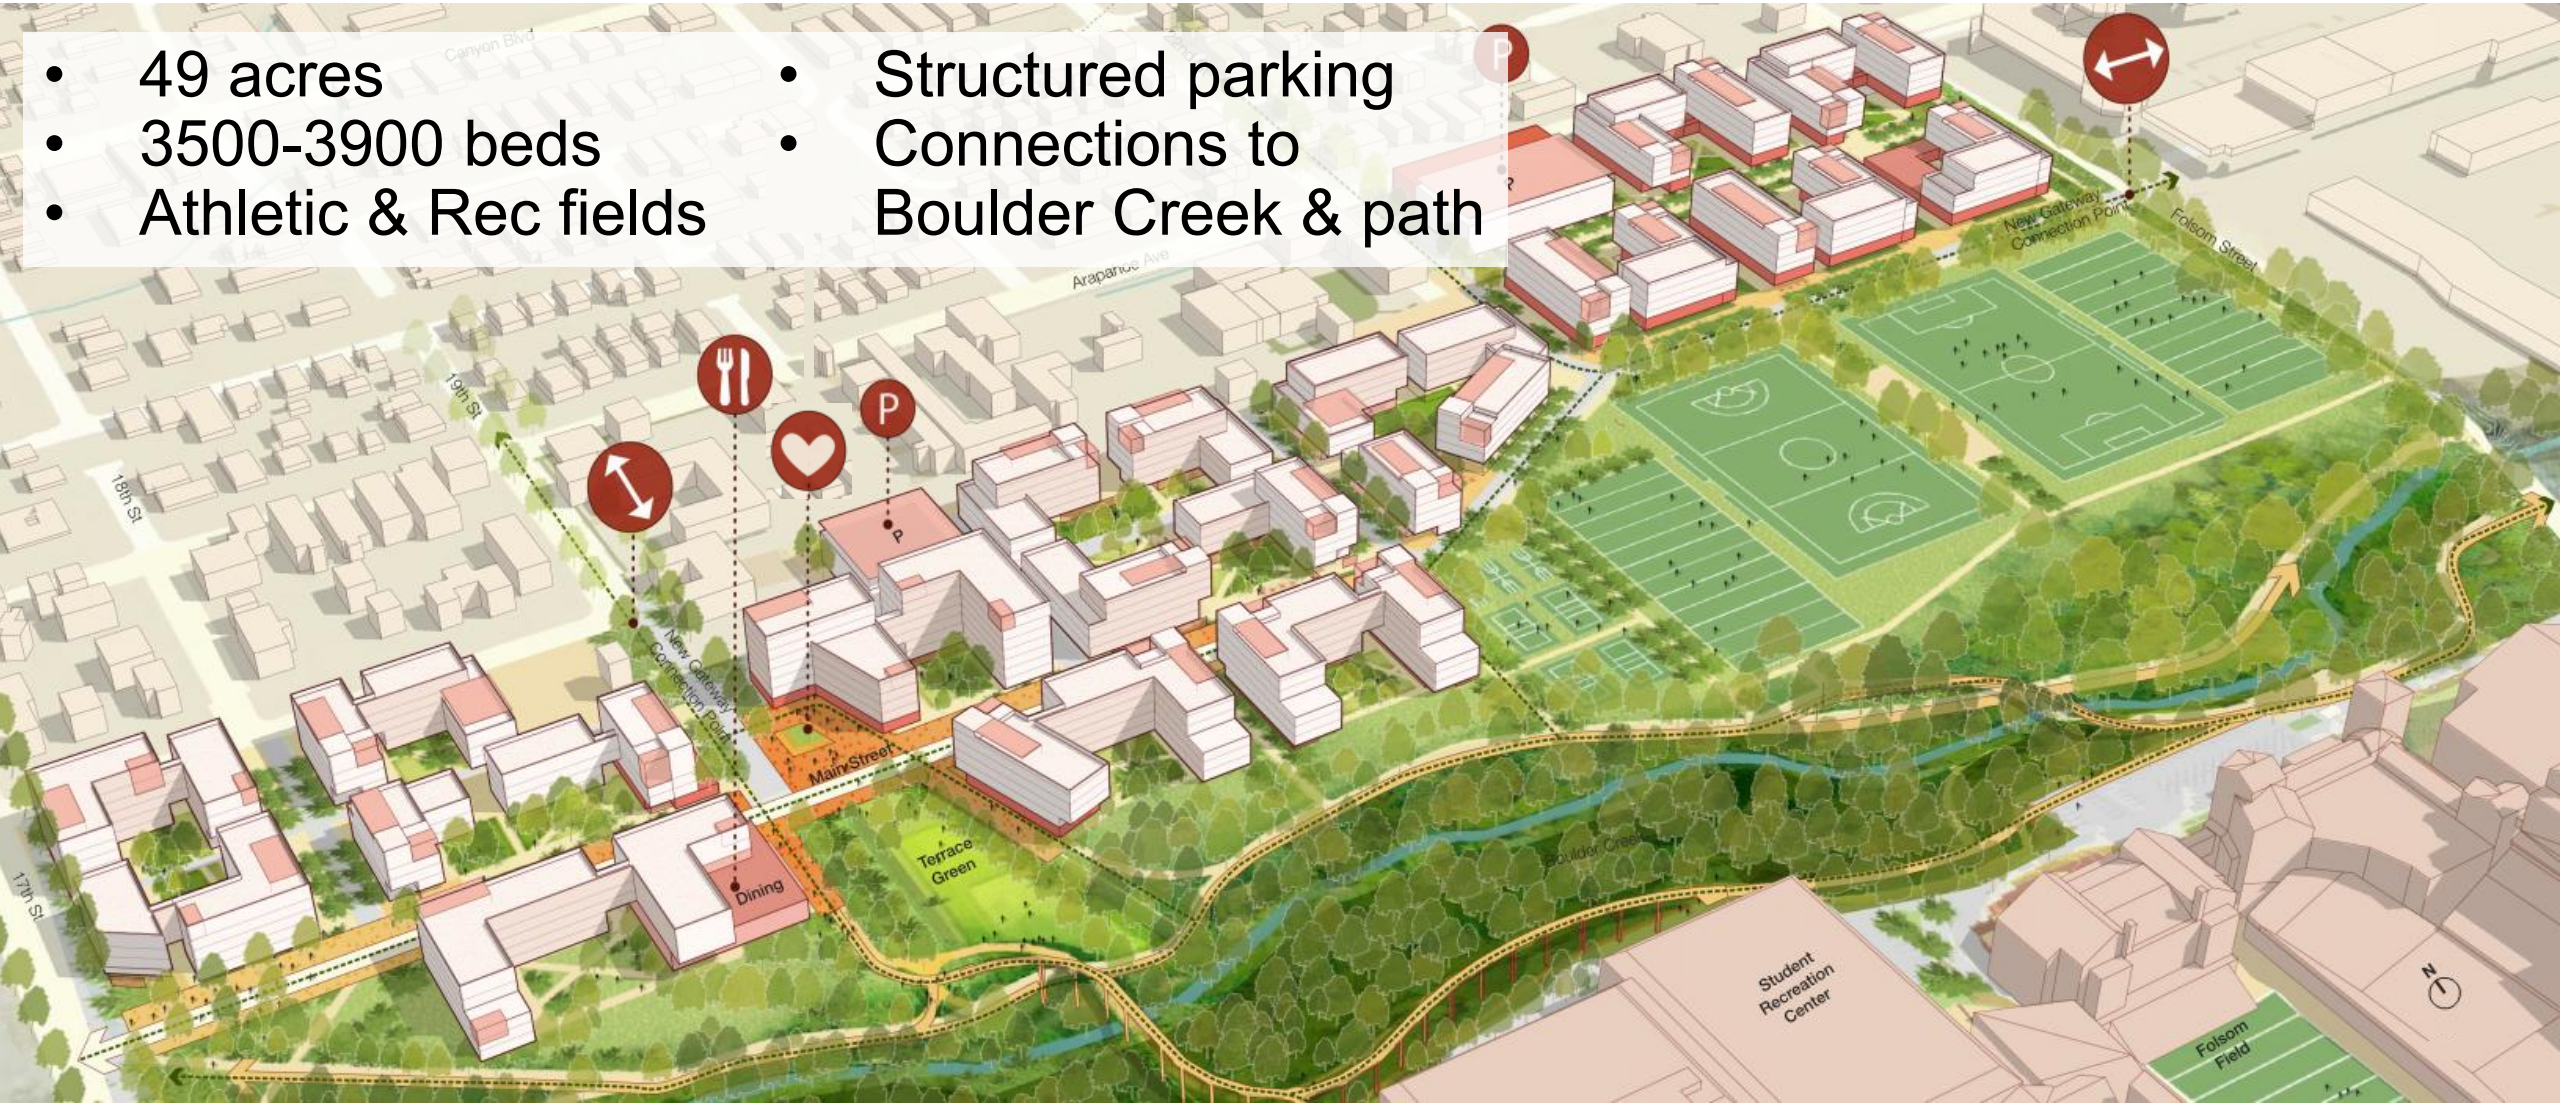

2021 CMP – NBC Framework

(plan view)



2021 CMP - Green Heart & Creek Connection

