THE CITY OF COLORADO SPRINGS

REQUEST FOR PROPOSAL

Services

R26-099MZ

Date Issued: October 27, 2026

PARKS ON-CALL IRRIGATION REPAIRS
THE CITY OF COLORADO SPRINGS

The City of Colorado Springs requests Time and Materials (T&M) proposals, as detailed in this Request for Proposal (RFP), for Parks On-Call Irrigation Repairs.

This RFP is posted to Rocky Mountain E-Purchasing BidNet Direct and the City of Colorado Springs' Procurement Services Website. It is available for all vendors free of charge, following free registration, at the Rocky Mountain E-Purchasing BidNet Direct website.

SUBMITTALS FOR THIS PROJECT WILL ONLY BE ACCEPTED ON THE ROCKY MOUNTAIN E-PURCHASING BIDNET DIRECT PLATFORM.

Please login to the following website to register (Free Registration) to submit a bid for this project. All required documents will be uploaded to the website.

https://www.bidnetdirect.com/

BIDNET Support

800-835-4603

SECTION INDEX

SECTION I	PROPOSAL INFORMATION
SECTION II	PROPOSAL CONTENT
SECTION III	EVALUATION FACTORS
SECTION IV	RESERVED
SECTION V	EXHIBITS
SECTION VI	SCHEDULES

SECTION I – PROPOSAL INFORMATION

1.0 PROPOSAL INFORMATION

Section I provides general information to potential Offerors, such as proposal submission instructions and other similar administrative elements. This RFP is available on BidNet (www.bidnetdirect.com). All addenda or amendments shall be issues through BidNet and may not be available through any other source.

1.1 RFP SCHEDULE OF EVENTS

The upcoming schedule of events is as follows:

Event	**Date**
Issue Request for Proposal	October 27, 2026
Pre-Proposal Conference	November 6, 2026 9:00PM MT

We will hold a pre-proposal conference via Microsoft Teams. This meeting is not mandatory. However, all Offerors are encouraged to attend. Please use the link below to attend the meeting:

Microsoft Teams meeting
Join: https://teams.microsoft.com/meet/287956738781040?p=nDbEex4YexG0Bszalz
Meeting ID: 287 956 738 781 040
Passcode: gM2Q6Am2

Need help? | System reference
Dial in by phone
+1 720-617-3426,,600443530# United States, Denver
Find a local number
Phone conference ID: 600 443 530#

Cut Off Date for Questions	November 13, 2026 1:00PM MT

Questions about the RFP must be directed to Mike Zeller, at the following email address: michael.zeller@coloradosprings.gov. A written response to any inquiry may be provided in the form of an Amendment to the solicitation. See 1.7 Amendments. Questions must be received no later than 1:00PM MT November 13, 2026.

Requests for information or support shall be addressed to:

Mike Zeller
Michael.zeller@coloradosprings.gov

DO NOT CONTACT ANY OTHER INDIVIDUAL AT THE CITY OF COLORADO SPRINGS REGARDING THIS SOLICITATION.

The only acceptable method of submitting questions is via email to the Contracting Specialist named above. Faxes, email or physical mail delivery are not acceptable.

Proposal Due Date	December 2, 2026 2:00PM MT
Interviews (if applicable)	TBD
Award of Contract	EST December 2026
Notice to Proceed	EST January 2027

1.2 SUBMISSION OF PROPOSALS

Proposals are to be submitted electronically on the BidNet Website (www.bidnetdirect.com). Please review the submission requirements *well in advance* of submission date and time; and allow for ample time to upload each required document.

It is recommended that Offerors begin the submission process at least one (1) day in advance of the proposal deadline.

Offerors are solely responsible to ensure their bid documents are uploaded and submitted correctly, and that a **confirmation number** is obtained upon successful submission.

Customer Support Team for www.bidnetdirect.com can be reached 1-800-835-4603.

1.3 NUMBER OF COPIES

One electronic proposal is to be submitted electronically on the BidNet Website (www.bidnetdirect.com).

1.4 SPECIAL TERMS

Please note the following definitions of terms as used herein:

The term “City” means the City of Colorado Springs.

The term “Contractor” or “Consultant” means the Offeror whose offer is accepted and is awarded the contract to provide the products or services specified in the RFP.

The term “Offer” means the proposal.

The term “Offeror” means the person, firm, or corporation that submits a formal proposal or offer and that may or may not be successful in being awarded the contract.

The term “Project” refers to Parks On-Call Irrigation Repairs.

The term “Request for Proposal” or “RFP” means this solicitation of a formal, negotiable proposal/offer. Any offer that is accepted will be the offer that is deemed by the City of Colorado Springs to be most advantageous in terms of the criteria designated in the RFP.

1.5 RFP OBJECTIVE

The objective of this RFP is to provide sufficient information to enable qualified Offerors to submit written proposals to the City of Colorado Springs. The RFP is not a contractual offer or

commitment to purchase products or services. The Offeror may present options and variables to the scope while still meeting the minimum requirements of this solicitation. Innovative proposals/solutions are encouraged and considered in the selection and/or award.

All information included in proposals must be legible. Any and all corrections and or erasures must be initialed by Offeror. Each proposal shall be accompanied by a cover letter signed by an authorized representative of the Offeror. The contents of the proposal submitted by the successful Offeror may become part of any contract awarded as a result of this solicitation.

1.6 CONFIDENTIAL OR PROPRIETARY INFORMATION

If an Offeror believes that parts of an offer are confidential, then the Offeror must so specify. The Offeror must include in bold letters the term “CONFIDENTIAL” on that part of the offer which the Offeror believes to be confidential. The Offeror must submit in writing specific detailed reasons, including any relevant legal authority, stating why the Offeror believes the material to be confidential. Vague and general claims as to confidentiality will not be accepted. The City of Colorado Springs will be the sole judge as to whether a claim is acceptable. Decisions regarding the confidentiality of information will be made when requests are made to make the information public. All offers and parts of offers, which are not marked as confidential, will automatically be considered public information after the contract is awarded. The successful offer may be considered public information even though parts are marked confidential.

1.7 AMENDMENTS

Amendments to this RFP may be issued at any time prior to the time set for receipt of proposals. Offerors are required to acknowledge receipt of any amendments issued to this RFP by returning a signed copy of each amendment issued. Signed copies of each amendment must be received on or before the time set for receipt of offers.

The City of Colorado Springs will post all amendments on the BidNet Website (www.bidnetdirect.com). It is the Offeror's responsibility to check the website for posted amendments or contact the Contracts Specialist listed to confirm the number of amendments which have been issued.

1.8 WITHDRAWAL OR MODIFICATION OF OFFERS

Any Offeror may modify or withdraw an offer in writing at any time prior to the deadline for submission of an offer.

1.9 ACCEPTANCE

Any offer received and not withdrawn shall be considered an offer, which may be accepted by the City of Colorado Springs based on initial submission without discussions or negotiations.

By submitting an offer in response to this solicitation, the Offeror agrees that any offer it submits may be accepted by the City of Colorado Springs at any time within 90 calendar days from the date of submission deadline.

The City of Colorado Springs reserves the right (a) to reject any or all offers,(b) to waive informalities and minor irregularities in offers received, and/or (c) to accept any portion of an offer if deemed in the best interest of the City of Colorado Springs. Failure of the Offeror to provide in

its offer any information requested in the RFP may result in rejection of the offer for non-responsiveness.

1.10 PROPOSAL PREPARATION COST

The cost of proposal preparation is not a reimbursable cost. Proposal preparation shall be at the Offeror's sole expense and is the Offeror's total and sole responsibility.

1.11 AWARD

The City of Colorado Springs may make multiple awards, using the evaluation criteria listed in this RFP, to determine the best value, considering all factors and criteria in the proposals submitted. Best value means the expected outcome of an acquisition that, in the City's estimation, provides the greatest overall benefit in response to the requirements detailed in the RFP. The City of Colorado Springs reserves the right to reject any or all offers and to not make an award.

1.12 PERFORMANCE PERIOD

The performance period for the project detailed in this RFP will be established as follows:

NTP – December 31, 2031

You may submit to michael.zeller@coloradosprings.gov updated rate sheets in January of 2028, 2029, 2030 and 2031 for review and approval by Parks Staff. If approved the new rates will begin on January 1 of 2028, 2029, 2030 and 2031. If not approved current rates will apply.

1.13 DEBRIEFING

Offerors not selected may request a debriefing on the selection process as well as discussion of the strengths and weaknesses of their proposal upon receipt of notification that their offer was not selected.

A debriefing may be scheduled by contacting the Contracts Specialist listed above. The Contracts Specialist must receive a written request for debriefing no later than ten (10) calendar days after issuance of a notification that the Offeror's offer was not selected.

1.14 SUBSTANTIVE PROPOSALS

By responding to this RFP, the Offeror certifies (a) that Offeror's proposal is genuine and is not made in the interest of, or on behalf of, an undisclosed person, firm, or corporation; (b) that Offeror has not directly or indirectly induced or solicited any other Offerors to put in a false or sham proposal; (c) that Offeror has not solicited or induced any other person, firm, or corporation to refrain or abstain from proposing an offer or proposal; (d) that Offeror has not sought by collusion to obtain for themselves any advantage over any other Offerors or over the City of Colorado Springs; and (e) that Offeror has not violated or caused any person to violate, and shall not violate or cause any person to violate, the City's Code of Ethics contained in Article 3, of Chapter 1 of the City Code and in the City's Procurement Rules and Regulations.

1.15 OFFEROR'S QUALIFICATIONS

Each Offeror must complete Exhibit 1 – Qualification Statement.

No contract will be awarded to any Offeror who is in arrears to the City, upon any debt or contract, or who is in default, in any capacity, upon any obligation to the City or is deemed to be irresponsible or unreliable by the City based on past performance.

1.16 NON-COLORADO ENTITIES

If Offeror is a foreign entity, Offeror shall comply with C.R.S. section 7-90-801, “Authority to transact business or conduct activities required,” and section 7-90-802, “Consequences of transacting business or conducting activities without authority.”

Before or at the time that the contract is awarded to an entity organized or operating outside the State of Colorado, such entity shall obtain authorization to do business in the State of Colorado, designate a place of business herein, and appoint an agent for service of process.

Such entity must furnish the City of Colorado Springs with a certificate from the Secretary of the State of Colorado to the effect that a certificate of authority to do business in the State of Colorado has been issued by that office and is still valid. The entity shall also provide the City with a certified copy of the designation of place of business and appointment of agent for service of process from the Colorado Secretary of State, or a letter from the Colorado Secretary of State that such designation of place of business and agent for service of process has been made.

1.17 PROCUREMENT RULES AND REGULATIONS

All projects advertised by the City of Colorado Springs are solicited in accordance with the City's Procurement Rules and Regulations. The City's Procurement Rules and Regulations can be reviewed and/or downloaded from the City website https://www.coloradosprings.gov. The Contracts Specialist may also provide a soft copy of the Rules and Regulations upon request. Any discrepancies regarding conflicting statements, decisions, irregularities, clauses, or specifications will be rectified utilizing the City’s Procurement Rules and Regulations, when applicable. It is the Offeror’s responsibility to advise the Contracts Specialist listed in this RFP of any perceived discrepancies prior to the date and time the offer is due.

1.18 FAIR TREATMENT OF OFFERORS

The City Procurement Services Division shall be responsible for ensuring the procurement of products, commodities, and services in a manner that affords all responsible businesses a fair and equal opportunity to compete. If an Offeror believes that a procurement is not conducted in a fair and equitable manner, the Offeror is encouraged to inform the City Procurement Services Manager as soon as possible.

1.19 ORDER OF PRECEDENCE

Any inconsistency in this solicitation shall be resolved by giving precedence in the following order:

A. Sections I-IV of this Solicitation
B. Statement of Work
C. Other Appendices, Schedules, Exhibits, or Attachments

1.20 SALES TAX

The successful Offeror, if awarded a contract, shall apply to the Colorado Department of Revenue for a tax-exempt certificate for this project. The certificate does not apply to City of Colorado Springs Sales and Use Tax which shall be applicable and should be included in all proposals. The tax-exempt project number and the exemption certificate only apply to County, PPRTA (Pikes Peak Rural Transportation Authority), and State taxes when purchasing construction and building materials **to be incorporated into this project**.

Furthermore, the exemption **does not** include or apply to the purchase or rental of equipment, supplies or materials that **do not become a part of the completed project or structure**. In these instances, the purchase or rental is subject to full taxation at the current taxation rate.

The Offeror and all subcontractors shall include in their Offer City of Colorado Springs Sales and Use Tax on the work covered by the offer, and all other applicable taxes.

Forms and instructions can be downloaded at https://coloradosprings.gov/sales-tax. Questions can be directed to the City Sales Tax Division at (719) 385-5903 or SalesTax@coloradosprings.gov.

Our Registration Numbers are as follows:
City of Colorado Springs
Federal I.D.: 84-6000573
Federal Excise: A-138557
State Sales Tax: 98-03479

1.21 INTERPRETATION OF PLANS AND SPECIFICATIONS

Any change to proposal forms, plans, or specifications prior to the opening of proposals will be issued by the City in the form of an Amendment. Certain individuals may be named in the RFP that have authority to provide information, clarification or interpretation to Offerors prior to opening of proposals. Information obtained from persons other than those named individuals is invalid and shall not be used for proposal purposes.

1.22 COMBINATION OR CONDITIONAL PROPOSALS

If an RFP is issued for projects in combination and separately, the Offeror may submit proposals either on the combination or on separate units of the combination. The City reserves the right to make awards on combination or separate proposals to the advantage of the City. Combination proposals will be considered, only when specified.

1.23 ANTI-COLLUSION AFFIDAVIT

The Offeror by signing their proposal submitted to the City is certifying that the Offeror has not participated in any collusion or taken any action in restraint of free competitive bidding. This statement may also be in the form of an affidavit provided by the City and signed by the Offeror. The original of the signed anti-collusion affidavit, if separately required and provided with the RFP, shall be submitted with the proposal. The proposal will be rejected if it does not contain the completed anti-collusion affidavit.

SECTION II – PROPOSAL CONTENT

2.0 PROPOSAL CONTENT

Section II provides instructions regarding the format and content required for proposals submitted in response to this solicitation.

2.1 PROPOSAL FORMAT

Offeror's written proposal should include concise, but complete, information, emphasizing why the Offeror is best or best qualified to provide the required services. The Offeror's written proposal should include the information in the format outlined below and must be limited to no more than twenty-five (25) pages. **A page shall be defined as 8-1/2" x 11"; single sided, with one inch margins, and a minimum font of Times New Roman 10**. The only exception to the 8-1/2" x 11" paper size is the proposed project schedule. It may be submitted on 11" x 17" paper. Each 11" x 17" page for the schedule shall be counted in the overall page limitations above. Each section of the proposal should be labeled to clearly follow the requirements sections identified in this section of the RFP. The following listed Exhibits must be filled out and returned with the proposal and are not counted against the page limit:

Exhibit 1 Solicitation Qualifications Document
Appendix A Hourly Rate Sheet
Signed Addenda, if applicable

2.2 COVER LETTER

The cover letter shall be no more than three pages. The cover letter shall contain at least the following information.

A. RFP Number and Project Name.
B. Statement that the Offeror is qualified to perform the work.
C. Certification Statement that the information and data submitted are true and complete to the best knowledge of the individual signing the letter.
D. Name, telephone number, email address, and physical address of the individual to contact regarding the proposal.
E. The signature of an authorized principal, partner, or officer of the Offeror.

2.3 PROPOSAL CERTIFICATION

The Offeror must fill out and submit Exhibit 1, Solicitation Qualifications Document, with its Proposal.

2.4 ORGANIZATIONAL BACKGROUND AND OVERVIEW

The Offeror must provide a brief history and overview of its company and its organizational structure, with special emphasis on how this project will fit within that structure. Also include principal place of business location(s), office locations, and size of firm. Financial stability information (annual public reports or private financial statements shall be included in an appendix or under separate cover; private financial information will be kept confidential by the City) may be requested during the proposal evaluation and award process.

2.5 PROPOSAL NARRATIVE/TECHNICAL AND MANAGEMENT APPROACH

In the proposal narrative/technical and management approach section, the Offeror should explain what the Offeror will do and how it will perform if awarded a contract.

2.5.1 TECHNICAL AREA

The Offeror must explain its overall solution, considering the scope of work or statement of work provided. The content must include, but not necessarily be limited to, the following information.

A. Understanding of and Compliance with Technical Requirements

In the Technical Area, the Offeror should address each work area in sufficient detail to demonstrate a clear and full understanding of the work necessary to complete the project. The proposal should not merely parrot the requirements of the RFP. Further, the Offeror should provide evidence of sufficient planning to ensure the work is completed on schedule and within budget. It is highly recommended that the Offeror provide sufficient content and detail to answer completely the following questions:

1. Does the proposal demonstrate a firm understanding of the requirements and goals of the Statement of Work, as well as industry standards and reasonable expectations for a company in the industry?
2. Does the proposal fully and completely address each requirement and goal of the Statement of Work?
3. Does the proposal provide solutions to indicate that requirements and goals will be met on schedule?
4. Does the technical solution seem realistic?
5. Does it generally appear that the Offeror knows and thoroughly understands the business and the RFP requirements?

B. Project Approach

In the Technical Area, the Offeror should clearly present proposed solutions and indicate that it has performed adequate planning to accomplish project tasks as defined in the Statement of Work. Innovations, efficiencies, and detailed specifics are all encouraged.

The Offeror must at least address the following areas:

1. Schedule Management. Discuss Offeror's approach to schedule management including updating and reporting progress of the work.
2. Quality Control. Discuss Offeror's quality control plan, processes and approach to ensure that the City receives a quality product.
3. Safety. Discuss Offeror's approach and commitment to safety for its workers, the public, and City employees, if services are accomplished on a City site.
4. Potential issues that Offeror foresees with this project and how Offeror would make adjustments if encountered.

It is highly recommended that the Offeror provides sufficient content and detail to answer completely the following questions.

1. Does the proposal include a complete plan to accomplish each requirement, including subcontracting (if applicable)?

2. Does the proposal demonstrate that appropriate and qualified personnel and equipment will be provided to carry out the requirement?
3. Is the proper level of effort directed toward each requirement? Does the level of effort look unrealistically low or unreasonably high?

2.5.2 MANAGEMENT AREA

Offeror must explain its method of managing the work to be performed. The content must include, but no necessarily be limited to, the following information.

A. Program Management Controls

In the Management Area, the Offeror should provide:

1. A plan of operation, to include management of personnel, workload, schedule, and budget
2. An organization chart which demonstrates clear and effective lines of authority, responsibility, and communication for management, supervisory, and technical personnel. The plan should address which job classification or personnel will be assigned to each task and how that determination is made. Basic human resource management concepts should be addressed, including hiring, firing, discipline, incentive plans, etc.
3. If the Offeror plans to subcontract more than 10% of the work, include information on how the Offeror plans to manage its subcontractors.

It is highly recommended that the Offeror provide sufficient content and detail to answer completely the following questions.

1. Does the proposal address the issues above in sufficient detail to demonstrate a sophisticated and mature management control system?
2. Are program management controls consistent with the technical portion of the proposal, especially regarding schedule and level of effort?
3. Do the plan and controls indicate that the Offeror will obtain, keep, and efficiently utilize high-quality personnel?
4. Does the proposal explain how the Offeror will address corrective actions in case of delays (e.g. expediting materials, additional resources, etc.)?

B. Past Performance/Relevant Experience

In the Management Area, the Offeror should provide at least three references or name contracts demonstrating that it successfully provided services/products that are the same or similar to those required in the RFP. The proposal should adequately explain how the projects were completed on schedule and within budget. It is highly recommended that the Offeror provides sufficient content and detail to answer completely the following questions.

1. Does the proposal include at least three references or past performance citations?
2. Are the references or past performance citations relevant to the requirements of the Statement of Work of the RFP?
3. Does the Offeror explain how they were successful on the projects provided as past performance?
4. Does the Offeror apply the past performance to the City requirement in such a way as to demonstrate added value due to experience?

5. Does the Offeror describe specific experience with troubleshooting, repairs, irrigation design, water efficiency improvements for large commercial irrigation systems?
6. Does the Offeror describe specific experience working with ductile iron fittings, flange fittings, HDPE and backflow prevention systems?

C. Key Personnel

In the Management Area, resumes must be provided for all personnel considered key, as required by the RFP. Resumes do not count toward the page limit. It is highly recommended that the Offeror provide sufficient content and detail to answer completely the following questions. Explain how the key personnel were related to the projects cited as relevant past performance.

1. Does the Offeror provide complete resumes, including education, experience, background information, accomplishments, and other pertinent information?
2. Does the Offeror provide resumes for all key personnel, as required by the RFP?
3. Do the resumes demonstrate adequate professional, technical, and management levels to accomplish the work effectively and efficiently?

2.6 PRICE AREA

In the Price Area, the Offeror should provide a detailed breakdown of the price for each year of performance. The price must be all-inclusive and include all unit costs for material, labor, other direct costs (e.g. travel), indirect costs (i.e. overhead and general and administrative costs), and profit/fee. Offers must include sufficient detail to allow insight into the fairness and reasonableness of the price. If the contract type will be Time and Material (T&M) labor categories, labor rates, separated profit, and estimated material costs must be included in detail.

In addition, although price may not be the most important factor, it is still very important to the City of Colorado Springs. The Offeror's pricing must be competitive as compared to the budget amount, market pricing in the industry, and the pricing of other Offerors. It is highly recommended that the Offeror provide sufficient content and detail to answer completely the following questions.

1. How does the price compare to the industry competition?
2. If low, is it unrealistically low?
3. If high, is there demonstrated added value for the additional cost?
4. Does the Offeror provide general labor rates?
5. Does the Offeror provide equipment array pricing?
6. Does the Offeror provide cost plus markup fixed percentage rates for materials and products?

2.7 PROPOSAL PRESENTATION

Presentation is an important factor. Offerors should provide a highly professional product, which is complete, accurate, easily understood, and effectively presented.

2.8 EXCEPTIONS

All Offerors must complete Exhibit 1, Exceptions Form, found in the Solicitation Qualifications Document, and return it with their proposal. Some terms and conditions are not negotiable. Exceptions may be grounds for rendering the proposal unacceptable without further discussions.

2.9 INSURANCE REQUIREMENTS

All Offerors must complete Exhibit 1, Minimum Insurance Requirements, found in the Solicitation Qualifications Document, and return with their proposal. Lack of responsiveness in this area may be grounds for rendering the proposal unacceptable without further discussions.

SECTION III – EVALUATION FACTORS

3.0 EVALUATION AND AWARD

Section III provides information regarding evaluation criteria and scoring. It also includes information regarding proposal selection and award of the resultant contract.

3.1 EVALUATION CRITERIA

3.1.1 TECHNICAL AREA – UNDERSTANDING OF AND COMPLIANCE WITH TECHNICAL REQUIREMENTS

See Section II – Item 2.5.1A

3.1.2 TECHNICAL AREA – PROJECT APPROACH

See Section II - Item 2.5.1B

3.1.3 MANAGEMENT AREA – PROGRAM MANAGEMENT CONTROLS

See Section II – Item 2.5.2A

3.1.4 MANAGEMENT AREA – PAST PERFORMANCE/RELEVANT EXPERIENCE

See Section II – Item 2.5.2B

3.1.5 MANAGEMENT AREA – KEY PERSONNEL

See Section II – Item 2.5.2C

3.1.6 PRICE/COST AREA – PRICE/COST

See Section II – Item 2.6

3.1.7 PROPOSAL PRESENTATION AREA – PROPOSAL PRESENTATION

See Section II – Item 2.7

3.1.8 EXCEPTIONS AND INSURANCE

See Section II – Items 2.8 and 2.9

3.2 RANKING

A. The order of ranking or importance in the evaluation shall be as follows per grouping:

First: Technical Area
Second: Management Area
Third: Price/Cost Area
Fourth: Proposal Presentation Area

B. Definitions for scoring are as follows and apply to each grouping:

Exceptional – The proposal meets all and exceeds many of the requirements of the RFP to the benefit of the City, and the information provided is of such a nature as to answer all questions without need for further inquiry. There are no corrective actions required, and no compromise of requirements is needed.

Very Good – The proposal meets all and exceeds some of the requirements of the RFP to the benefit of the City, and the information provided is of such a nature as to answer most questions without need for further inquiry. There are no corrective actions required, and no compromise of requirements is needed.

Satisfactory – The proposal meets the requirements of the RFP, and the information provided is of such a nature as to answer many questions without need for further inquiry. There are very few corrective actions required, and no substantive compromise of requirements is needed.

Marginal – The proposal does not meet some of the requirements of the RFP, and the information provided is of such a nature as to require some clarification. There are some corrective actions required, and some non-substantive compromise of requirements is needed.

Unacceptable – The proposal does not meet many of the requirements of the RFP, and the information provided is of such a nature as to require much clarification. There are many corrective actions required, and substantive compromise of requirements is needed.

C. Area Scoring

The score for each area will be determined by multiplying the sum of the criteria in each area by the area evaluation factor. The area evaluation factors are as follows:

Technical Area:	40 Points
Management Area:	35 Points
Price/Cost Area	20 Points
Proposal Presentation:	5 Points
TOTAL	100 Points

D. Final/Overall scoring

The final proposal score will be determined by adding the area scoring. The sum of the area scores will be the final/overall score.

3.3 SELECTION COMMITTEE

A selection committee will review all proposals. Through this process, the City will determine which proposals are acceptable or unacceptable. The City will notify, in writing, the Offerors whose proposals are deemed to be unacceptable. Those Offerors offering proposals deemed to be acceptable by the City will be evaluated by grouping and scored by grouping by the selection committee. This scoring will determine which Offerors are considered to be in the competitive range and may be the basis for an award decision without further steps.

If the selection committee elects not to award based upon evaluation scoring, it may engage in a forced elimination process. To inform this process, it may require oral presentations or interviews with the Offerors considered to be in the competitive range. If oral presentations or interviews are conducted, they may also be scored, or they may simply be considered as information supporting the forced elimination process. The selection committee may request revisions to the proposal from each of the Offerors at the conclusion of the interviews. The intent of the forced elimination process is to reach consensus. The decision will be based on all relevant factors and based upon perception of best value. The final decision may or may not exactly reflect scoring ranking.
The City also reserves the right to request best and final offers from all Offerors at any point in the proposal evaluation process.

3.4 AWARD OF CONTRACT

It is anticipated that there will be negotiations or discussions with Offerors. However, the City reserves the right to award without negotiations or discussions. The City also reserves the right to award a contract not necessarily or merely to the Offeror with the most advantageous price. The City intends to award each grouping to the Offeror that demonstrates the best value to the City and the most substantiated ability to fulfill the requirements contained in this Request for Proposal. A contract or contracts prepared by the City will be finalized and/or negotiated with the successful Offeror(s). In the event a contract cannot be negotiated with the top-ranked Offeror, the City may enter into negotiations with the second highest-ranked Offeror, or the City may decide to call for new proposals. Immediately after the notice of award, the successful Offeror(s) will begin planning in conjunction with the City of Colorado Springs staff (to be designated by the City) to ensure fulfillment of all its obligations. The successful Offeror may be expected to attend regular meetings as required by the City to assist in the preparation for startup.

SECTION IV – RESERVED

SECTION V – EXHIBITS

5.0 EXHIBITS

Exhibit 1 Solicitation Qualifications Document
Exhibit 2 Sample Contract
Exhibit 3 Evaluation Scoresheet

EXHIBIT 1 SOLICITATION QUALIFICATIONS DOCUMENTS

FOLLOWS THIS PAGE.

SOLICITATION QUALIFICATIONS DOCUMENTS

Please complete all sections of this document including the Solicitation Certification, Representations and Certifications, Qualification Statement, Exceptions, Minimum Insurance Requirements, and Signature Page.

Please submit all completed documents with your bid/ proposal and sign the Minimum Insurance Requirements and Signature Page.

Solicitation:

Solicitation Number:

Firm Name: _____ Date: _____

Address: _____

_____

Federal Tax ID #: _____

Tax Classification:

☐ Sole Proprietorship ☐ Partnership ☐ C Corporation

☐ S Corporation ☐ LLC ☐ Nonprofit

DUNS Number: _____

OFFEROR REPRESENTATIVE

Offeror has appointed the following as the offeror's representative and contact for all questions or clarifications in regard to this offeror.

Name: _____

Telephone: _____

E-mail: _____

SOLICITATION CERTIFICATION

PLACE OF BUSINESS

Company's Principal Place of Business

Does Offeror Have an established office or facility in Colorado Springs? ☐ YES ☐ NO

If Yes, Indicate address below if different from principal place of business.

Year Facility Was Established

Percent of Work to be performed from principal place of business.

Percent of Work to be performed from Colorado Springs Facility

INSURANCE

Indicate your ability to provide a certificate of insurance evidencing the required coverage types and limits specified in Minimum Insurance Requirements Exhibit. (The certificate of insurance must reflect the City of Colorado Springs as an Additional Insured, as applicable.)

Initial Here

Indicate your Ability to Comply with the following requirements:

The City shall be added as an Additional Insured to all liability policies

☐ YES ☐ NO

Your property and liability insurance company is licensed to do business in Colorado

☐ YES ☐ NO

Your property and liability insurance company has an AM best rating of not less than B+ and/or

☐ YES ☐ NO

Worker's Compensation Insurance is carried for all employees and covers work done in Colorado.

☐ YES ☐ NO

Provide the name of your property and liability insurance company here:

FINANCIAL STATEMENTS

☐ Current Financial Statements are not required for this solicitation.

☐ Current Financial Statements are required for this solicitation. Please include financial statements as a separate document with your proposal.

☐

Initial Here

COMPLETED PROPOSAL

Provide the completed and signed proposal. (Proposals must be identified as specified in this RFP document). All required Exhibits are attached.

☐

Initial Here

ACKNOWLEDGE ADDENDUM

Offeror hereby acknowledges receipt of the following amendments, if applicable Offeror agrees that it is bound by all Amendments identified herein.

Addendum #1	*Initial Here*	Dated:
Addendum #2	*Initial Here*	Dated:
Addendum #3	*Initial Here*	Dated:
Additional Addendum, if issued	*Initial Here*	Dated:

REPRESENTATIONS AND CERTIFICATIONS

1. INSURANCE REQUIREMENTS

Offeror shall comply with all insurance requirements and will submit the Insurance Certificates prior to performance start date. If limits are different from the stated amounts, Offeror shall explain variance. Certain endorsements and "additionally insured" statements may require further clarification and specific statements on a project specific basis and should have been described in the Offeror's proposal.

Initial Here #1

2. ETHICS VIOLATIONS

a) The Offeror shall have in place and follow reasonable procedures designed to prevent and detect possible violations described in this clause in its own operations and direct business relationships.
b) Offeror certifies the Offeror has not violated or caused any person to violate, and shall not violate or cause any person to violate, the City's Code of Ethics contained in Article 3, of Chapter 1 of the City Code and in the City's Procurement Rules and Regulations
c) When the Offeror has reasonable grounds to believe that a violation described in this clause may have occurred, the Offeror shall promptly report the possible violation to the City Contracts Specialist in writing.
d) The Offeror must disclose with the signing of this proposal, the name of any officer, director, or agent who is also an employee of the City and any City employee who owns, directly or indirectly, an interest of ten percent (10%) or more in the Offeror's firm or any of its branches.
e) In addition, the Offeror must report any conflict or apparent conflict, current or discovered during the performance of the Contract, to the City Contracts Specialist.
f) The Offeror shall not engage in providing gifts, meals or other amenities to City employees. The right of the Offeror to proceed may be terminated by written notice issued by City Contracts Specialist if Offeror offered or gave a gratuity to an officer, official, or employee of the City and intended by the gratuity to obtain a contract or favorable treatment under a contract.
g) The Offeror shall cooperate fully with the City or any agency investigating a possible violation on behalf of the City. If any violation is determined, the Offeror will properly compensate the City.
h) The Offeror agrees to incorporate the substance of this clause (after substituting "Contractor" for "Offeror") in all subcontracts under this offer.

Initial Here #2

3. COOPERATION WITH OTHER CONTRACTORS

Other City activities/contracts may be in progress or start during the performance of this contract. The Offeror shall coordinate the work harmoniously with the other contractors or City personnel, if applicable.

☐
Initial Here #3

4. INTERNET USE

Should the Offeror require access to City Internet resources in the performance of this requirement, a “Contractor’s Internet Use Agreement” form must be separately signed by each individual having access to the City Network. The completed Contractor’s Internet Use Agreement will be maintained with this agreement. Inappropriate use of the City Network will be grounds for immediate termination of any awarded contact.

☐
Initial Here #4

5. LITIGATION

If awarded a contract, Offeror shall notify the City within five (5) calendar days after being served with a summons, complaint, or other pleading in any matter which has been filed in any federal or state court or administrative agency. The Offeror shall deliver copies of such document(s) to the City's Procurement Services Manager. The term "litigation" includes an assignment for the benefit of creditors, and filings of bankruptcy, reorganization and/or foreclosure.

☐
Initial Here #5

6. CONTRACTOR’S REGISTRATION INFORMATION

Offeror’s firm verifies and states that they are (check all that apply):

☐ Large Business (i.e. do not qualify as a small business or non-profit)

☐ Nonprofit

☐ Small Business

☐ Minority Owned Business/Small Disadvantaged Business

☐ Woman Owned Business

☐ Veteran Owned Business

☐ Service-Disabled Veteran Owned Business

☐ HUBZone Business

Note: The City accepts self-certification for these categories in accordance with Small Business Administration (SBA) standards. The SBA size standards are found on the SBA website https://www.sba.gov/content/am-i-small-business-concern.

☐

Initial Here #6

7. CONTRACTOR PERSONNEL

a) The Offeror shall appoint one of its key personnel as the "Authorized Representative" who shall have the power and authority to interface with the City and represent the Offeror in all administrative matters concerning this proposal and any awarded contract, including without limitation such administrative matters as correction of problems modifications, and reduction of costs.

b) The Authorized Representative shall be the person identified in the Offeror's proposal, unless the Offeror provides written notice to the City naming another person to serve as its Authorized Representative. Communications received by the City Contracts Specialist from the Authorized Representative shall be deemed to have been received from the Offeror.

Name: ☐

Telephone: ☐

E-mail: ☐

☐

Initial Here #7

8. OFFEROR'S CERTIFICATION

The undersigned hereby affirms that:

a) He/She is a duly authorized agent of the Offeror;

b) He/She has read and agrees to the City's standard terms and conditions attached.

c) The offer is presented in full compliance with the collusive prohibitions of the City of Colorado Springs. The Offeror certifies that no employee of its firm has discussed, or

compared the offer with any other offeror or City employee and has not colluded with any other offeror or City employee.

d) The Offeror certifies that it has checked all of its figures, and understands that the City will not be responsible for any errors or omissions on the part of the Offeror in preparing its proposal.

e) By submitting an offer the Offeror certifies that it has complied and will comply with all requirements of local, state, and federal laws, and that no legal requirements have been or will be violated in making or accepting this solicitation.

I hereby certify that I am submitting the proposal based on my company's capabilities to provide quality products and/or services on time.

☐

Initial Here #8

9. OFFEROR CERTIFICATION REGARDING DEBARMENT, SUSPENSION, PROPOSED DEBARMENT, AND OTHER RESPONSIBILITY MATTERS:

1. The Offeror certifies to the best of its knowledge and belief, that (i) the Offeror and/or any of its Principals

   ☐ Are ☐ Are Not

   Presently debarred, suspended, proposed for debarment, or declared ineligible for the award of contracts by any Federal agency.

   ☐ Have ☐ Have Not

   Within a three year period preceding this offer, been convicted of or had a civil judgment rendered against them for: commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (federal, state, local) contract or subcontract; violation of Federal or state antitrust statutes relation to the submission of offers; or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statement, tax evasion, or receiving stolen property; and

   ☐ Are ☐ Are Not

   presently indicated for, or otherwise criminally or civilly charged by a governmental entity with commission of any of the offenses enumerated in any paragraphs above.

2. The Offeror shall provide immediate written notice to the City Contracts Specialist if, at any time prior to contract award, the Offeror learns that its certification was erroneous when submitted or has become erroneous by reasons of changed circumstances.
3. The certification in paragraph 1. above, is a material representation of fact upon which reliance was placed when making award. If it is later determined that the Offeror knowingly rendered an erroneous certification, in addition to other remedies available to the City, the

City Contracts Specialist may terminate the contract resulting from this solicitation for default. Termination for default may result in additional charges being levied for the costs incurred by the City to initiate activities to replace the awarded Contractor.

Initial Here #9

10. ACCEPTANCE OF CITY CONTRACTS SPECIALIST'S SOLE AUTHORITY FOR CHANGES

Unless otherwise specified in the Contract, the Offeror hereby agrees that any changes to the scope of work, subsequent to the original contract signing, shall be generated in writing and an approval signature shall be obtained from the City Contracts Specialist prior to additional work performance.

Initial Here #10

11. CITY CONTRACTOR SAFETY PROGRAM

The Offeror hereby agrees to adhere to a worker safety program for contractor employees on a City job site or location. By initialing below, the Offeror has reviewed the information and will abide by the City Policy which is available for review:

https://coloradosprings.gov/finance/page/procurement-regulations-and-documents

Initial Here #11

12. ACCEPTANCE OF CITY ENVIRONMENTALLY PREFERRED PURCHASING (EPP) POLICY

The City of Colorado Springs is committed to buying more environmentally preferable goods and services, as long as they meet performance needs, are available within a reasonable time and at a reasonable cost. The Offeror hereby acknowledges review of this policy by initialing below.

https://coloradosprings.gov/finance/page/procurement-regulations-and-documents

Initial Here #12

13. FRAUD, WASTE, AND ABUSE

Everyone has a duty to report any suspected unlawful act impacting the City of Colorado Springs operations and its enterprises. Anyone who becomes aware of the existence or apparent existence of fraud, waste, and abuse in City of Colorado Springs is encouraged to report such matters to the City Auditor's Office in writing or on the telephone hotline 385-2387 (ADTR). Written correspondence can be mailed to:

City Auditor

P.O. Box 2241

Colorado Springs CO 80901

Or via email FraudHotline@ColoradoSprings.gov. Any of these mechanisms allow for anonymous reporting. For more information, please go to the website https://coloradosprings.gov/cityfraud.

Initial Here #13

QUALIFICATION STATEMENT

This statement will provide information which will enable the City to evaluate the qualifications of your firm and staff with regard to the requirements of this solicitation. Please complete this form in its entirety. If a request in the Qualification Statement is contained in the proposal, indicate the section in the proposal where that information can be found.

1. **TYPE OF LICENSE(S) HELD**

2. **TYPE OF SERVICE TO BE PROVIDED FOR THIS SOLICITATION**

3. **NUMBER OF YEARS IN BUISNESS**

4. **FIRM HSITORY & STAFF QUALIFICATIONS**

   In your proposal provide a brief history of your firm, staff size, and experience. Submit a resume for the project manager and each key personnel assigned to this project.

5. **WHAT OTHER NAME(S) HAS YOUR COMPANY OPERATED UNDER**

   ☐ My Firm has not operated under any other names

6. **HAVE YOU OR YOUR FIRM EVER FAILED TO COMPELTE ANY WORK AWARDED TO YOU?**

   ☐ Yes ☐ No

   If Yes, Please Explain

7. **HAS ANY OFFICER OF PARTNER OF YOUR ORGANIZATION EVER BEEN AN OFFICER OR PARTNER OF ANOTHER ORGANIZATION THAT FIALED TO COMPLETE A CONTRACT WITHIN THE LAST FIVE (5) YEARS?**

☐ Yes ☐ No

If Yes, Please Explain

8. **HAS YOUR FIRM OR ANY PARTNERS OR OFFICERS EVER BEEN INVOVLED IN ANY BANKRUPTCY ACTION?**

☐ Yes ☐ No

If Yes, Please Explain

9. **ARE YOU PRESENTLY INVOVLED IN ANY LITIGATION WITH ANY GOVERNMENT AGENCY?**

☐ Yes ☐ No

If Yes, Please Explain Type, Kind, Plaintiff, Defendant, etc. and state the current status:

10. **BANK REFERENCE**

Bank Name:	
Address:	
Contact:	
Phone #:	
E-mail:	

11. SIMILAR PROJECTS

List Three similar projects (local or state-wide) from the last five (5) years. Include the location of the project, size of project (contract amount), contract name and information. NOTE: Detailed information on these projects may also be requested in the solicitation package

☐ Indicate here if this information is provided within your proposal and Identify where in the proposal it is located.

1. Company:

   Location of Project:

   Contract Amount:

   Contract Period of Performance:

   Company Representative:

   Representative's Title:

   Representative's Address:

   Representative's Phone #:

   Representative's E-mail:

   Brief Description of service/goods provided and how your firm was successful carrying out the scope of work of the contract.

2. Company:

   Location of Project:

   Contract Amount:

   Contract Period of Performance:

   Company Representative:

Representative's Title:

Representative's Address:

Representative's Phone #:

Representative's E-mail:

Brief Description of service/goods provided and how your firm was successful carrying out the scope of work of the contract.

3. Company:

Location of Project:

Contract Amount:

Contract Period of Performance:

Company Representative:

Representative's Title:

Representative's Address:

Representative's Phone #:

Representative's E-mail:

Brief Description of service/goods provided and how your firm was successful carrying out the scope of work of the contract.

12. SIMILAR PROJECTS CURRENTLY UNDER CONTRACT

list three projects currently under contract and in progress (local or state-wide) from the last five (5) years. Include the location of the project, size of project (contract amount), contract name and information. NOTE: Detailed information on these projects may also be requested in the solicitation package

☐ Indicate here if this information is provided within your proposal and Identify where in the proposal it is located.

1. Company:

   Location of Project:

   Contract Amount:

   Contract Period of Performance:

   Company Representative:

   Representative's Title:

   Representative's Address:

   Representative's Phone #:

   Representative's E-mail:

   Brief Description of service/goods provided.

2. Company:

   Location of Project:

   Contract Amount:

   Contract Period of Performance:

   Company Representative:

Representative's Title:

Representative's Address:

Representative's Phone #:

Representative's E-mail:

Brief Description of service/goods provided.

3. Company:

Location of Project:

Contract Amount:

Contract Period of Performance:

Company Representative:

Representative's Title:

Representative's Address:

Representative's Phone #:

Representative's E-mail:

Brief Description of service/goods provided.

13. ADDITIONAL QUALIFICATION REQUIREMENTS

☐ There are no additional qualification requirements for this solicitation.

☐ There are additional qualification requirements as follows:

EXCEPTIONS

Please Indicate below if there are any exceptions taken to any of the terms, conditions, or specifications of these proposal documents or contract.

If there are exceptions taken to any of the terms, conditions, or specifications of the proposal document or contract, they must be clearly stated on an additional document attached to this exhibit and returned with your proposal.

NOTE: All potential Offerors are hereby advised that exceptions taken may be considered during the evaluation phase which may affect the final scoring of proposals. Offerors stipulating that the City must use their contract or agreement may be determined non-responsive and their Proposal determined unacceptable.

Please indicate below:

☐ My Firm has no exceptions.

☐ My Firm does have exceptions. (Attach Exceptions to this exhibit)

MINIMUM INSURANCE REQUIREMENTS

The following listed minimum insurance requirements shall be carried by all contractors and consultants unless otherwise specified in the City's solicitation package, Special Provisions or Standard Specifications.

1. Commercial General Liability for limits not less than $1,000,000 combined single limit for bodily injury and property damage for each occurrence. Coverage shall include blanket contractual, broad form property damage, products and completed operations.

2. Workers' Compensation and Employers Liability as required by statute. Workers' Compensation and Employers Liability coverage is to be carried for a minimum limit of $1,000,000.

3. Automobile Liability covering any auto (including owned, hired, and non-owned autos) with a minimum of $1,000,000 each accident combined single limit.

Except for workers' compensation and employer's liability insurance and Professional Liability, the City of Colorado Springs must be named as an additional insured. Certificates of Insurance must be submitted before commencing the work and provide 30 days' notice prior to any cancellation, non-renewal, or material changes to policies required under the contract.

Name of Company

Signature

Date

SIGNATURE PAGE

By signing below, the Offeror certifies that no person or firm other than the Offeror or as otherwise indicated has any interest whatsoever in this offer or any Contract that may be entered into as a result of this offer and that in all respects the offer is legal and firm, submitted in good faith without collusion or fraud.

The undersigned additionally declares that it has carefully examined the Bid/Proposal information and the complete Solicitation prior to submitting a Bid / Proposal. The Offeror's signature will be considered the Offeror's acknowledgement of understanding and ability to comply with all items in the solicitation.

The undersigned acknowledges and understands the terms, conditions, Specifications and all Requirements contained and/or referenced and are legally authorized by the Offeror to make the above statements or representations.

Signature

Name (Printed)

Company Name

Title

Date

EXHIBIT 2 SAMPLE CONTRACT

SERVICES CONTRACT

Contract Number:		Project Name/Title	
Vendor/Contractor			
Contact Name:		Telephone:	
Email Address:			
Address:			
City Contracting Specialist		City Dept Rep	
NOT TO EXCEED Contract Amount:		City Account #	
Contract Type:		Period of Performance	

1. INTRODUCTION

THIS FIXED UNIT PRICE INDEFINITATE DELIVERY INDEFINATE QUANTITY (IDIQ) CONTRACT ("Contract") is made and entered into this ___ day of_____, 2025 by and between the City of Colorado Springs, a Colorado municipal corporation and home rule city, in the County of El Paso, State of Colorado, (the "City"), and _____ (the "Contractor").

THE CITY AND THE CONTRACTOR HEREBY AGREE AS FOLLOWS:

The City has heretofore prepared the necessary Contract Documents for the following Activity:

The Contractor did submit to the City the Contractor's written offer and proposal to do the work therein described under the terms and conditions therein set forth and furnish all materials, supplies, labor, services, transportation, tools, equipment, and parts for said work in strict conformity with the accompanying Contract Documents, which are attached hereto and incorporated herein by this reference, including the following:

1. This Contract Document
2. Appendix A – Additional Terms and Conditions
3. Appendix B – Contractor's Proposal
4. Appendix C – Statement of Work
5. Appendix D – Project Schedule
6. Appendix E – Insurance Requirements

2. COMPENSATION/CONSIDERATION

THIS FIXED UNIT PRICE INDEFINITE DELIVERY/INDEFINITE QUANTITY CONTRACT is established at the Not to Exceed amount of or $1,500,000.00 per year. This contract does not obligate or award contract values, funds, or work. All value; funds and work will be awarded through

Task Orders issued under this IDIQ Contract. It is anticipated that the total value of Task Orders will not exceed $1,500,000.00 per year. There is no guaranteed minimum amount for the cumulative value of the Task Orders.

Subject to the terms and conditions of the Contract Documents, Contractor agrees to furnish all materials and to perform all work as set forth in its proposal and as required by the Contract Documents.

All pricing is in accordance with the fixed unit prices found in Schedule A – Hourly Rates, as proposed by the Contractor. At no time shall the total obligation of the City exceed the not to exceed amount of this Contract.

3. TERM OF CONTRACT

The performance period for the project detailed in this RFP will be established as follows:

NTP – December 31, 2031

You may submit to michael.zeller@coloradosprings.gov updated rate sheets in January of 2028, 2029, 2030 and 2031 for review and approval by Parks Staff. If approved the new rates will begin on January 1 of 2028, 2029, 2030 and 2031. If not approved current rates will apply.

4. INSURANCE

The Contractor shall provide and maintain acceptable Insurance Policy(s) consistent with the Minimum Insurance Requirements attached as Appendix E, which includes Property, Liability and Professional Errors and Omissions coverage, and as otherwise listed in Appendix E. The City of Colorado Springs shall be reflected as an additional insured on the Property and Liability policy(s).

Further, Contractor understands and agrees that Contractor shall have no right of coverage under any existing or future City comprehensive, self, or personal injury policies. Contractor shall provide insurance coverage for and on behalf of Contract that will sufficiently protect Contractor, or Contractor's agents, employees, servants or other personnel, in connection with the services which are to be provided by Contractor pursuant to this Contract, including protection from claims for bodily injury, death, property damage, and lost income. Contractor shall provide worker's compensation insurance coverage for Contractor and all Contractor personnel. Contractor shall file applicable insurance certificates with the City and shall also provide additional insurance as indicated in this Contract. ***A CURRENT CERTIFICATE OF INSURANCE IS REQUIRED PRIOR TO COMMENCEMENT OF SERVICES LISTING THE CITY AS ADDITIONALLY INSURED.***

5. RESPONSIBILITY OF THE CONTRACTOR

A. The Contractor shall be responsible for the professional quality, technical accuracy, and the coordination of all Scope of Work services furnished by the Contractor under this Contract. The Contractor shall, without additional compensation, correct or revise any errors or deficiencies in services provided under this Contract to the satisfaction of the City.

B. The City's review, approval of, acceptance of, or payment for the services required under this Contract shall not be construed to operate as a waiver of any rights under this Contract or of any cause of action arising out of the performance of this Contract, and the Contractor shall

be and remain liable to the City for any and all damages to the City caused by the Contractor's negligent performance of any of the services furnished under this Contract.

C. The rights and remedies of the City provided for under this Contract are in addition to any other rights and remedies provided by law.

D. If the Contractor is comprised of more than one legal entity, each such entity shall be jointly and severally liable hereunder.

6. WORK OVERSIGHT

A. The extent and character of the work to be done by the Contractor shall be subject to the general approval of the City's delegated Project Manager.

B. If any of the work or services being performed does not conform with Contract requirements, the City may require the Contractor to perform the work or services again in conformity with Contract requirements, at no increase in Contract amount. When defects in work or services cannot be corrected by re-performance, the City may (1) require the Contractor to take necessary action to ensure that future performance conforms to Contract requirements and (2) reduce the Contract price to reflect the reduced value of the work or services performed.

C. If the Contractor fails to promptly perform the defective work or services again or to take the necessary action to ensure future performance is in conformity with Contract requirements, the City may (1) by Contract or otherwise, perform the services and charge to the Contractor any cost incurred by the City that is directly related to the performance of such work or service or (2) terminate the Contract for breach of contract.

7. SUBCONTRACTORS, ASSOCIATES, AND OTHER CONTRACTORS

A. Any subcontractor, outside associates, or other contractors used by the Contractor in connection with Contractor's work under this Contract shall be limited to individuals or firms that are specifically identified by the Contractor in the Contractor's proposal and agreed to by the City. The Contractor shall obtain the City's Project Manager's written consent before making any substitution of these subcontractors, associates, or other contractors.

B. The Contractor shall include a flow down clause in all of its subcontracts, agreements with outside associates, and agreements with other contractors. The flow down clause shall cause all of the terms and conditions of this Contract, including all of the applicable parts of the Contract Documents, to be incorporated into all subcontracts, agreements with outside associates, and agreements with other contractors. The flow down clause shall provide clearly that there is no privity of contract between the City and the Contractor's subcontractors, outside associates, and other contractors.

8. KEY PERSONNEL

The key personnel listed in the proposal and/or below will be the individuals used in the performance of the work. If any of the listed key personnel leave employment or are otherwise not utilized in the performance of the work, approval to substitute must be obtained by the Contractor from the City's Project Manager. Any substitute shall have the same or a higher standard of qualifications that the key personnel possessed at the time of Contract award.

9. START AND CONTINUANCE OF WORK

It is further agreed that the Contractor will start work promptly and continue to work diligently until this Contract is completed.

10. APPROPRIATION OF FUNDS

This Contract is expressly made subject to the limitations of the Colorado Constitution and Section 7-60 of the Charter of the City of Colorado Springs. Nothing herein shall constitute, nor be deemed to constitute, the creation of a debt or multi-year fiscal obligation or an obligation of future appropriations by the City Council of Colorado Springs, contrary to Article X, § 20, Colo. Const., or any other constitutional, statutory, or charter debt limitation. Notwithstanding any other provision of this Contract, with respect to any financial obligation of the City which may arise under this Agreement in any fiscal year after the year of execution, in the event the budget or other means of appropriation for any such year fails to provide funds in sufficient amounts to discharge such obligation, such failure (i) shall act to terminate this Contract at such time as the then-existing and available appropriations are depleted, and (ii) neither such failure nor termination shall constitute a default or breach of this Contract, including any sub-agreement, attachment, schedule, or exhibit thereto, by the City. As used herein, the term “appropriation” shall mean and include the due adoption of an appropriation ordinance and budget and the approval of a Budget Detail Report (Resource Allocations) which contains an allocation of sufficient funds for the performance of fiscal obligations arising under this Contract.

11. CHANGES

The Contractor and the City agree and acknowledge as a part of this Contract that no change order or other form or order or directive may be issued by the City which requires additional compensable work to be performed, which work causes the aggregate amount payable under the Contract to exceed the amount appropriated for this Contract as listed above, unless the Contractor has been given a written assurance by the City that lawful appropriations to cover the costs of the additional work have been made or unless such work is covered under a remedy-granting provision of this Contract. The Contractor and the City further agree and acknowledge as a part of this Contract that no change order or other form or order or directive which requires additional compensable work to be performed under this Contract shall be issued by the City unless funds are available to pay such additional costs, and, regardless of any remedy-granting provision included within this Contract, the Contractor shall not be entitled to any additional compensation for any change which increases or decreases the Contract completion date, or for any additional compensable work performed under this Contract, and expressly waives any rights to additional compensation, whether by law or equity, unless, prior to commencing the additional work, the Contractor is given a written change order describing the change in Contract completion date or the additional compensable work to be performed, and setting forth the amount of compensation to be paid, and such change order is signed by the authorized City representative, as defined below. The amount of compensation to be paid, if any, shall be deemed to cover any and all additional, direct, indirect or other cost or expense or profit of the Contractor whatsoever. It is the Contractor's sole responsibility to know, determine, and ascertain the authority of the City representative signing any change order under this Contract.

No change, amendment, or modification to this Contract shall be valid unless duly approved and issued in writing by the City of Colorado Springs Procurement Services Division. The City shall not be liable for any costs incurred by the Contractor resulting from work performed for changes not issued in writing by the City of Colorado Springs Procurement Services Division.

The following personnel are authorized to sign changes, amendments, or modifications to this Contract.

The Department Manager: up to $149,999.99
The City of Colorado Springs Deputy Chief of Staff: $150,000.00 to $499,999.99
The City of Colorado Springs Chief of Staff: $500,000.00 to $1,999,999.99
The Mayor of Colorado Springs: Unlimited

12. ASSIGNMENT

No assignment or transfer by the Contractor of this Contract or any part thereof or of the funds to be received thereunder by the Contractor will be recognized unless such assignment has had the prior written approval of the City and the surety has been given due notice of such assignment. Such written approval by the City shall not relieve the Contractor of the obligations under the terms of this Contract. In addition to the usual recitals in assignment contracts, the following language must be included in the assignment:

It is agreed that the funds to be paid to the assignee under this assignment are subject to a prior lien for services rendered or materials supplied for the performance of the work called for in said contract in favor of all persons, firms, or corporations rendering such services or supplying such materials.

13. CHOICE OF LAW

This Contract is subject to and shall be interpreted under the law of the State of Colorado, and the Charter, City Code, Ordinances, Rules and Regulations of the City of Colorado Springs, Colorado, a Colorado home rule city. Court venue and jurisdiction shall be exclusively in the Colorado District Court for El Paso County, Colorado. The Parties agree that the place of performance for this Contract is deemed to be in the City of Colorado Springs, El Paso County, State of Colorado. The Contractor shall ensure that the Contractor and the Contractor's employees, agents, officers and subcontractors are familiar with, and comply with, applicable Federal, State, and Local laws and regulations as now written or hereafter amended.

14. WORKERS' COMPENSATION INSURANCE

Contractor shall take out and maintain during the Period of Performance, Colorado Worker's Compensation Insurance for the Contractor and all employees of the Contractor. If any service is sublet by the Contractor, the Contractor shall require the subcontractor to provide the same coverage for the subcontractor and subcontractor's employees. Workers' Compensation Insurance shall include occupational disease provisions covering any obligations of the Contractor in accord with the provisions of the Workers' Compensation Act of Colorado.

15. INDEMNIFICATION

Contractor agrees that the Contractor shall indemnify, defend and hold harmless the City, its officers, employees and agents, from and against any and all loss, damage, injuries, claims, cause or causes of action, or any liability whatsoever resulting from, or arising out of, or in connection with the Contractor's obligations or actions under this Contract caused by any willful or negligent error, omission or act or a failure to observe any applicable standard of care by the Contractor or any person employed by it or anyone for whose acts the Contractor is legally liable. In consideration of the award of this Contract, to the extent damages are covered by insurance,

the Contractor agrees to waive all rights of subrogation against the City, its subsidiary, parent, associated and/or affiliated entities, successors, or assigns, its elected officials, trustees, employees, agents, and volunteers for losses arising from the work performed by the Contractor for the City. The indemnification obligation shall survive the expiration or termination of this Contract

16. INDEPENDENT CONTRACTOR

In the performance of the Contractor's obligations under this Contract, it is understood, acknowledged and agreed between the parties that the Contractor is at all times acting and performing as an independent contractor, and the City shall neither have nor exercise any control or direction over the manner and means by which the Contractor performs the Contractor's obligations under this Contract, except as otherwise stated within the Contract terms. The City shall not provide any direction to the Contractor on the work necessary to complete the project. Contractor understands that it is an independent contractor responsible for knowing how to perform all work or tasks necessary to complete project. The Contractor understands and agrees that the Contractor and the Contractor's employees, agents, servants, or other personnel are not City employees. The Contractor shall be solely responsible for payment of salaries, wages, payroll taxes, unemployment benefits or any other form of compensation or benefit to the Contractor or any of the Contractor's employees, agents, servants or other personnel performing services or work under this Contract, whether it is of a direct or indirect nature. Further in that regard, it is expressly understood and agreed that for such purposes neither the Contractor nor the Contractor's employees, agents, servants or other personnel shall be entitled to any City payroll, insurance, unemployment, worker's compensation, retirement or any other benefits whatsoever.

17. APPLICABLE LAW AND LICENSES

In the conduct of the services or work contemplated in this Contract, the Contractor shall ensure that the Contractor and all subcontractors comply with all applicable state, federal and City and local law, rules and regulations, technical standards or specifications. The Contractor shall qualify for and obtain any required licenses prior to commencement of work.

18. PRIOR AGREEMENTS

This is a completely integrated Contract and contains the entire agreement between the parties. Any prior written or oral agreements or representations regarding this Contract shall be of no effect and shall not be binding on the City. This Contract may only be amended in writing, and executed by duly authorized representatives of the parties hereto.

19. INTELLECTUAL PROPERTY

The Parties hereby agree, and acknowledge, that all products, items writings, designs, models, examples, or other work product of the Contractor produced pursuant to this Contract are works made for hire, and that the City owns, has, and possesses any and all ownership rights and interests to any work products of the Contractor made under this Contract, including any and all copyright, trademark, or patent rights, and that compensation to the Contractor for Agreement and acknowledgment of this intellectual property right section of this Contract is included in any compensation or price whatsoever paid to the Contractor under this Contract. It is the intent of the parties that the City shall have full ownership and control of the Contractor's work products produced pursuant to this Contract, and the Contractor specifically waives and assigns to the City all rights which Contractor may have under the 1990 Visual Artists Rights Act, federal, and state

law, as now written or later amended or provided. In the event any products, items writings, designs, models, examples, or other work product produced pursuant to this Contract is deemed by a court of competent jurisdiction not to be a work for hire under federal copyright laws, this intellectual property rights provision shall act as an irrevocable assignment to the City by the Contractor of any and all copyrights, trademark rights, or patent rights in the Contractor's products, items writings, designs, models, examples, or other work product produced pursuant to this Contract, including all rights in perpetuity. Under this irrevocable assignment, the Contractor hereby assigns to the City the sole and exclusive right, title, and interest in and to the Contractor's products, items writings, designs, models, examples, or other work product produced pursuant to this Contract, without further consideration, and agrees to assist the City in registering and from time to time enforcing all copyrights and other rights and protections relating to the Contractor's products, items writings, designs, models, examples, or other work product in any and all countries. It is the Contractor's specific intent to assign all right, title, and interest whatsoever in any and all copyright rights in the Contractor's products, items writings, designs, models, examples, or other work product produced pursuant to this Contract, in any media and for any purpose, including all rights of renewal and extension, to the City. To that end, the Contractor agrees to execute and deliver all necessary documents requested by the City in connection therewith and appoints the City as Contractor's agent and attorney-in-fact to act for and in Contractor's behalf and stead to execute, register, and file any such applications, and to do all other lawfully permitted acts to further the registration, prosecution, issuance, renewals, and extensions of copyrights or other protections with the same legal force and effect as if executed by the Contractor; further, the parties expressly agree that the provisions of this intellectual property rights section shall be binding upon the parties and their heirs, legal representatives, successors, and assigns.

20. WAIVERS

No waiver of default by the City of any of the terms, covenants, and conditions hereof to be performed, kept, and observed by the Contractor shall be construed, or shall operate, as a waiver of any subsequent default of any of the terms, covenants, or conditions herein contained to be performed, kept, and observed by the Contractor.

21. THIRD PARTIES

It is expressly understood and agreed that enforcement of the terms and conditions of this Contract, and all rights of action relating to such enforcement, shall be strictly reserved to the Parties hereto, and nothing contained in this Contract shall give or allow any such claim or right of action by any other or third person or entity on such Contract. It is the express intention of the Parties hereto that any person or entity, other than the Parties to this Contract, receiving services or benefits under this Contract shall be deemed to be incidental beneficiaries only.

22. TERMINATION

A. Termination for Convenience.
   By signing this Contract, Contractor represents that it is a sophisticated business and enters into the Contract voluntarily, has calculated all business risks associated with this Contract, and understands and assumes all risks of being terminated for convenience, whether such risks are known or not known. Contractor agrees that the City may terminate this Contract at any time for convenience of the City, upon written notice to the Contractor. Contractor expressly agrees to and assumes the risk that the City shall not be liable for any costs or fees of whatsoever kind and nature if termination for convenience occurs before Contractor begins

any work or portion of the work. Contractor further expressly agrees and assumes the risks that the City shall not be liable for any unperformed work, anticipated profits, overhead, mobilizations costs, set-up, demobilization costs, relocation costs of employees, layoffs or severance costs, administrative costs, productivity costs, losses on disposal of equipment or materials, cost associated with the termination of subcontractors, costs associated with purchase orders or purchases, or any other costs or fees of any kind and nature, if Contractor has started or performed portions of the Contract prior to receiving notice from the City. The City shall be liable only for the portions of work Contractor actually satisfactorily completed up to the point of the issuance of the Notice of Termination for convenience. Upon receipt of this notice the Contractor shall immediately: discontinue all services affected (unless the notice directs otherwise), and deliver to the City all data, drawings, specifications, reports, estimates, summaries, and other information and materials accumulated in performing this Contract, whether completed or in process.

B. Termination for Cause: The occurrence of any one or more of the following events ("Event of Default") will justify termination for cause:
   i. Contractor's failure to perform the work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the progress schedule as adjusted from time to time.
   ii. Contractor's disregard of the laws or regulations of any public body having jurisdiction.
   iii. Contractor's disregard of the authority of Project Manager.
   iv. Contractor's violation in any material provision of the Contract Documents.
   v. Contractor's failure to make prompt payments to its subcontractors, and suppliers of any tier, or laborers or any person working on the work by, through, or under the Contractor or any of them, any all of their employees, officers, servants, members, and agents.
   vi. Contractor files a petition commencing a voluntary case under the U.S. Bankruptcy Code, or for liquidation, reorganization, or an arrangement pursuant to any other U.S. or state bankruptcy Laws, or shall be adjudicated a debtor or be declared bankrupt or insolvent under the U.S. Bankruptcy Code, or any other federal or state laws relating to bankruptcy, insolvency, winding-up, or adjustment of debts, or makes a general assignment for the benefit of creditors, or admits in writing its inability to pay its debts generally as they become due, or if a petition commencing an involuntary case under the U.S. Bankruptcy Code or an answer proposing the adjudication of Contractor as a debtor or bankrupt or proposing its liquidation or reorganization pursuant to the Bankruptcy Code or any other U.S. federal or state bankruptcy laws is filed in any court and Contractor consents to or acquiesces in the filing of that pleading or the petition or answer is not discharged or denied within sixty (60) Calendar Days after it is filed.
   vii. A custodian, receiver, trustee or liquidator of Contractor, all or substantially all of the assets or business of Contractor, or of Contractor's interest in the Work or the Contract, is appointed in any proceeding brought against Contractor and not discharged within sixty (60) Calendar Days after that appointment, or if Contractor shall consent to or acquiesces in that appointment.
   viii. Contractor fails to commence correction of defective work or fails to correct defective work within a reasonable period of time after written notice.

If one or more of the events identified in Paragraphs i-viii above occur, City may give Contractor written notice of the event and direct the event be cured. Any such Notice to Cure will provide Contractor a minimum of ten (10) calendar days to prepare and submit to the Project Manager a plan to correct the Event of Default. If such plan to correct the Event of Default is not submitted to the Project Manager within ten (10) days after the date of the written notice or such plan is unacceptable to the City, the City may, give Contractor (and the Surety, if any) written notice that

Contractor's services are being terminated for cause. Upon delivery of the termination notice, City may terminate the services of Contractor in whole or in part, exclude Contractor from the site, and take possession of the work and of all Contractor's tools, appliances, equipment, and machinery at the project site, and use the same to the full extent they could be used by Contractor (without liability to Contractor for trespass or conversion), incorporate in the work all materials and equipment stored at the site or for which City has paid Contractor but which are stored elsewhere, and finish the work as City may deem expedient. In such case, Contractor shall not be entitled to receive any further payment until Certificate of Completion of the work. In the event City terminates this Contract for Cause and the cost of completing the work exceeds the unpaid balance of the Contract price, Contractor shall pay City for any costs of completion which exceed the Contract price when combined with all amounts previously paid to Contractor. When exercising any rights or remedies under this paragraph City shall not be required to obtain the lowest price for the work performed. Should the cost of such completion, including all proper charges, be less than the original Contract price, the amount so saved shall accrue to the City. Neither the City nor any officer, agent or employee of the City shall be in any way liable or accountable to the Contractor or the Surety for the method by which the completion of the said work, or any portion thereof, may be accomplished or for the price paid.

Where Contractor's services have been so terminated by City, the termination will not affect any rights or remedies of City against Contractor or Surety then existing or which may thereafter accrue. Any retention or payment of moneys due Contractor by City will not release Contractor from liability.

C. Termination Notice. Upon receipt of a termination notice, whether for convenience or cause, the Contractor shall immediately: discontinue all services affected (unless the notice directs otherwise), and deliver to the City all data, drawings, specifications, reports, estimates, summaries, and other information and materials accumulated in performing this Contract, whether completed or in process.

D. Removal of Equipment. Except as provided above, in the case of termination of this Contract before completion from any cause whatever, the Contractor, if notified to do so by the City, shall promptly remove any part or all of Contractor's equipment and supplies from the property of the City, failing which the City shall have the right to remove such equipment and supplies at the expense of the Contractor.

23. BOOKS OF ACCOUNT AND AUDITING

The Contractor shall make available to the City if requested, true and complete records, which support billing statements, reports, performance indices, and all other related documentation. The City's authorized representatives shall have access during reasonable hours to all records, which are deemed appropriate to auditing billing statements, reports, performance indices, and all other related documentation. The Contractor agrees that it will keep and preserve for at least seven years all documents related to the Contract which are routinely prepared, collected or compiled by the Contractor during the performance of this Contract.

The City's Auditor and the Auditor's authorized representatives shall have the right at any time to audit all of the related documentation. The Contractor shall make all documentation available for examination at the Auditor's request at either the Auditor's or Contractor's offices, and without expense to the City.

24. COMPLIANCE WITH IMMIGRATION REFORM AND CONTROL ACT OF 1986

Contractor certifies that Contractor has complied with the United States Immigration Reform and Control Act of 1986. All persons employed by Contractor for performance of this Contract have completed and signed Form I-9 verifying their identities and authorization for employment.

25. LABOR

The Contractor shall employ only competent and skilled workmen and foremen in the conduct of work on this Contract. The Contractor shall at all times enforce strict discipline and good order among Contractor's employees. The Project Manager shall have the authority to order the removal from the work of any person, including Contractor's or any subcontractor's employees, who refuses or neglects to observe any of the provisions of these Plans or Specifications, or who is incompetent, abusive, threatening, or disorderly in conduct and any such person shall not again be employed on the Project.

In no event shall the City be responsible for overtime pay.

26. GRATUITIES

A. This Contract may be terminated if the Mayor, the Mayor's designee, and/or the Procurement Services Manager determine, in their sole discretion, that the Contractor or any officer, employee, agent, or other representative whatsoever, of the Contractor offered or gave a gift or hospitality to a City officer, employee, agent or Contractor for the purpose of influencing any decision to grant a City contract or to obtain favorable treatment under any City contract.

B. The terms "hospitality" and "gift" include, but are not limited to, any payment, subscription, advance, forbearance, acceptance, rendering or deposit of money, services, or anything of value given or offered, including but not limited to food, lodging, transportation, recreation or entertainment, token or award.

C. Contract termination under this provision shall constitute a breach of contract by the Contractor, and the Contractor shall be liable to the City for all costs of reletting the contract or completion of the project. Further, if the Contractor is terminated under this provision, or violates this provision but is not terminated, the Contractor shall be subject to debarment under the City's Procurement Regulations. The rights and remedies of the City provided in this clause shall not be exclusive and are in addition to any other rights and remedies provided by law or under this Contract.

27. NON-DISCRIMINATION

A. In accord with section 24-34-402, C.R.S., Title VII of the Civil Rights Act of 1964, Americans with Disabilities Act of 1990 as amended, all applicable federal and state laws, the Contractor will not discriminate against any employee or applicant for employment because of disability, race, creed, color, sex, sexual orientation, gender identity, gender expression, religion, age, national origin, or ancestry.

B. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

C. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to disability, race, creed, color, sex, sexual orientation, gender identity, gender expression, religion, age, national origin, or ancestry.

28. TECHNOLOGY ACCESSIBILITY

Contractor hereby certifies and guarantees that the products and services, including but not limited to any software-as-a-service or online platform, being purchased by City are compliant with: (i) the accessibility standards established by the chief information officer of the State of Colorado in accord with Section 24-85-103, C.R.S., as may be amended, including Web Content Accessibility Guidelines ("WCAG") 2.1 "Level A" and "Level AA," or other applicable accessibility standards required by the State of Colorado pertaining to those with disabilities, and (ii) any federally adopted law or regulation pertaining to technology accessibility for those with disabilities, including but not limited to the final rule published by the Department of Justice in the Federal Register on April 24, 2024, updating regulations for Title II of the Americans with Disabilities Act (ADA), "Nondiscrimination on the Basis of Disability; Accessibility of Web Information and Services of State and Local Government Entities," 28 CFR Part 35, [CRT Docket No. 144; AG Order No. 5919-2024], RIN 1190-AA79, as such laws may be amended (together the "Accessibility Laws"). Contractor shall provide the City with a completed Voluntary Product Accessibility Template ("VPAT"), WCAG Edition, attached hereto as Exhibit __ and incorporated herein, that demonstrates compliance with applicable WCAG standards and the Accessibility Laws. Contractor shall immediately, or within the timeframe designated by City, resolve and remediate all accessibility issues discovered in Contractor's products and services. All of Contractor's ongoing maintenance, updates, upgrades, fixes, and other changes to the products or services shall conform to these requirements and comply with the Accessibility Laws. During all periods where Contractor's products and services do not conform to the Accessibility Laws or otherwise have accessibility issues, Contractor shall provide all reasonable accommodations for users of the products and services as directed by the City and at no additional charge.

Failure to comply with the Accessibility Laws and accessibility standards or to provide the necessary documentation may result in the City, in its sole discretion, terminating the Agreement, Statement of Work, Order Form, or other agreement for material breach, without Contractor recourse. In the event of such termination by City, Contractor shall refund all amounts paid to Contractor under the Agreement or other terminated document. Contractor shall indemnify, defend, and hold harmless City and its representatives for any failure, or allegation of failure, of the products or services to conform with the applicable accessibility standards and Accessibility Laws, including but not limited to any civil claim or suit filed by a person with a disability pursuant to Section 24-34-802, C.R.S., as may be amended.

29. ORDER OF PRECEDENCE

Any inconsistency in this Contract shall be resolved by giving precedence in the following order:

A. This Contract document with its terms and conditions
B. The Statement of Work
C. Other Appendices, Attachments, Exhibits, or Schedules

30. HEADINGS

The section headings contained in this Contract are for reference purposes only and shall not affect the meaning or interpretation of this Contract.

31. DISPUTES

A. All administrative and contractual disputes arising from or related to this Contract shall be addressed in the following manner:
   i. If either Party disputes or disagrees with a Contract term or the other Party's interpretation of a Contract term or has any other administrative or contractual dispute not addressed in the Unanticipated Circumstances provisions, such Party shall promptly give the other Party written notice of said dispute.
   ii. The Parties shall hold a meeting as soon as reasonably possible, but in no event later than thirty (30) calendar days from the initial written notice of the dispute, attended by persons with decision-making authority regarding the dispute, to attempt in good faith to negotiate a resolution of the dispute; provided, however, that no such meeting shall be deemed to vitiate or reduce the obligations and liabilities of the Parties or be deemed a waiver by a Party of any remedies to which such Party would otherwise be entitled unless otherwise agreed to by the Parties in writing.
   iii. If, within thirty (30) calendar days after such meeting, the Parties have not succeeded in negotiating a resolution of the dispute, they agree to submit the dispute to non-binding mediation and to bear equally the costs of the mediation.
   iv. The Parties will jointly appoint a mutually acceptable mediator. If they fail to do so within twenty (20) calendar days from the conclusion of the negotiation period, they shall each select a mediator. The two mediators will then appoint a third mediator who shall conduct mediation for the Parties as the sole mediator.
   v. The Parties agree to participate in good faith in the mediation and negotiations for a period of thirty (30) calendar days. The substantive and procedural law of the State of Colorado shall apply to the proceedings. If the Parties are not successful in resolving the dispute through mediation, then the Parties shall be free to pursue any other remedy afforded by the laws of the State of Colorado.
   vi. Until final resolution of any dispute hereunder, the Contractor shall diligently proceed with the performance of this Contract as directed by the City. For purposes of this Contract, termination for convenience shall not be deemed a dispute. The City of Colorado Springs and the Contractor agree to notify each other in a timely manner of any claim, dispute, or cause of action arising from or related to this Contract, and to negotiate in good faith to resolve any such claim, dispute, or cause of action. To the extent that such negotiations fail, the City of Colorado Springs and the Contractor agree that any lawsuit or cause of action that arises from or is related to this Contract shall be filed with and litigated only by the Colorado District Court for El Paso County, CO.

32. DELIVERY

The City may cancel this Contract or any portion thereof if delivery is not made when and as specified, time being of the essence in this Contract. Contractor shall pay the City for any loss or damage sustained by the City because of failure to perform in accordance with this Contract.

33. PAYMENTS

The City will make payments for services on a monthly basis for services performed during the previous month in accordance with this Contract. All labor Invoices shall include labor categories, rates, hours worked, and total amounts per category. All labor categories and rates charged must

be included in this Contract. No other categories or rates will be allowed or payable. All labor invoices are subject to City approval.

Materials will be payable on a reimbursable basis with no additional profit, fee, overhead, handling, or General and Administrative (G&A) costs. All costs for materials shall be approved by the City Contracts Specialist before the costs are incurred and payable.

The City will pay the Contractor, upon submission of proper invoices, the prices stipulated in the Contract for services rendered and accepted, less any deductions provided in this Contract within 30 days (Net 30). The City will not pay late fees or interest. Any discount payment terms offered on the invoice may be taken by the City.

34. INSPECTION OF SERVICES

The Contractor is responsible for performing or having performed all inspections and tests necessary to substantiate that the services furnished under this Contract conform to Contract requirements, including any applicable technical requirements for specified manufacturers' parts. This clause takes precedence over any City inspection and testing required in the Contract's specifications, except for specialized inspections or tests specified to be performed solely by the City.

A. Definition of "services", as used in this clause, includes services performed, workmanship, and material furnished or utilized in the performance of services.

B. The Contractor shall provide and maintain an inspection system acceptable to the City covering the services under this Contract. Complete records of all inspection work performed by the Contractor shall be maintained and made available to the City during Contract performance and for as long afterwards as the Contract requires.

C. The City has the right to inspect and test all services called for by the Contract, to the extent practicable at all times and places during the term of the Contract. The City will perform inspections and tests in a manner that will not unduly delay the work.

D. If the City performs inspections or test on the premises of the Contractor or a subcontractor, the Contractor shall furnish, and shall require subcontractors to furnish, at no increase in Contract price, all reasonable facilities and assistance for the safe and convenient performance of these duties.

35. SECURITY

The City maintains security requirements regarding access to City buildings and other City workplaces and worksites on City property. All Contractor personnel accessing City buildings, workplaces, or worksites, may be required to produce a valid, Government issued picture identification. Contractor personnel lacking such identification may not be allowed access to such sites. No costs incurred by the Contractor due to City security requirements shall be allowable or payable under this Contract.

36. TIME IS OF THE ESSENCE

In as much as the Contract concerns a needed or required service, the terms, conditions, and provisions of the Contract relating to the time of performance and completion of work are of the

essence of this Contract. The Contractor shall begin work on the day specified and shall prosecute the work diligently so as to assure completion of the work within the number of calendar days or date specified, or the date to which the time for completion may have been extended.

37. EMPLOYMENT OF LABOR

The Contractor shall comply with and defend and hold the City harmless from any violation of all laws and lawful rules and regulations, both of the State of Colorado and of the United States, relating to Workmen's Compensation, unemployment compensation, Social Security, payment for overtime, and all other expenses and conditions of employment under this Contract.

38. SALES TAX

The Contractor must have a tax-exemption certificate from the Colorado Department of Revenue for this project. The certificate does not apply to City of Colorado Springs Sales and Use Tax which shall be applicable. The tax-exempt project number and the exemption certificate only applies to County, PPRTA (Pikes Peak Rural Transportation Authority), and State taxes when purchasing construction and building materials **to be incorporated into this project**.

Furthermore, the exemption **does not** include or apply to the purchase or rental of equipment, supplies or materials that **do not become a part of the completed project or structure**. Such purchases and rentals are subject to full applicable taxation.

All contracts with subcontractors must include the City of Colorado Springs Sales and Use Tax on the work covered by the Contract, and other taxes as applicable.

Note: For all equipment, materials and supplies incorporated into the work purchased from vendors or suppliers not licensed to collect City Sales Tax (i.e. out of state suppliers, etc.), City Use Tax is due and payable to the City. The Contractor shall execute and deliver and shall cause the Contractor's subcontractors to execute and deliver to the City Sales Tax Office, the appropriate ST forms as designated by the City Sales Tax Office. These forms shall list all said equipment, materials and supplies and the corresponding use tax due, along with payment for said taxes. Any outstanding taxes due may be withheld from the final payment due the Contractor and may result in suspension of Contractor from bidding on City projects.

Forms and instructions can be downloaded at https://coloradosprings.gov/sales-tax. Questions can be directed to the City Sales Tax Division at (719) 385-5903 or SalesTax@coloradosprings.gov.
Our Registration Numbers are as follows:
City of Colorado Springs
Federal I.D.: 84-6000573
Federal Excise: A-138557
State Sales Tax: 98-03479

The Contractor's payment or exemption of State of Colorado, El Paso County and City Sales and Use Taxes shall be as specified herein.

39. SEVERABILITY

If any terms, conditions, or provisions of this Contract shall be held unconstitutional, illegal, or void, such finding shall not affect any other terms, conditions, or provisions of this Contract.

40. LIABILITY OF CITY EMPLOYEES

All authorized representatives of the City are acting solely as agents and representatives of the City when carrying out and exercising the power or authority granted to them under the Contract. There shall not be any liability on them either personally or as employees of the City.

41. USE OF CITY NAME OR LOGO

Except as otherwise provided in this Contract, the Contractor shall not refer to this Contract or the City of Colorado Springs in any advertising or promotions in such a manner as to state or imply that the product or service provided is endorsed or preferred by the City of Colorado Springs, its employees, or its Departments, or is considered by these entities to be superior to other products or services. Any use of the name or logo of the City of Colorado Springs in advertising or promotions must be approved in writing by the City of Colorado Springs Contracts Specialist assigned to the Contract prior to such use.

42. TRAVEL

If travel expenses are included as a line item in this Contract, all travel expenses incurred and billable by the Contractor are subject to City approval. Air travel shall be limited to the round trip "economy coach" fare. Travel from the Colorado Springs Airport is encouraged. Unless there are extenuating circumstances, the Contract should take advantage of lower airfares by purchasing tickets more than 14 days in advance of travel. In-state travel by air must be more economical than travel by private vehicle. Use of a private vehicle may be reimbursed per mile at the current rate published by the IRS annually. Short-term parking, long-term parking or cab fare associated with airport departure and arrival may be allowable expenses. Valet parking will not be allowed unless it is the least expensive or only option. Car rental rates may be reimbursed for car rentals no greater than the intermediate or standard classification. The City will not reimburse any other travel methods or expenses. The City will pay for lodging, meals, and miscellaneous expenses on a per diem basis only, in accordance with the current per diem rates published by the IRS annually. The City will not pay for Contractor expenses exceeding the per diem rates. Receipts for all reimbursable expenses must be provided with the Contractor’s invoice.

43. ELECTRONIC SIGNATURES

This Agreement and all other documents contemplated hereunder may be executed using electronic signatures with delivery via facsimile transmission, by scanning and transmission of electronic files in Portable Document Format (PDF) or other readily available file format, or by copy transmitted via email, or by other electronic means and in one or more counterparts, each of which shall be (i) an original, and all of which taken together shall constitute one and the same agreement, (ii) a valid and binding agreement and fully admissible under state and federal rules of evidence and (iii) enforceable in accordance with its terms.

44. APPENDICES

The following Appendices are made a part of this Agreement:

1. Appendix A – Additional Terms and Conditions
2. Appendix B – Contractor’s Proposal,
3. Appendix C – Statement of Work.
4. Appendix D – Project Schedule

5. Appendix E – Insurance Requirements

CONTRACT SIGNATURE PAGE

IN WITNESS WHEREOF, the parties have caused these presents to be executed on the day and the year first above written.

This Contract is executed in one (1) original copy.

THE CITY OF COLORADO SPRINGS, COLORADO:

SECOND PARTY: SAMPLE CONTRACT ONLY	
Corporate Name	
Signature	Date
Title	

EXHIBIT 3 EVALUATION SCORESHEET

Proposer's Name: _____

Evaluator's Name: _____

Project Name/RFP#: _____

RFP EVALUATION CRITERIA DESCRIPTION	SCORE
1. TECHNICAL AREA The Offeror must explain its overall solution, considering the scope of work or statement of work provided. The content must include, but not necessarily be limited to, the following information.	
A. UNDERSTANDING OF AND COMPLIANCE WITH TECHNICAL REQUIREMENTS	
In the Technical Area, the Offeror should address each work area in sufficient detail to demonstrate a clear and full understanding of the work. The proposal should not merely parrot the requirements of the RFP. Further, the Offeror should provide evidence of sufficient planning to ensure the work is completed on schedule and within budget. Consider the following questions. 1. Does the proposal demonstrate a firm understanding of the requirements and goals of the Statement of Work, as well as industry standards and reasonable expectations for a company in the industry? 2. Does the proposal fully and completely address each requirement and goal of the Statement of Work? 3. Does the proposal provide solutions to indicate that requirements and goals will be met on schedule? 4. Does the technical solution seem realistic? 5. Does it generally appear that the Offeror knows and thoroughly understands the business and requirement? **COMMENTS:**	
B. PROJECT APPROACH	
In the Technical Area, the Offeror should clearly present proposed solutions and indicate that it has performed adequate planning to accomplish tasks as defined in the Statement of Work. Innovations, efficiencies, and detailed specifics are all encouraged. The Offeror must at least address the following areas: 1. Schedule Management. Offeror must approach to schedule management including updating and reporting progress of the work.	

2. Quality Control. Offeror must discuss quality control plan, processes and approach to ensure that the City receives a quality product. 3. Safety. Offeror must discuss approach and commitment to safety for its workers, the public, and City employees, if services are accomplished on a City site. 4. Offeror must discuss potential issues it foresees with this project and how Offeror would make adjustments if encountered. Consider the following questions. 1. Does the proposal include a complete plan to accomplish each requirement, including subcontracting (if applicable)? 2. Does the proposal demonstrate that appropriate and qualified personnel and equipment will be provided to carry out the requirement? 3. Is the proper level of effort directed toward each requirement? Does the level of effort look unrealistically low or unreasonably high? **COMMENTS**	
Sum of Ratings in Management Area (Add numbers in Sections 1.A. and 1.B.)	
2. MANAGEMENT AREA The Offeror must explain its method of managing the work to be performed. The content must include, but no necessarily be limited to, the following information.	
A. PROJECT MANAGEMENT CONTROLS	
In In the Management Area, the Offeror should provide a plan of operation, to include management of personnel, workload, schedule, and budget. It should also include an organization chart which demonstrates clear and effective lines of authority, responsibility, and communication for management, supervisory, and technical personnel. The plan should address which job classification or personnel will be assigned to each task and how that determination is made. Basic human resource management concepts should be addressed, including hiring, firing, discipline, incentive plans, etc. If the Offeror plans to subcontract more than 10% of the work, include information on how the Offeror plans to manage its subcontractors. Consider the following questions. 1. Does the proposal address the issues above in sufficient detail to demonstrate a sophisticated and mature management control system? 2. Are program management controls consistent with the technical portion of the proposal, especially regarding schedule and level of effort? 3. Does the plan and controls indicate that the Offeror will obtain, keep, and efficiently utilize high quality personnel? 4. Does the offer address corrective actions? **COMMENTS:**	
B. PAST PERFORMANCE/RELEVANT EXPERIENCE	
In the Management Area, the Offeror should provide at least three references or contracts demonstrating that it successfully provided services/products same or	

similar to those required in the RFP. The proposal should adequately explain how the projects were completed on schedule and within budget. Consider the following questions. 1. Does the proposal include at least three references or past performance citations? 2. Are the references or past performance citations relevant to the requirements of the Statement of Work of the RFP? 3. Does the Offeror explain how they were successful on the projects provided as past performance? 4. Does the Offeror apply the past performance to the City requirement in such a way as to demonstrate added value due to experience? 5. Does the Offeror describe specific experience with troubleshooting, repairs, irrigation design, water efficiency improvements for large commercial irrigation systems? 6. Does the Offeror describe specific experience working with ductile iron fittings, flange fittings, HDPE and backflow prevention systems? **COMMENTS**	
C. KEY PERSONNEL	
In the Management Area, resumes must be provided for all personnel considered key, as required by the RFP. It is highly recommended that the Offeror provide sufficient content and detail to answer completely the following questions. Resumes do not count toward the page limitation. Explain how the key personnel were related to the projects cited as relevant past performance. Consider the following questions. 1. Does the Offeror provide complete resumes, including education, experience, background information, accomplishments, and other pertinent information? 2. Does the Offeror provide resumes for all key personnel, as required by the RFP? 3. Do the resumes demonstrate adequate professional, technical, and management levels to accomplish the work effectively and efficiently? **COMMENTS:**	
Sum of Ratings in Management Area (Add numbers in Sections 2.A., 2.B and 2. C.)	
3. PRICE/COST AREA	
In the Price Area, the Offeror should provide a detailed breakdown of the price for each year of performance. The price must be fully loaded/all-inclusive and include unit cost for material, labor, other direct costs (e.g. travel), indirect costs (i.e. overhead and general and administrative costs), and profit/fee. Offers must include sufficient detail to allow insight into the fairness and reasonableness of the price. If the contract type will be T&M, labor categories, labor rates, separated profit, and estimated material costs must be included in detail.	

In addition, although price may not be the most important factor, it is still very important to the City of Colorado Springs. The Offeror's pricing must be competitive as compared to the budget amount, market pricing in the industry, and the pricing of the other Offerors. Consider the following questions: 1. How does the price compare to the industry competition? 2. If low, is it unrealistically low? 3. If high, is there demonstrated added value for the additional cost? 4. Does the Offeror provide general labor rates? 5. Does the Offeror provide equipment array pricing? 3. Does the Offeror provide cost plus markup fixed percentage rates for materials and products? **COMMENTS:**	
Total Price/Cost Area (Insert number from Section 3 evaluation above):	
4. PROPOSAL PRESENTATION	
Presentation is an important factor. Offerors should provide a highly professional product, which is complete, accurate, easily understood, and effectively presented. **COMMENTS:**	
EXCEPTIONS PROPOSED	
What (if any) exceptions (redlines to our terms and conditions) were proposed? Are they acceptable? **COMMENTS:**	**Pass/Fail**
INSURANCE EXCEPTIONS PROPOSED	
What (if any) exceptions (redlines to our insurance terms and conditions) were proposed? Are they acceptable? **COMMENTS:**	**Pass/Fail**
TOTAL SCORE – Add Evaluation Scores from Sections 1-5. The sum is the total score.	Total Score:

SECTION VI – APPENDICES

6.0 APPENDICES

Appendix A Hourly Rate Sheet
Appendix B Scope of Work
Appendix C CSPR Standard Details
Appendix D CSPR Irrigation Repairs Standards

APPENDIX A – PRICE SHEET

PLEASE SUBMIT YOUR HOURLY RATE SHEETS ON COMPANY LETTERHEAD. PLEASE LIST ALL HOURLY RATES AND INCLUDE HOURLY RATES FOR ANY SUBCONTRACTORS.

PLEASE ALSO INCLUDE THE FOLLOWING:

GENERAL LABOR RATES
EQUIPMENT ARRAY PRICING
COST PLUS MARKUP PERCENTAGE FOR MATERIALS AND PRODUCTS

APPENDIX B – SCOPE OF WORK

B.1 OVERVIEW

The City of Colorado Springs Parks Department is requesting on-call irrigation repair services to City owned infrastructure to include: sprinkler heads, piping, valves, controllers, wiring, electrical service and related work in parks, athletic fields, medians, right-of-ways and open spaces. On-call irrigation contractors may be notified of requested repairs either by a Parks representative or outside contractor.

B.2 RESPONSE TIME

All repairs shall be made within 48 hours of notification, unless prior arrangements are made with a Parks representative, to not adversely disrupt or cause damage to park programs, resources, operations and infrastructure. For instance, bluegrass turf may not survive periods without irrigation in very hot, dry, windy weather.

B.3 QUALIFICATIONS

Irrigation repairs and/or troubleshooting shall be made by, or under the direct supervision of, a certified irrigation contractor (CIC) or technician (minimum CIT or equivalent). Each bidder shall be prepared to submit a Statement of Qualifications, his experience record in performing the type of repairs embraced in this contract, staffing and equipment available to successfully complete requested irrigation and landscape repairs.

B.4 REQUIREMENTS

A. All Irrigation repairs shall be made to bring infrastructure back to pre-existing or better condition with approved materials from CSPR Irrigation Repair Standards and/or CSPR IRR Standard Details (see provided documents). Recommended repair parts and methods shall be approved by a Parks representative prior to repairs being made.

B. Any damaged turf and landscapes shall be restored to pre-existing or better condition. Any modifications to grades, curb heights, and walk elevations must be integrated with surrounding conditions to create a safe and maintainable area.

C. Completed underground repairs shall remain exposed for inspection by a Parks representative; after acceptance by Parks, contractor may bury repairs.

D. A Parks representative will schedule a post-construction walk-through. All debris, construction materials, signage, and construction equipment shall be removed before this time.

E. Landscape restorations and irrigation repairs shall have a warranty through one full growing season. Infrastructure systems shall be charged and tested, and any issues will be noted and repaired before project sign-off. If walk-through is after irrigation systems have been winterized, then system testing shall take place as soon as possible in the spring and all irrigation issues rectified prior to May 1. Project sign-off shall occur after all issues have been resolved.

B.5 EQUIPMENT EXAMPLES

Manufacturer	Item	Description	Unit Cost
Hunter	PROS-06-PRS40 CV	MP Rotator w/ nozzle, swing joint assembly	
Rainbird	1804 SAM PRS	Fixed Spray w/ nozzle, swing joint assembly	
Hunter	I-20-06 SS CV	Gear driven rotor w/nozzle, swing joint assembly	
Hunter	I-25-06 SS CV	Gear driven rotor w/nozzle, swing joint assembly	
Rainbird	PEB-Series 2"	Electric valve	
Carson	1419-12	Rectangular valve box w/lid	
Carson	1220	Jumbo box w/ lid	
Carson	910-T	Round valve box w/lid	
Spears	SH118	2" slip fix w/ slip coupling	
Smith-Blair	Quantum Coupling 461	3" dresser coupling	
Various	DBRY	Direct bury waterproof connectors	
GENERAL	VARIES	MATERIAL COST MARKUP RATE	
	Irrigation Technician	Hourly rate	
	Irrigation Laborer	Hourly rate	
	Irrigation Technician	After-Hours hourly rate	
	Irrigation Laborer	After-Hours hourly rate	

APPENDIX C – CSPR STANDARD DETAILS

FOLLOWS THIS PAGE

GENERAL NOTES:

A. PLANS ARE DIAGRAMMATIC: PRECISE PLACEMENT OF EQUIPMENT MAY NOT BE POSSIBLE AS INDICATED. CONSULT PROJECT MANAGER PRIOR TO MAKING RANDOM FIELD CHANGES WHICH ALTER THE INTENT OF THE DESIGN.

B. SCOPE OF WORK TO BE PROVIDED AND INSTALLED BY IRRIGATION SYSTEM CONTRACTOR TO INCLUDE BUT MAY NOT BE LIMITED TO:

1. PROVISION AND INSTALLATION OF ALL EQUIPMENT REQUIRED PER THE DRAWINGS, EQUIPMENT SCHEDULE AND SPECIFICATIONS, INCLUDING ALL MISCELLANEOUS INCIDENTAL EQUIPMENT, WHETHER INDICATED OR NOT, BUT WHICH MAY BE REQUIRED TO RESULT IN A COMPLETE AND OPERABLE IRRIGATION SYSTEM (FROM P.O.C.)
2. OBTAINING ALL NECESSARY PERMITS AND APPROVALS TO INSTALL AND COMPLETE THE WORK AS SHOWN ON THESE PLANS.
3. COORDINATION AND INSTALLATION OF ALL SUBSURFACE SLEEVES AS INDICATED ON THE DRAWINGS.
4. FLAGGING OF ALL SPRINKLER HEAD AND CONTROL ZONE VALVE LOCATIONS, AND MARKING OF ALL MAINLINE AND LATERAL PIPELINE LOCATIONS FOR INSPECTION AND APPROVAL BY THE PROJECT MANAGER PRIOR TO TRENCHING AND EXCAVATING.
5. TESTING FOR STATIC WATER PRESSURE AT POINT OF CONNECTION AND DETERMINING ADEQUACY FOR USE PRIOR TO COMMENCING WORK DOWNSTREAM OF POINT OF CONNECTION. INADEQUATE PRESSURE OF FLOW SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT MANAGER AND DEFICIENCIES SHALL BE CORRECTED PRIOR TO COMMENCEMENT OF WORK DOWNSTREAM OF THE POINT OF CONNECTION. FAILURE TO TEST AND VERIFY ADEQUACY OF THE STATIC PRESSURE OR FLOW AND DETERMINING FEASIBILITY OF OPERATION AS INTENDED BY DESIGN PRIOR TO COMMENCEMENT OF WORK DOWNSTREAM OF THE POINT OF CONNECTION SHALL NOT PRECLUDE IRRIGATION CONTRACTOR'S RESPONSIBILITY TO PROVIDE OPTIMUM COVERAGE OF ALL IRRIGATED AREAS AS INTENDED BY DESIGN AT THE CONTRACTOR'S EXPENSE.
6. PROVISION AND INSTALLATION OF ALL CONTROLLERS, CABINETS, PEDESTAL MOUNTINGS, CONCRETE PADS, WIRE CHASES/SWEEPS, POWER SUPPLY (IF SPECIFIED), WATER TAP (IF DOWNSTREAM OF P.O.C.) AND ANY OTHER CONTROLLER RELATED EQUIPMENT AS MAY BE REQUIRED BY THE DRAWINGS AND SPECIFICATIONS. INSTALLER IS RESPONSIBLE FOR MAKING ALL LOW VOLTAGE WIRING CONNECTIONS FROM THE REMOTE CONTROL VALVES TO ALL CONTROLLERS AND FOR CORRECT SEQUENCING OF ALL VALVE OPERATION INDICATED IN THE CONTROL ZONE VALVE SCHEDULE.
7. ACTIVATION OF ALL IRRIGATION SYSTEMS AND ADJUSTMENT OF ALL FLOW CONTROLS AND NOZZLES FOR OPTIMUM PERFORMANCE AND COVERAGE AS INTENDED BY DESIGN WITH MINIMAL OVERLAP ONTO PAVEMENTS AND/OR STRUCTURES. INSTALLER IS RESPONSIBLE FOR ALL ADJUSTMENTS TO NOZZLES, RISERS, FLOW CONTROLS, ETC., PRIOR TO REQUEST FOR INSPECTION BY THE PROJECT MANAGER. ALL ZONES SHALL HAVE BEEN PROGRAMMED AND PERMITTED TO OPERATE AUTOMATICALLY VIA CONTROLLERS THROUGH AT LEAST TWO (2) COMPLETE CYCLES FOR A PERIOD OF NOT LESS THAN 24 HOURS PRIOR TO INSPECTION BY PROJECT MANAGER.
8. DEMONSTRATION OF OPERATION OF SYSTEM IN AN AUTOMATIC MODE IN THE PRESENCE OF THE OWNER'S REPRESENTATIVE, THE PROJECT MANAGER, AND THE INSTALLER SHALL BE GIVEN WITH NOT LESS THAN 24 HOURS NOTICE THAT AN INSPECTION FOR OPERATION IS REQUESTED. REQUESTS FOR INSPECTIONS SHALL BE ON A "PER TAP/CONTROLLER" BASIS. ACCEPTANCE FOR WORK AND COMMENCEMENT OF WARRANTIES SHALL BE GIVEN UPON COMPLETION, INSPECTION AND ACCEPTANCE OF ALL WORK REQUIRED PER THE DRAWINGS, SPECIFICATIONS AND CONTRACT DOCUMENTS.
9. JOBSITE SHALL BE CLEANED DAILY OF ANY TRASH OR DEBRIS. COMPLETE CLEANUP OF ALL DIRT, UNUSED MATERIALS, AND OTHER DEBRIS SHALL BE PERFORMED BY INSTALLER PRIOR TO OWNER'S INSPECTION FOR FINAL ACCEPTANCE. PAVEMENTS AND WALKS WITHIN WORK AREAS SHALL BE SWEPT AND POWER WASHED WITH WATER AS MAY BE NECESSARY TO REMOVE DIRT AND DEBRIS. ALL IRRIGATION DITCHES SHALL BE COMPLETE, FLAGS REMOVED, AND FINE TUNING ADJUSTMENTS MADE PRIOR TO INSPECTION FOR FINAL ACCEPTANCE.
10. AS-BUILT REPRODUCIBLE RECORD DRAWINGS, WRITTEN WARRANTIES, SEASONAL MAINTENANCE INSTRUCTIONS, OPERATIONAL GUIDELINES AND SPARE EQUIPMENT SHALL BE PROVIDED BY THE INSTALLER AT INSPECTION FOR FINAL ACCEPTANCE. SUBMITTALS SHALL BE IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS. FAILURE TO MAKE ALL PROJECT CLOSEOUT SUBMITTALS AT THE REQUIRED TIME IN THE REQUIRED FORMAT MAY RESULT IN DELAY OF FINAL ACCEPTANCE AND RELEASE OF APPLICABLE RETAINAGES BY THE OWNER.

C. IRRIGATION INSTALLER SHALL BE RESPONSIBLE FOR PROVIDING A 30 DAY ON-SITE MAINTENANCE PROGRAM, TO INCLUDE BUT NOT LIMITED TO FINE TUNING OF NOZZLES, FLOW CONTROLS, AND OTHER EQUIPMENT INSTALLED UNDER THE CONTRACT TO MAINTAIN OPTIMUM OPERATION OF ALL SYSTEMS AT ALL TIMES. CONTROLLER PROGRAMMING SHALL BE COORDINATED WITH THE OWNER TO ESTABLISH AND PROMOTE GROWTH OF PLANTINGS MADE UNDER THE CONTRACT, AND TO SUSTAIN OPTIMUM PLANT APPEARANCE AT ALL TIMES AS SEASONALLY APPROPRIATE. INSTALLER SHALL PROVIDE OWNER WITH WRITTEN COPY OF 'CUT SHEETS HANDBOOK' WITH FUNCTIONAL INSTRUCTIONS FROM THE MANUFACTURERS AS TO HOW TO OPERATE AND MAINTAIN SYSTEM COMPONENTS FOR SPECIFIC COMPONENTS CALLED FOR IN THIS WORK.

D. IRRIGATION INSTALLER SHALL BE RESPONSIBLE FOR PERFORMANCE OF SEASONAL MAINTENANCE TO INCLUDE BUT NOT NECESSARILY LIMITED TO DEACTIVATION AND ACTIVATION OF ALL IRRIGATION SYSTEMS TO PREVENT FREEZE DAMAGE TO ALL EQUIPMENT. INSTALLER SHALL BE RESPONSIBLE FOR COORDINATION AND PERFORMANCE OF ALL SEASONAL MAINTENANCE PROCEDURES REQUIRED TO DEACTIVATE SYSTEMS ON OR BEFORE OCTOBER 15TH OF THE FIRST YEAR FOLLOWING DATE OF ACCEPTANCE, AND ACTIVATION OF IRRIGATION SYSTEMS SHALL BE PREFORMED ON OR BY APRIL 1ST OF THE YEAR FOLLOWING DEACTIVATION. IN THE EVENT THE INSPECTION FOR FINAL ACCEPTANCE OCCURS AFTER OCTOBER 15TH, REQUIRED SEASONAL MAINTENANCE SCHEDULE SHALL BE EXTENDED TO OCCUR THE YEAR FOLLOWING FINAL ACCEPTANCE OF WORK.

E. A 2 YEAR CONDITIONAL WARRANTY SHALL BE EXTENDED BY THE INSTALLER TO COVER ALL MATERIAL AND WORKMANSHIP PROVIDE UNDER THE CONTRACT. DURING THE 2 YEAR WARRANTY PERIOD, ANY INSTALLATION WHICH BECOMES IN OPERABLE, OR WHICH DOES NOT OPERATE AS ORIGINALLY INTENDED [IE CONDITION AS OBSERVED AND ACCEPTED AT INSPECTION FOR FINAL ACCEPTANCE] THE INSTALLER SHALL REPAIR AND/OR REPLACE ANY WORK WHICH CAN BE ATTRIBUTED TO DEFECTS REGARDING MATERIAL AND/OR WORKMANSHIP AT NO COST TO THE OWNER. DEFICIENCIES MAY INCLUDE BUT ARE NOT LIMITED TO LEAKS, SETTLEMENT OF TRENCHES OR VALVE BOXES GREATER THAN ONE INCH, FREEZE DAMAGE, AND EQUIPMENT DEFECTS. VANDALISM, IMPROPER USE AND/OR MAINTENANCE OF SYSTEMS BY OWNER RESULTING IN DEFICIENCIES SHALL NOT BE THE RESPONSIBILITY OF THE INSTALLER, AND REPAIR/REPLACEMENT MAY BE MADE AT EXTRA COST TO THE OWNER AS AGREED.

F. ALL INSTALLATIONS SHALL BE MADE IN STRICT ACCORDANCE WITH THE DRAWINGS, SPECIFICATIONS, CONTRACT DOCUMENTS, AND STATE & LOCAL CODES AND ORDINANCES HAVING JURISDICTION OVER THE WORK. IN THE EVENT OF CONFLICT BETWEEN REQUIREMENTS, THE MOST STRINGENT REQUIREMENT WILL PREVAIL IN ANY CASE.

G. QUANTITIES WHICH MAY BE STATED OR IMPLIED IN SCHEDULES, GENERAL NOTES, ETC., ARE PROVIDED FOR REFERENCE ONLY. IN THE EVENT OF CONFLICT, THAT QUANTITY WHICH IS REPRESENTED GRAPHICALLY PER THE DRAWINGS SHALL PREVAIL IN ANY CASE.

H. ALL IRRIGATION WORK SHALL BE COORDINATED WITH GENERAL, OTHER SUBCONTRACTORS, OTHER SITE WORK, AND LANDSCAPING WORK TOWARDS PROMOTING A TEAM EFFORT. INSTALLER SHALL NOT WILLFULLY MAKE ANY DESIGN CHANGES TO FACILITATE OTHERS WORK YET INTERFERE WITH IRRIGATION SYSTEM OPERATION AND COVERAGE AS INTENDED BY DESIGNER. NOTIFY THE PROJECT MANAGER OF SUCH CONFLICTS AND RESOLVE CONFLICTS PRIOR TO PROCEEDING WITH WORK.

I. ALTERNATE EQUIPMENT FROM THAT INDICATED ON THE DRAWINGS AND SPECIFICATIONS, WHICH WHEN INSTALLED WILL RESULT IN EQUAL OR IMPROVED PERFORMANCE, AND/OR CONSIDERABLE COST SAVINGS TO THE OWNER WITH EQUAL AND/OR IMPROVED PERFORMANCE TO THAT INDICATED MAY BE CONSIDERED BY THE OWNER. ALL PROPOSED ALTERNATE EQUIPMENT MUST BE PROPOSED TO AND APPROVED BY THE OWNER PRIOR TO SUBMITTAL OF BID PROPOSAL. ONLY THOSE ALTERNATE EQUIPMENT MANUFACTURER'S AND EQUIPMENT LISTED IN THE SPECIFICATIONS WILL BE CONSIDERED. PROVISION/INSTALLATION OF ALTERNATE EQUIPMENT WITHOUT PRIOR APPROVAL BY THE OWNER MAY RESULT IN DELAY AND/OR REJECTION OF FINAL ACCEPTANCE OF WORK.


J. UPON ENTERING INTO AN AGREEMENT TO PROVIDE LABOR AND MATERIALS TO COMPLETE ALL THE WORK REQUIRED UNDER THIS SECTION, THE INSTALLER HEREBY GUARANTEES TO THE OWNER THAT THE WORK WILL BE EXECUTED TO THE BEST OF THE INSTALLER'S ABILITY AND TO AT LEAST THE MINIMUM INDUSTRY STANDARDS AND/OR MANUFACTURER'S RECOMMENDATIONS. TIME IS OF THE ESSENCE AND PROGRESS TOWARDS FINAL ACCEPTANCE SHALL BE STEADY AND WITHOUT DELAY OR INTERRUPTION EXCEPT FOR UNREASONABLE WEATHER CONDITIONS. THE INSTALLER WILL NOT QUALIFY ANY TERM, CONDITION, OR REQUIREMENT STATED HEREIN AT ANY TIME DURING OR AFTER COMPLETION OF AGREEMENT TO PROVIDE WORK UNDER THIS SECTION. THE INSTALLER MAY HAVE CERTAIN RIGHTS PERTAINING TO THIS GUARANTEE AS MAY BE DESCRIBED IN THE GENERAL CONDITIONS OF THE AGREEMENT BETWEEN OWNER AND INSTALLER.

K. IRRESPECTIVE OF ANY OTHER TERM IN THIS DOCUMENT, DESIGNER SHALL NOT CONTROL OR BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SCHEDULES, SEQUENCES OR PROCEDURES: OR FOR THE CONSTRUCTION SAFETY OR ANY OTHER RELATED PROGRAMS; OR FOR ANOTHER PARTIES' ERRORS OR OMISSIONS OR FOR ANY ANOTHER PARTIES' FAILURE TO COMPLETE THEIR WORK OR SERVICES IN ACCORDANCE WITH DESIGNERS' DOCUMENTS. DUE TO VARYING CLIMACTIC CONDITIONS AND/OR REASONS STATED ABOVE, THE DESIGNER SHALL NOT BE HELD RESPONSIBLE FOR QUALITY, QUANTITY, VITALITY, OR SURVIVAL OF ANY AND ALL LANDSCAPE PLANTINGS. SCHEDULING ON DOCUMENTS ARE RECOMMENDED GUIDELINES ONLY.

L. FURTHER THAT OWNER IS SOLELY RESPONSIBLE FOR ANY AND ALL ROUTINE MAINTENANCE OF THE SYSTEM AND ITS COMPONENTS AFTER FINAL WRITTEN ACCEPTANCE OF PROJECT .

D:\CSPR\SD23 SPECIFICATIONS\CSPR STD DETAILS HCI JAN2024FINAL.DWG 01-25-24 9:59:27 AM


NOTES:
1) BOXES TO BE PARALLEL AND PERPENDICULAR TO WALKS, EDGES, CURBS, ETC.
2) ALL VALVE BOX LIDS SHALL BE EMBOSSED WITH CORRESPONDING ZONE NUMBER OR EQUIPMENT TYPE (ie MV, FS, QCV, GV, ETC.)

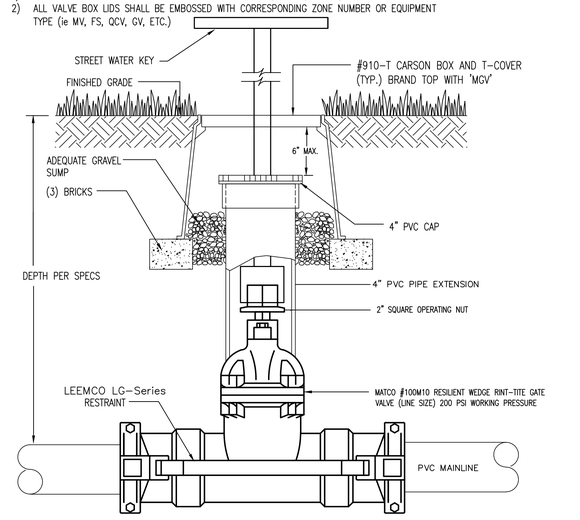

ISO GATE VALVE DETAIL (3" or more)

Diagrammatic Not To Scale


NOTES:
1) BOXES TO BE PARALLEL AND PERPENDICULAR TO WALKS, EDGES, CURBS, ETC.
2) ALL VALVE BOX LIDS SHALL BE EMBOSSED WITH CORRESPONDING ZONE NUMBER OR EQUIPMENT TYPE (ie MV, FS, QCV, GV, ETC.).

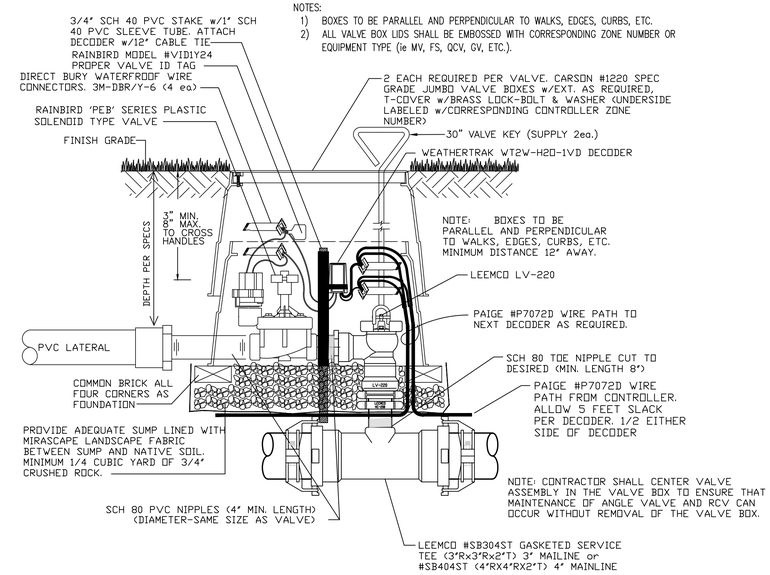

ZONE VALVE DETAIL

Diagrammatic Not To Scale


NOTES:
1) BOXES TO BE PARALLEL AND PERPENDICULAR TO WALKS, EDGES, CURBS, ETC.
2) ALL VALVE BOX LIDS SHALL BE EMBOSSED WITH CORRESPONDING ZONE NUMBER OR EQUIPMENT TYPE (ie MV, FS, QCV, GV, ETC.)

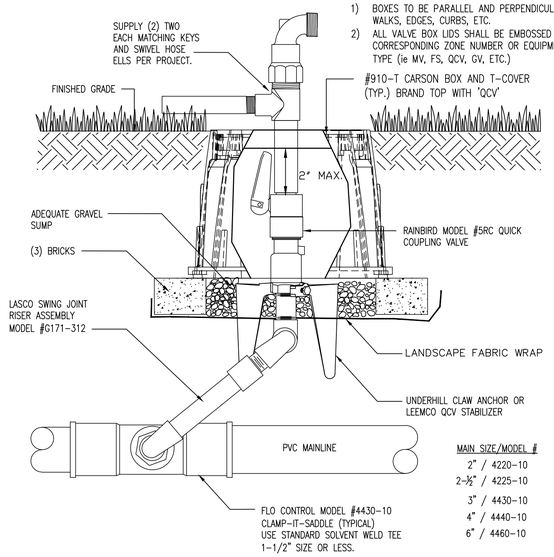

NOTE: PROVIDE OWNER WITH TWO QUICK COUPLER KEYS, ATTACHED HOSE SWIVEL AND 150' SWAN PRO HEAVY-DUTY RUBBER HOSE.

QCV VALVE DETAIL

Diagrammatic Not To Scale

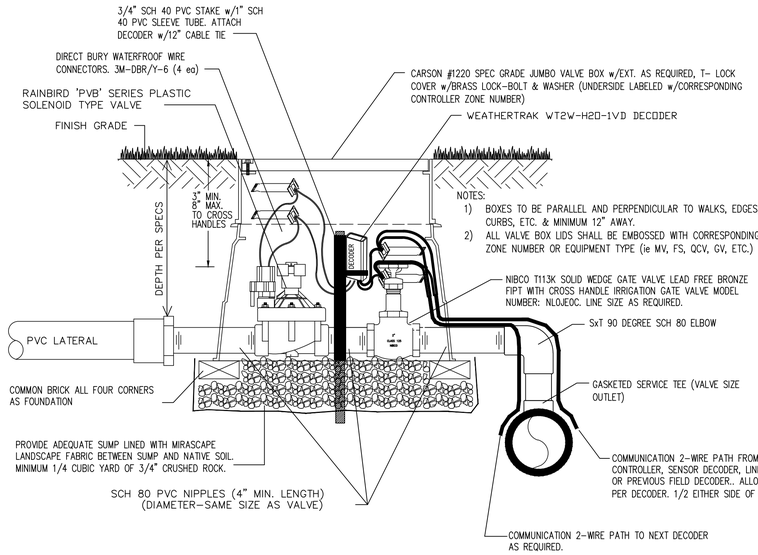

1.5" or SMALLER ZONE VALVE/DECODER DETAIL

Diagrammatic Not To Scale

VERIFICATION:

1. BEFORE PROCEEDING WITH ANY WORK, THE CONTRACTOR SHALL INSPECT THE SITE, LOCATE ANY EXISTING IRRIGATION SYSTEM AND PUMPING COMPONENTS, AND VERIFY ALL DIMENSIONS AND CONDITIONS AFFECTING THE WORK IN ORDER TO PROCEED SAFELY.
2. TESTING FOR STATIC WATER PRESSURE AT POINT OF CONNECTION AND DETERMINING ADEQUACY FOR USE PRIOR TO COMMENCING WORK DOWNSTREAM OF POINT OF CONNECTION. INADEQUATE PRESSURE OF FLOW SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT MANAGER AND DEFICIENCIES SHALL BE CORRECTED PRIOR TO COMMENCEMENT OF WORK DOWNSTREAM OF THE POINT OF CONNECTION. FAILURE TO TEST AND VERIFY ADEQUACY OF THE STATIC PRESSURE OR FLOW AND DETERMINING FEASIBILITY OF OPERATION AS INTENDED BY DESIGN PRIOR TO COMMENCEMENT OF WORK DOWNSTREAM OF THE POINT OF CONNECTION SHALL NOT PRECLUDE IRRIGATION CONTRACTOR'S RESPONSIBILITY TO PROVIDE OPTIMUM COVERAGE OF ALL IRRIGATED AREAS AS INTENDED BY DESIGN AT THE CONTRACTOR'S EXPENSE.
3. CONTRACTOR TO DETERMINE IN THE FIELD ACTUAL LOCATIONS AND ELEVATIONS OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THE PLANS OR NOT. THE CONTRACTOR SHALL CALL UTILITY PROTECTION SERVICE 72 HOURS PRIOR TO CONSTRUCTION.ANY DAMAGE TO EXISTING UTILITIES SHALL BE CONTRACTOR'S RESPONSIBILITY.
4. CONTRACTOR SHALL EXAMINE FINISH SURFACE AND GRADES. DO NOT START ANY WORK UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED. VERIFY LIMITS OF WORK BEFORE STARTING.
5. CONTRACTOR TO REPORT ALL DAMAGES TO EXISTING CONDITIONS AND INCONSISTENCIES WITH PLANS TO OWNER'S REPRESENTATIVE PRIOR TO BEGINNING OF CONSTRUCTION.
6. CONTRACTOR SHALL REPORT TO THE OWNER OR PROJECT MANAGER ANY DEVIATION AND/OR CONFLICTS BETWEEN DRAWINGS AND SITE CONDITIONS. EXTRA WORK ARISING FROM FAILURE TO DO SO SHALL BE DONE AT THE CONTRACTOR'S EXPENSE.

Know what's below. Call before you dig. 811
CALL BEFORE YOU DIG...
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH COLORADO REGISTERED 000062 PROFESSIONAL LANDSCAPE ARCHITECT

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM DATA PROVIDED BY CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 18th, 2024


PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024


SHEET 1 OF 11 SHEETS

FILE NUMBER:

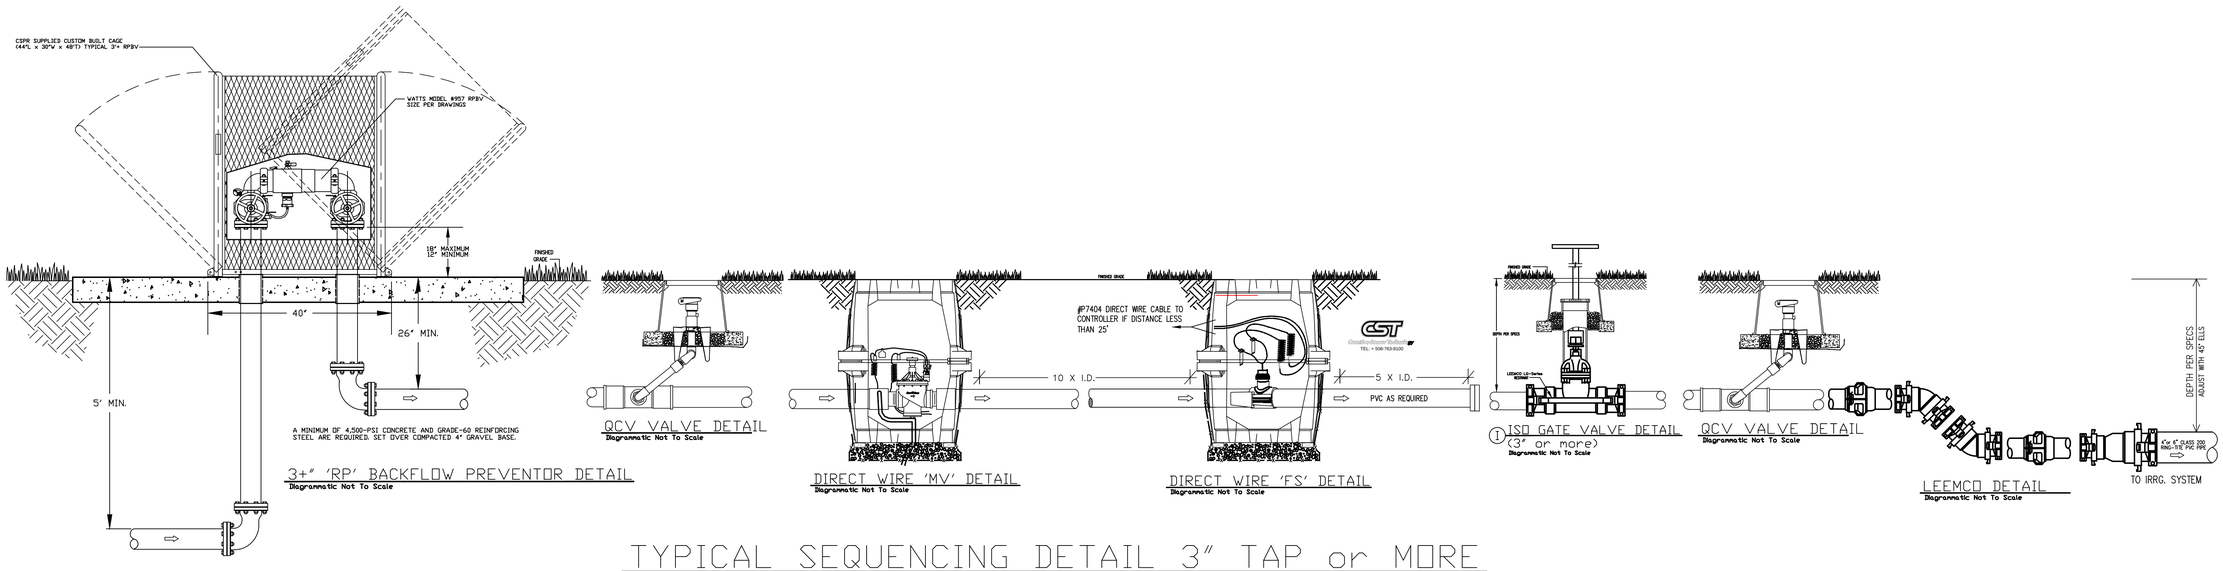

TYPICAL SEQUENCING DETAIL 3" TAP or MORE

Diagrammatic Not To Scale

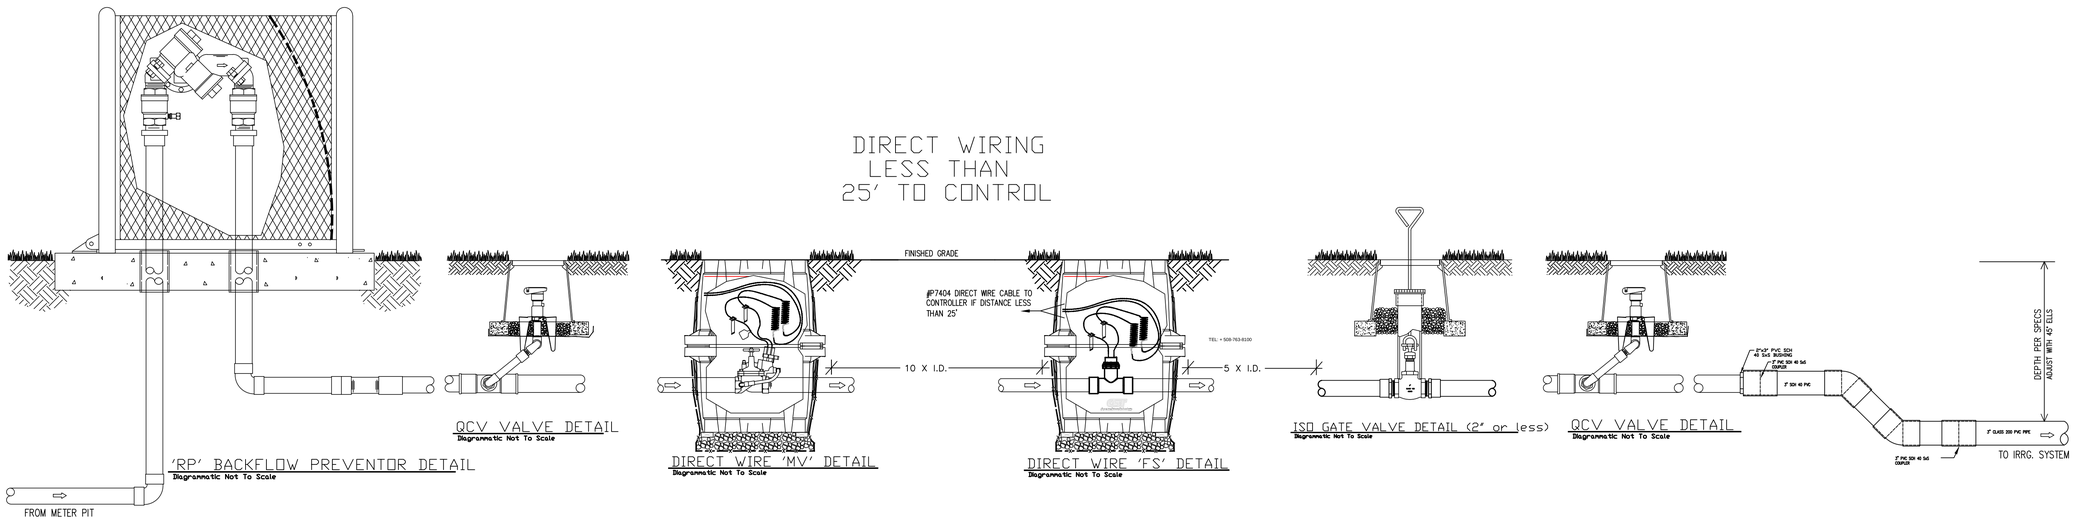

TYPICAL SEQUENCING DETAIL 2" TAP or LESS

Diagrammatic Not To Scale

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

IRRIGATION DESIGN BY:
James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM DATA PROVIDED BY THE CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 18th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940


COLORADO SPRINGS OLYMPIC CITY USA


TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 2 OF 11 SHEETS

FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAMES\#TMAL.DWG 01-25-24 9:59:30AM

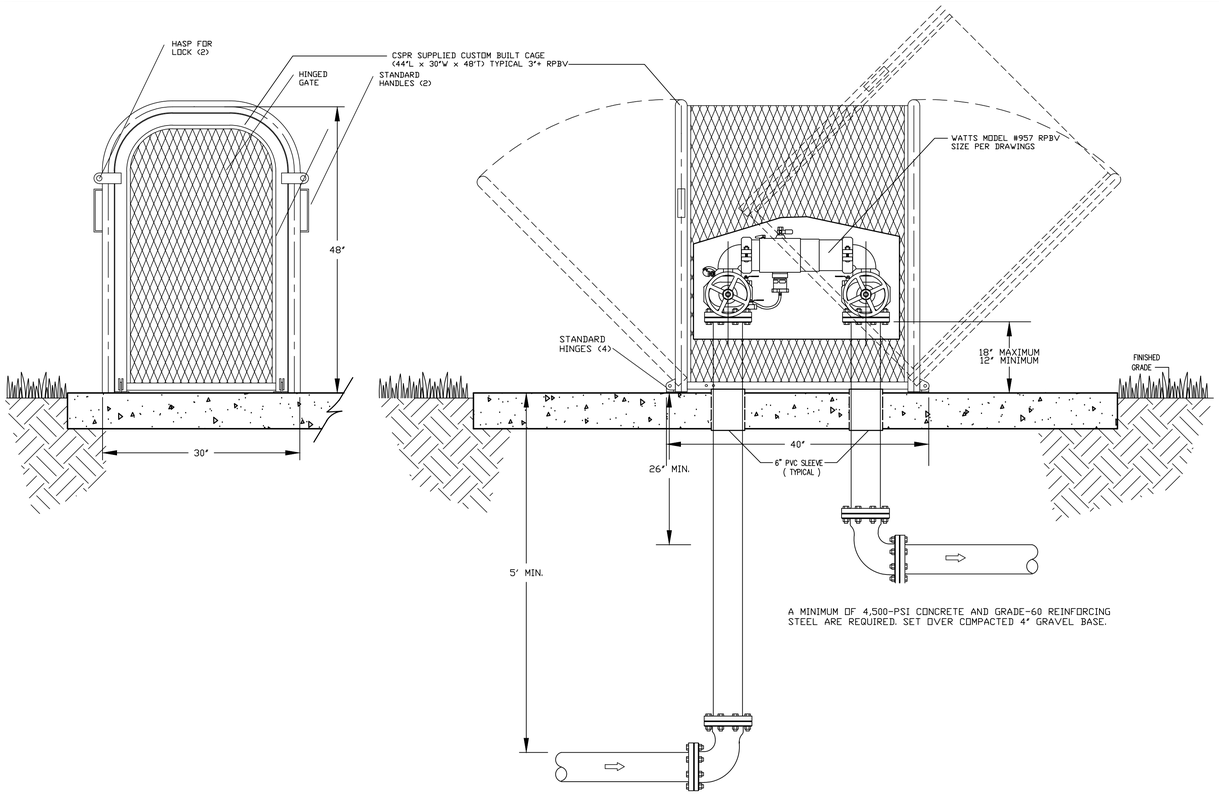

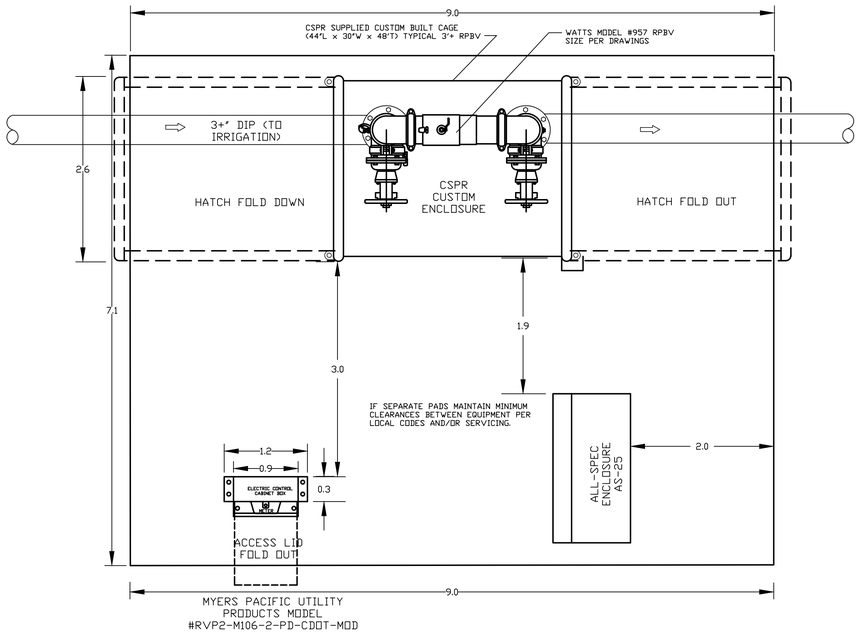


3+" 'RP' BACKFLOW PREVENTOR DETAIL

Diagrammatic Not To Scale

NOTE: USE "SIL-FOS" SILVER SOLDER OR FLARE TYPE FITTINGS FOR ALL UNDERGROUND COPPER PIPE JOINTS. USE OF 50/50 SOLDER PERMITTED ONLY ABOVE FINISHED GRADE.

MAIN	VACUUM BREAKER	SLAB SIZE
2"	FEBCO 825YA-2"	42"L x 30"W x 4"D

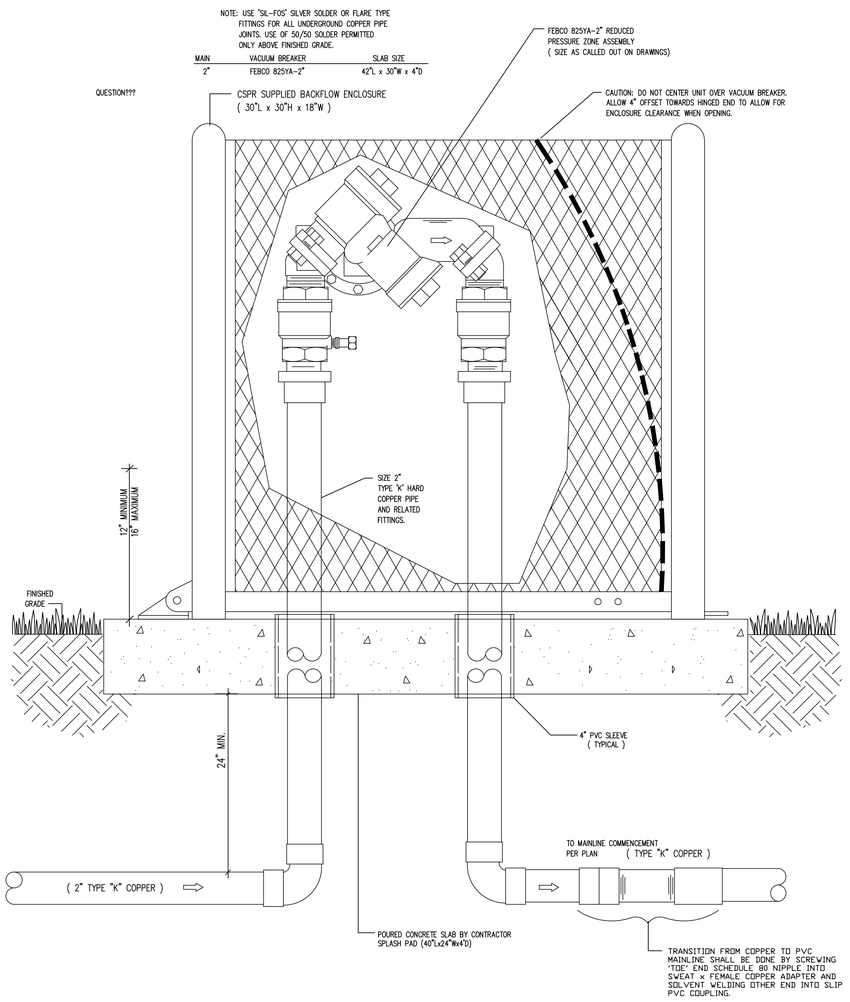

2" or SMALLER 'RP' BACKFLOW PREVENTOR DETAIL

Diagrammatic Not To Scale

ANY CONTRACTOR WHO INSTALLS A NEW BACKFLOW PROTECTION ASSEMBLY WILL BE RESPONSIBLE FOR THE INITIAL TESTING AND TEST REPORTING OF THE ASSEMBLY TO COLORADO SPRINGS UTILITIES WITHIN 10 DAYS OF INSTALLATION.

Know what's below. Call before you dig. 811
CALL BEFORE YOU DIG...
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 RESIDENTIAL COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON CONTRIBUTED BY THE CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 18th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA


TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 3 OF 11 SHEETS

FILE NUMBER:


D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAN2024FINAL.DWG 02-05-24 9:59:37AM

1. ALL PIPE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. NO PIPE OR WIRE SHALL BE LOCATED UNDER PAVING UNLESS IT IS SLEEVED.
3. PARALLEL PIPING SHALL NOT BE INSTALLED IN SAME TRENCH BESIDE OR ATOP ONE ANOTHER.
4. BACKFILL MATERIAL SHALL BE FREE OF RUBBISH, VEGETABLE MATTER, FROZEN MATERIALS, AND STONES LARGER THAN 3/8" IN MAXIMUM DIMENSIONS. PROVIDE NOT LESS THAN 6" OF CLEARANCE BETWEEN EACH LATERAL LINE, AND NOT LESS THAN 18" OF CLEARANCE BETWEEN LATERAL LINES AND MAINS.

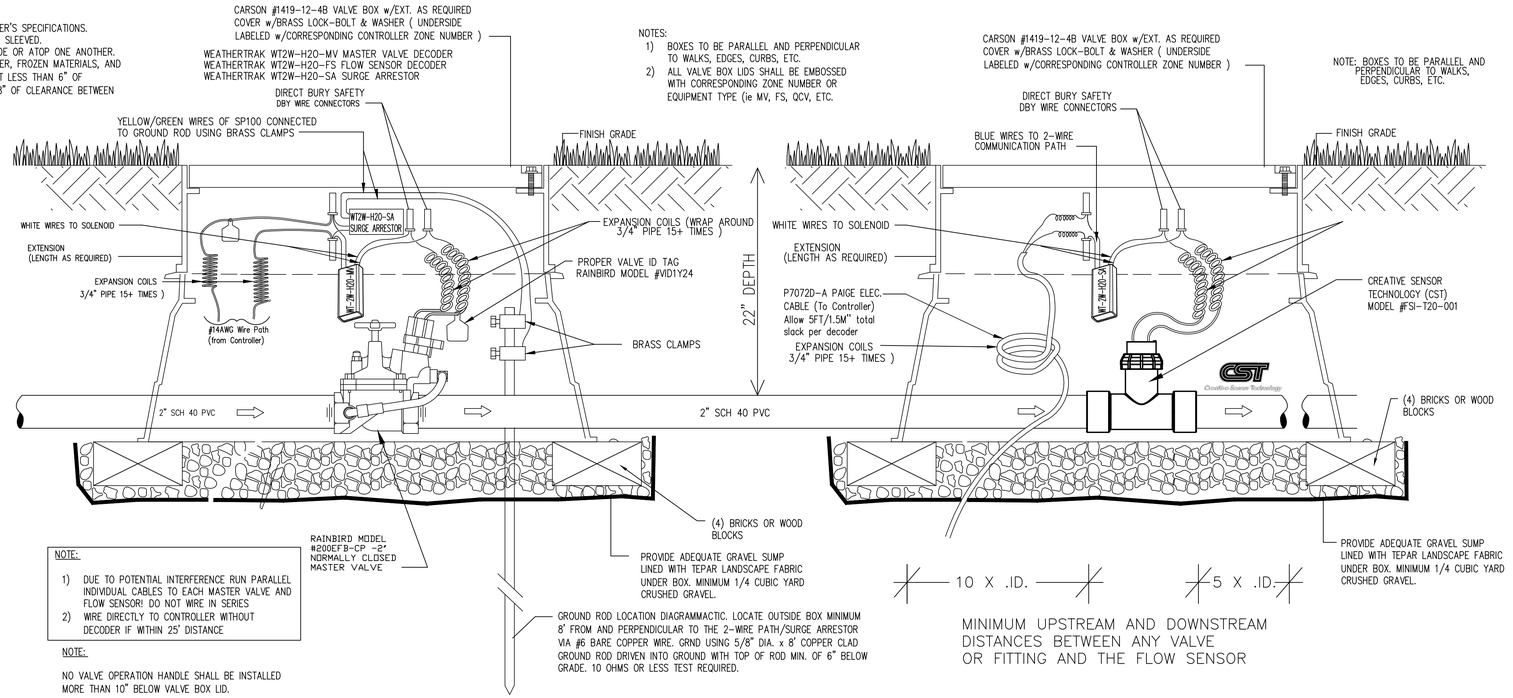

WEATHERTRAK 2-WIRE MASTER VALVE / FLOW SENSOR (2" AND SMALLER)

Diagrammatic Not To Scale

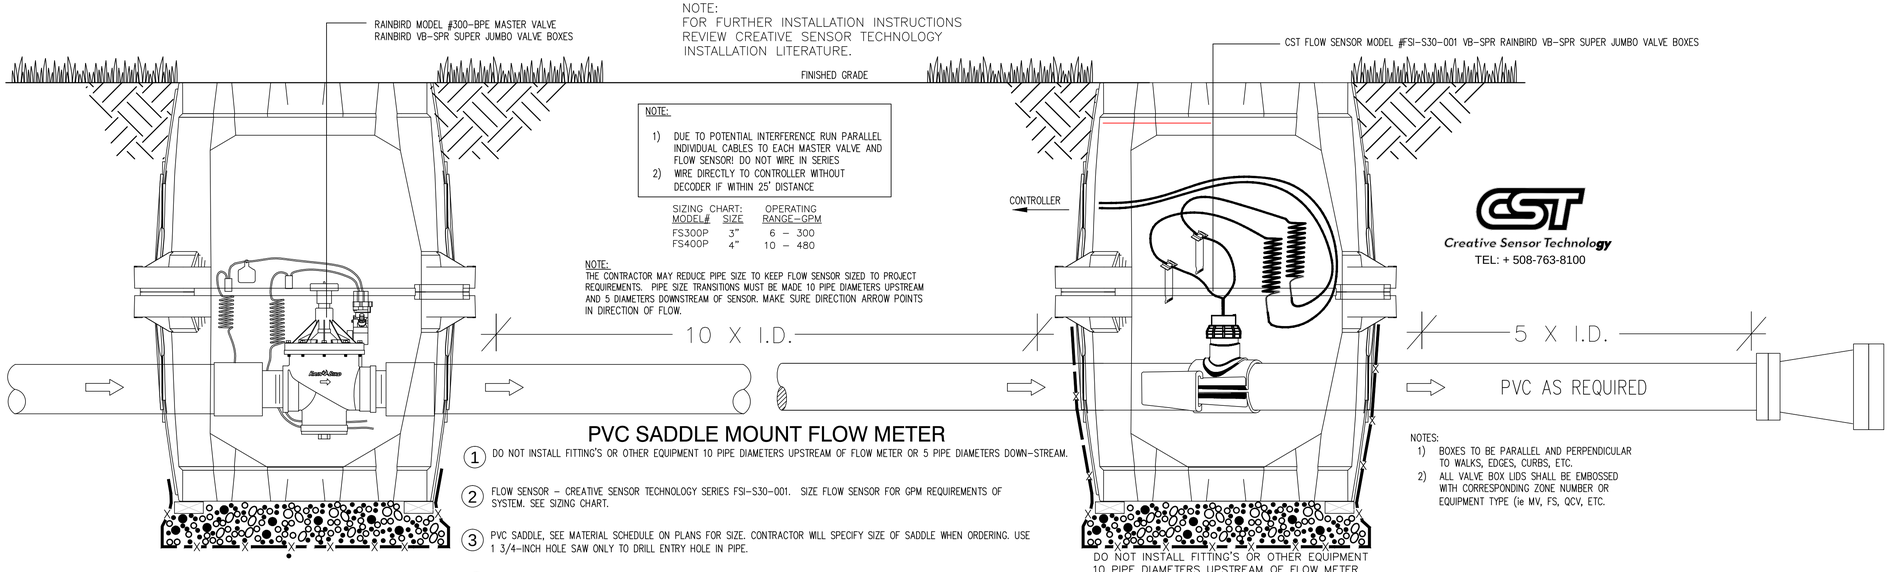

PVC SADDLE MOUNT FLOW METER

1. DO NOT INSTALL FITTING'S OR OTHER EQUIPMENT 10 PIPE DIAMETERS UPSTREAM OF FLOW METER OR 5 PIPE DIAMETERS DOWN-STREAM.
2. FLOW SENSOR – CREATIVE SENSOR TECHNOLOGY SERIES FSI-S30-001. SIZE FLOW SENSOR FOR GPM REQUIREMENTS OF SYSTEM. SEE SIZING CHART.
3. PVC SADDLE, SEE MATERIAL SCHEDULE ON PLANS FOR SIZE. CONTRACTOR WILL SPECIFY SIZE OF SADDLE WHEN ORDERING. USE 1 3/4-INCH HOLE SAW ONLY TO DRILL ENTRY HOLE IN PIPE.
4. WATERPROOF WIRE SPLICE, 3M SCOTCHPACK OF EQUIVALENT, 2 SPLICES ARE REQUIRED.
5. DIRECT BURIAL 1 PAIR, TWSTED SHIELDED CABLE—MINIMUM CONDUCTOR SIZE 20 AWG. DO NOT EXCEED 2,000 FEET IN LAYING DISTANCE FROM FLOW SENSOR TO IRRIGATION CONTROLLER. INSTALL WITH A MINIMUM OF 30-INCH LOOPED WIRE EXPANSION COIL.

WEATHERTRAK 2-WIRE MASTER VALVE / FLOW SENSOR (3" AND LARGER)

Diagrammatic Not To Scale

CST
Creative Sensor Technology
TEL: + 508-763-8100

CALL BEFORE YOU DIG... Know what's below. Call before you dig. 811 48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 16th, 2024


PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024


SHEET 4 OF 11 SHEETS

FILE NUMBER:



NOTE:
MINIMUM CONCRETE BASE REQUIREMENTS. CONTRACTORS SHALL VERIFY NUMBER AND SIZE OF CONDUITS REQUIRED FOR EACH ENCLOSURE INSTALLATION. USE ENCLOSURE MANUFACTURER'S TEMPLATE FOR PROPER LAG BOLT PLACEMENT. PROVIDE A MINIMUM OF 2" OF CONCRETE FROM LAG BOLT TO OPENING IN CONCRETE BASE FOR CONDUITS.


TOP VIEW

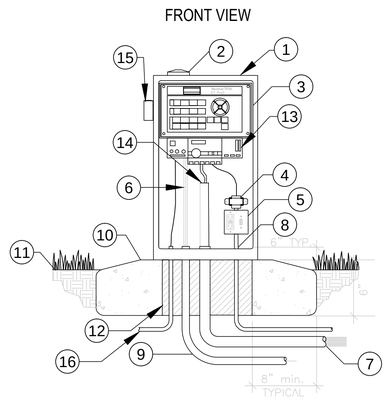


1. ALL SPEC GREEN POWERED COATED MILD STEEL AUTOMATIC CONTROLLER ENCLOSURE ASSEMBLY. MODEL #AS-2317UL-PC GREEN UNLESS OTHERWISE NOTED ON IRRIGATION LEGEND FOR MAKE AND MODEL.
2. LOW PROFILE ANTENNA.
3. WEATHERTRAK WTPRO3-C-H2048-CWM CONTROLLER (MOUNT IN CABINET AS REQUIRED)
4. CONTROLLER TRANSFORMER.
5. GFI ON/OFF POWER SWITCH RECEPTACLE.
6. PAIGE ELECTRIC P7072 2-wire FLOW SENSOR CABLE AND SEPARARTE P7072 2-wire MASTER VALVE WIRES PER SPECIFICATIONS.
7. 3" PVC SWEEP ELL AND CONDUIT FOR 2-WIRE COMMUNICATION CABLE/S
8. 1" PVC SWEEP ELL AND CONDUIT FOR 120VAC FROM METERED POWER SUPPLY.
9. 2" PVC SWEEP ELL AND CONDUIT FOR OPTIONAL CONVENTIONALLY WIRED FLOW SENSOR AND MASTER VALVE WIRES.
10. POURED CONCRETE BASE. SLOPE TO DRAIN.
11. FINISH GRADE. 2" BELOW TOP OF CONCRETE BASE.
12. FILL VOIDS WITH CONCRETE SLURRY MIX.
13. UNIVERSAL RADIO REMOTE INTERFACE. (TYPICAL)
14. NEATLY BUNDLE WIRES AND SECURE WITH WIRE TIES (TYPICAL)
15. RAIN SENSOR WITHIN VIT RAIN SENSOR ENCLOSURE (PT PER SPEC.)
16. #6 BARE WIRE TO GROUNDING GRID

WEATHERTRAK #WTPRO3-C-H2048-CWM 2-WIRE SERIES CONTROLLER

Diagrammatic Not To Scale

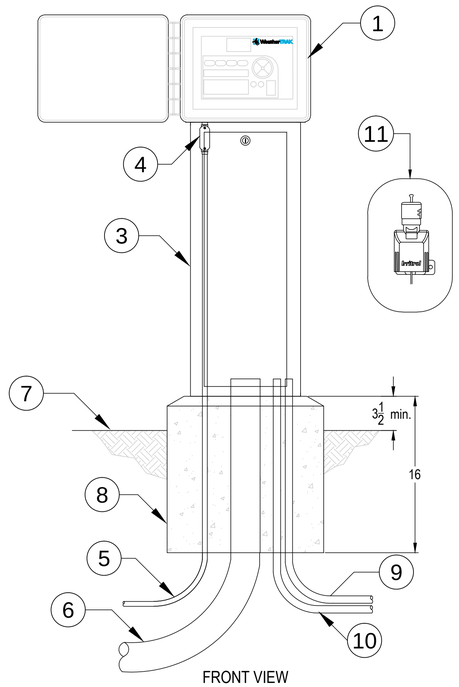


1. WEATHERTRAK LC+ CENTRAL AUTOMATIC IRRIGATION CONTROLLER MOUNTED WITHIN A RAINBIRD ESPLX CABINET WITH A RAINBIRD #RBLLXMM PEDESTAL ADAPTER.
2. MOUNTING TEMPLATE.
3. RAINBIRD PEDESTAL #RBLLXMMPED
4. J-BOX FOR 120VAC WIRING (NOT INCLUDED)
5. PVC OR RIGID CONDUIT & CONDUIT SWEEP FOR 120VAC WIRING.
6. PVC CONDUIT AND CONDUIT SWEEP FOR VALVE WIRING
7. FINISH GRADE
8. POURED-IN-PLACE CONCRETE BASE WITH SLOPED EDGES FOR DRAINAGE AWAY FROM PEDESTAL.
9. PVC CONDUIT AND CONDUIT SWEEP FOR FLOW SENSOR WIRING AND MASTER VALVE WIRING
10. PVC CONDUIT AND CONDUIT SWEEP FOR #6 BARE COPPER GROUND WIRE.
11. WIRED OR WIRELESS RAIN SENSOR PER SPECS



NOTES:


MINIMUM CONCRETE BASE REQUIREMENTS: CONTRACTOR SHALL VERIFY NUMBER & SIZE OF CONDUITS & GROUND RODS REQUIRED FOR EACH ENCLOSURE. USE MOUNTING TEMPLATE TO LOCATE "J" BOLT FASTENERS.

SEE IRRIGATION DRAWINGS FOR ENCLOSURE DIMENSIONS AND FINISH.



WEATHERTRAK LC+ SERIES PED MOUNT CONTROLLER 12 ZONES or FEWER

Diagrammatic Not To Scale

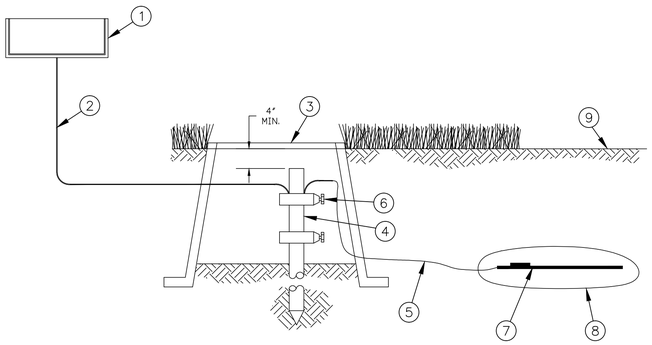



1. WEATHERTRAK CONTROLLER
2. SOLID BARE COPPER WIRE (#6 AWG) FROM GROUNDING ROD TO CONTROLLER. MAKE WIRE AS SHORT AND STRAIGHT AS POSSIBLE
3. COVER GROUNDING ROD WITH 10-INCH ROUND VALVE BOX AS SHOWN
4. 5/8-INCH X 10 FT COPPER CLAD GROUNDING ROD OR GROUNDING PLATE. INSTALL RODS IN SOIL IN A TRIAGULAR PATTERN SPACED A MINIMUM OF 16 FT APART FROM EACH OTHER. GROUNDING GRID TO HAVE A RESISTANCE OF TEN (10) OHMS OR LESS
5.
6. BARE COPPER WIRE (#6 AWG MIN.) BETWEEN GROUNDING ROD AND GROUNDING PLATE
7. GROUND ROD CLAMP OR WELDS
8. COPPER GROUNDING PLATE
9. GROUND ENHANCEMENT MATERIAL (IF REQUIRED) FINISH GRADE

CONTROLLER GROUNDING GRID DESIGN LAYOUT


Diagrammatic Not To Scale

TYPICAL DETAILS

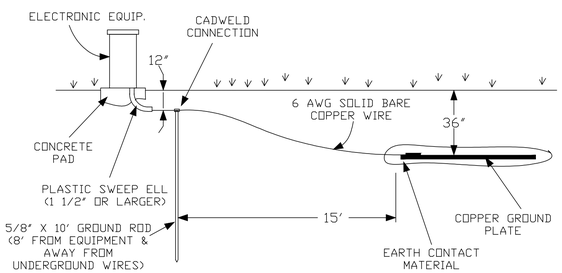




GROUND ROD LAYOUT



GROUND ROD ASSEMBLY

1. WEATHERTRAK CONTROLLER
2. SOLID BARE COPPER WIRE (#10 AWG) FROM GROUNDING ROD TO CONTROLLER. MAKE WIRE AS SHORT AND STRAIGHT AS POSSIBLE
3. COVER GROUNDING ROD WITH 10-INCH ROUND VALVE BOX AS SHOWN
4. 5/8-INCH X 8 FT COPPER CLAD GROUNDING ROD OR GROUNDING PLATE. INSTALL RODS IN SOIL IN A TRIAGULAR PATTERN SPACED A MINIMUM OF 16 FT APART FROM EACH OTHER. GROUNDING GRID TO HAVE A RESISTANCE OF TEN (10) OHMS OR LESS
5. BARE COPPER WIRE (#10 AWG MIN.) BETWEEN GROUNDING RODS
6. GROUND ROD CLAMP OR WELDS
7. FINISH GRADE



RAIN/FREEZE SENSOR POST MOUNT

Diagrammatic Not To Scale

CALL BEFORE YOU DIG... Know what's below. Call before you dig. 811 48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER. Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH — COLORADO — REGISTERED — 000062 — PROFESSIONAL ENGINEER — CIVIL/MECHANICAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON CONTRIBUTED BY THE CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 5th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA


TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 5 OF 11 SHEETS


FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAN2024FINAL.DWG 01-25-24 9:59:47AM


R26-099MZ




LB-SERIES
90 ELL




LB-SERIES
45 ELL




LH-SERIES
TEE (NO RUN RESTRANTS)




LG-Series
RING GATE
top view




LPP-SERIES
BELL RING



LH-SERIES
w/ RUN RESTRAINTS




LG-Series
side view

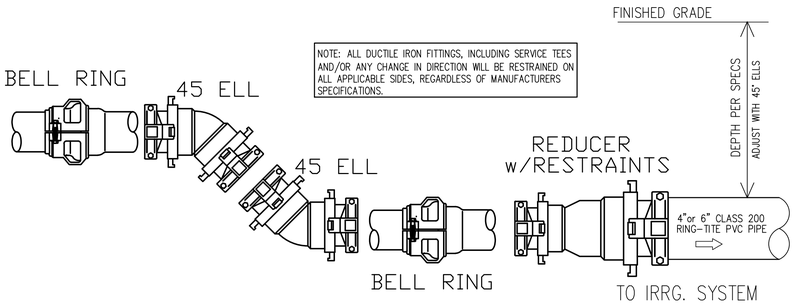

NOTE: ALL DUCTILE IRON FITTINGS, INCLUDING SERVICE TEES AND/OR ANY CHANGE IN DIRECTION WILL BE RESTRAINED ON ALL APPLICABLE SIDES, REGARDLESS OF MANUFACTURERS SPECIFICATIONS.

LEEMCO DETAIL

Diagrammatic Not To Scale

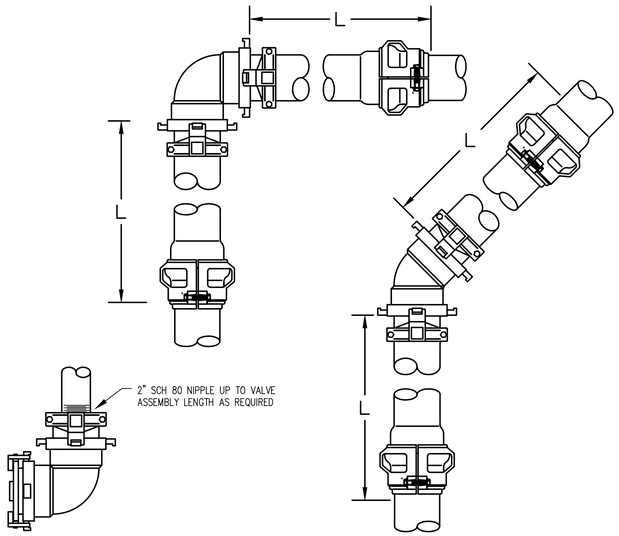

LB-SERIES ELL w/ Tapped Plug
REDUCER MODEL #SB-304TP
3"x2" NPT TERMINAL REDUCTION

DISTANCE CHART

REFER TO THE FOLLOWING TABLE THAT LISTS THE LENGTH (IN FEET) FOR EACH SIZE/TYPE FITTING WITHIN WHICH ALL JOINTS JUST BE RESTRAINED. ALL FITTINGS AND JOINT RESTRAINTS SHALL BE INSTALLED PER MANUFACTURERS RECOMMENDATIONS & SPECIFICATIONS.

AS AN EXAMPLE, IF YOU ARE INSTALLING A 3" MAINLINE WITH A DIRECTIONAL CHANGE OF 90°, REFER TO CHART UNDER PIPE SIZE TO 3" AND UNDER BENDS 90 YOU WILL SEE THE DISTANCE OF 11'. IF THERE IS ANY JOINT (VALVE, BELL, ETC.) YOU MUST INSTALL A JOINT RESTRAINT WITHIN 11' OF THE 90° MAINLINE DIRECTIONAL CHANGE.

PIPE SIZE	BENDS				REDUCERS			DEAD END	
	11°	22°	45°	90°	1 STEP	2 STEP	3 STEP	BLIND	SERV. B.
3"	2'	3'	6'	11'	8'	10'	-	15'	30'
4"	2'	4'	9'	20'	14'	20'	31'	25'	45'

INSTALLATION CHART

REFER TO THE FOLLOWING TABLE WHICH LISTS THE NUMBER OF BOLTS, SIZE, AND TORQUE FOR EACH BOLT IN REFERENCE TO THE SIZE OF PIPE WHICH IS BEING RESTRAINED.

AS AN EXAMPLE, IF YOU HAVE A 3" PIPE, YOU WILL NEED 2 BOLTS THAT ARE 3/8 X 2.5" AND TIGHTEN THEM WITH A TORQUE WRENCH TO 20 FT-LBS.

PIPE SIZE	NO. BOLTS	BOLT SIZE	TORQUE FT-LBS.
3"	2	3/8" x 2.5"	20
4"	2	1/2" x 3"	50

CONTACT JASON MOWER (AQUACITA) @ (720) 233-9698, THE LEEMCO REPRESENTATIVE, FOR ALL QUESTIONS CONCERNING LEEMCO PRODUCTS. COORDINATE AN INSTALLATION CLINIC WITH JASON MOWER PRIOR TO INSTALLING THE MAINLINE.


NOTES:

1. INSTALL ALL RESTRAINTS PER MANUFACTURER RECOMMENDATIONS AS REQUIRED.
2. FIELD PIPE CUT – OUTSIDE EDGE OF CUT PIPE MUST BE BEVELED AND SMOOTHED. STRAIGHT ALIGNMENT IS IMPORTANT IN ALL CASES.
3. IMPORTANT! LUBRICATE CARRIAGE BOLT THREADS USING WD-40 LUBRICANT TO PREVENT POSSIBILITY OF GALLING OR SEIZING OF THE STEEL THREADS.
4. SPIGOT AND BELL JOINTS – PROPER LUBRICANT MUST BE APPLIED TO THE INSTALLED GASKET TO REDUCE FRICTION AND AVOID GASKET DAMAGE. ALSO APPLY THIN COAT OF LUBRICANT TO THE BEVELED PORTION OF THE PLAIN PIPE END OR SPIGOT INSERTED INTO THE FITTING. USE COMMERCIALLY AVAILABLE PUSH-ON JOINT LUBRICANTS THAT ARE NON-TOXIC, ODORLESS, TASTELESS, AND WILL NOT SUPPORT BACTERIA. "SEAL LUBE" SKU#87710OFFERED BY WELDON CORP IS RECOMMENDED.

1 Joint Restraint Chart Detail
NTS

IN THE EVENT THAT THE MATERIAL FROM THE EXCAVATION OR TRENCHING IS FOUND TO BE UNSUITABLE FOR USE IN BACKFILL, IT SHALL BE REMOVED FROM THE SITE AND PROPERLY DISPOSED OF BY THE CONTRACTOR AND AT THE CONTRACTOR'S EXPENSE.


LEEMCO 'PVC' CATEGORY 'B' IPS JOINT RESTRAINTS

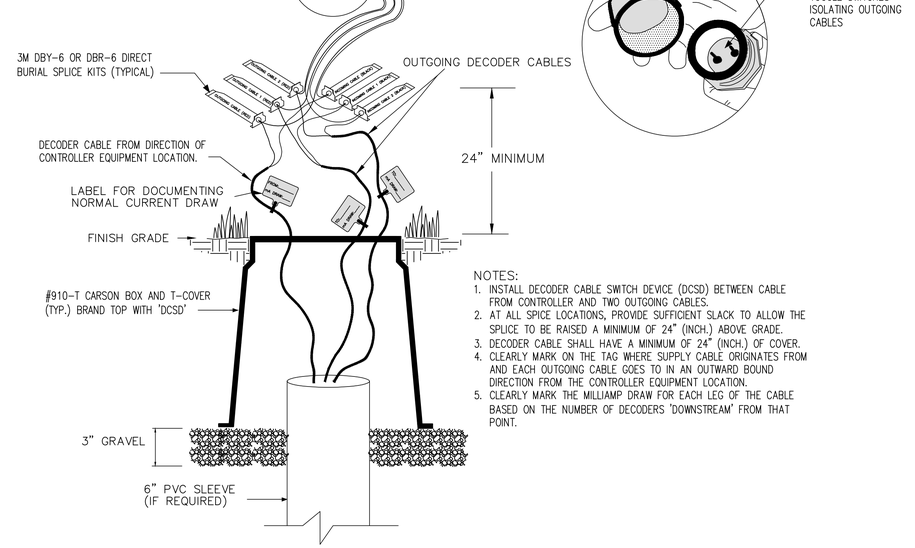

NOTES:
1. INSTALL DECODER CABLE SWITCH DEVICE (DCSD) BETWEEN CABLE FROM CONTROLLER AND TWO OUTGOING CABLES.
2. AT ALL SPICE LOCATIONS, PROVIDE SUFFICIENT SLACK TO ALLOW THE SPLICE TO BE RAISED A MINIMUM OF 24" (INCH.) ABOVE GRADE.
3. DECODER CABLE SHALL HAVE A MINIMUM OF 24" (INCH.) OF COVER.
4. CLEARLY MARK ON THE TAG WHERE SUPPLY CABLE ORIGINATES FROM AND EACH OUTGOING CABLE GOES TO IN AN OUTWARD BOUND DIRECTION FROM THE CONTROLLER EQUIPMENT LOCATION.
5. CLEARLY MARK THE MILLIAMP DRAW FOR EACH LEG OF THE CABLE BASED ON THE NUMBER OF DECODERS 'DOWNSTREAM' FROM THAT POINT.

PAIGE ELECTRIC (DCSD) INSTALLATION DETAIL

Diagrammatic Not To Scale

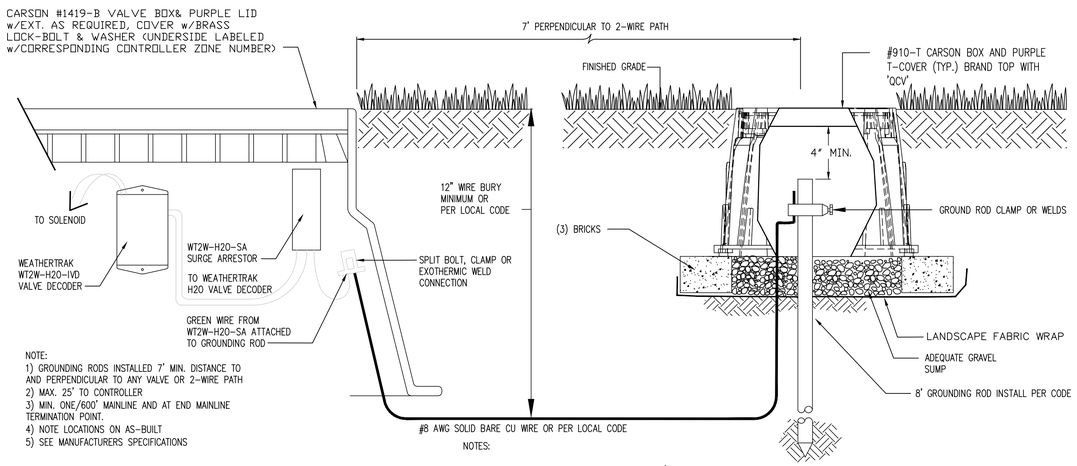

NOTE:
1) GROUNDING RODS INSTALLED 7' MIN. DISTANCE TO AND PERPENDICULAR TO ANY VALVE OR 2-WIRE PATH
2) MAX. 25' TO CONTROLLER
3) MIN. ONE/600' MAINLINE AND AT END MAINLINE TERMINATION POINT.
4) NOTE LOCATIONS ON AS-BUILT
5) SEE MANUFACTURERS SPECIFICATIONS

NOTES:
- MOISTURE-RESISTANT CONNECTORS 3M DBR/Y-6 OR EQUAL TO BE INSTALLED IN VERTICAL POSITION AS SHOWN
- THIS BOX MAY BE A VALVE BOX OR A ROUND BOX. IF A VALVE BOX WITH VALVE, CONNECT DECODER FOR VALVES TO TWO-WIRE PATH AND WIRE FROM WT2W-H2O-SA.
- 8 FT. MIN. SEPARATION FROM OTHER EQUIPMENT.

WEATHERTRAK 2-WIRE SURGE ARRESTOR DECODER AND DECODER CONNECTIONS

Diagrammatic Not To Scale

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH 000062 DESIGNER COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON CONSTITUTED TO BE THE PROPERTY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 16th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940


COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 6 OF 11 SHEETS


FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAN2024FINAL.DVG 01-25-24 9:59:50AM

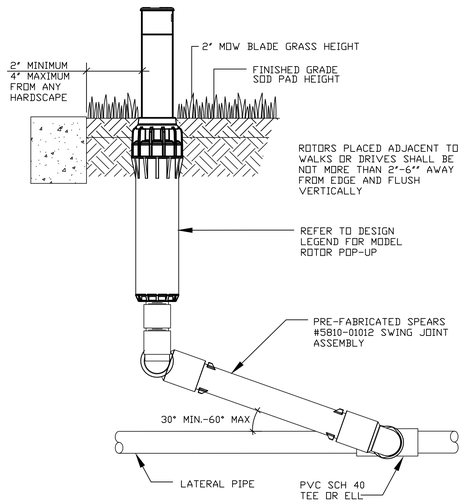


ROTOR POP-UP w/PRE-FAB SWING JOINT

Diagrammatic Not To Scale

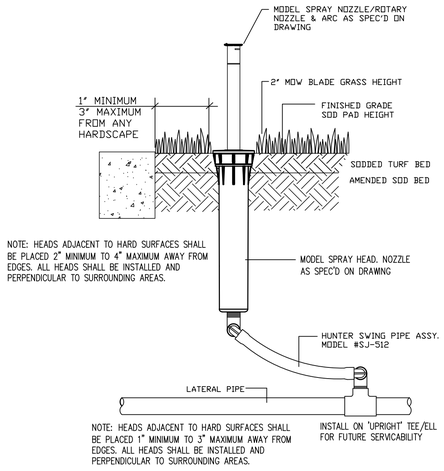


MODEL SPRAY HEAD AS SPEC'D

Diagrammatic Not To Scale

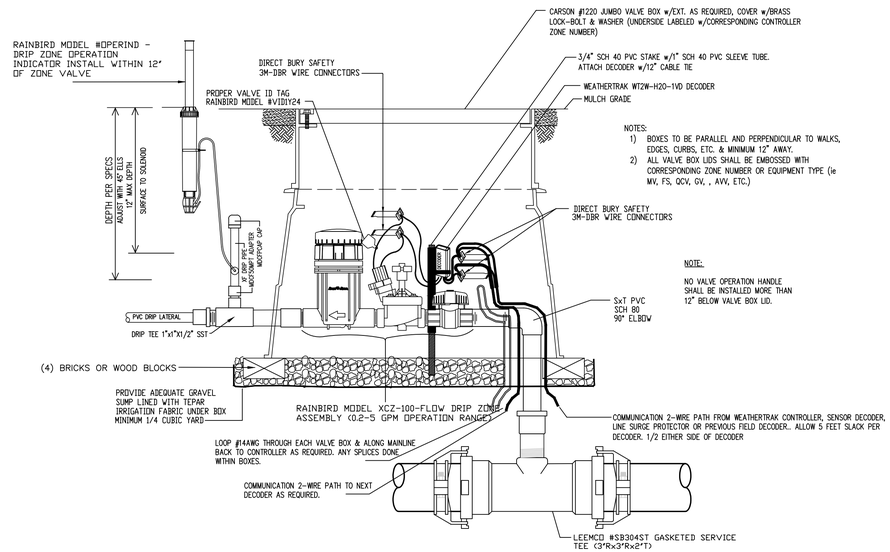


1" DRIP ZONE VALVE/DECODER DETAIL (0.3 to 20 GPM)

Diagrammatic Not To Scale

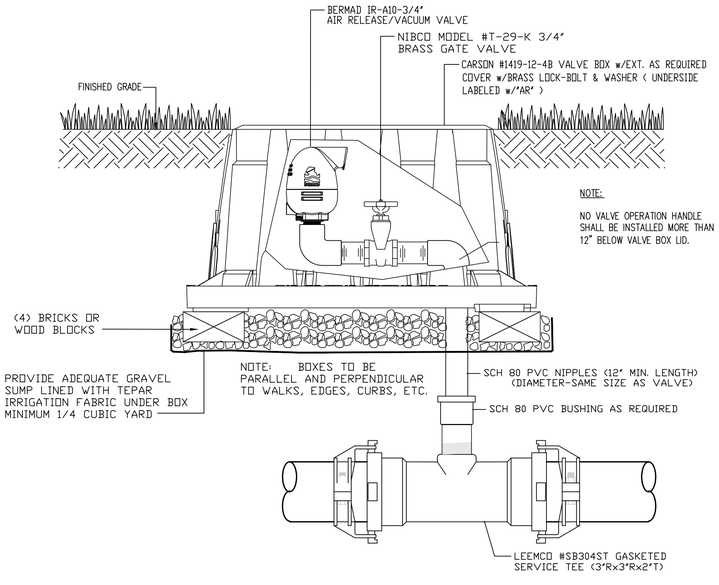

AIR RELEASE/VACUUM VALVE

Diagrammatic Not To Scale

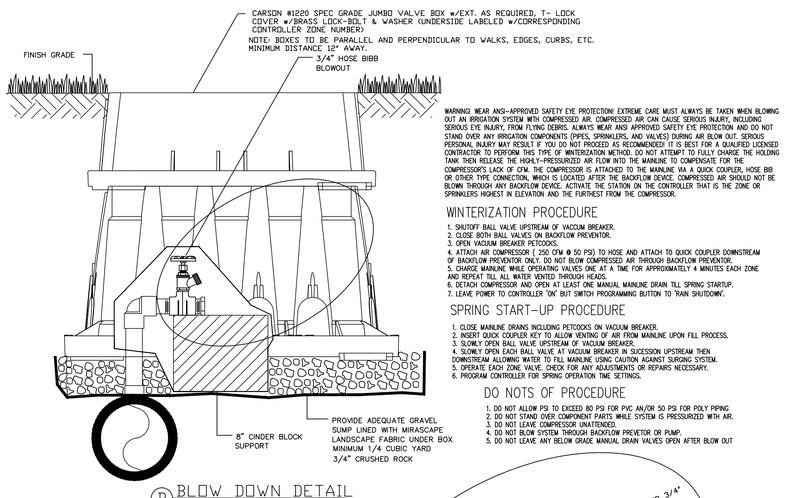

Ⓑ BLOW DOWN DETAIL

Diagrammatic Not To Scale

WARNING WEAR ANSI-APPROVED SAFETY EYE PROTECTION! EXTREME CARE MUST ALWAYS BE TAKEN WHEN BLOWING OUT AN IRRIGATION SYSTEM WITH COMPRESSED AIR. COMPRESSED AIR CAN CAUSE SERIOUS INJURY, INCLUDING SERIOUS EYE INJURY, FROM FLYING DEBRIS. ALWAYS WEAR ANSI APPROVED SAFETY EYE PROTECTION AND DO NOT STAND OVER ANY IRRIGATION COMPONENTS (PIPES, SPRINKLERS, AND VALVES) DURING AIR BLOW OUT. SERIOUS PERSONAL INJURY MAY RESULT IF YOU DO NOT PROCEED AS RECOMMENDED! IT IS BEST FOR A QUALIFIED LICENSED CONTRACTOR TO PERFORM THIS TYPE OF WINTERIZATION METHOD. DO NOT ATTEMPT TO FULLY CHARGE THE HOLDING TANK THEN RELEASE THE HIGHLY-PRESSURIZED AIR FLOW INTO THE MAINLINE TO COMPENSATE FOR THE COMPRESSOR'S LACK OF CFM. THE COMPRESSOR IS ATTACHED TO THE MAINLINE VIA A QUICK COUPLER, HOSE BIB OR OTHER TYPE CONNECTION, WHICH IS LOCATED AFTER THE BACKFLOW DEVICE. COMPRESSED AIR SHOULD NOT BE BLOWN THROUGH ANY BACKFLOW DEVICE. ACTIVATE THE STATION ON THE CONTROLLER THAT IS THE ZONE OR SPRINKLERS HIGHEST IN ELEVATION AND THE FURTHEST FROM THE COMPRESSOR.

WINTERIZATION PROCEDURE


1. SHUTOFF BALL VALVE UPSTREAM OF VACUUM BREAKER.
2. CLOSE BOTH BALL VALVES ON BACKFLOW PREVENTOR.
3. OPEN VACUUM BREAKER PETCOCKS.
4. ATTACH AIR COMPRESSOR (250 CFM @ 50 PSI) TO HOSE AND ATTACH TO QUICK COUPLER DOWNSTREAM OF BACKFLOW PREVENTOR ONLY. DO NOT BLOW COMPRESSED AIR THROUGH BACKFLOW PREVENTOR.
5. CHARGE MAINLINE WHILE OPERATING VALVES ONE AT A TIME FOR APPROXIMATELY 4 MINUTES EACH ZONE AND REPEAT TILL ALL WATER VENTED THROUGH HEADS.
6. DETACH COMPRESSOR AND OPEN AT LEAST ONE MANUAL MAINLINE DRAIN TILL SPRING STARTUP.
7. LEAVE POWER TO CONTROLLER 'ON' BUT SWITCH PROGRAMMING BUTTON TO 'RAIN SHUTDOWN'.

SPRING START-UP PROCEDURE

1. CLOSE MAINLINE DRAINS INCLUDING PETCOCKS ON VACUUM BREAKER.
2. INSERT QUICK COUPLER KEY TO ALLOW VENTING OF AIR FROM MAINLINE UPON FILL PROCESS.
3. SLOWLY OPEN BALL VALVE UPSTREAM OF VACUUM BREAKER.
4. SLOWLY OPEN EACH BALL VALVE AT VACUUM BREAKER IN SUCCESSION UPSTREAM THEN DOWNSTREAM ALLOWING WATER TO FILL MAINLINE USING CAUTION AGAINST SURGING SYSTEM.
5. OPERATE EACH ZONE VALVE. CHECK FOR ANY ADJUSTMENTS OR REPAIRS NECESSARY.
6. PROGRAM CONTROLLER FOR SPRING OPERATION TIME SETTINGS.


DO NOTS OF PROCEDURE

1. DO NOT ALLOW PSI TO EXCEED 80 PSI FOR PVC AND/OR 50 PSI FOR POLY PIPING
2. DO NOT STAND OVER COMPONENT PARTS WHILE SYSTEM IS PRESSURIZED WITH AIR.
3. DO NOT LEAVE COMPRESSOR UNATTENDED.
4. DO NOT BLOW SYSTEM THROUGH BACKFLOW PREVETOR OR PUMP.
5. DO NOT LEAVE ANY BELOW GRADE MANUAL DRAIN VALVES OPEN AFTER BLOW OUT



BLOW DOWN DETAIL

Diagrammatic Not To Scale

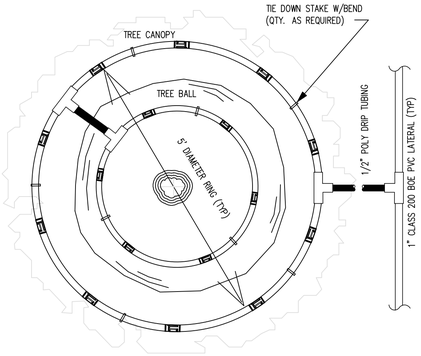

NOTE: 3" CALIPER TREES & LARGER REQUIRE DOUBLE LOOP, ALL SMALLER REQUIRE ONLY 5' DIAMETER LOOP.

NOTE: CENTER RING ON TREE TRUNK USING RAINBIRD XFS-18 DRIPLINE TUBING. MINIMUM OF SIX PORTS PER TREE.

TREE RING DETAIL

Diagrammatic Not To Scale

Know what's below. Call before you dig.
811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
CALL BEFORE YOU DIG...
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 16th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024


SHEET 7 OF 11 SHEETS

FILE NUMBER:

DIRECT BURY/30V SINGLE CONDUCTOR TYPE

FOR ALL UNDERGROUND CONNECTIONS LAWN IRRIGATION SYSTEMS

NOTE: FOR DIRECT BURIAL SPLICES 'UL' LISTED 30V WITH WIRE SIZES No. 14, No. 12 AND No. 10. MAXIMUM THREE WIRES PER CONNECTOR.

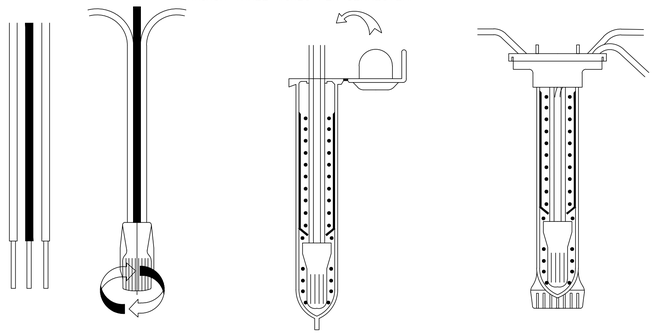

1. STRIP WIRES APPROXIMATELY 1/2" FROM ENDS. TWIST ENDS TOGETHER AND SCREW INTO WIRE NUT. AFTER PRE-TWISTING BARE WIRES 'DIP' ENDS INTO GREASE SLEEVE BEFORE INSTALLING WIRENUT.

2. INSERT THE SPLICE INTO THE GEL-FILLED TUBE. PUSH PAST THE LOCKING FINGERS TO HOLD THE SCOTCHLOCK CONNECTOR IN PLACE.NUT.


3. POSITION WIRE CHANNELS AND SNAP INSULATOR TUBE COVER CLOSED.SCOTCHLOCK CONNECTOR IN PLACE.NUT.

IMPORTANT: TURN OFF POWER BEFORE INSTALLING OR REMOVING CONNECTOR.

3M-DBR/Y6 WIRE CONNECTION DETAIL


Diagrammatic Not To Scale

LEGEND:



NOTES:

1. SLEEVING AT ALL ROADWAY CROSSINGS HAVE BEEN NOTED WITH SIZE AND DEPTH REQUIRED. SLEEVE ALL WALKS OR DRIVEWAYS WITH CL200 PVC SIZED TWICE PIPE DIAMETER CARRIED. WIRE CROSSINGS SHALL BE IN SEPARATE 2" CL200 PVC SLEEVE PARALLEL TO MAINLINE SLEEVE.

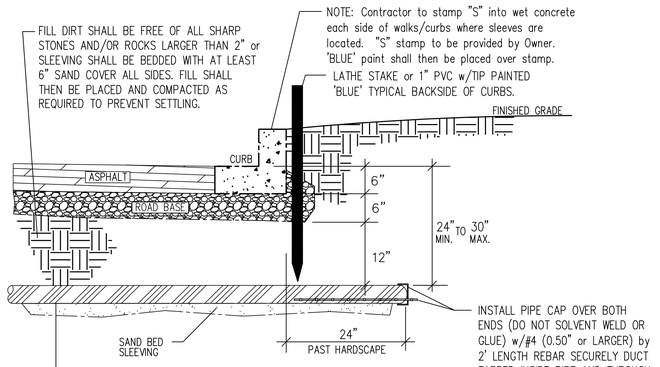

MAXIMUM NUMBER OF WIRES TO BE INSTALLED IN A SCHEDULE 40 PVC SLEEVE

WIRE SIZE (AWG)	2"	2-1/2"	3"	WIRE SIZE (AWG)
14	25	40	56	14
12	20	33	50	12
COMMUNICATION CABLE	2" PVC			

MINIMUM SLEEVE SIZE TO BE INSTALLED IN A SCHEDULE 40 PVC SLEEVE

LATERAL or MAINLINE SIZE	REQ. SLEEVE SIZE & (QUANTITY)
3/4" to 1-1/4"	2" PVC (1)
1-1/2" to 2"	4" PVC (1)
2-1/2" to 3"	6" PVC (1)
4"	8" PVC (1)
6"	12" PVC (1)


NOTE:

1. ALL WIRE SLEEVES TO BE SCHEDULE 40 PVC AND SHALL BE INSTALLED WITH A MINIMUM OFFSET AT THE JOINTS TO PERMIT EASY INSTALLATION AND REMOVAL OF CONTROL AND COMMON WIRES. ALL WIRES SHALL BE INSTALLED IN SLEEVES UNDER THE PAVED AREAS. SLEEVES SHALL EXTEND AT LEAST 12" BEYOND THE EDGES OF THE PAVEMENT. SIZE OF SLEEVES SHALL BE AS SHOWN.

IRRIGATION SLEEVING DETAIL

Diagrammatic Not To Scale

110/120 VOLT & COMMUNICATION WIRE




ALL 120 VOLT WIRING IN CONDUIT TO BE INSTALLED PER STATE AND LOCAL CODES.

14 GAUGE PE CONTROL WIRES	
Number of Wires	Size of Conduit
19	1-1/2" (40 mm)
31	2" (50 MM)
44	2-1/2" (65 MM)
68	3" (75 MM)

12 GAUGE PE CONTROL WIRES	
Number of Wires	Size of Conduit
16	1-1/2" (40 mm)
26	2" (50 MM)
37	2-1/2" (65 MM)
58	3" (75 MM)


CONTROL WIRING



PROVIDE PVC CONDUIT FOR WIRES WHEN TRENCHED ALONE OR ALONG SIDE MAINLINE SLEEVE BENEATH WALKS OR PAVEMENT.

WIRE ONLY

NOTE: USE ONLY PAIGE ELECTRIC P7072D WIRE FOR 2-WIRE DECODER SYSTEMS.



BAND 20" LOOP OF WIRES IN ALL CHANGES OF DIRECTION GREATER THAN 30 DEGREES. UNTIE LOOPS AFTER CONNECTIONS ARE MADE.

WIRE TRENCHING DETAIL

Diagrammatic Not To Scale

NOTES:


1. ALL PIPE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. NO PIPE OR WIRE SHALL BE LOCATED UNDER PAVING UNLESS IT IS SLEEVED.
3. PARALLEL PIPING SHALL NOT BE INSTALLED IN SAME TRENCH BESIDE OR ATOP ONE ANOTHER.
4. BACKFILL MATERIAL SHALL BE FREE OF RUBBISH, VEGETABLE MATTER, FROZEN MATERIALS, AND STONES LARGER THAN 3/8" IN MAXIMUM DIMENSIONS. PROVIDE NOT LESS THAN 6" OF CLEARANCE BETWEEN EACH LATERAL LINE, AND NOT LESS THAN 18" OF CLEARANCE BETWEEN LATERAL LINES AND MAINS.

MAINLINE, LATERAL LINE, AND WIRING

MAINLINE ONLY

LATERAL ONLY (ROTOR ZONES ONLY)

LATERAL ONLY (SPRAY ZONES & 'MP' ROTATOR ZONES ONLY)



- NO PIPING SHALL BE INSTALLED WITH LESS THAN 12" LATERAL CLEARANCE HORIZONTALLY, NOR 6" VERTICALLY (NO SHARED TRENCHES)
- INSTALL ALL MAINLINE AND LATERAL LINE PIPING PER SPECIFICATIONS AND IN FULL ACCORDANCE WITH MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- DEPTHS INDICATED ARE MINIMUM DEPTHS TO TOP OF PIPELINE AND NOT TRENCH DEPTH.
- WIRING AND PIPING SHALL BE INSTALLED IN SEPARATE SLEEVES AT LOCATIONS NOTED ON DRAWINGS. SLEEVE MINIMUM SIZING SHALL BE DOUBLE THE BUNDLE OR PIPE DIAMETER.
- CLEAN BACKFILL SHALL HAVE 90% RELATIVE COMPACTION, CLEAN SOIL, NO BRANCHES, ROOTS AND ROCK FREE.
- CRISSEY WATER LINE MARKING TAPE LABELED 'BURIED WATER PIPE' SHALL BE INSTALLED ALONG DITCH AT CENTERLINE OF MAINLINE PIPES (6"-8" DEEP) WITH AN EXPOSED END AT ALL VALVES AND CONTROLLER.
- SAND BED PIPING 6" ALL SIDES IN ROCKY TRENCH EXCAVATIONS
- IN THE EVENT THAT THE MATERIAL FROM THE EXCAVATION OR TRENCHING IS FOUND TO BE UNSUITABLE FOR USE IN BACKFILL, IT SHALL BE REMOVED FROM THE SITE AND PROPERLY DISPOSED OF BY THE CONTRACTOR AND AT THE CONTRACTOR'S EXPENSE.

PIPE SIZING CHART	
SIZE OF PIPE	MAXIMUM GPM
3/4"	10
1"	15
1-1/2"	35
2"	55
2-1/2"	75
3"	110
4"	225

PVC PIPE TRENCHING DETAIL

Diagrammatic Not To Scale



NOTE:FOR USE BELOW 40°





NOTE:FOR USE ABOVE 40° ONLY



NOTE:FOR USE BELOW 40°





NOTE:FOR USE ABOVE 40° ONLY



NOTE:FOR USE BELOW 40°





NOTE:FOR USE ABOVE 40° ONLY

PROPER WELDING PVC TECHNIQUE:

1. SQUARE CUT PIPE
2. DEBURR WITH UTILITY KNIFE & FINE GRAINED SANDPAPER
3. DRY FIT – MARK WITH PERMANENT MARKER
4. USE PROPER CEMENT & PRIMER (WET AND DRY CONDITIONS)(TEMPERATURE 40±)
5. COAT PIPE WITH PRIMER (BOTH MALE/FEMALE ENDS)(3 TIMES AROUND TO DEPTH OF FITTING +)
6. IMMEDIATELY APPLY 3 COATS CEMENT (MALE EXTERIOR PIPE END ONLY)
7. PUSH JOINT TOGETHER TO DEPTH PERMANENT MARK AND GIVE AT LEAST 1/4 TURN
8. HOLD TIGHT AT LEAST 30 SECONDS.
9. WIPE EXCESS CEMENT FROM EXPOSED JOINT WITH RAG/PAPER TOWEL/CLOTH.

PVC CEMENT AND PRIMER DETAIL

Diagrammatic Not To Scale

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC. The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC. All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 DESIGNER COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 18th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 8 OF 11 SHEETS

FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS MC1 JANUARY.DWG 01-17-24 10:00:00AM


NOTES & PROCEDURES

THE FOLLOWING ACTIVITIES ARE PROHIBITED WITHIN THE LIMITS OF THE CRITICAL ROOT ZONE (CRZ) OF ANY PROTECTED TREE SUBJECT TO THE PROVISIONS OF THE TREE PRESERVATION ORDINANCE. THE FOLLOWING PROCEDURES SHALL BE FOLLOWED ON ALL TYPES OF CONSTRUCTION PROJECTS (INCLUDING RESIDENTIAL, COMMERCIAL, AND MUNICIPAL / PUBLIC DOMAIN PROJECTS).

1. MATERIAL STORAGE: NO STORAGE OR PLACEMENT OF MATERIALS INTENDED FOR USE IN CONSTRUCTION OR WASTE MATERIALS ACCUMULATED DUE TO EXCAVATION OR DEMOLITION SHALL BE PLACED WITHIN THE LIMITS OF THE CRITICAL ROOT ZONE.
2. EQUIPMENT CLEANING/LIQUID DISPOSAL: NO EQUIPMENT SHALL BE CLEANED OR OTHER LIQUIDS, INCLUDING, WITHOUT LIMITATION, PAINT, OIL, SOLVENTS, ASPHALT, CONCRETE, MORTAR OR SIMILAR MATERIALS DEPOSITED OR ALLOWED TO FLOW INTO CRITICAL ROOT ZONE OF A PROTECTED TREE.
3. TREE ATTACHMENTS: NO SIGNS, WIRES, OR OTHER ATTACHMENTS, OTHER THAN THOSE OF A PROTECTIVE NATURE, SHALL BE ATTACHED TO ANY PROTECTED TREE.
4. VEHICULAR TRAFFIC: NO VEHICULAR AND/OR CONSTRUCTION EQUIPMENT TRAFFIC OR PARKING SHALL TAKE PLACE WITHIN CRITICAL ROOT ZONE OF ANY PROTECTED TREE.
5. GRADE CHANGES: NO GRADE CHANGES SHALL BE ALLOWED WITHIN THE LIMITS OF THE CRITICAL ROOT ZONE OF ANY PROTECTED TREE UNLESS ADEQUATE PROTECTIVE CONSTRUCTION METHODS ARE APPROVED IN ADVANCE IN WRITING BY COLORADO SPRINGS FORESTRY DEPARTMENT.
6. NO HEAVY EQUIPMENT, INCLUDING BUT NOT LIMITED TO TRUCKS, TRAILERS, BULLDOZERS, BOBCAT TRACTORS, TRENCHERS, COMPRESSORS AND HOISTS, SHALL BE ALLOWED INSIDE THE DRIP LINE OF ANY PROTECTED TREE ON ANY CONSTRUCTION SITE WITHOUT WRITTEN PERMISSION OF THE COLORADO SPRINGS FORESTRY DEPARTMENT.

THE FOLLOWING PROCEDURES SHALL BE FOLLOWED FOR ALL TYPES OF CONSTRUCTION.

1. PROTECTIVE FENCING: PRIOR TO COMMENCING CONSTRUCTION, THE CONTRACTOR OR SUB CONTRACTOR SHALL CONSTRUCT AND MAINTAIN, FOR EACH PROTECTED TREE ON THE CONSTRUCTION SITE, A PROTECTIVE FENCING WHICH ENCIRCLES THE OUTER LIMITS OF THE CRITICAL ROOT ZONE OF THE TREE TO PROTECT IT FROM CONSTRUCTION ACTIVITY.
2. ALL PROTECTIVE FENCING SHALL BE IN PLACE PRIOR TO COMMENCEMENT OF ANY SITE WORK AND REMAIN IN PLACE UNTIL ALL EXTERIOR CONSTRUCTION ACTIVITY AT THE SITE HAS BEEN COMPLETED.
3. PROTECTIVE FENCING SHALL BE AT LEAST FOUR (4) FEET HIGH, CLEARLY VISIBLE, AND SHALL HAVE A TREE PROTECTION SIGN AFFIXED TO THE FENCE EVERY TWENTY (20) FEET IN SUCH A MANNER TO BE CLEARLY VISIBLE TO WORKERS ON THE SITE.
4. THE USE OF ORANGE VINYL CONSTRUCTION FENCING OR OTHER SIMILAR FENCING IS GENERALLY PERMITTED ONLY IF THERE IS NO CONSTRUCTION OR VEHICULAR ACTIVITY WITHIN TEN (10) FEET OF THE FENCE. IF CONSTRUCTION ACTIVITY OR VEHICULAR TRAFFIC IS EXPECTED WITHIN TEN (10) FEET OF THE FENCE, THE FENCE SHALL BE CONSTRUCTED OF CHAIN LINK OR OTHER SIMILAR MATERIAL, WOODEN MATERIAL OR SEMI-RIGID VINYL TAPE FENCING SUPPORTED WITH A TOP WIRE OR EQUIVALENT SUPPORT MATERIAL AFFIXED TO METAL OR WOODEN POSTS, ALL OF WHICH SHALL BE SIX (6) FEET IN HEIGHT.
5. ALL PROTECTIVE FENCING SHALL BE SUPPORTED AT TEN (10') FOOT INTERVALS BY APPROVED METHODS SUFFICIENT ENOUGH TO KEEP THE FENCE UPRIGHT AND IN PLACE FOR THE DURATION OF THE CONSTRUCTION
6. THE RESPONSIBLE PARTY/CONSTRUCTION CONTRACTOR SHALL CAUSE THE REQUIRED FENCING TO BE INSTALLED AND MAINTAINED FOR THE DURATION OF THE CONSTRUCTION.
7. FOR PERMITS INVOLVING TRENCHING SUCH AS IRRIGATION SYSTEMS OR UNDERGROUND ELECTRICAL WORK, THE APPLICANT SHALL PROVIDE SUFFICIENT PLANS TO PROVIDE PROTECTION OF THE TREES IN THE VICINITY OF THE WORK.
8. THE 'TREE PROTECTION SIGN' TREE PRESERVATION INSTRUCTION DETAIL SHEET AND THE APPROVED TREE CONSERVATION PLAN SHALL BE POSTED AT EACH ENTRANCE TO THE SUBJECT PROPERTY UPON WHICH ONE OR MORE TREES SUBJECT TO THE PERMIT IS SITUATED, AND AT ANY OTHER LOCATION DESIGNATED BY CITY OF COLORADO SPRINGS FORESTRY DEPARTMENT.
9. ALL OF THE ABOVE CONDITIONS MUST BE ADHERED TO AND INSPECTED BY CITY OF COLORADO SPRINGS FORESTRY DEPARTMENT PRIOR TO THE ISSUANCE OF ANY PERMITS..

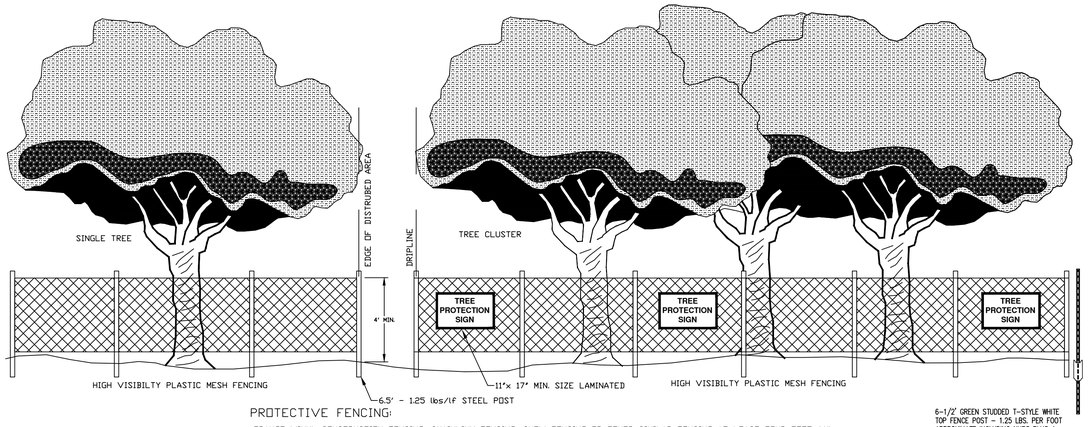

PROTECTIVE FENCING:

ORANGE VINYL CONSTRUCTION FENCING, CHAINLINK FENCING, SNOW FENCING OR OTHER SIMILAR FENCING AT LEAST FOUR FEET (4') HIGH AND SUPPORTED AT A MAXIMUM OF TEN-FOOT (10') INTERVALS BY APPROVED METHODS SUFFICENT ENOUGH TO KEEP THE FENCE UPRIGHT AND IN PLACE. THE FENCING SHALL BE OF A HIGHLY VISIBLE MATERIAL, AND SHALL HAVE TREE PROTECTION SIGN AFFIXED TO THE FENCE EVERY TWENTY (20) FEET IN SUCH A MANNER TO BE CLEARLY VISIBLE TO WORKERS ON-SITE.


6-1/2' GREEN STUDDED T-STYLE WHITE TOP FENCE POST - 1.25 LBS. PER FOOT APPROXIMATE INCLUDING NUBS PLUS A STABILIZING PLATE APPROX ONE FOOT FROM BOTTOM WEIGHS APPROX 0.5 LBS., TOTAL WEIGHT 8.3 LBS. APPROX.

PRIOR TO CONSTRUCTION:

THE CONTRACTOR OR SUBCONTRACTOR SHALL CONSTRUCT AND MAINTAIN, FOR EACH PROTECTED TREE OR GROUP OF TREES ON A CONSTRUCTION SITE, A PROTECTIVE FENCING WHICH ENCIRCLES THE OUTER LIMITS OF THE CRITICAL ROOT ZONE (CRZ) OF THE TREES TO PROTECT THEM FROM CONSTRUCTION ACTIVITY. ALL PROTECTIVE FENCING SHALL BE IN PLACE PRIOR TO COMMENCEMENT OF ANY SITE WORK AND REMAIN IN PLACE UNTIL ALL EXTERIOR WORK HAS BEEN COMPLETED.

TYPICAL FENCING TREE PROTECTION DETAIL


Diagrammatic Not To Scale

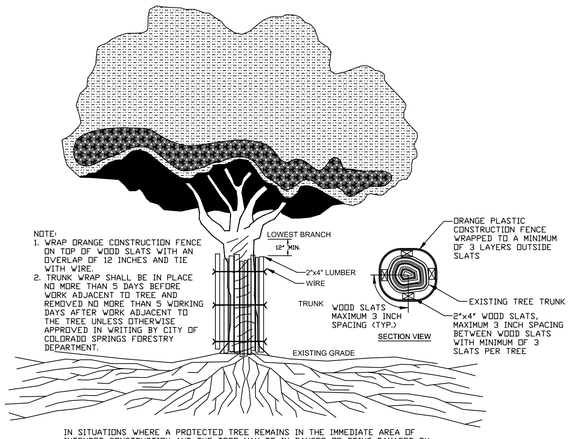


IN SITUATIONS WHERE A PROTECTED TREE REMAINS IN THE IMMEDIATE AREA OF INTENDED CONSTRUCTION AND THE TREE MAY BE IN DANGER OF BEING DAMAGED BY CONSTRUCTION EQUIPMENT OR OTHER ACTIVITY, THE CONTRACTOR OR SUB-CONTRACTOR SHALL PROTECT THE TREE WITH 2"x4" LUMBER ENCIRCLED WITH WIRE OR OTHER MEANS THAT DO NOT DAMAGE THE TREE. THE INTENT IS TO PROTECT THE TREE AGAINST INCIDENTAL CONTACT BY LARGE CONSTRUCTION EQUIPMENT.

TYPICAL BARK PROTECTION DETAIL

Diagrammatic Not To Scale



PLAN VIEW



ELEVATION VIEW

REQUIRED INSTALLATION IF IRRIGATION TRENCHES REQUIRED WITHIN DRIPLINE.

1. TREE PROTECTION MEASURES MUST BE IN PLACE BEFORE CONSTRUCTION, DEMOLITION, GRADING ACTIVITIES AND/OR IRRIGATION TRENCHING COMMENCE.
2. TREES CALLED OUT FOR PRESERVATION SHALL BE FENCED AT THE DRIPLINE ERECTION OF FENCE PROTECTION AROUND TREES SHALL BE MINIMUM 6' LONG #5 REBAR OR T-POSTS DRIVEN 1' INTO THE GROUND 8' O.C. AT DRIPLINE. ATTACH ORANGE MESH BARRIER WITH NYLON ZIP TIES OR TWISTED WIRE TO REBAR OR T-POSTS. FENCING MAY OCCUR AT THE COMBINED DRIPLINES OF GROVES OF TREES. PLACE 4'-6" BARK MULCH BENEATH DRIPLINES OF TREES TO BE PRESERVED. KEEP BARK 2-3 FEET FROM TREE TRUCKS.
3. NO GRADING SHALL OCCUR WITHIN THE DRIPLINES/FENCED AREA OF EXISTING TREES.
4. NO CONSTRUCTION MATERIALS OR CONSTRUCTION VEHICLES MAY BE STORED WITHIN DRIPLINES/FENCED AREAS OF EXISTING TREES.
5. CONSTRUCTION VEHICLES OR MACHINERY MAY NOT PASS BETWEEN TWO OR MORE EXISTING TREES IDENTIFIED FOR PRESERVATION IF THEIR CANOPIES ARE WITHIN 10 FEET OF TOUCHING. ADDITIONAL FENCING MAY BE REQUIRED AS NEEDED TO SATISFY THIS REQUIREMENT.
6. CONTRACTOR IS REQUIRED TO HAVE ARBORIST CERTIFIED BY THE INTERNATIONAL SOCIETY OF ARBORICULTURE (ISA), APPROVED BY CSPR, ON SITE IF SITE CONSTRUCTION EFFORTS REQUIRE REMOVAL OF EXISTING ROOTS OR BRANCH PRUNING. ROOTS APPROVED FOR CUTTING MUST BE CUT CLEANLY WITH A SAW. RIPPING OR SHREDDING ROOTS SUBJECT TO FINE/PENLTY.
7. UNAUTHORIZED TREE REMOVAL IS SUBJECT TO REPLACEMENT EQUAL TO THE APPRAISED VALUE OF THE TREE LOST.
8. THE CONTRACTOR IS REQUIRED TO WATER, AND ATTEND TO OTHER MAINTENANCE NEEDS OF EXISTING TREES TO MAINTAIN HEALTHY GROWTH THROUGHOUT THE CONSTRUCTION PERIOD. TREES SHALL BE WATERED ACCORDING TO WEATHER AND TREE SPECIES REQUIREMENTS.
9. ALL IRRIGATION TRENCHING WITHIN 'TREE PROTECTION LIMITS DEFINED ABOVE SHALL BE 'HAND EXCAVATED' AVOIDING AS MUCH DAMAGE TO ROOTS AS POSSIBLE.

EXISTING TREE PROTECTION/TRENCHING DETAIL


Diagrammatic Not To Scale

TREE PROTECTION ZONES


The Tree Protection Zone (TPZ) shall be equal to eighteen inches (24") radially from the tree for every one inch of trunk diameter at breast height (DBH = 4.5' above soil line).

The Critical Root Zone (CRZ) shall be equal to twelve inches (12") radially from the tree for every one inch of trunk diameter at breast height (DBH = 4.5' above soil line).

The Structural Root Zone (SRZ) shall be equal to six inches (6") radially from the tree for every one inch of trunk diameter at breast height (DBH = 4.5' above soil line).

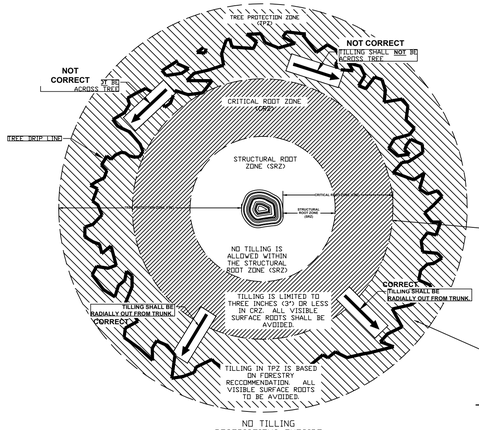

Plan

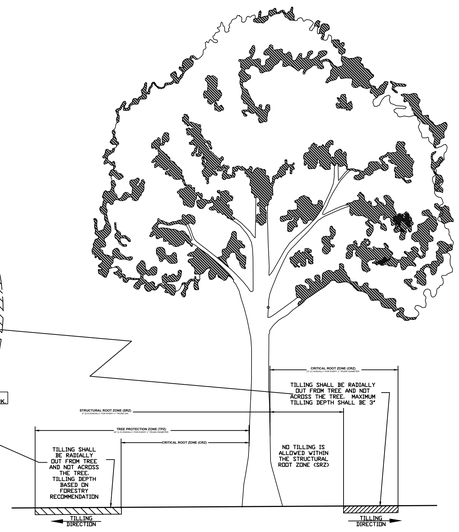


Elevation

SOIL PREPARATION WITHIN TREE PROTECTION ZONES

TYPICAL PLAN/ELEVATION VIEWS TREE PROTECTION DETAIL

Diagrammatic Not To Scale

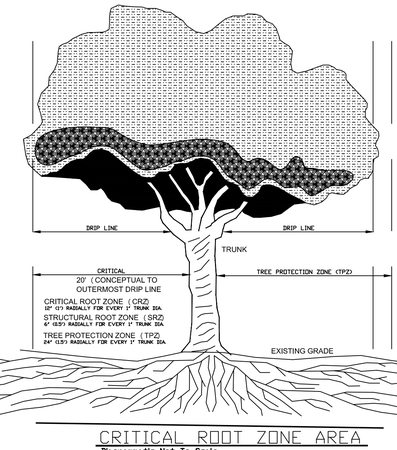

CRITICAL ROOT ZONE AREA

Diagrammatic Not To Scale

NOTE: THE MOST CURRENT CITY TREE PROTECTION STANDARDS CAN BE FOUND AT - https://flycos.coloradosprings.gov/document/treeprotectiondetailsfinalfromdw.pdf

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH — COLORADO — 000062 — REGISTERED LANDSCAPE ARCHITECT

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 9th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
385-6550
(719)


COLORADO SPRINGS — OLYMPIC CITY USA

TITLE: CSPR STANDARD IRRIGATION DETAILS 2024

SHEET 9 OF 11 SHEETS


FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAN2024FINAL.DWG 01-05-24 10:06:08AM

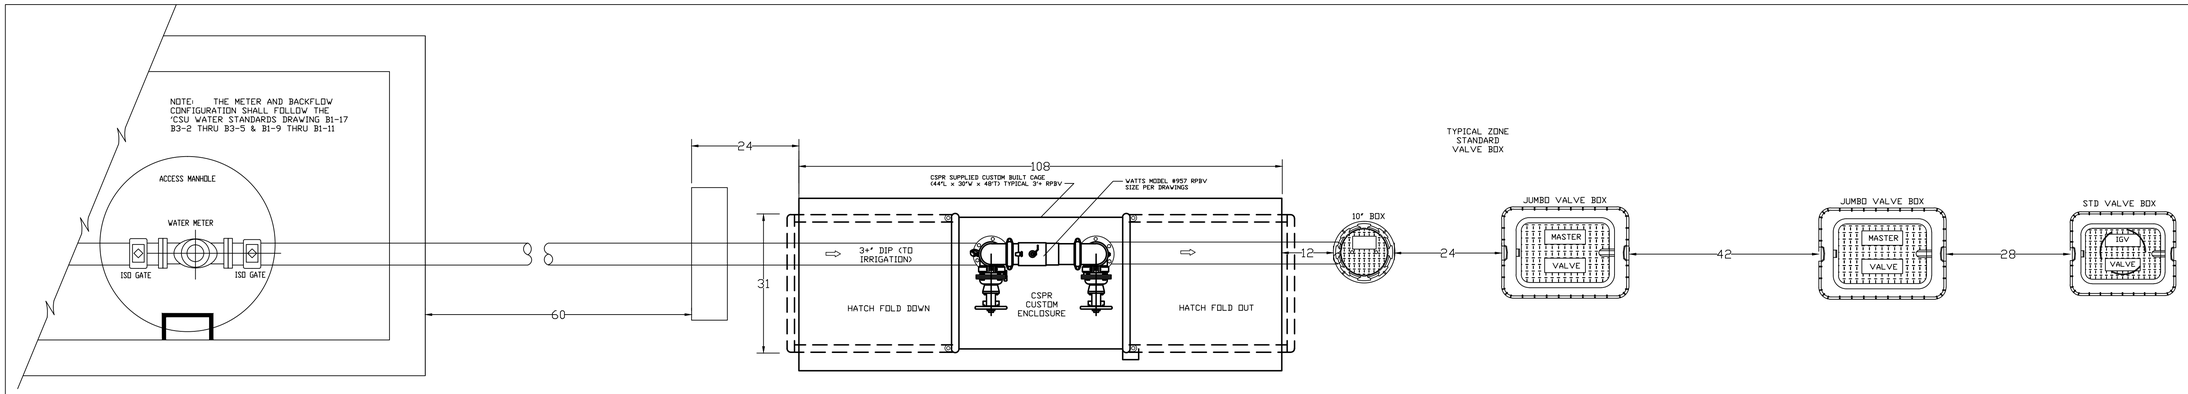


D TYPICAL TAP VALVE BOX LAYOUT 3" or 4"

SCALE: 3/4" = 1'-0"

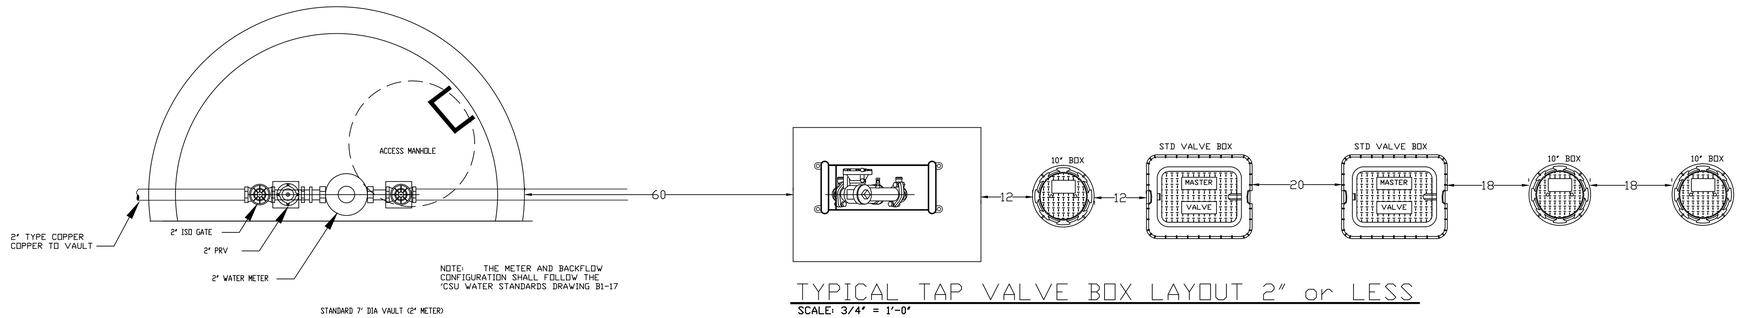

TYPICAL TAP VALVE BOX LAYOUT 2" or LESS

SCALE: 3/4" = 1'-0"

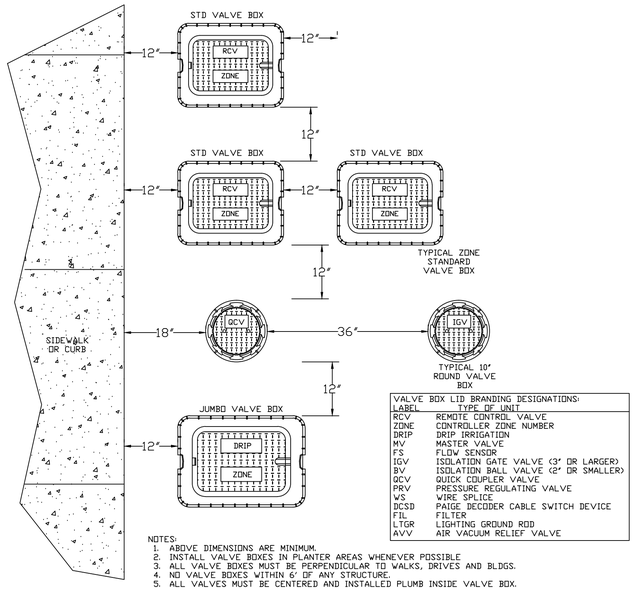

VALVE BOX LID BRANDING DESIGNATIONS:	
LABEL	TYPE OF UNIT
RCV	REMOTE CONTROL VALVE
ZONE	CONTROLLER ZONE NUMBER
DRIP	DRIP IRRIGATION
MV	MASTER VALVE
FS	FLOW SENSOR
IGV	ISOLATION GATE VALVE (3" OR LARGER)
BV	ISOLATION BALL VALVE (2" OR SMALLER)
QCV	QUICK COUPLER VALVE
PRV	PRESSURE REGULATING VALVE
WS	WIRE SPLICE
DCSD	PAIGE DECODER CABLE SWITCH DEVICE
FIL	FILTER
LTGR	LIGHTING GROUND ROD
AVV	AIR VACUUM RELIEF VALVE

NOTES:
1. ABOVE DIMENSIONS ARE MINIMUM.
2. INSTALL VALVE BOXES IN PLANTER AREAS WHENEVER POSSIBLE
3. ALL VALVE BOXES MUST BE PERPENDICULAR TO WALKS, DRIVES AND BLDGS.
4. NO VALVE BOXES WITHIN 6' OF ANY STRUCTURE.
5. ALL VALVES MUST BE CENTERED AND INSTALLED PLUMB INSIDE VALVE BOX.

TYPICAL VALVE BOX LAYOUT

SCALE: 3/4" = 1'-0"

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS HCI JAMES\#TWAL.DWG 02-25-24 10:02:04AM

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR STANDARD VALVE BOX STANDARDS 2024

SHEET 10 OF 11 SHEETS

FILE NUMBER:

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.


Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 RESIDENTIAL COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908


NOTE: THIS DESIGN SHALL BE USED ONLY FOR LOADS IMPOSED BY PEDESTRIAN TRAFFIC, SEE CHAPTER 7.05.


MAIN	VALVE TYPE	MANUFACTURER
3/4" or 1"	BALL	APOLLO #70-108

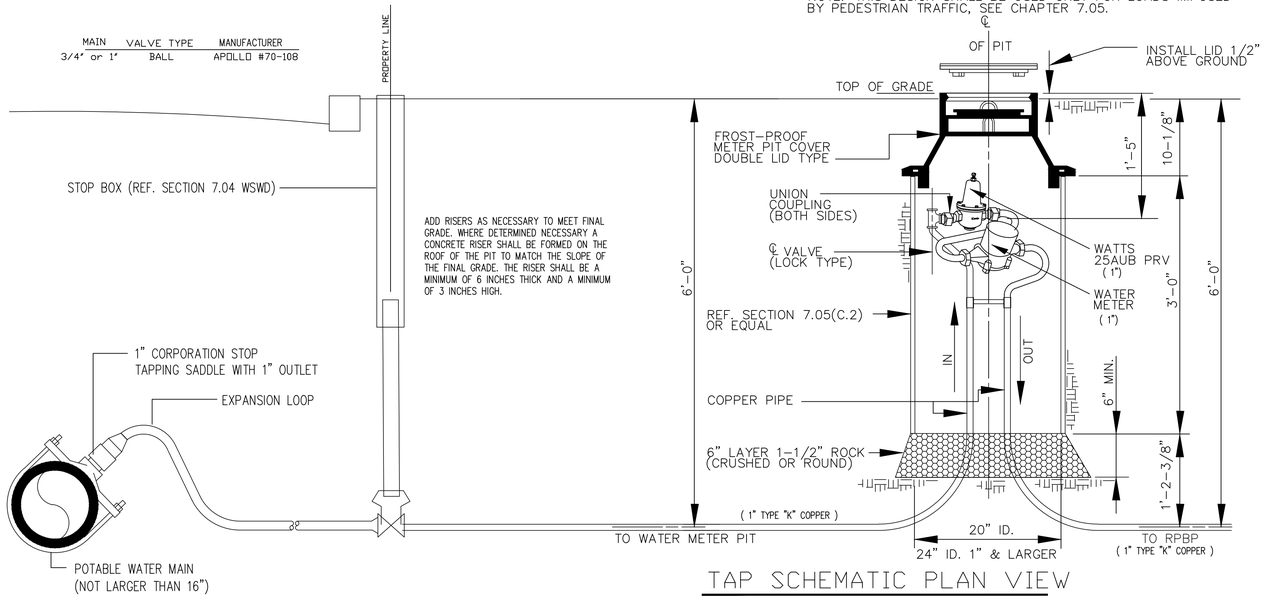

TAP SCHEMATIC PLAN VIEW

DIAGRAMMACTIC NOT TO SCALE

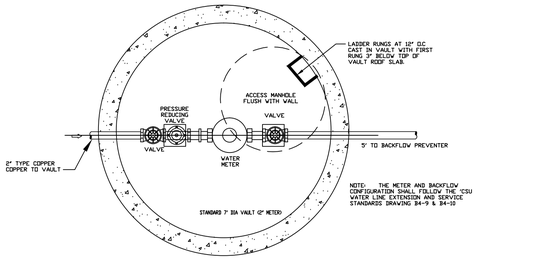

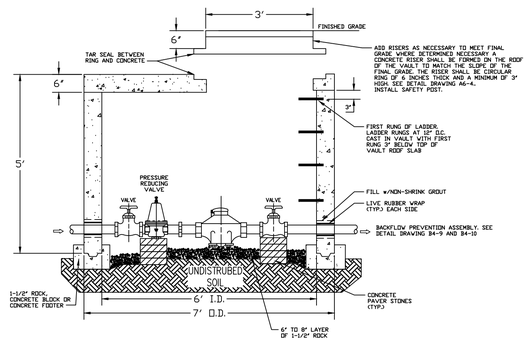


NOTES:
1. REFER TO DETAIL DRAWINGS B4-4, B4-5 AND B4-8 FOR METER INSTALLATION REQUIREMENTS.
2. THE METER MUST BE INSTALLED WITH THE CLEARANCE DIMENSIONS AS SHOWN IN THE DETAIL DRAWINGS B4-19 THRU B4-22. ONE SIDE OF THE METER SHALL BE FREE FROM ANY OBSTRUCTION. 3' MINIMUM CLEARANCE IS REQUIRED ABOVE AND IN FRONT OF THE METER.
3. THE PRESSURE REDUCING VALVE IS TO BE INSTALLED ON THE INLET SIDE OF THE METER.
4. PRECAST CONCRETE VAULT SHALL BE DESIGNED FOR HS-20 TRAFFIC LOADING CONDITIONS AND 300 PSF SURCHARG LOAD.
5. SEE DETAIL DRAWING B-5 FOR FRAME DIMENSIONS AND STRUCTURAL REQUIREMENTS.
6. NO DRAIN VALVES, OUTLETS OR BRANCH LINES SHALL BE LOCATED BEFORE THE APPROVED BACKFLOW PREVENTION ASSEMBLY.

REFER TO COLORADO SPRINGS UTILITIES 'WATER LINE EXTENSION AND SERVICE STANDARDS' FOR UPDATED INFORMATION

TYPICAL METER PIT (2")


SCALE: 6' = 1'-0"

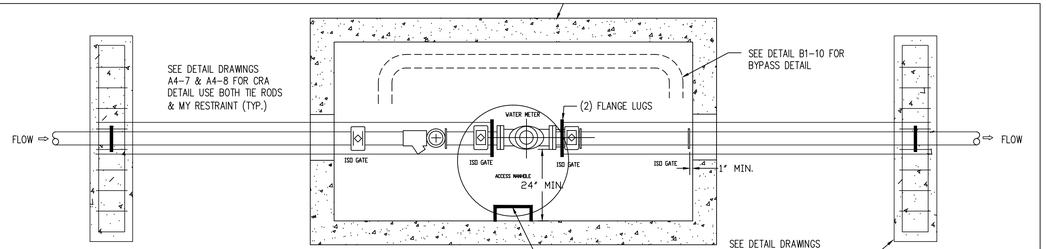

TYPICAL METER PIT 3"

SCALE: 6' = 1'-0"

REFER TO COLORADO SPRINGS UTILITIES 'WATER LINE EXTENSION AND SERVICE STANDARDS' FOR UPDATED INFORMATION

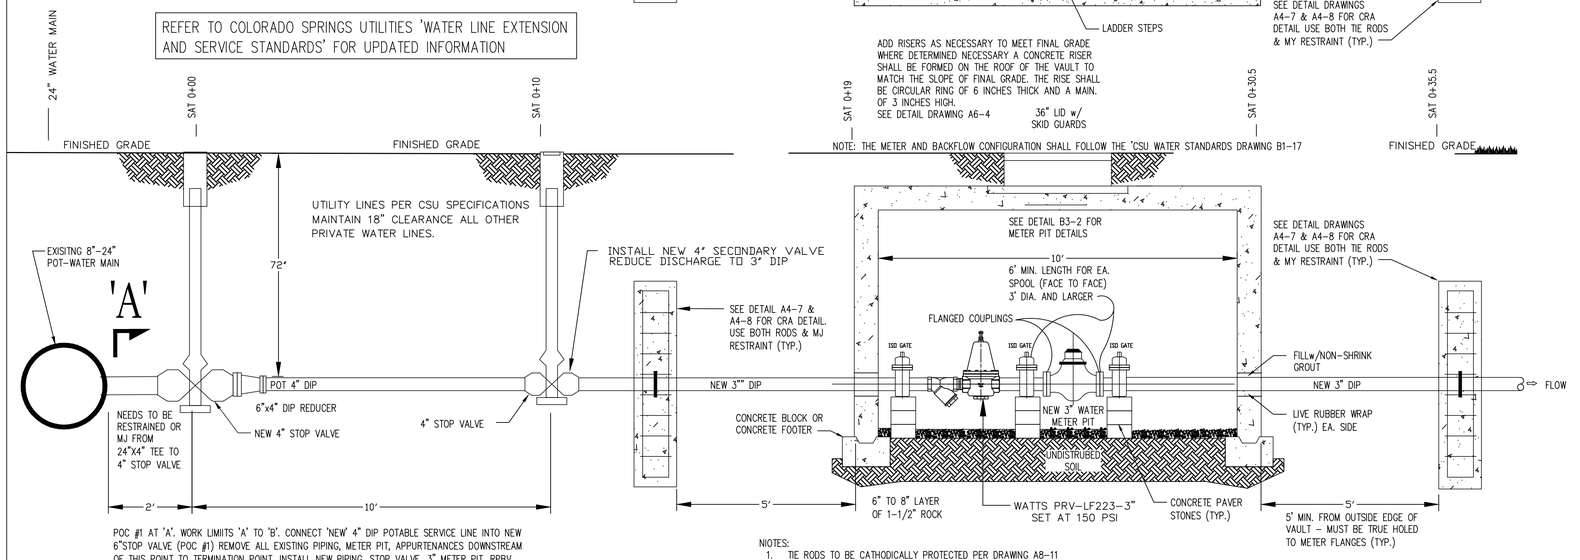

POC #1 AT 'A'. WORK LIMITS 'A' TO 'B'. CONNECT 'NEW' 4" DIP POTABLE SERVICE LINE INTO NEW 6"STOP VALVE (POC #1) REMOVE ALL EXISTING PIPING, METER PIT, APPURTENANCES DOWNSTREAM OF THIS POINT TO TERMINATION POINT. INSTALL NEW PIPING, STOP VALVE, 3" METER PIT, RPBV, MASTER VALVE AND FLOW SENSOR PER ABOVE DETAIL. CONNECT NEW WORK TO NEW 4" CLASS 200 PVC AT TERMINAL POINT AS REQUIRED.

NIOTES:
1. TIE RODS TO BE CATHODICALLY PROTECTED PER DRAWING A8-11
2. PRECAST CONCRETE VAULTS SHALL BE DESIGNED FOR HS-20 TRAFFIC LOADING CONDITIONS AND 300 PSF SURCHARGE LOAD.
3. SEE DETAIL DRAWING B-3 FOR FOOTER DIMENSIONS AND STRUCTURAL REQUIREMENTS.
4. NO DRAIN VAVLE OUTLETS OR BRANCH LINES SHALL BE LOCATED BEFORE THE APPROVED BACKFLOW ASSEMBLY.
5. BACKFLOW PREVENTION ASSEMBLY MUST BE LOCATED NO MORE THAN 10' FROM OUTSIDE EDGE OF VAULT.

REFER TO COLORADO SPRINGS UTILITIES 'WATER LINE EXTENSION AND SERVICE STANDARDS' FOR UPDATED INFORMATION

NOTE: REFER TO THE MOST CURRENT COLORADO SPRINGS UTILITY 'Water Line Extension and Service Standards' (CURRENT AS OF JAN. 1, 2023) FOR MODIFICATIONS/UPDATES. THEY CAN BE FOUND AT - https://www.csu.org/Pages/ConstructionStandards.aspx

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC. The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2024 HCI, LLC. All rights reserved.

JAMES ROBERT HACKWORTH — 000062 — DESIGNER — COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: JAN 5th, 2021
SCALE: AS NOTED
REVISIONS: JAN 24th, 2024

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA

TITLE: CSPR STANDARD METER PIT STANDARDS 2024

SHEET 11 OF 11 SHEETS

FILE NUMBER:

D:\CSPR\2023 SPECIFICATIONS\CSPR STD DETAILS M21 JAN2024FINAL.DWG 01-25-24 10:03:08AM


APPENDIX D – CSPR IRRIGATION REPAIRS STANDARDS

FOLLOWS THIS PAGE

NOTES

- All repairs shall be made to bring infrastructure back to pre-existing conditions with like materials. (see Parks Standard Details) Any alterations to recommended repairs must be approved by a Parks representative prior to repairs being made.
- Any damaged turf and landscapes shall be restored to pre-existing conditions. Any modifications to grades, curb heights, and walk elevations must be integrated with surrounding conditions to create a maintainable area.
- All repairs are to be made by qualified professional technicians; all electrical service wire repairs shall be done by a licensed electrician. All repairs will be made in a timely manner so as to not adversely disrupt or cause damage to park programs, resources, operations and infrastructure. For instance, bluegrass turf may not survive periods without irrigation in very hot, dry windy weather, or, park security lighting must be maintained for public safety, etc.
- 3M DBR/Y-6 (or equivalent) wire connectors with high impact, UV-resistant polypropylene tube prefilled with moisture-resistant grease, may be used for irrigation field wire repairs. Under NO circumstances are they to be used for long term direct bury applications, especially under any sort of hardscapes. All splices must be enclosed in an approved valve box with serviceable lengths of wire per the City's typical splice box details.
- 3M™ Scotchcast™ 3570G-N connector sealing packs MUST be used for all direct bury applications and be installed per Manufacturer's instructions. Any substitutions for this product must be approved by a Parks representative PRIOR to installation. A Parks irrigation Technician must be on site during the installation and burying of all underground splices.
- When repairing PVC laterals or mainlines, the pipe must be cut back far enough that a clean cut can be made where no cracks or stress is visible, and no debris can be seen within the pipe.
- ALWAYS replace PVC fittings or pipe with a class/schedule of equal or greater strength and pressure rating than what was removed. Anything less than Class 200 will not be accepted.
- A Spears or equivalent slip-fix (telescopic repair coupling) may be used for PVC repairs 2½"in diameter or smaller and must be solvent-welded per City and Manufacturer's specifications. All other couplings, tees, and fittings of any sort must be LASCO or equivalent and be a minimum of SCH 40.
- Any repairs 3"or larger MUST use mechanical dresser couplings, HARCO (or equivalent) ductile iron tees/elbows/etc. and be installed per City and Manufacturer's specifications.
- Carson Industries 12"deep Standard commercial boxes to be installed per City's Typical Zone Valve Box Detail. Carson Industries 12"deep Jumbo commercial boxes will be used for larger drip valve assemblies, Master Valves, Flow Sensors or any other application that requires a larger box and installed per City Typical Details.
- Carson Industries 10"Round commercial boxes will be used for Quick Coupler assemblies or small wire splices installed per the City's Typical Details. Large Splices need to be in a 12"deep Standard box.
- Any substitutions will need approval from a City Representative PRIOR to installation.
- Completed underground repairs shall remain exposed for inspection by a Parks representative; after acceptance by Parks, contractor may bury repairs.
- A Parks representative will schedule a post-construction walk-through. All debris, construction materials, signage, and construction equipment shall be removed before this time.
- Landscape restorations and irrigation repairs shall have a warranty through one full growing season. Infrastructure systems shall be charged and tested, and any issues will be noted and repaired before project sign-off. If walk-through is after irrigation systems have been winterized, then system testing shall take place as soon as possible in the spring and all irrigation issues rectified prior to May 1. Project sign-off shall occur after all issues have been resolved.

NOTES:
1) BOXES TO BE PARALLEL AND PERPENDICULAR TO WALKS, EDGES, CURBS, ETC.
2) ALL VALVE BOX LIDS SHALL BE EMBOSSED WITH CORRESPONDING ZONE NUMBER OR EQUIPMENT TYPE (ie MV, FS, QCV, GV, ETC.)

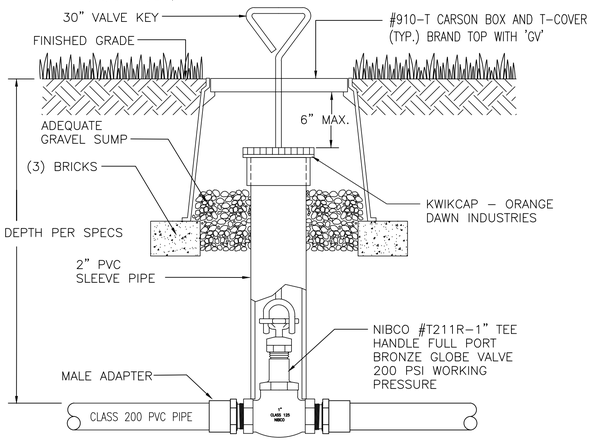


G ISO GATE VALVE DETAIL (2.5" or less)

Diagrammatic Not To Scale

DIRECT BURY/30V SINGLE CONDUCTOR TYPE

FOR ALL UNDERGROUND CONNECTIONS LAWN IRRIGATION SYSTEMS

NOTE: FOR DIRECT BURIAL SPLICES 'UL' LISTED 30V WITH WIRE SIZES No. 14, No. 12 AND No. 10. MAXIMUM THREE WIRES PER CONNECTOR.

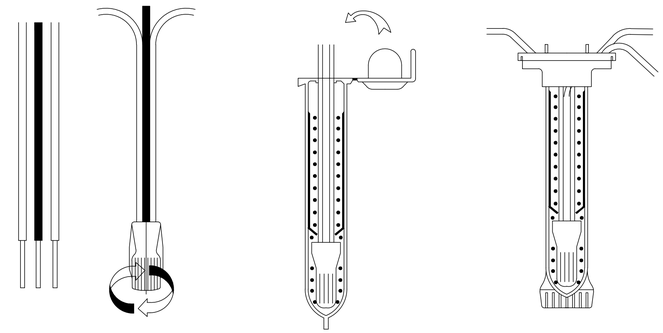


1. STRIP WIRES APPROXIMATELY 1/2" FROM ENDS. TWIST ENDS TOGETHER AND SCREW INTO WIRE NUT. AFTER PRE-TWISTING BARE WIRES 'DIP' ENDS INTO GREASE SLEEVE BEFORE INSTALLING WIRENUT.
2. INSERT THE SPLICE INTO THE GEL-FILLED TUBE. PUSH PAST THE LOCKING FINGERS TO HOLD THE SCOTCHLOCK CONNECTOR IN PLACE.NUT.
3. POSITION WIRE CHANNELS AND SNAP INSULATOR TUBE COVER CLOSED.SCOTCHLOCK CONNECTOR IN PLACE.NUT.

IMPORTANT: TURN OFF POWER BEFORE INSTALLING OR REMOVING CONNECTOR.

D 3M-DBR/Y6 WIRE CONNECTION DETAIL


Diagrammatic Not To Scale

NOTES:
1) BOXES TO BE PARALLEL AND PERPENDICULAR TO WALKS, EDGES, CURBS, ETC.
2) ALL VALVE BOX LIDS SHALL BE EMBOSSED WITH CORRESPONDING ZONE NUMBER OR EQUIPMENT TYPE (ie MV, FS, QCV, GV, ETC.).

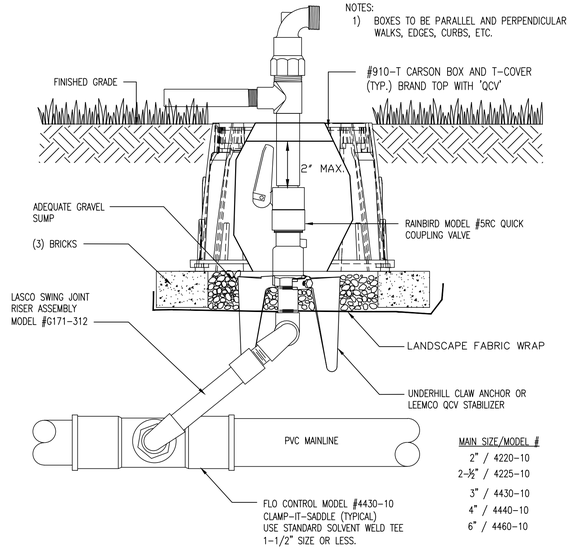

QCV VALVE DETAIL

Diagrammatic Not To Scale

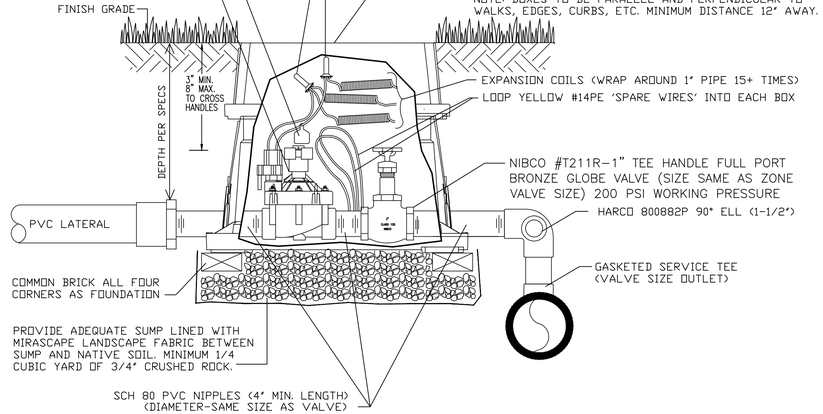

2" or SMALLER ZONE VALVE/DECODER DETAIL

Diagrammatic Not To Scale

VERIFICATION:

1. Installer shall adjust watering schedules on cin controller to repentish 'field capacity' for a period of 2 weeks.
2. Readjust zone timing to return of normal irrigation schedule.

Know what's below. Call before you dig. 811
CALL BEFORE YOU DIG... 48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH CERTIFIED IRRIGATION DESIGNER 000062 COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM DATA OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 19th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940


COLORADO SPRINGS OLYMPIC CITY USA


TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS

SHEET 1 OF 5 SHEETS

FILE NUMBER:

D:\CSPR\2021 CSPR JAMES\REPAIR STANDARDS\CSPR REPAIR STANDARDSDETAILS HCI MAY2021FINAL.DVG 05-17-21 14:16PM



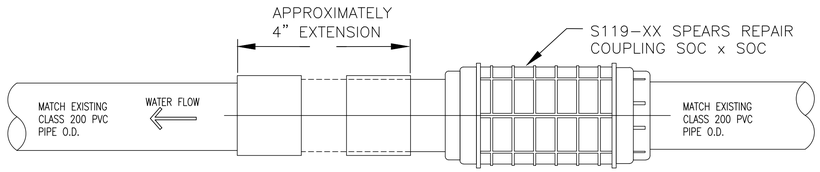


INSTALLATION INSTRUCTIONS:

1. CLEAN ALL DIRT OR LOOSE FILINGS FROM END EXISTING PIPE ENDS. CHECK SURFACES WHERE GASKET CONTACTS THE PIPE TO ENSURE THERE ARE NO IMPERFECTIONS SUCH AS GOUGES OR GROOVES THAT WILL IMPAIR THE PERFORMANCE OF SOLVENT WELD FITTING..
2. FOR REPAIR COUPLINGS, MEASURE APPROXIMATE DISTANCE NEEDING TO BE SPANNED. SUBTRACT LENGTH OF COUPLING PLUS 4" EQUALS LENGTH OF PIPE SECTION TO BE SPANNED.
3. SOLVENT WELD NON-ADJUSTABLE END ON ONE EACH END. USE CHRISTY'S HOT BLUE CEMENT & PURPLE PRIMER.
4. TEST LENGTH IN PLACE. ENDS SHOULD BE WITHIN 4" OF EXISTING PIPE.
5. EXTEND COUPLER END AND SOLVENT WELD AS REQUIRED USING 1/4 TURN TO EVENLY DISTRIBUTE CEMENT.
6. WIPE EXCESS CEMENT AND PRIMER FROM JOINT WITH CLEAN RAG.
7. COUPLING ARE 'PRESSURE SEAL ONLY'. REPAIR MUST BE PROPERLY ANCHORED AT TERMINAL POINTS BOTH ENDS OF EXISTING PIPING.

(F) SPEARS 'SLIP-FIX' COUPLING DETAIL SIZE 2-1/2" OR SMALLER PVC PIPE

Diagrammatic Not To Scale

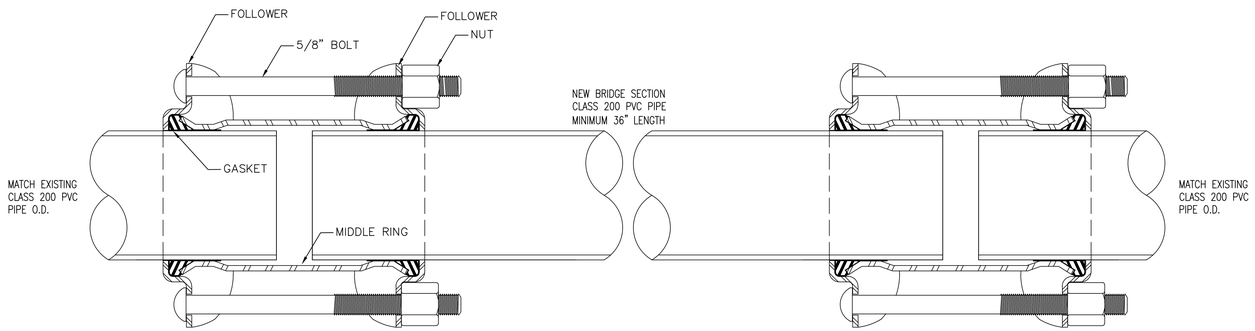

INSTALLATION INSTRUCTIONS:


1. CLEAN ALL DIRT OR LOOSE SCAPE FROM END EXISTING PIPE ENDS. CHECK SURFACES WHERE GASKET CONTACTS THE PIPE TO ENSURE THERE ARE NO IMPERFECTIONS SUCH AS GOUGES OR GROOVES THAT WILL IMPAIR THE PERFORMANCE OF THE GASKET SEAL.
2. FOR REPAIR COUPLINGS, MEASURE BACK ON EACH PIPE END ONE-HALF OF THE MIDDLE RING LENGTH PLUS TWO INCHES AND PLACE MARK. THESE MARKS ARE USED FOR CENTERING THE COUPLING OVER THE JOINT TO BE COUPLED.
3. SLIDE FOLLOWER (S) OVER THE PIPE END (S) .
4. WIPE GASKETS CLEAN AND LUBRICATE EACH GASKET, PIPE O.D. AND MIDDLE RING FLARES WITH SOAPY WATER OR NON-PETROLEUM BASE LUBRICANT. (ANTIFREEZE SHOULD BE ADDED IN FREEZING WEATHER) .
5. SLIDE GASKETS OVER EACH PIPE END AND ASSEMBLE THE MIDDLE RING ON ONE PIPE END.
6. STAB THE PIPE END INTO MIDDLE RING AND CENTER COUPLING BETWEEN MARKS. PIPE END MUST BE PAST THE END OF GASKET A MINIMUM OF ONE INCH AFTER DEFLECTION HAS OCCURRED.
7. INSTALL BOLTS AND HEX NUTS AND DRAW UP FINGER TIGHT.
8. TIGHTEN NUTS ON OPPOSITE SIDES DRAWING UP THE FOLLOWERS EVENLY UNTIL ALL NUTS HAVE BEEN TIGHTEN TO RECOMMENDED TORQUE OF 75 FT. LBS. FOR 5/8" BOLTS. TORQUE WRENCH REQUIRED!!!
9. COUPLINGS ARE 'PRESSURE SEAL ONLY". REPAIR MUST BE PROPERLY ANCHORED AT TERMINAL POINTS BOTH ENDS OF EXISTING PIPING.

(F) DRESSER STYLE 38 MJ COUPLING DETAIL SIZE 3" OR LARGER MAINLINE

Diagrammatic Not To Scale

NOTE:


1) BELL END SHALL BE STATIONARY AND THE SPIGOT END (MALE END) BE INSTALLED INTO JOINT AS SEEN BELOW. REDUCES THE RISK OF DEBRIS ENTERING THE BELL PRIOR TO INSTALLATION. ASSEMBLY FORCE IS EASIER TO ACHIEVE WITH CORRECT ALIGNMENT OF SMALLER SPIGOT INSERTED INTO LARGER BELL.
2) CONSULT WITH MANUFACTURER AS TO TYPE OF GASKET LUBRICANT SPECIFICS.
3) MAINTAIN GAP BETWEEN FULLY INSERTED SPIGOT INTO BELL BY NEVER INSERTING BEYOND INSERTION MARK!
4) A MAXIMUM 1° FOR DEFLECTION AT JOINT TO BE STRICTLY ADHERED TO!
5) SHOULD FACTORY MADE SPIGOT END NEED TO BE CUT, ENSURE PROPER SQUARE CUT WITH NEW BEVEL END AND FACTORY INSERTION DISTANCE TO MARKED.

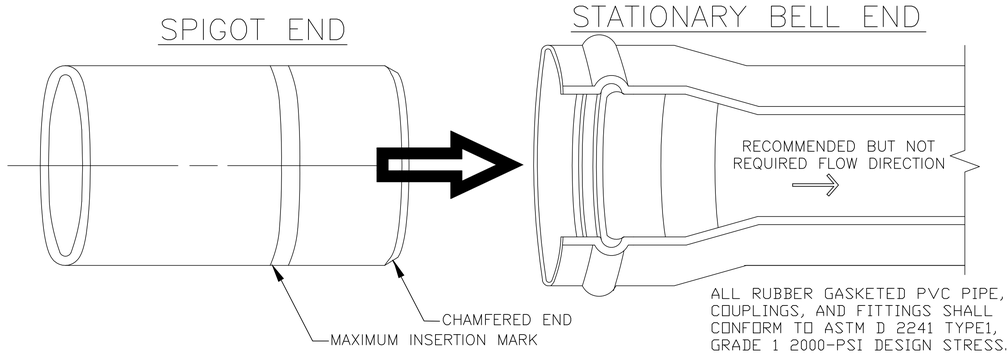

(F) RING-TITE PVC BELL INSTALLATION

Diagrammatic Not To Scale

NOTE: MAXIMUM OF TEN WIRES BUNDLE IN & OUT. IF MORE USE CARSON 1419B FOR UP TO 25 WIRES BUNDLE IN & OUT.

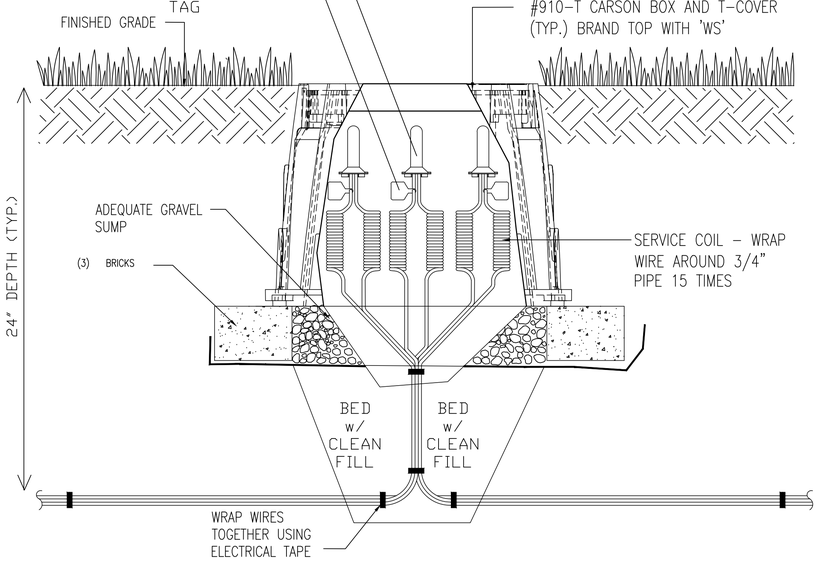

(F) UNDERGROUND WIRE SPLICE DETAIL

Diagrammatic Not To Scale

CALL BEFORE YOU DIG...

Know what's below. Call before you dig. 811

48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER

Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH 000062 DESIGNER COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COPYRIGHTED TO THE CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 7th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940


COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS


SHEET 2 OF 5 SHEETS

FILE NUMBER:


D:\CSPR\2021 CSPR JAMES\REPAIR STANDARDS\CSPR REPAIR STANDARDSDETAILS HCI WATERSEPTEMAL.DWG 05-17-21 14:20PM




LB-SERIES
90 ELL




LB-SERIES
45 ELL




LH-SERIES
TEE (NO RUN RESTRANTS)




LG-Series
RING GATE
top view




LPP-SERIES
BELL RING




LH-SERIES
w/ RUN RESTRAINTS



LG-Series
side view

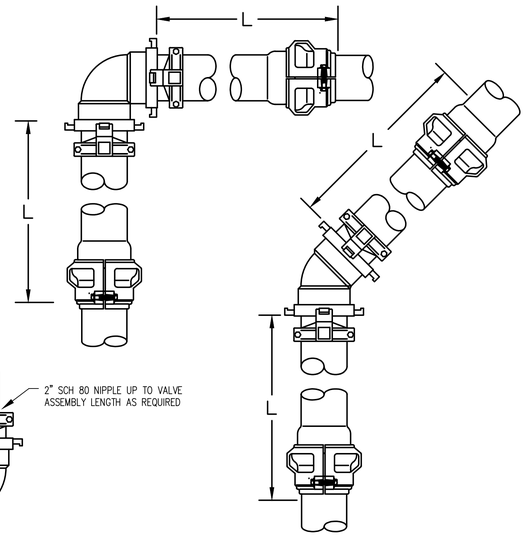



LB-SERIES ELL w/ Tapped Plug
REDUCER MODEL #SB-304TP
3"x2" NPT TERMINAL REDUCTION

DISTANCE CHART

REFER TO THE FOLLOWING TABLE THAT LISTS THE LENGTH (IN FEET) FOR EACH SIZE/TYPE FITTING WITHIN WHICH ALL JOINTS JUST BE RESTRAINED. ALL FITTINGS AND JOINT RESTRAINTS SHALL BE INSTALLED PER MANUFACTURERS RECOMMENDATIONS & SPECIFICATIONS.

AS AN EXAMPLE, IF YOU ARE INSTALLING A 3" MAINLINE WITH A DIRECTIONAL CHANGE OF 90°, REFER TO CHART UNDER PIPE SIZE TO 3" AND UNDER BENDS 90 YOU WILL SEE THE DISTANCE OF 11'. IF THERE IS ANY JOINT (VALVE, BELL, ETC.) YOU MUST INSTALL A JOINT RESTRAINT WITHIN 11' OF THE 90° MAINLINE DIRECTIONAL CHANGE.

PIPE SIZE	BENDS				REDUCERS			DEAD END	
	11°	22°	45°	90°	1 STEP	2 STEP	3 STEP	BLIND	SERV. B.
3"	2'	3'	6'	11'	8'	10'	-	15'	30'
4"	2'	4'	9'	20'	14'	20'	31'	25'	45'

INSTALLATION CHART

REFER TO THE FOLLOWING TABLE WHICH LISTS THE NUMBER OF BOLTS, SIZE, AND TORQUE FOR EACH BOLT IN REFERENCE TO THE SIZE OF PIPE WHICH IS BEING RESTRAINED.

AS AN EXAMPLE, IF YOU HAVE A 3" PIPE, YOU WILL NEED 2 BOLTS THAT ARE 3/8 X 2.5" AND TIGHTEN THEM WITH A TORQUE WRENCH TO 20 FT-LBS.

PIPE SIZE	NO. BOLTS	BOLT SIZE	TORQUE FT-LBS.
3"	2	3/8" x 2.5"	20
4"	2	1/2" x 3"	50

CONTACT JASON MOWER (AQUACITA) @ (720) 233-9698, THE LEEMCO REPRESENTATIVE, FOR ALL QUESTIONS CONCERNING LEEMCO PRODUCTS. COORDINATE AN INSTALLATION CLINIC WITH JASON MOWER PRIOR TO INSTALLING THE MAINLINE.


NOTES:

1. INSTALL ALL RESTRAINTS PER MANUFACTURER RECOMMENDATIONS AS REQUIRED.
2. FIELD PIPE CUT – OUTSIDE EDGE OF CUT PIPE MUST BE BEVELED AND SMOOTHED. STRAIGHT ALIGNMENT IS IMPORTANT IN ALL CASES.
3. IMPORTANT! LUBRICATE CARRIAGE BOLT THREADS USING WD-40 LUBRICANT TO PREVENT POSSIBILITY OF GALLING OR SEIZING OF THE STEEL THREADS.
4. SPIGOT AND BELL JOINTS – PROPER LUBRICANT MUST BE APPLIED TO THE INSTALLED GASKET TO REDUCE FRICTION AND AVOID GASKET DAMAGE. ALSO APPLY THIN COAT OF LUBRICANT TO THE BEVELED PORTION OF THE PLAIN PIPE END OR SPIGOT INSERTED INTO THE FITTING. USE COMMERCIALLY AVAILABLE PUSH-ON JOINT LUBRICANTS THAT ARE NON-TOXIC, ODORLESS, TASTELESS, AND WILL NOT SUPPORT BACTERIA. "SEAL LUBE" SKU#87710OFFERED BY WELDON CORP IS RECOMMENDED.

1 Joint Restraint Chart Detail
NTS

IN THE EVENT THAT THE MATERIAL FROM THE EXCAVATION OR TRENCHING IS FOUND TO BE UNSUITABLE FOR USE IN BACKFILL, IT SHALL BE REMOVED FROM THE SITE AND PROPERLY DISPOSED OF BY THE CONTRACTOR AND AT THE CONTRACTOR'S EXPENSE.

LEEMCO 'PVC' CATEGORY 'B' IPS JOINT RESTRAINTS

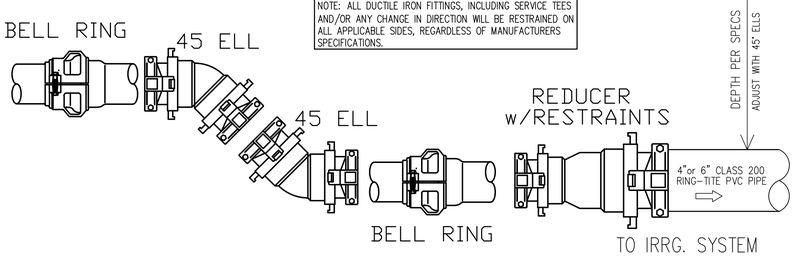


NOTE: ALL DUCTILE IRON FITTINGS, INCLUDING SERVICE TEES AND/OR ANY CHANGE IN DIRECTION WILL BE RESTRAINED ON ALL APPLICABLE SIDES, REGARDLESS OF MANUFACTURERS SPECIFICATIONS.

LEEMCO DETAIL


Diagrammatic Not To Scale

Correct Use
The trick to getting plumber's tape right is to wrap it around the pipe in the proper direction. When the pipe is turned into the fitting, the friction of the mating threads should work to tighten the tape around the pipe, rather than work against it and unravel or ball up the tape. Therefore, you wrap the tape around the pipe in the opposite direction (CLOCKWISE) of how the pipe will turn into the fitting. Here are the basic steps:

1. Clean the male threads at the end of the pipe with a clean rag.
2. Place the end of the plumber's tape on the second thread from the end of the pipe and hold it in place with a finger or thumb. The tape should lie flat (not bunched up) over the threads and extend perpendicularly to the length of the pipe.
3. Begin wrapping the tape around the pipe in the opposite direction to the direction the pipe will be turned.
4. Maintain tension on the tape so it wraps snugly around the pipe. Work away from the end of the pipe, overlapping the tape as you go.
5. Complete four to six wraps around the pipe, finishing near the end of the threads (opposite the end of the pipe).
6. Break the tape from the roll by gripping it between thumb and MID-finger and pulling sharply; it breaks easily. Smooth the loose end down over the threads. The pipe is now ready to go into the fitting.



1. CLEAN THE MALE THREADS AT THE END OF THE PIPE WITH A CLEAN RAG.
2. HOLDING PIPE IN RIGHT HAND CAPTURE END TEFLON TAPE UNDER THUMB ABOUT 2 TREADS FROM PIPE END TO BEGIN.
3. INSERT INDEX FINGER LEFT HAND INTO TAPE DISPENSER. UNROLL TAPE TIGHTLY MAINTAINING TENSION OFF TOP BACKWARD SIDE OF ROLL CREATING FIGURE 'Z' PIPE TO TAPE REEL. UNROLL CLOCKWISE OVERLAPPING TAPE AS YOU GO.
4. WRAP 4 TO 6 COMPLETE TIMES TO END OF THREADS.




4. FIRMLY GRIP TAPE HOLDER & PLACE MIDDLE FINGER WHERE 'TEAR' WILL OCCUR AND PINCH OFF TAPE. PINCH BREAK 'NOT PULL'
5. SMOOTH TAPE INTO TREADS.
6. SCREW INTO FITTING/VALVE BY HAND
7. TIGHTEN JOINT 1-2 COMPLETE TURNS AFTER HAND TIGHT.
8. JOINT SHOULD NOW BE LEAKPROOF.

TEFLON TAPE APP DETAIL

Diagrammatic Not To Scale

ALL PIPING EXPOSED ENDS SHALL BE DUCT TAPED UNTIL END COVERED TO PREVENT CONTAMINATION .

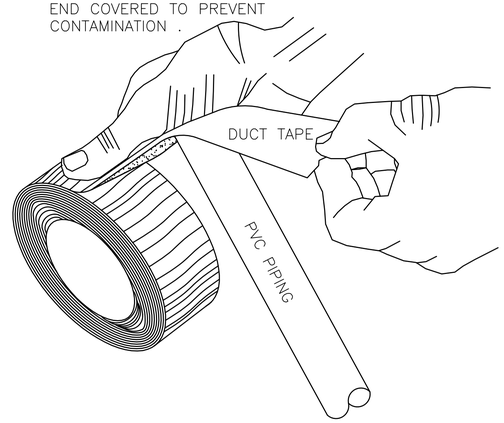

F PREVENT DRIT/DEBRIS ENTERING PIPE

Diagrammatic Not To Scale

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH — CERTIFIED — 000062 — DESIGNER — COMMERCIAL

HACKWORTH CONSULTING, LLC

IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062

hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM RECORDS OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 19th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS

SHEET 3 OF 5 SHEETS


FILE NUMBER:

D:\CSPR\2021 CSPR JAMIE\REPAIR STANDARDS\CSPR REPAIR STANDARDSETAILS HCI MAY19DRFINAL.DWG 05-17-21 14:42:49PM

R26-099MZ

I-20-06-SS-PRB SPEARS #5810-01012 w/ 1" FIPT x 3/4" MPT BUSHING SWING JOINT
I-25-06-SS-PRB SPEARS #5810-01012 1" SWING JOINT


*NOZZLE TO MATCH EXISTING ON PROJECT

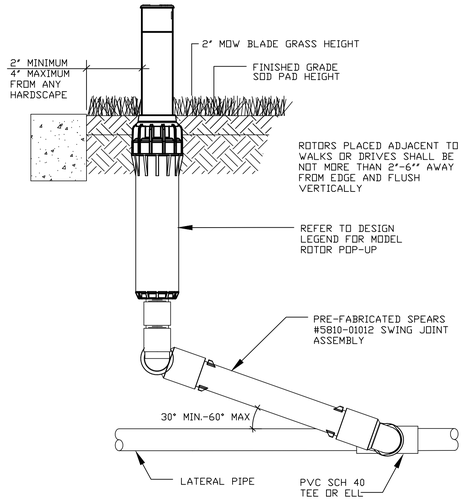

ROTOR POP-UP
w/PRE-FAB SWING JOINT
Diagrammatic Not To Scale

1806-SAM-PRS-45 RAINBIRD SPRAY w/ROTATOR NOZZLES
1806-SAM-PRS-30 RAINBIRD SPRAY w/FIXED SPRAY NOZZLES

*NOZZLE TO MATCH EXISTING ON PROJECT

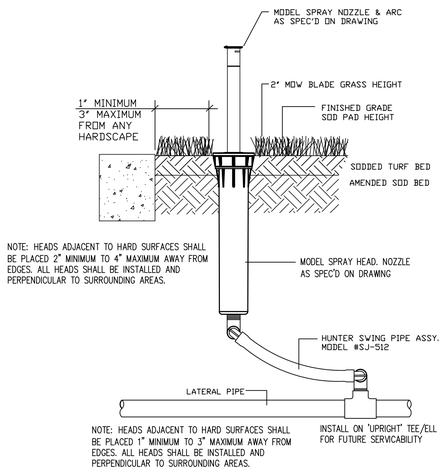

MODEL SPRAY HEAD AS SPEC'D
Diagrammatic Not To Scale

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811
48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH — 000062 — REGISTERED — COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijm@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM DATA PROVIDED BY THE CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 19th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS

SHEET 4 OF 5 SHEETS

FILE NUMBER:

D:\CSPR\2021 CSPR JARED\REPAIR STANDARDS\CSPR REPAIR STANDARDSDETAILS HCI MAY2021FINAL.DVG 05-17-21 14:29:PM

LEGEND:

CL200 PVC PIPE ROUTING


SLEEVE SIZE — DEPTH

6"/24"

SLEEVE ALL ROADS, WALKS, WALLS, DRIVES AND SIDEWALKS

NOTES:

1. SLEEVING AT ALL ROADWAY CROSSINGS HAVE BEEN NOTED WITH SIZE AND DEPTH REQUIRED. SLEEVE ALL WALKS OR DRIVEWAYS WITH CL200 PVC SIZED TWICE PIPE DIAMETER CARRIED. WIRE CROSSINGS SHALL BE IN SEPARATE 2" CL200 PVC SLEEVE PARALLEL TO MAINLINE SLEEVE.

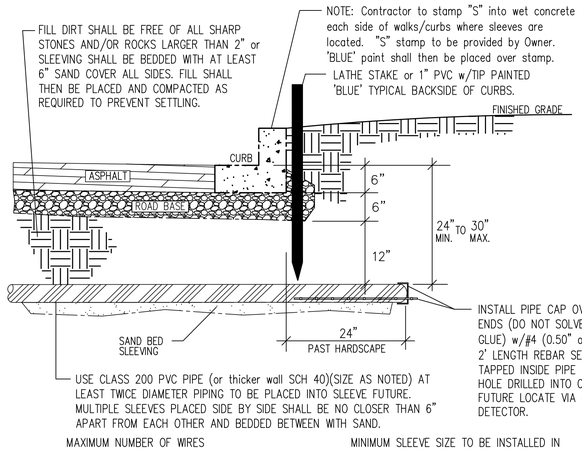

WIRE SIZE (AWG)	MAXIMUM NUMBER OF WIRES TO BE INSTALLED IN A SCHEDULE 40 PVC SLEEVE 2"	2-1/2"	3"	WIRE SIZE (AWG)
14	25	40	56	14
12	20	33	50	12
COMMUNICATION CABLE	2" PVC			

MINIMUM SLEEVE SIZE TO BE INSTALLED IN A SCHEDULE 40 PVC SLEEVE

LATERAL or MAINLINE SIZE	REQ. SLEEVE SIZE & (QUANTITY)
3/4" to 1-1/4"	2" PVC (1)
1-1/2" to 2"	4" PVC (1)
2-1/2" to 3"	6" PVC (1)
4"	8" PVC (1)
6"	12" PVC (1)


NOTE:

1. ALL WIRE SLEEVES TO BE SCHEDULE 40 PVC AND SHALL BE INSTALLED WITH A MINIMUM OFFSET AT THE JOINTS TO PERMIT EASY INSTALLATION AND REMOVAL OF CONTROL AND COMMON WIRES. ALL WIRES SHALL BE INSTALLED IN SLEEVES UNDER THE PAVED AREAS. SLEEVES SHALL EXTEND AT LEAST 12" BEYOND THE EDGES OF THE PAVEMENT. SIZE OF SLEEVES SHALL BE AS SHOWN.

IRRIGATION SLEEVING DETAIL


Diagrammatic Not To Scale

110/120 VOLT & COMMUNICATION WIRE



ALL 120 VOLT WIRING IN CONDUIT TO BE INSTALLED PER STATE AND LOCAL CODES.


CONTROL WIRING



PROVIDE PVC CONDUIT FOR WIRES WHEN TRENCHED ALONE OR ALONG SIDE MAINLINE SLEEVE BENEATH WALKS OR PAVEMENT.

WIRE ONLY

NOTE: USE ONLY PAIGE ELECTRIC P7072D WIRE FOR 2-WIRE DECODER SYSTEMS.



BAND 20" LOOP OF WIRES IN ALL CHANGES OF DIRECTION GREATER THAN 30 DEGREES. UNTIE LOOPS AFTER CONNECTIONS ARE MADE.

14 GAUGE PE CONTROL WIRES	
Number of Wires	Size of Conduit
19	1-1/2" (40 mm)
31	2" (50 MM)
44	2-1/2" (65 MM)
68	3" (75 MM)

12 GAUGE PE CONTROL WIRES	
Number of Wires	Size of Conduit
16	1-1/2" (40 mm)
26	2" (50 MM)
37	2-1/2" (65 MM)
58	3" (75 MM)


WIRE TRENCHING DETAIL

Diagrammatic Not To Scale

NOTES:

1. ALL PIPE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. NO PIPE OR WIRE SHALL BE LOCATED UNDER PAVING UNLESS IT IS SLEEVED.
3. PARALLEL PIPING SHALL NOT BE INSTALLED IN SAME TRENCH BESIDE OR ATOP ONE ANOTHER.
4. BACKFILL MATERIAL SHALL BE FREE OF RUBBISH, VEGETABLE MATTER, FROZEN MATERIALS, AND STONES LARGER THAN 3/8" IN MAXIMUM DIMENSIONS. PROVIDE NOT LESS THAN 6" OF CLEARANCE BETWEEN EACH LATERAL LINE, AND NOT LESS THAN 18" OF CLEARANCE BETWEEN LATERAL LINES AND MAINS.

MAINLINE, LATERAL LINE, AND WIRING — MAINLINE ONLY — LATERAL ONLY (ROTOR ZONES ONLY) — LATERAL ONLY (SPRAY ZONES & 'MP' ROTATOR ZONES ONLY)

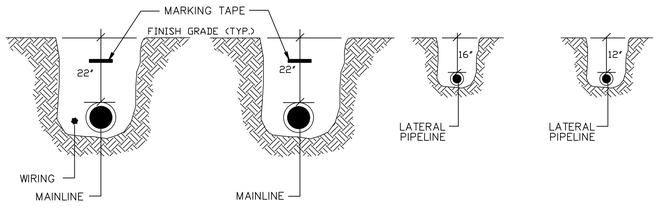

- NO PIPING SHALL BE INSTALLED WITH LESS THAN 12" LATERAL CLEARANCE HORIZONTALLY, NOR 6" VERTICALLY (NO SHARED TRENCHES)
- INSTALL ALL MAINLINE AND LATERAL LINE PIPING PER SPECIFICATIONS AND IN FULL ACCORDANCE WITH MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- DEPTHS INDICATED ARE MINIMUM DEPTHS TO TOP OF PIPELINE AND NOT TRENCH DEPTH.
- WIRING AND PIPING SHALL BE INSTALLED IN SEPARATE SLEEVES AT LOCATIONS NOTED ON DRAWINGS. SLEEVE MINIMUM SIZING SHALL BE DOUBLE THE BUNDLE OR PIPE DIAMETER.
- CLEAN BACKFILL SHALL HAVE 90% RELATIVE COMPACTION, CLEAN SOIL, NO BRANCHES, ROOTS AND ROCK FREE.
- CRISSEY WATER LINE MARKING TAPE LABELED 'BURIED WATER PIPE' SHALL BE INSTALLED ALONG DITCH AT CENTERLINE OF MAINLINE PIPES (6'-8' DEEP) WITH AN EXPOSED END AT ALL VALVES AND CONTROLLER.
- SAND BED PIPING 6" ALL SIDES IN ROCKY TRENCH EXCAVATIONS
- IN THE EVENT THAT THE MATERIAL FROM THE EXCAVATION OR TRENCHING IS FOUND TO BE UNSUITABLE FOR USE IN BACKFILL, IT SHALL BE REMOVED FROM THE SITE AND PROPERLY DISPOSED OF BY THE CONTRACTOR AND AT THE CONTRACTOR'S EXPENSE.

PIPE SIZING CHART	
SIZE OF PIPE	MAXIMUM GPM
3/4"	10
1"	15
1-1/2"	35
2"	55
2-1/2"	75
3"	110
4"	225

PVC PIPE TRENCHING DETAIL

Diagrammatic Not To Scale

CALL BEFORE YOU DIG... Know what's below. Call before you dig. 811 48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH — CERTIFIED IRRIGATION DESIGNER — 000062 — COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 19th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS OLYMPIC CITY USA

TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS

SHEET 5 OF 5 SHEETS

FILE NUMBER:

D:\CSPR\2021 CSPR JAMES\REPAIR STANDARDS\CSPR REPAIR STANDARDSDETAILS #01 MAYSHEET.DWG 05-17-21 14:13:49PM

Parks and Recreation Underground Electrical Repair Specifications

EXPOSURE OF ELECTRICAL CABLES

- Power cables that are exposed by contractors will need to be assessed by a qualified Parks and Recreation employee before they are to be buried. Crews on site are not permitted to make the determination as to whether or not cables are safe for cover up.
- Any repairs made by contractors must be inspected by a qualified member of the Parks and Recreation staff prior to being buried. Parks and Recreation staff will reserve the right to have the repair re-made in the event that is does not meet set standards.

BURIAL DEPTHS

- Underground electrical conduits shall be buried to a depth of 24"under all roadways, and 18"under all other applications, per NEC 300.5. If existing conduits are encountered that do not meet minimum depth requirements, such conduits may be repaired to match existing depth.
- Direct burial type UF cables shall be buried to a minimum depth of 24"under all surfaces, per NEC 300.5. If existing UF cables are encountered that do not meet minimum depth requirements, such cables may be repaired to match existing burial depth.
- Power cables that are to pass under permanent hard surfaces shall have a conduit sleeve installed for ease of repair, should any future problems occur.

REPAIR OF TYPE UF CABLES

- Type UF power cables shall only be repaired with a listed repair kit, consisting of heat shrink tubing containing heat activated sealant- Similar to Ilsco DBK-1 or Tyco CPGI-HS-SPLICE-KIT-UF.
- Use of UF repair kits requires that their installation be performed exactly as manufacturer's instructions are written. NO deviation or shortcuts will be acceptable.
- "Wraparound"or "clamshell"style UF repair kits are not permitted by Parks and Recreation.
- Silicone sealant of any type shall not be used in the repair of any underground power cables.
- Underground "direct bury"wirenuts shall not be used on the repair of power cables.
- Any repair that uses electrical tape as a sealing device shall not be used. ELECTRICAL TAPE IS NOT WATERPROOF, UNDER ANY CIRCUMSTANCES, EVER.

REPAIR OF BURIED ELECTRICAL CONDUITS

- Where underground conduit is to be repaired, any damaged wiring contained inside of conduit must be replaced. There are to be no underground J-boxes added, or splices or any type made to repair wiring contained inside of conduits.
- If wiring inside of conduit is not damaged- a clamshell style conduit repair device, of a listed type, will be acceptable.
- Broken conduits shall be repaired with like materials, and like class of conduit.
- Older, galvanized conduits may be converted to PVC for ease of repair.
- Galvanized conduits may be repaired with compression type fittings, if use of threaded fittings is not practical or feasible.

BASE DATA DEPICTED HEREON COMPILED FROM CITY OF COLORADO SPRINGS ON BEHALF OF COLORADO SPRINGS UTILITIES.

DESIGNED BY: JRH
DRAWN BY: JRH
DATE: MAY 19th, 2021
SCALE: AS NOTED
REVISIONS:

PARKS, RECREATIONAL AND CULTURAL SERVICES
1401 RECREATION WAY
COLORADO SPRINGS, CO 80905
(719) 385-5940

COLORADO SPRINGS
OLYMPIC CITY USA

TITLE: CSPR REPAIR STANDARD IRRIGATION DETAILS

SHEET 1 OF 5 SHEETS

FILE NUMBER:

Know what's below. Call before you dig.
CALL BEFORE YOU DIG... 811 48 HOURS BEFORE YOU DIG, CALL UTILITY LOCATORS FOR LOCATING AND MARKING GAS, ELECTRIC, WATER AND WASTEWATER
Determina lo que esta bajo tierra. Llama antes de excavar.

Reuse of Document
This document is the property of HCI, LLC.
The ideas and design incorporated on this document and specifications are instruments of professional service and shall not be used for any other project without written authorization of HCI, LLC.
© 2020 HCI, LLC.
All rights reserved.

JAMES ROBERT HACKWORTH PROFESSIONAL ENGINEER CERTIFICATE 000062 DESIGNER COMMERCIAL

HACKWORTH CONSULTING, LLC
IRRIGATION DESIGN BY: James Hackworth
C.I.D. #000062
hcijim@comcast.net
17850 SAWMILL ROAD
(719) 599-3998 Ph
(719) 287-4241 Cell
Colorado Springs, CO 80908

D:\CSPR\2021 CSPR JAMES\REPAIR STANDARDS\CSPR REPAIR STANDARDSDETAILS HCI WAYSDOTTNAL.DVG 05-17-21 14:39PM